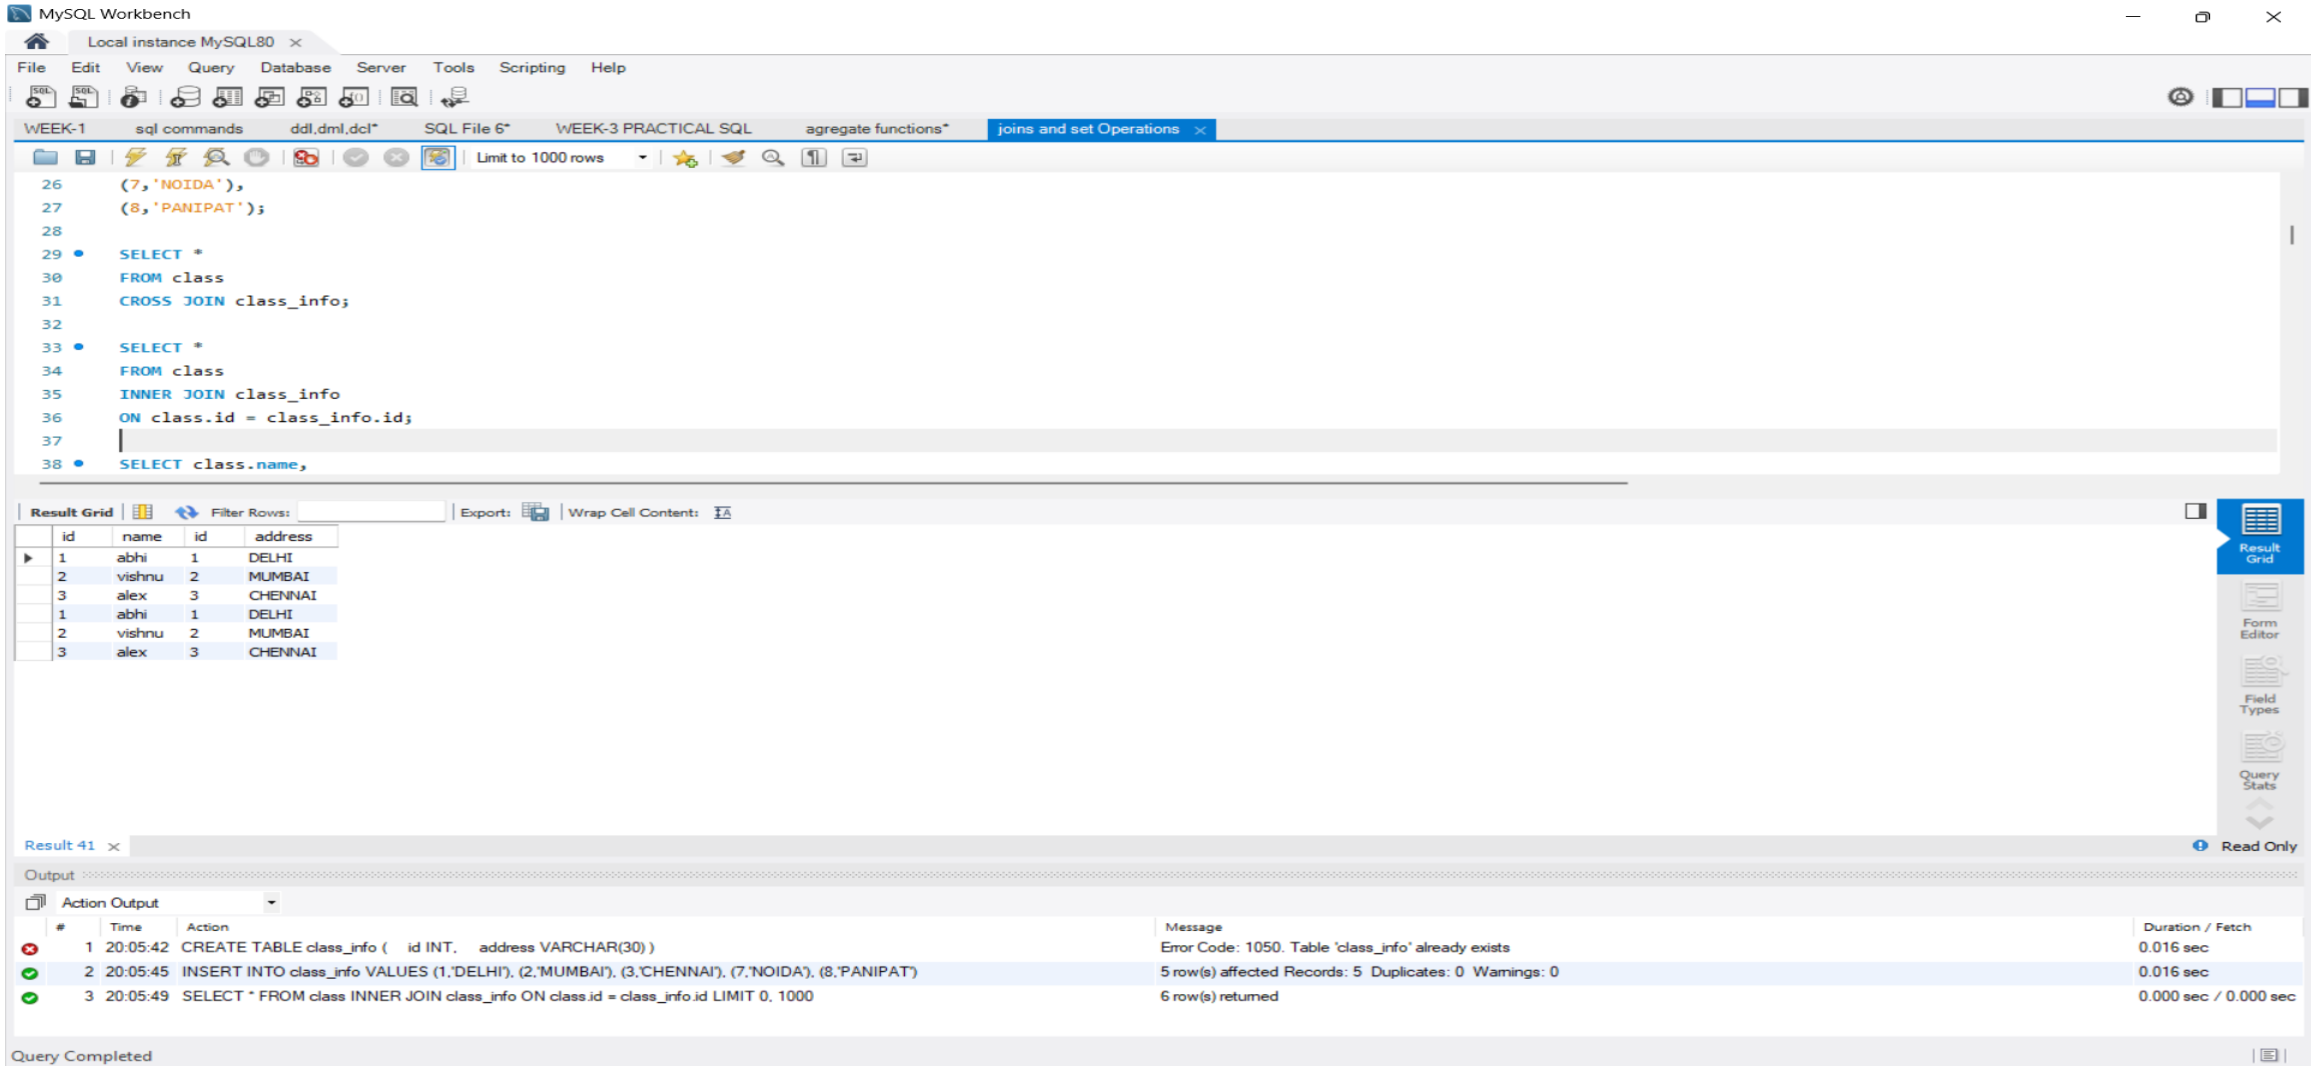
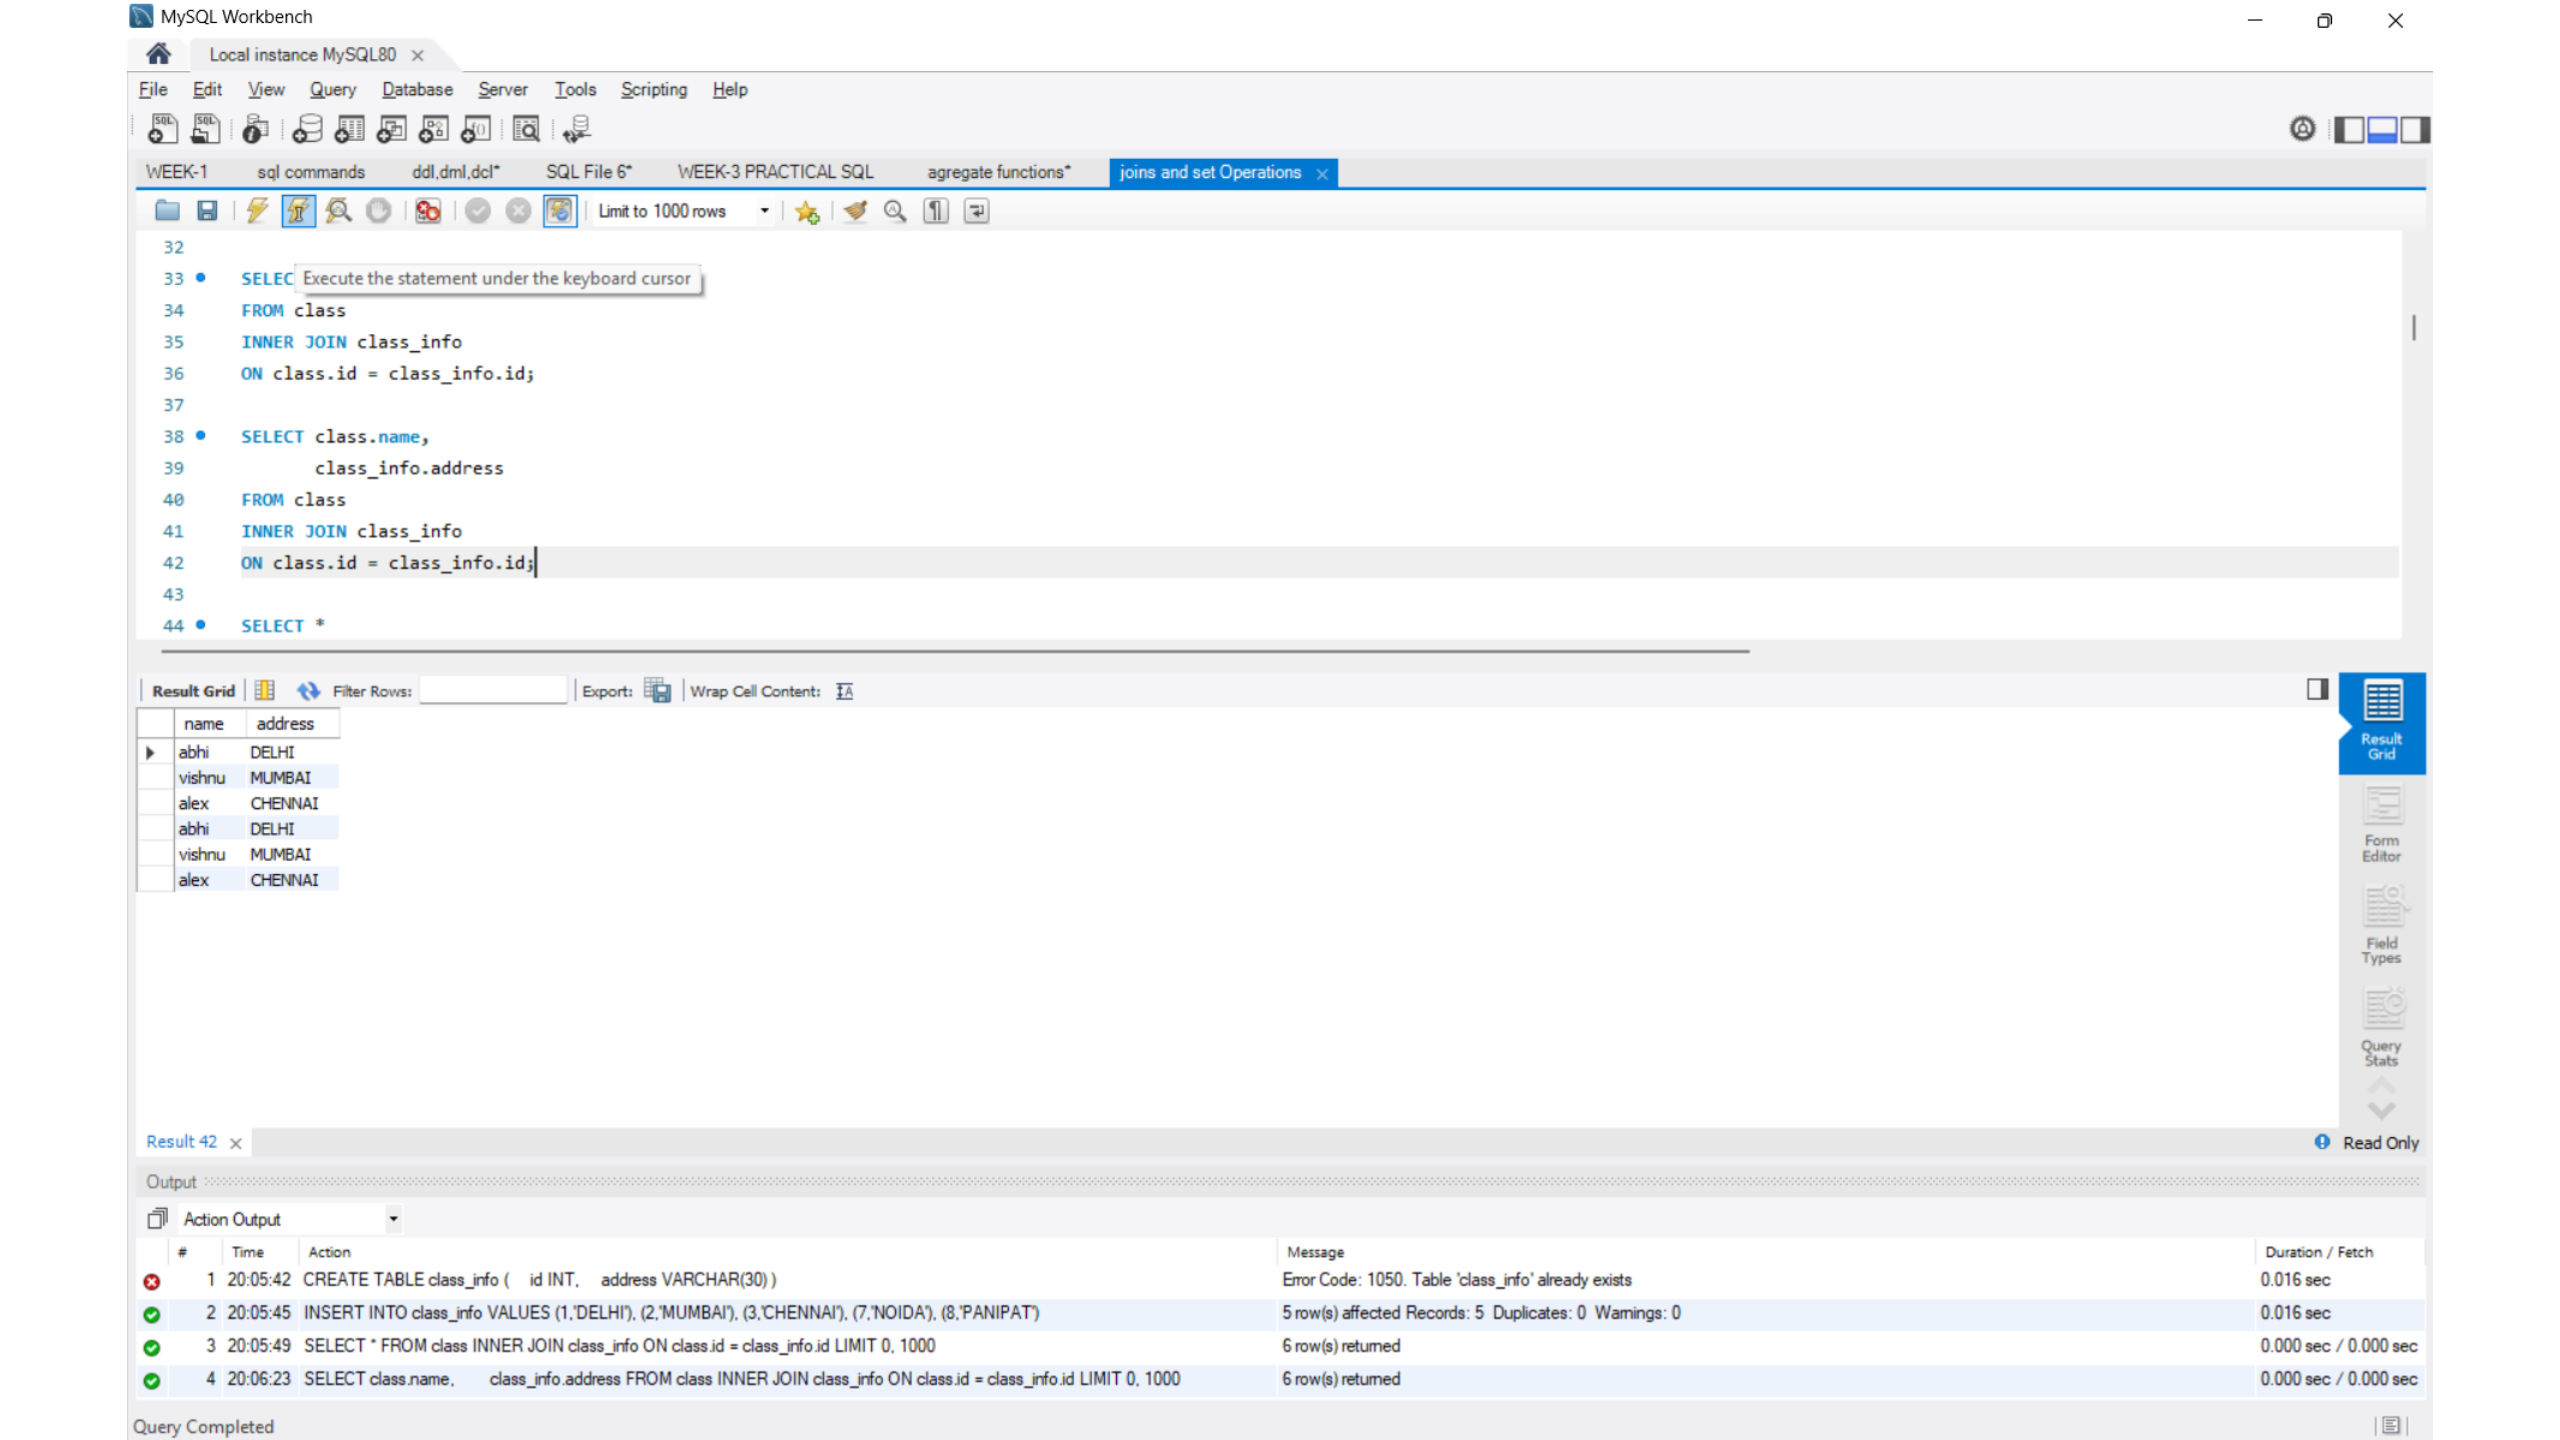
Name:K.Vishnu

S-3




MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
32
33 SELEC
Execute the statement under the keyboard cursor
34 FROM class
35 INNER JOIN class_info
36 ON class.id = class_info.id;
37
38 SELECT class.name,
39 class_info.address
40 FROM class
41 INNER JOIN class_info
42 ON class.id = class_info.id;
43
44 SELECT *
Result Grid Filter Rows: Export: Wrap Cell Content:
name address
abhi DELHI
vishnu MUMBAI
alex CHENNAI
abhi DELHI
vishnu MUMBAI
alex CHENNAI
Result Grid
Form Editor
Field Types
Query Stats
Result 42
Read Only
Output
Action Output
Time Action Message Duration / Fetch
1 20:05:42 CREATE TABLE class_info (id INT, address VARCHAR(30)) Error Code: 1050. Table 'class_info' already exists 0.016 sec
2 20:05:45 INSERT INTO class_info VALUES (1,'DELHI'), (2,'MUMBAI'), (3,'CHENNAI'), (7,'NOIDA'), (8,'PANIPAT') 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
3 20:05:49 SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 6 row(s) returned 0.000 sec / 0.000 sec
4 20:06:23 SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 6 row(s) returned 0.000 sec / 0.000 sec
Query Completed

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

WEEK-1 | sql commands | ddl,dml,dcl* | SQL File 6* | WEEK-3 PRACTICAL SQL | agregate functions* | joins and set Operations

Limit to 1000 rows

```
38  SELECT class.name,
39         class_info.address
40  FROM class
41  INNER JOIN class_info
42  ON class.id = class_info.id;
43
44  SELECT *
45  FROM class
46  NATURAL JOIN class_info;
47
48  SELECT *
49  FROM class
50  LEFT OUTER JOIN class_info
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name	address
1	abhi	DELHI
2	vishnu	MUMBAI
3	alex	CHENNAI
1	abhi	DELHI
2	vishnu	MUMBAI
3	alex	CHENNAI

Result Grid | Form Editor | Field Types | Query Stats

Result 43

Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
2	20:05:45	INSERT INTO class_info VALUES (1,'DELHI'), (2,'MUMBAI'), (3,'CHENNAI'), (7,'NOIDA'), (8,'PANIPAT')	5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0	0.016 sec
3	20:05:49	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
4	20:06:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
5	20:06:33	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec

Query Completed

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations

Limit to 1000 rows

```
47
48 •  SELECT *
49    FROM class
50    LEFT OUTER JOIN class_info
51    ON class.id = class_info.id;
52
53 •  SELECT *
54    FROM class
55    LEFT JOIN class_info
56    ON class.id = class_info.id
57    WHERE class_info.id IS NULL;
58
59 •  SELECT *
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name	id	address
1	abhi	1	DELHI
1	abhi	1	DELHI
2	vishnu	2	MUMBAI
2	vishnu	2	MUMBAI
3	alex	3	CHENNAI
3	alex	3	CHENNAI
4	anu	NULL	NULL
5	ashish	NULL	NULL

Result Grid Form Editor Field Types Query Stats

Result 44

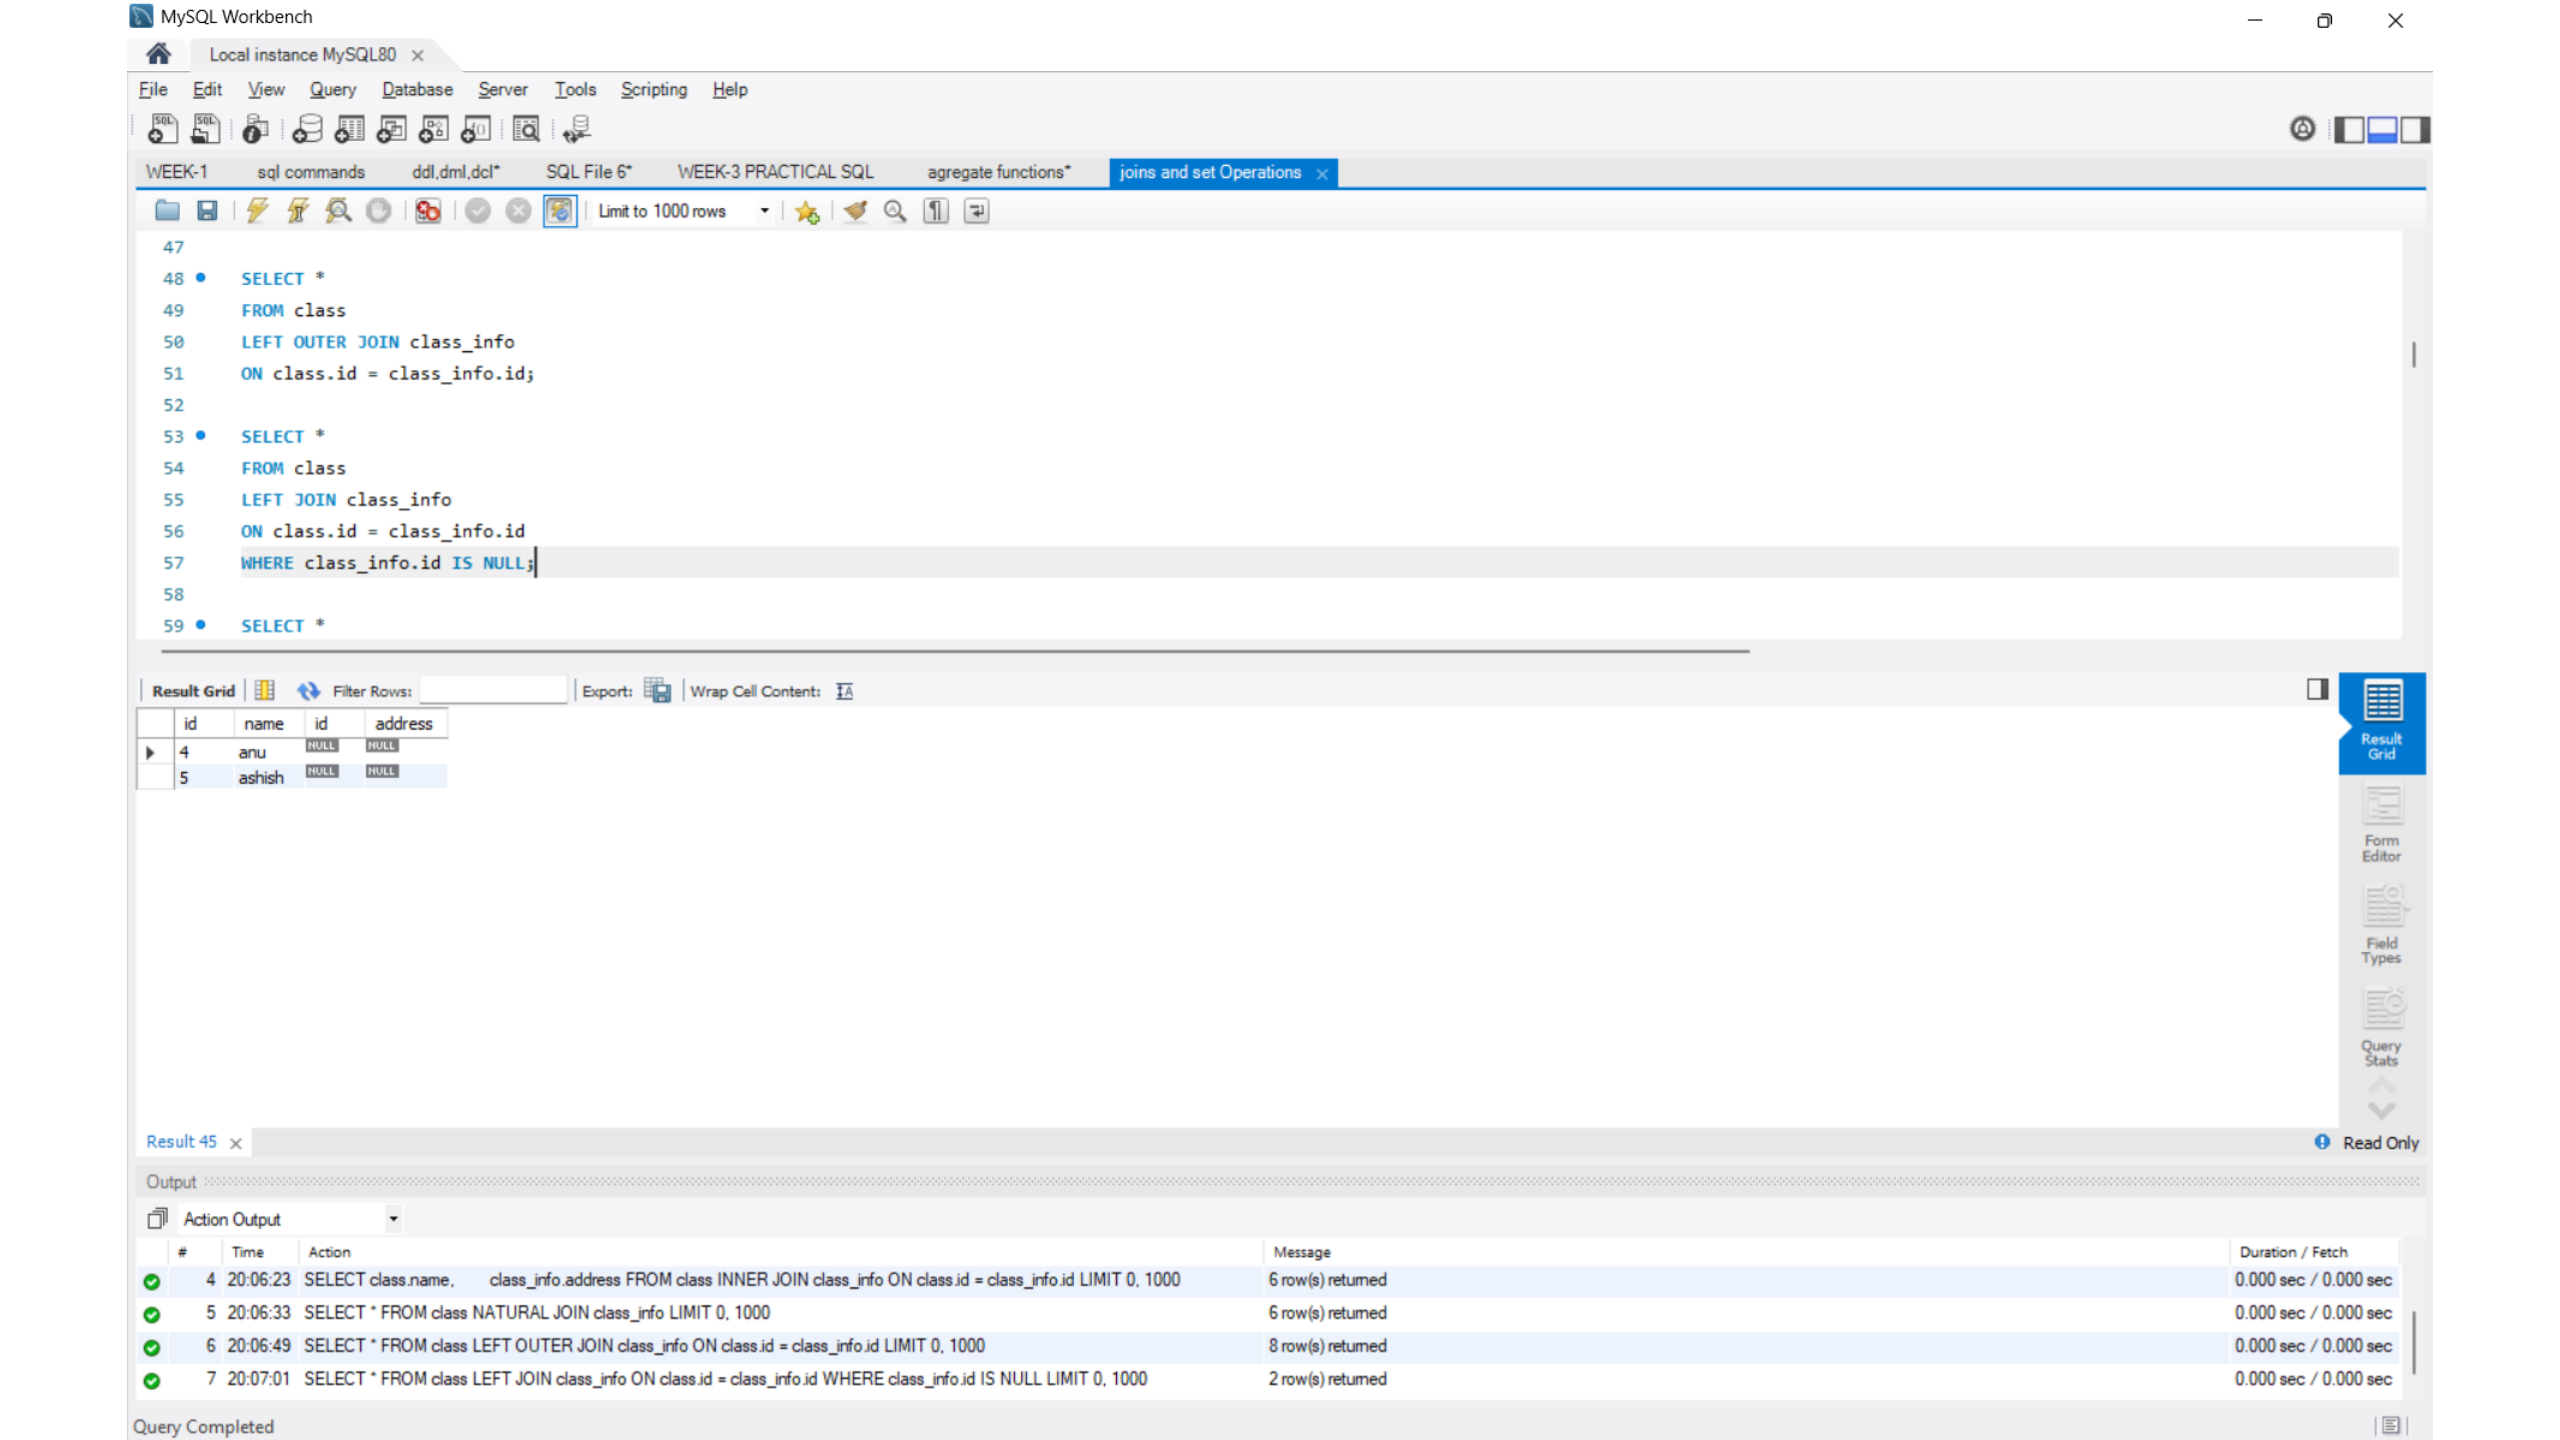
Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
3	20:05:49	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
4	20:06:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
5	20:06:33	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
6	20:06:49	SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec

Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
47
48 SELECT *
49 FROM class
50 LEFT OUTER JOIN class_info
51 ON class.id = class_info.id;
52
53 SELECT *
54 FROM class
55 LEFT JOIN class_info
56 ON class.id = class_info.id
57 WHERE class_info.id IS NULL;
58
59 SELECT *
Result Grid Filter Rows: Export: Wrap Cell Content:
id name id address
4 anu NULL NULL
5 ashish NULL NULL
Result Grid
Form Editor
Field Types
Query Stats
Result 45
Read Only
Output
Action Output
Time Action Message Duration / Fetch
4 20:06:23 SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 6 row(s) returned 0.000 sec / 0.000 sec
5 20:06:33 SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000 6 row(s) returned 0.000 sec / 0.000 sec
6 20:06:49 SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 8 row(s) returned 0.000 sec / 0.000 sec
7 20:07:01 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000 2 row(s) returned 0.000 sec / 0.000 sec
Query Completed

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations

Limit to 1000 rows

```
53  SELECT *
54  FROM class
55  LEFT JOIN class_info
56  ON class.id = class_info.id
57  WHERE class_info.id IS NULL;
58
59  SELECT *
60  FROM class
61  RIGHT OUTER JOIN class_info
62  ON class.id = class_info.id;
63
64  SELECT *
65  FROM class
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name	id	address
1	abhi	1	DELHI
2	vishnu	2	MUMBAI
3	alex	3	CHENNAI
NULL	NULL	7	NOIDA
NULL	NULL	8	PANIPAT
1	abhi	1	DELHI
2	vishnu	2	MUMBAI
3	alex	3	CHENNAI
NULL	NULL	7	NOIDA
NULL	NULL	8	PANIPAT

Result Grid | Form Editor | Field Types | Query Stats

Result 46

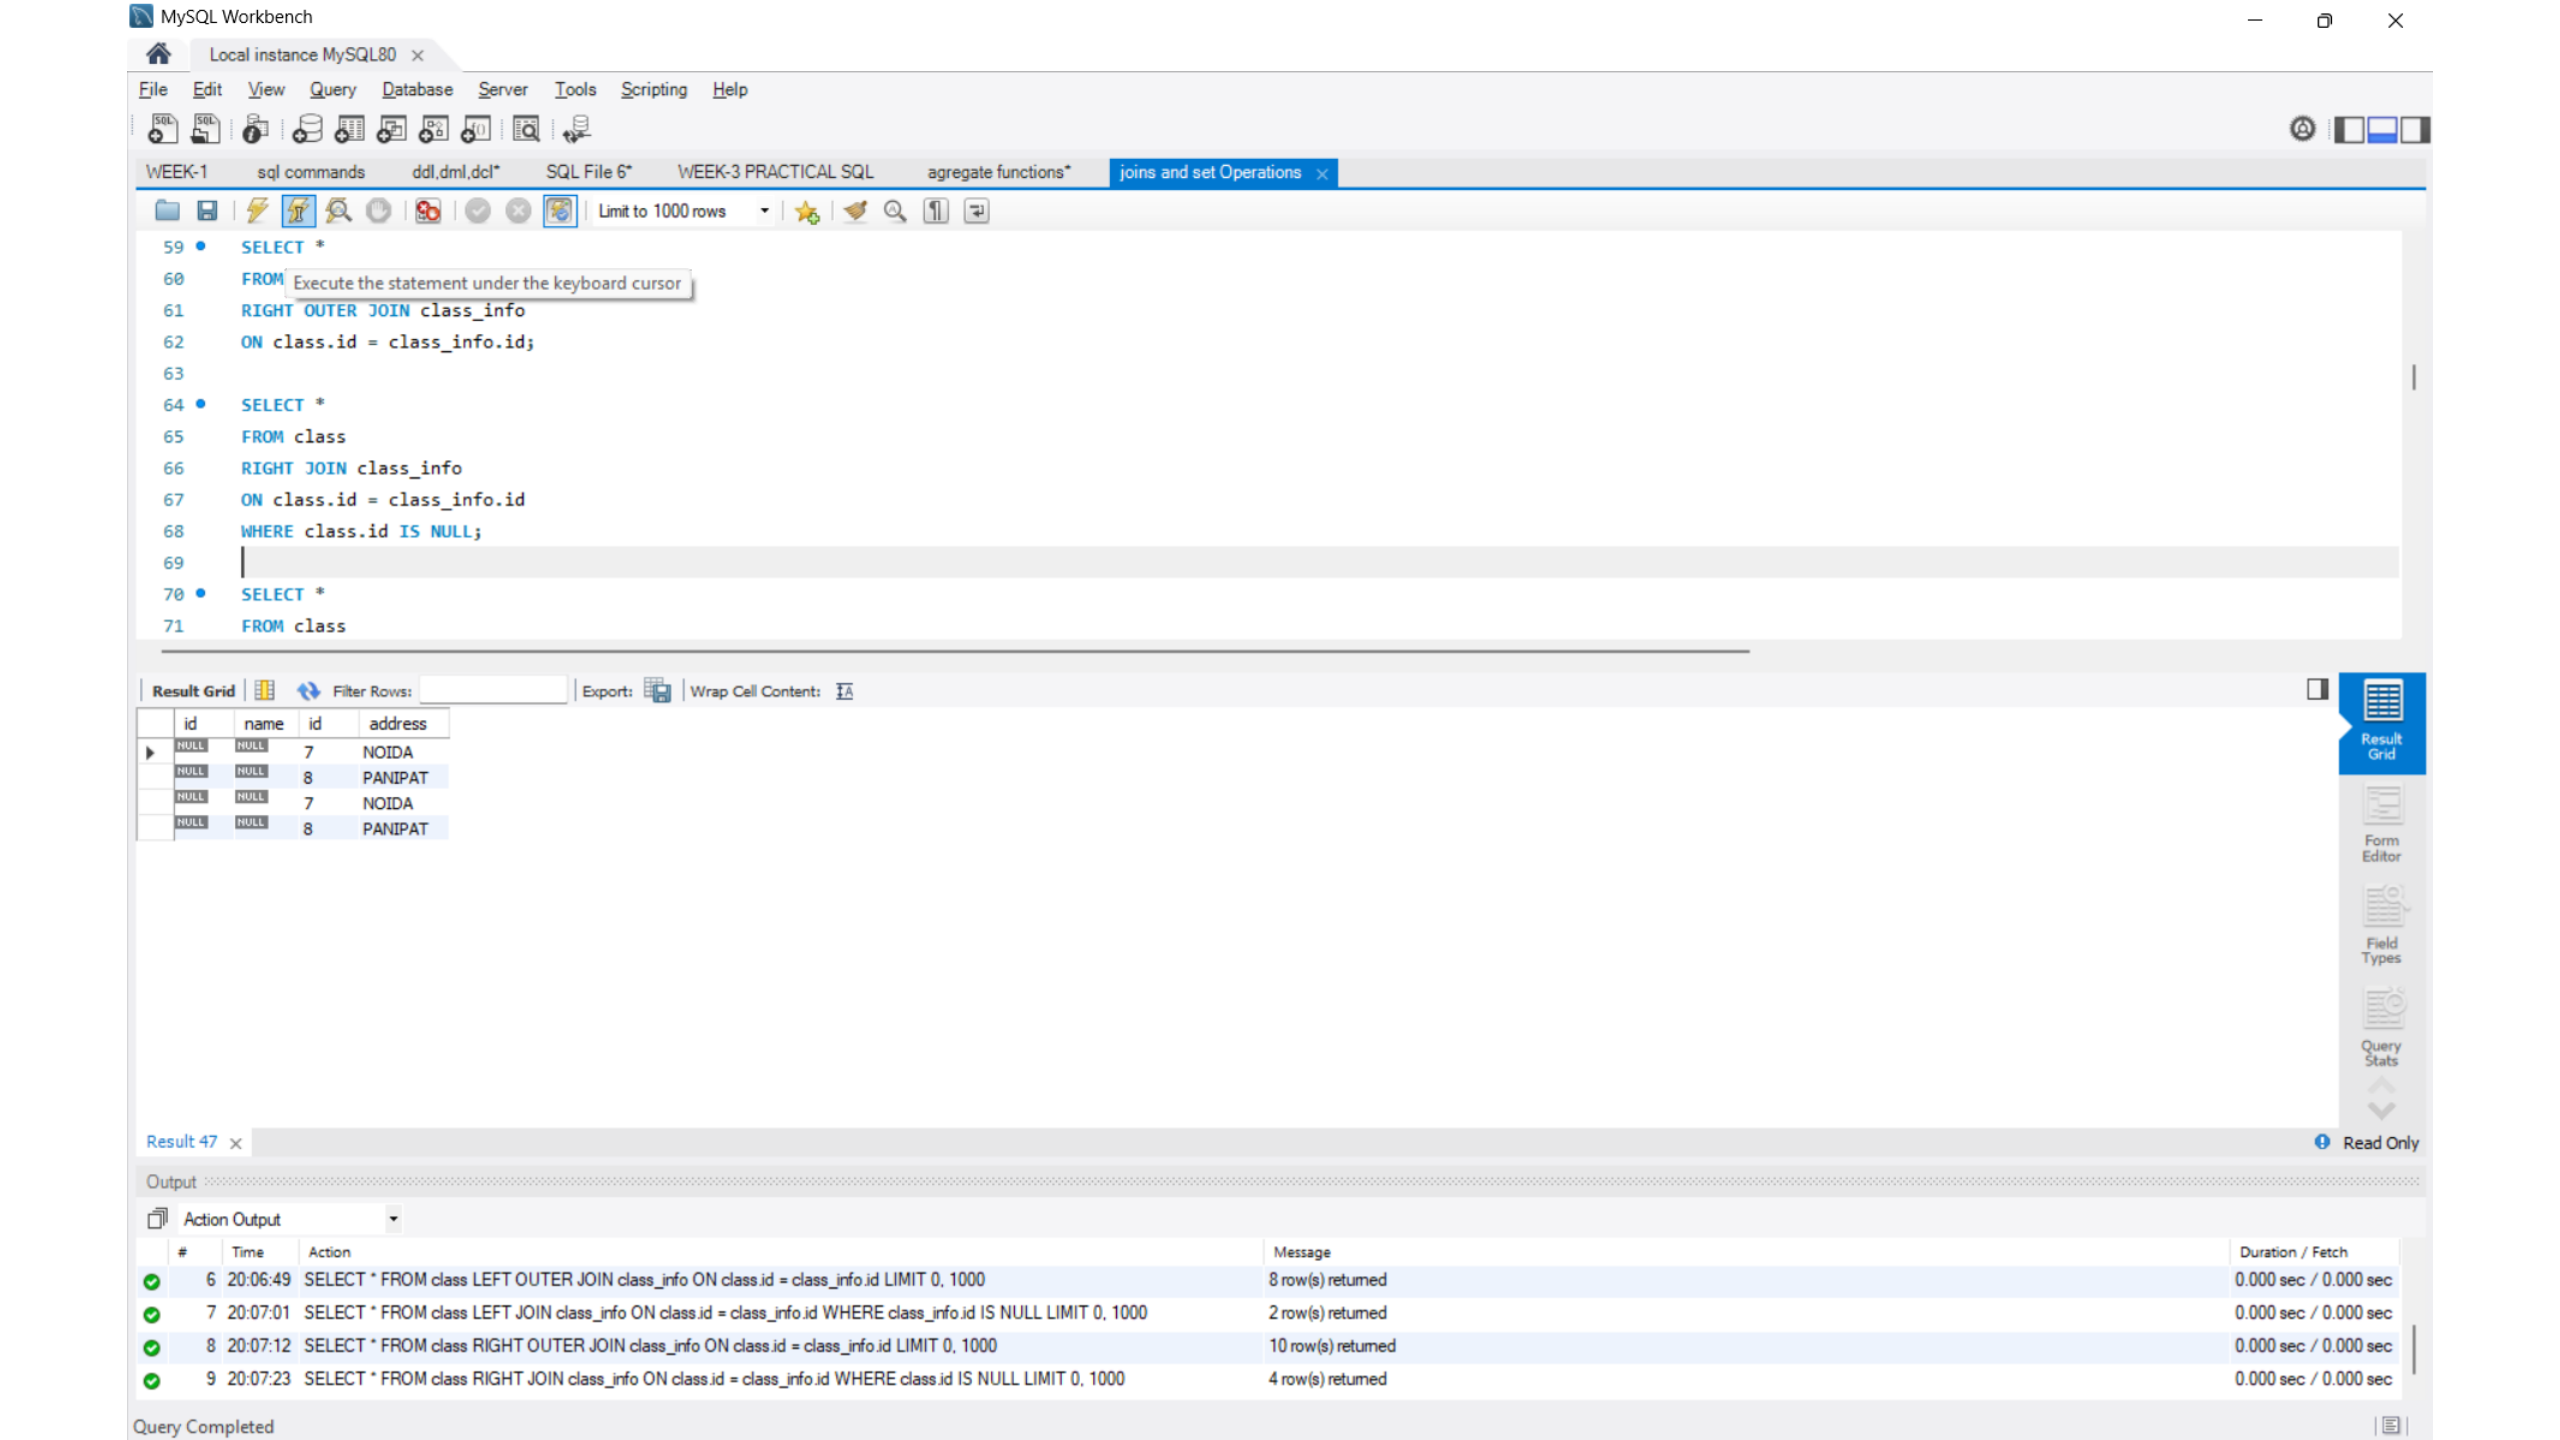
Read Only

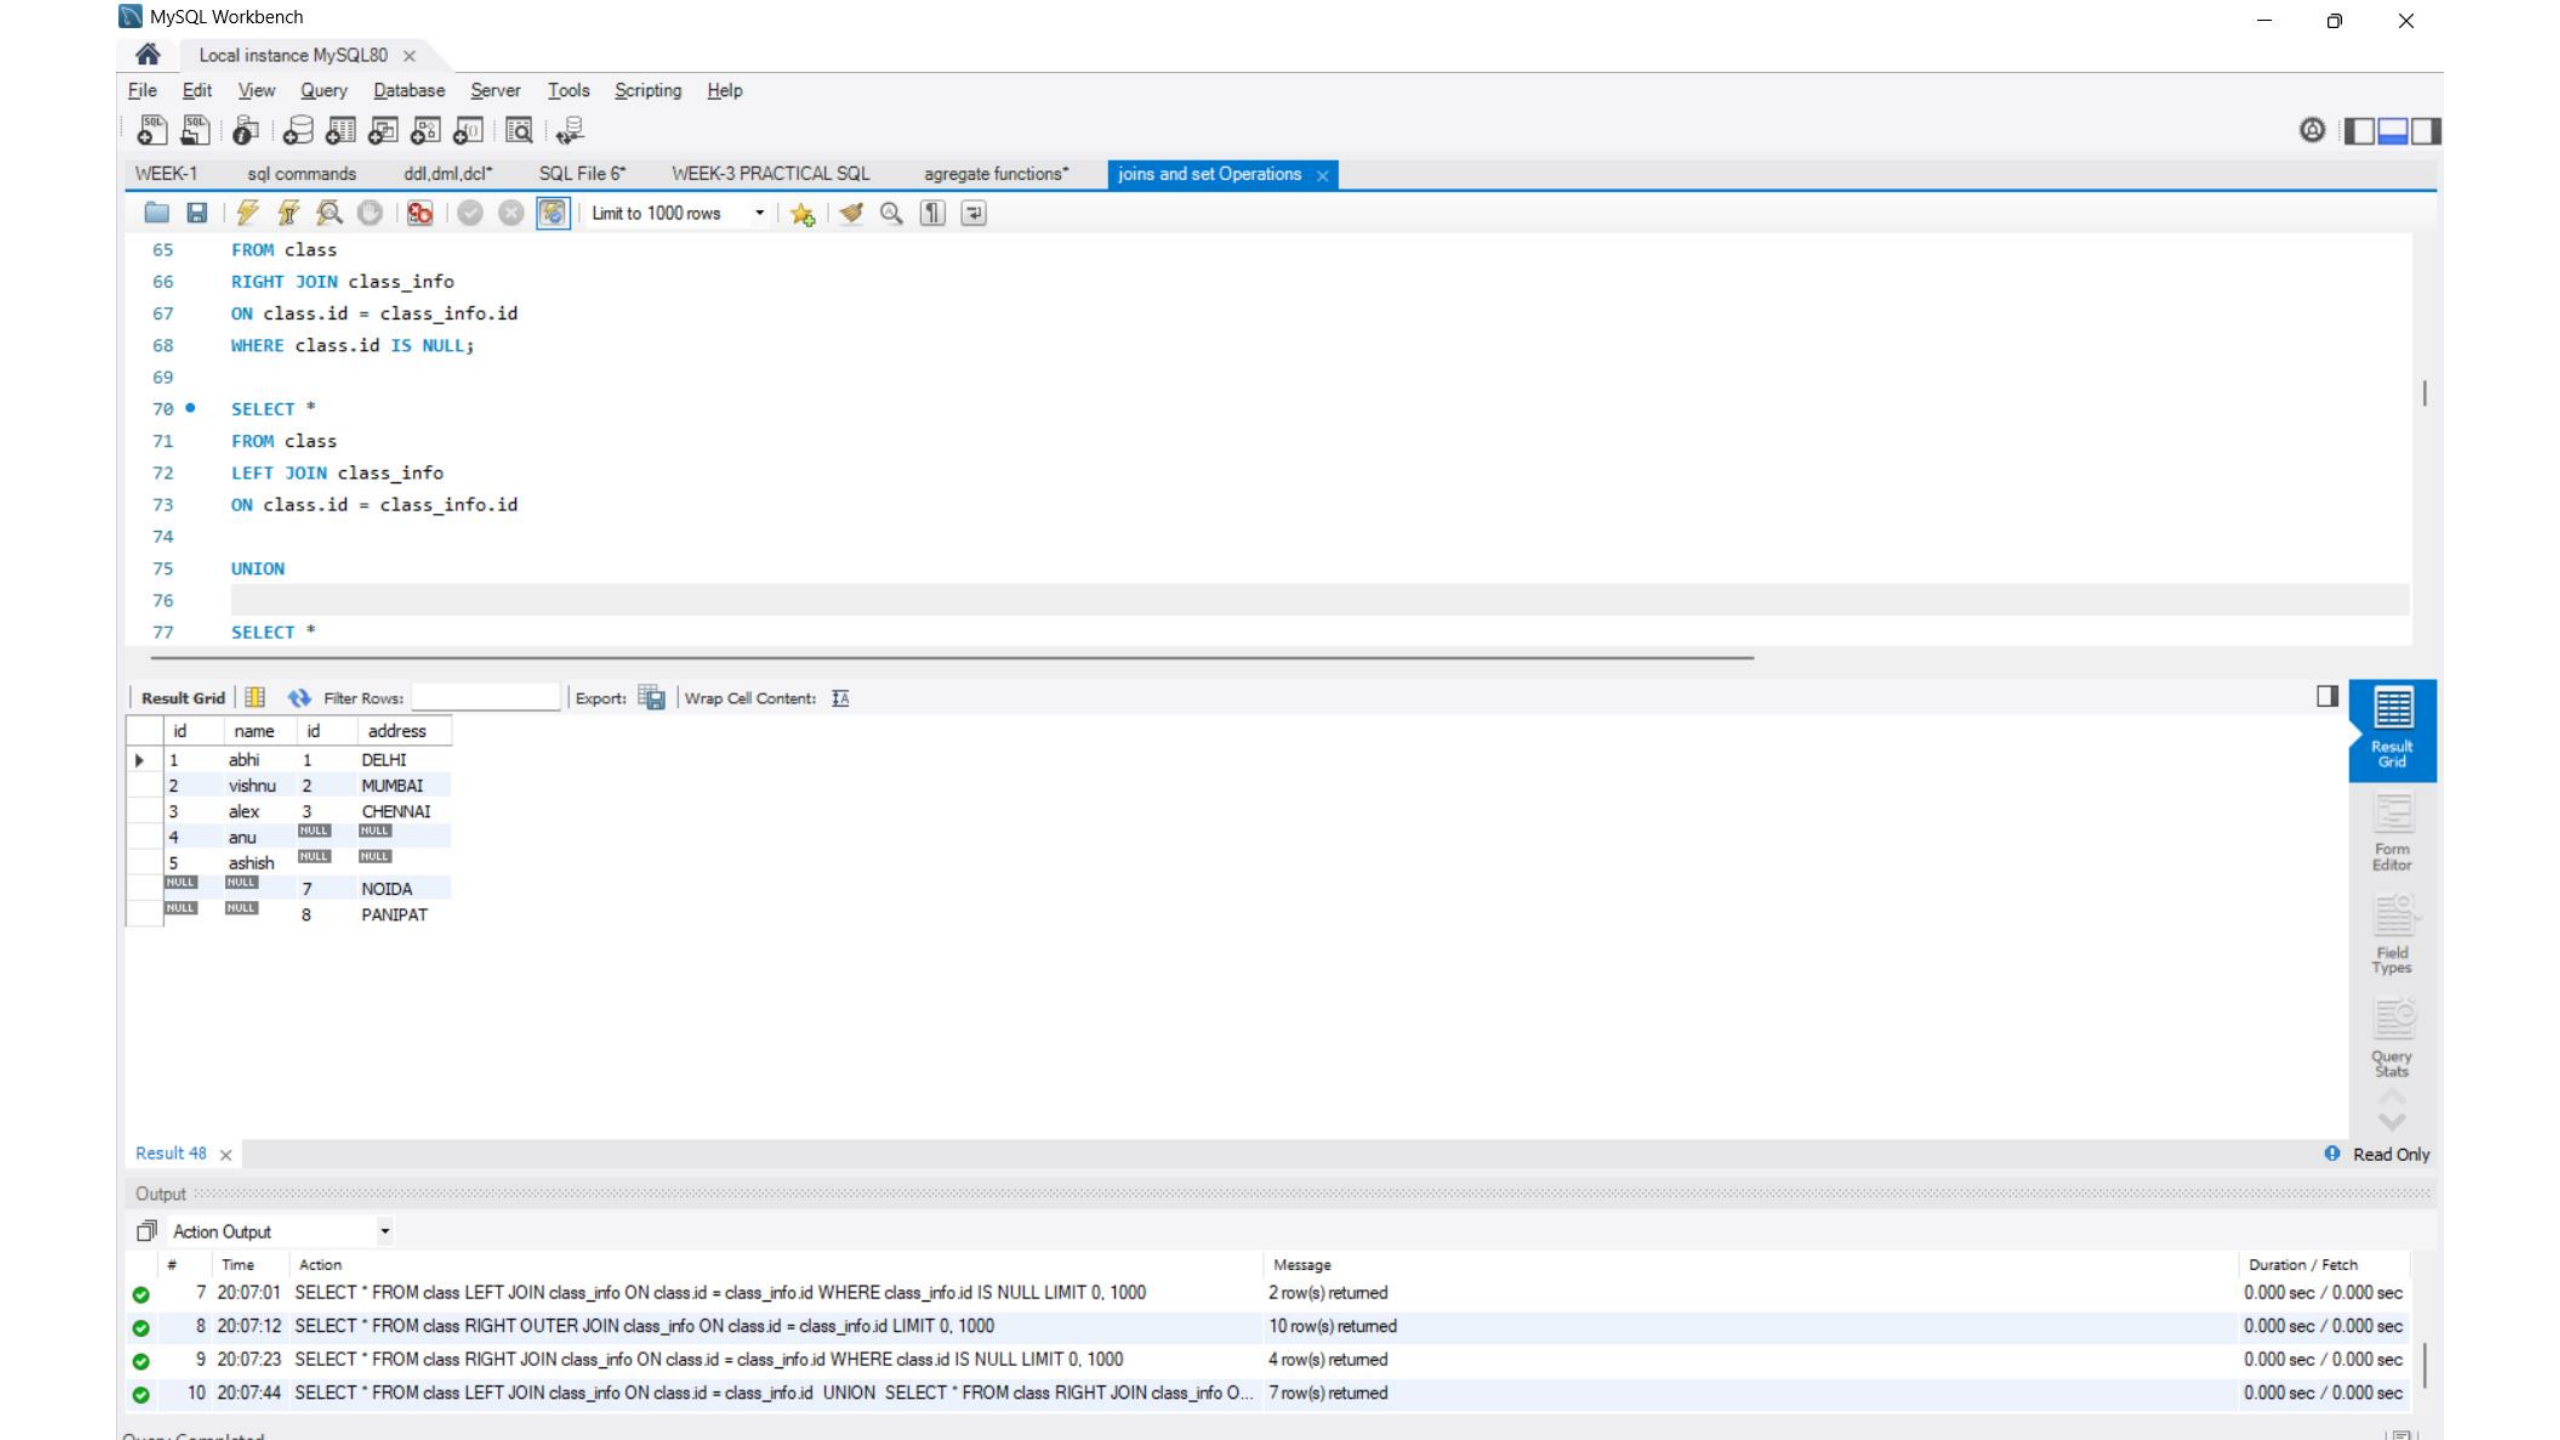
Output

Action Output

#	Time	Action	Message	Duration / Fetch
5	20:06:33	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec
6	20:06:49	SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec
7	20:07:01	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
8	20:07:12	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	10 row(s) returned	0.000 sec / 0.000 sec

Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
59 SELECT *
60 FROM
Execute the statement under the keyboard cursor
61 RIGHT OUTER JOIN class_info
62 ON class.id = class_info.id;
63
64 SELECT *
65 FROM class
66 RIGHT JOIN class_info
67 ON class.id = class_info.id
68 WHERE class.id IS NULL;
69
70 SELECT *
71 FROM class
Result Grid Filter Rows: Export: Wrap Cell Content:
id name id address
NULL NULL 7 NOIDA
NULL NULL 8 PANIPAT
NULL NULL 7 NOIDA
NULL NULL 8 PANIPAT
Result Grid
Form Editor
Field Types
Query Stats
Result 47
Read Only
Output
Action Output
Time Action Message Duration / Fetch
6 20:06:49 SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 8 row(s) returned 0.000 sec / 0.000 sec
7 20:07:01 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000 2 row(s) returned 0.000 sec / 0.000 sec
8 20:07:12 SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 10 row(s) returned 0.000 sec / 0.000 sec
9 20:07:23 SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000 4 row(s) returned 0.000 sec / 0.000 sec
Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
65 FROM class
66 RIGHT JOIN class_info
67 ON class.id = class_info.id
68 WHERE class.id IS NULL;
69
70 SELECT *
71 FROM class
72 LEFT JOIN class_info
73 ON class.id = class_info.id
74
75 UNION
76
77 SELECT *
Result Grid Filter Rows: Export: Wrap Cell Content:
id name id address
1 abhi 1 DELHI
2 vishnu 2 MUMBAI
3 alex 3 CHENNAI
4 anu NULL NULL
5 ashish NULL NULL
NULL NULL 7 NOIDA
NULL NULL 8 PANIPAT
Result Grid
Form Editor
Field Types
Query Stats
Result 48
Read Only
Output
Action Output
Time Action Message Duration / Fetch
7 20:07:01 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000 2 row(s) returned 0.000 sec / 0.000 sec
8 20:07:12 SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000 10 row(s) returned 0.000 sec / 0.000 sec
9 20:07:23 SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000 4 row(s) returned 0.000 sec / 0.000 sec
10 20:07:44 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info O... 7 row(s) returned 0.000 sec / 0.000 sec

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations

Limit to 1000 rows

```
71    FROM class
72    LEFT JOIN class_info
73    ON class.id = class_info.id
74
75    UNION
76
77    SELECT *
78    FROM class
79    RIGHT JOIN class_info
80    ON class.id = class_info.id
81    WHERE class.id IS NULL;
82
83    SELECT *
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name	id	address
1	abhi	1	DELHI
2	vishnu	2	MUMBAI
3	alex	3	CHENNAI
4	anu	NULL	NULL
5	ashish	NULL	NULL
NULL	NULL	7	NOIDA
NULL	NULL	8	PANIPAT

Result Grid Form Editor Field Types Query Stats

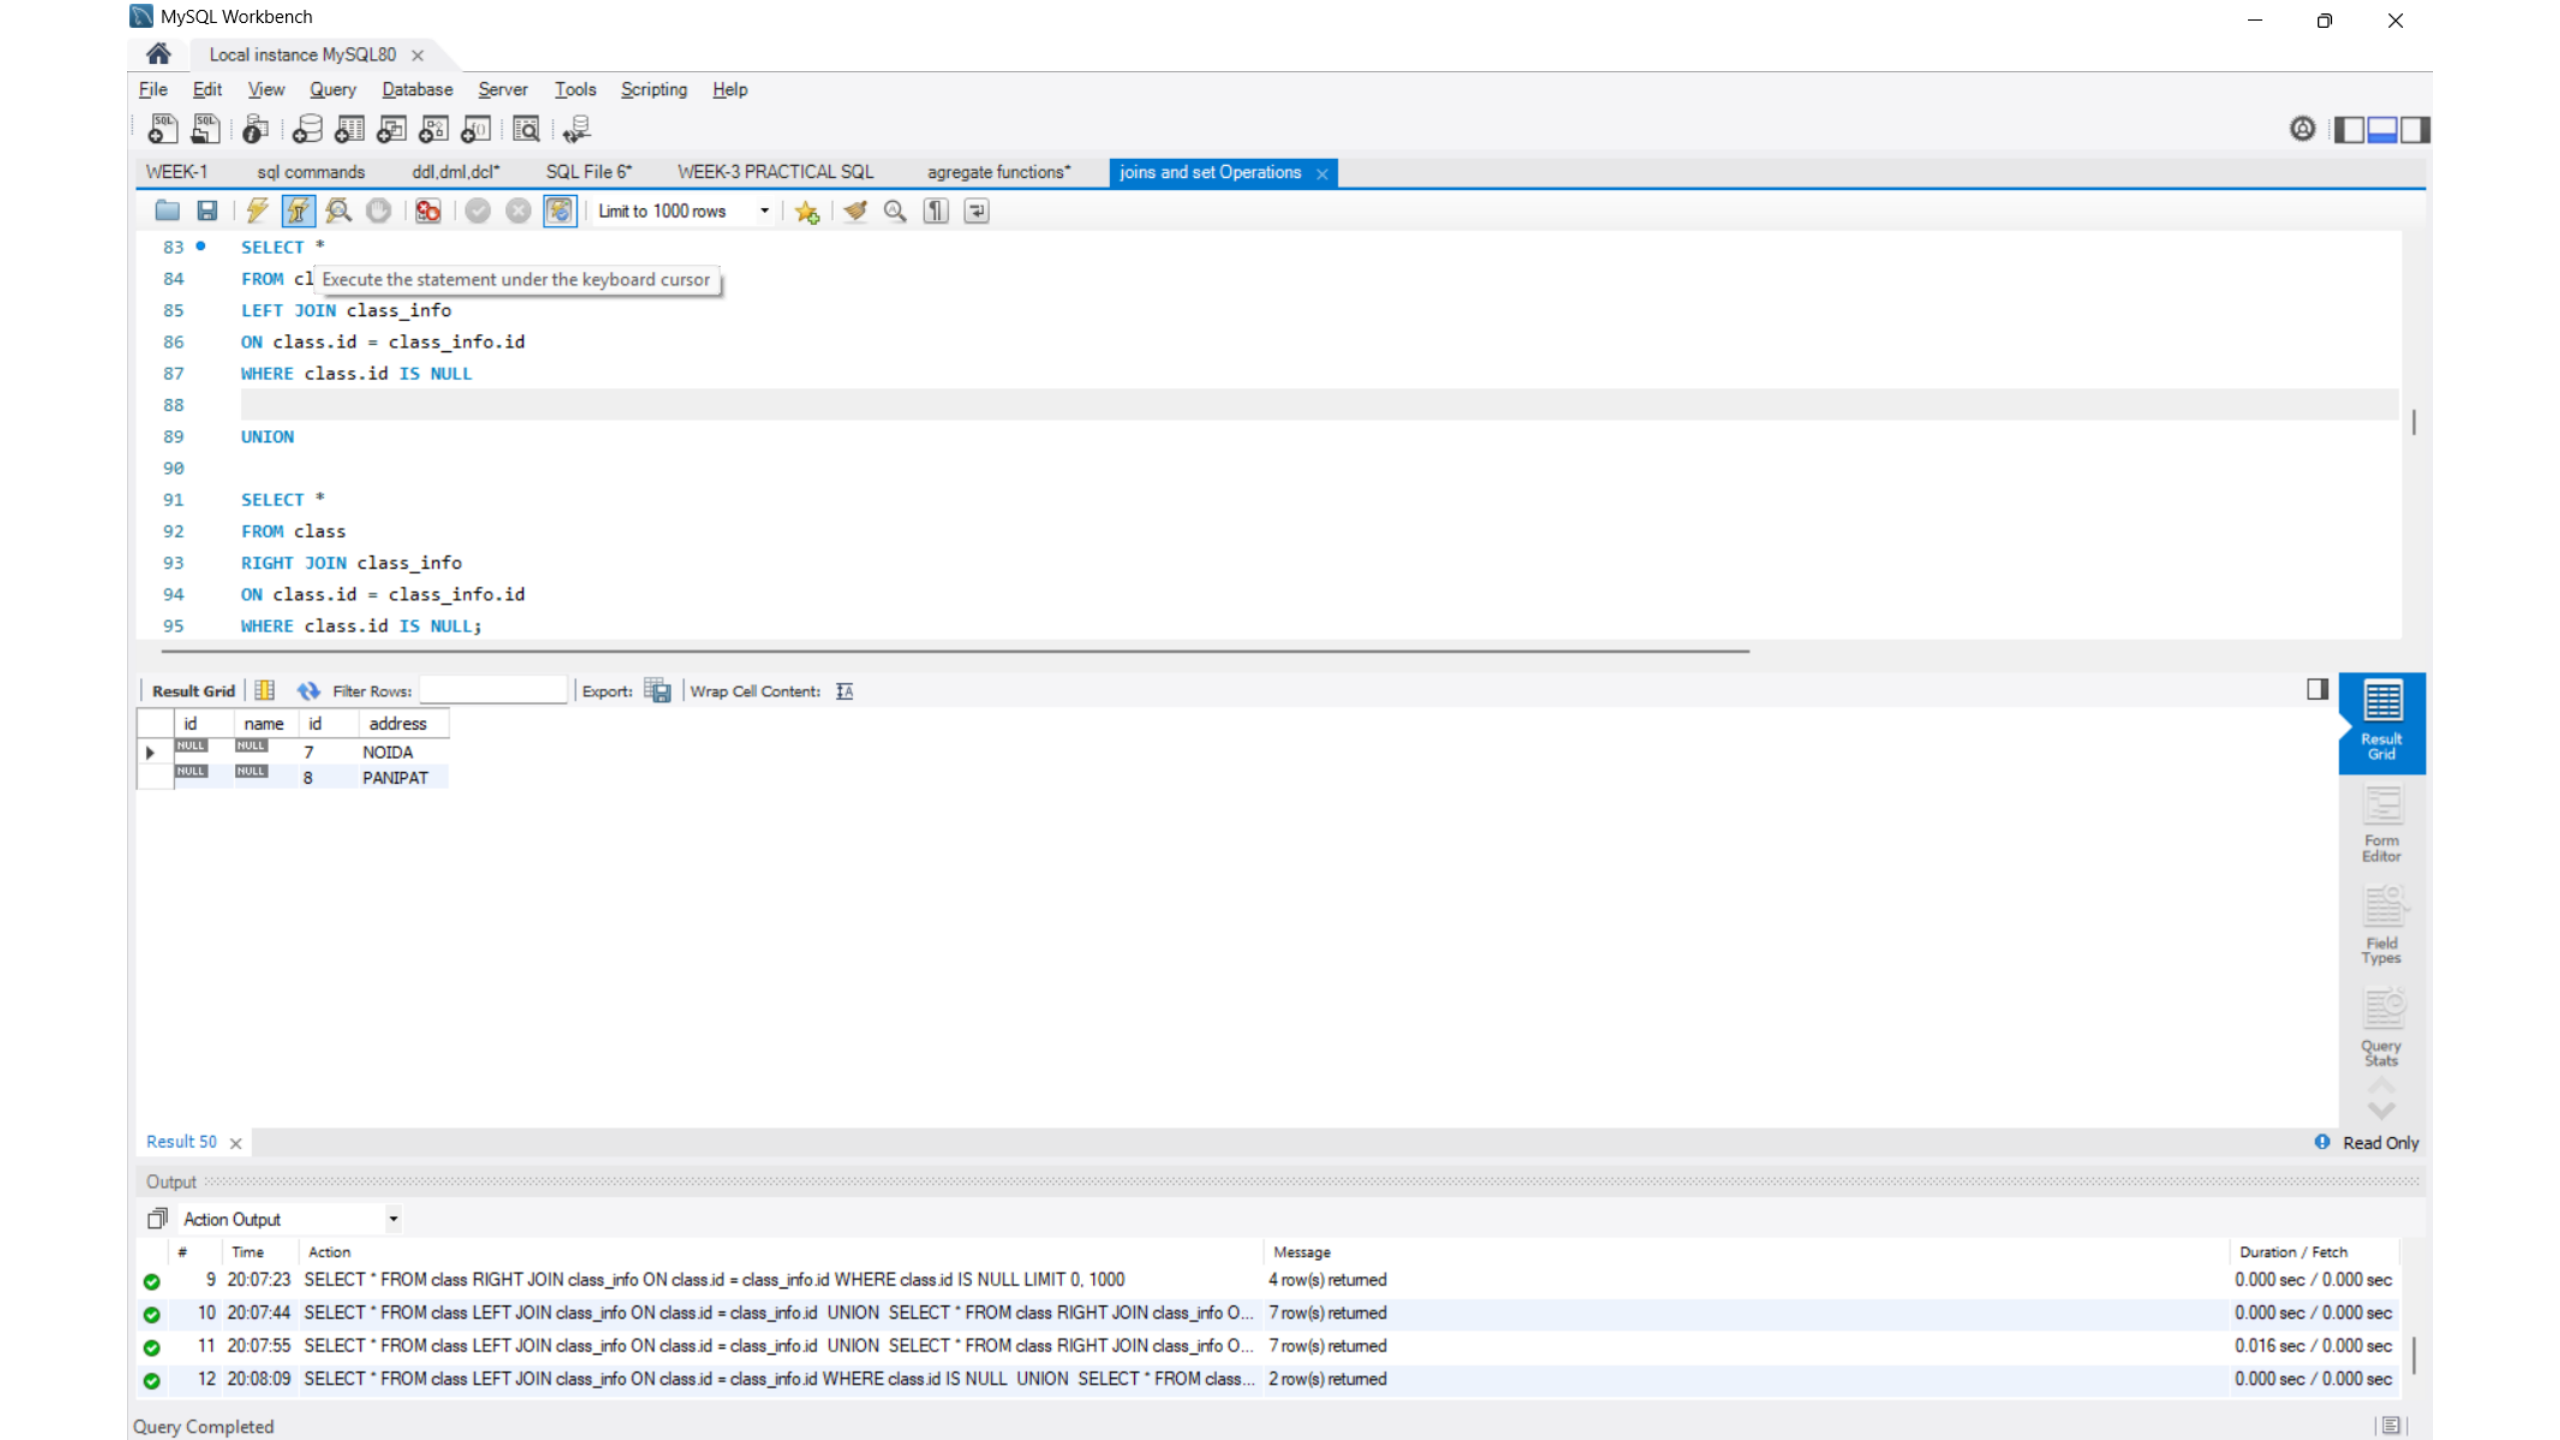
Result 49

Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
8	20:07:12	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	10 row(s) returned	0.000 sec / 0.000 sec
9	20:07:23	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
10	20:07:44	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info O...	7 row(s) returned	0.000 sec / 0.000 sec
11	20:07:55	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info O...	7 row(s) returned	0.016 sec / 0.000 sec


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
83 SELECT *
84 FROM cl
Execute the statement under the keyboard cursor
85 LEFT JOIN class_info
86 ON class.id = class_info.id
87 WHERE class.id IS NULL
88
89 UNION
90
91 SELECT *
92 FROM class
93 RIGHT JOIN class_info
94 ON class.id = class_info.id
95 WHERE class.id IS NULL;
Result Grid Filter Rows: Export: Wrap Cell Content:
id name id address
NULL NULL 7 NOIDA
NULL NULL 8 PANIPAT
Result Grid
Form Editor
Field Types
Query Stats
Result 50
Read Only
Output
Action Output
Time Action Message Duration / Fetch
9 20:07:23 SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000 4 row(s) returned 0.000 sec / 0.000 sec
10 20:07:44 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info O... 7 row(s) returned 0.000 sec / 0.000 sec
11 20:07:55 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info O... 7 row(s) returned 0.016 sec / 0.000 sec
12 20:08:09 SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL UNION SELECT * FROM class... 2 row(s) returned 0.000 sec / 0.000 sec
Query Completed

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations

Limit to 1000 rows

```
108    (1,'abhi'),
109    (2,'ada
110
111 •  INSERT INTO second_table VALUES
112    (2,'adam'),
113    (3,'chester');
114
115 •  SELECT *
116    FROM first_table
117    UNION
118    SELECT *
119    FROM second_table;
120
```

Execute the statement under the keyboard cursor

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

id	name
1	abhi
2	adam
3	chester

Result Grid Form Editor Field Types Query Stats

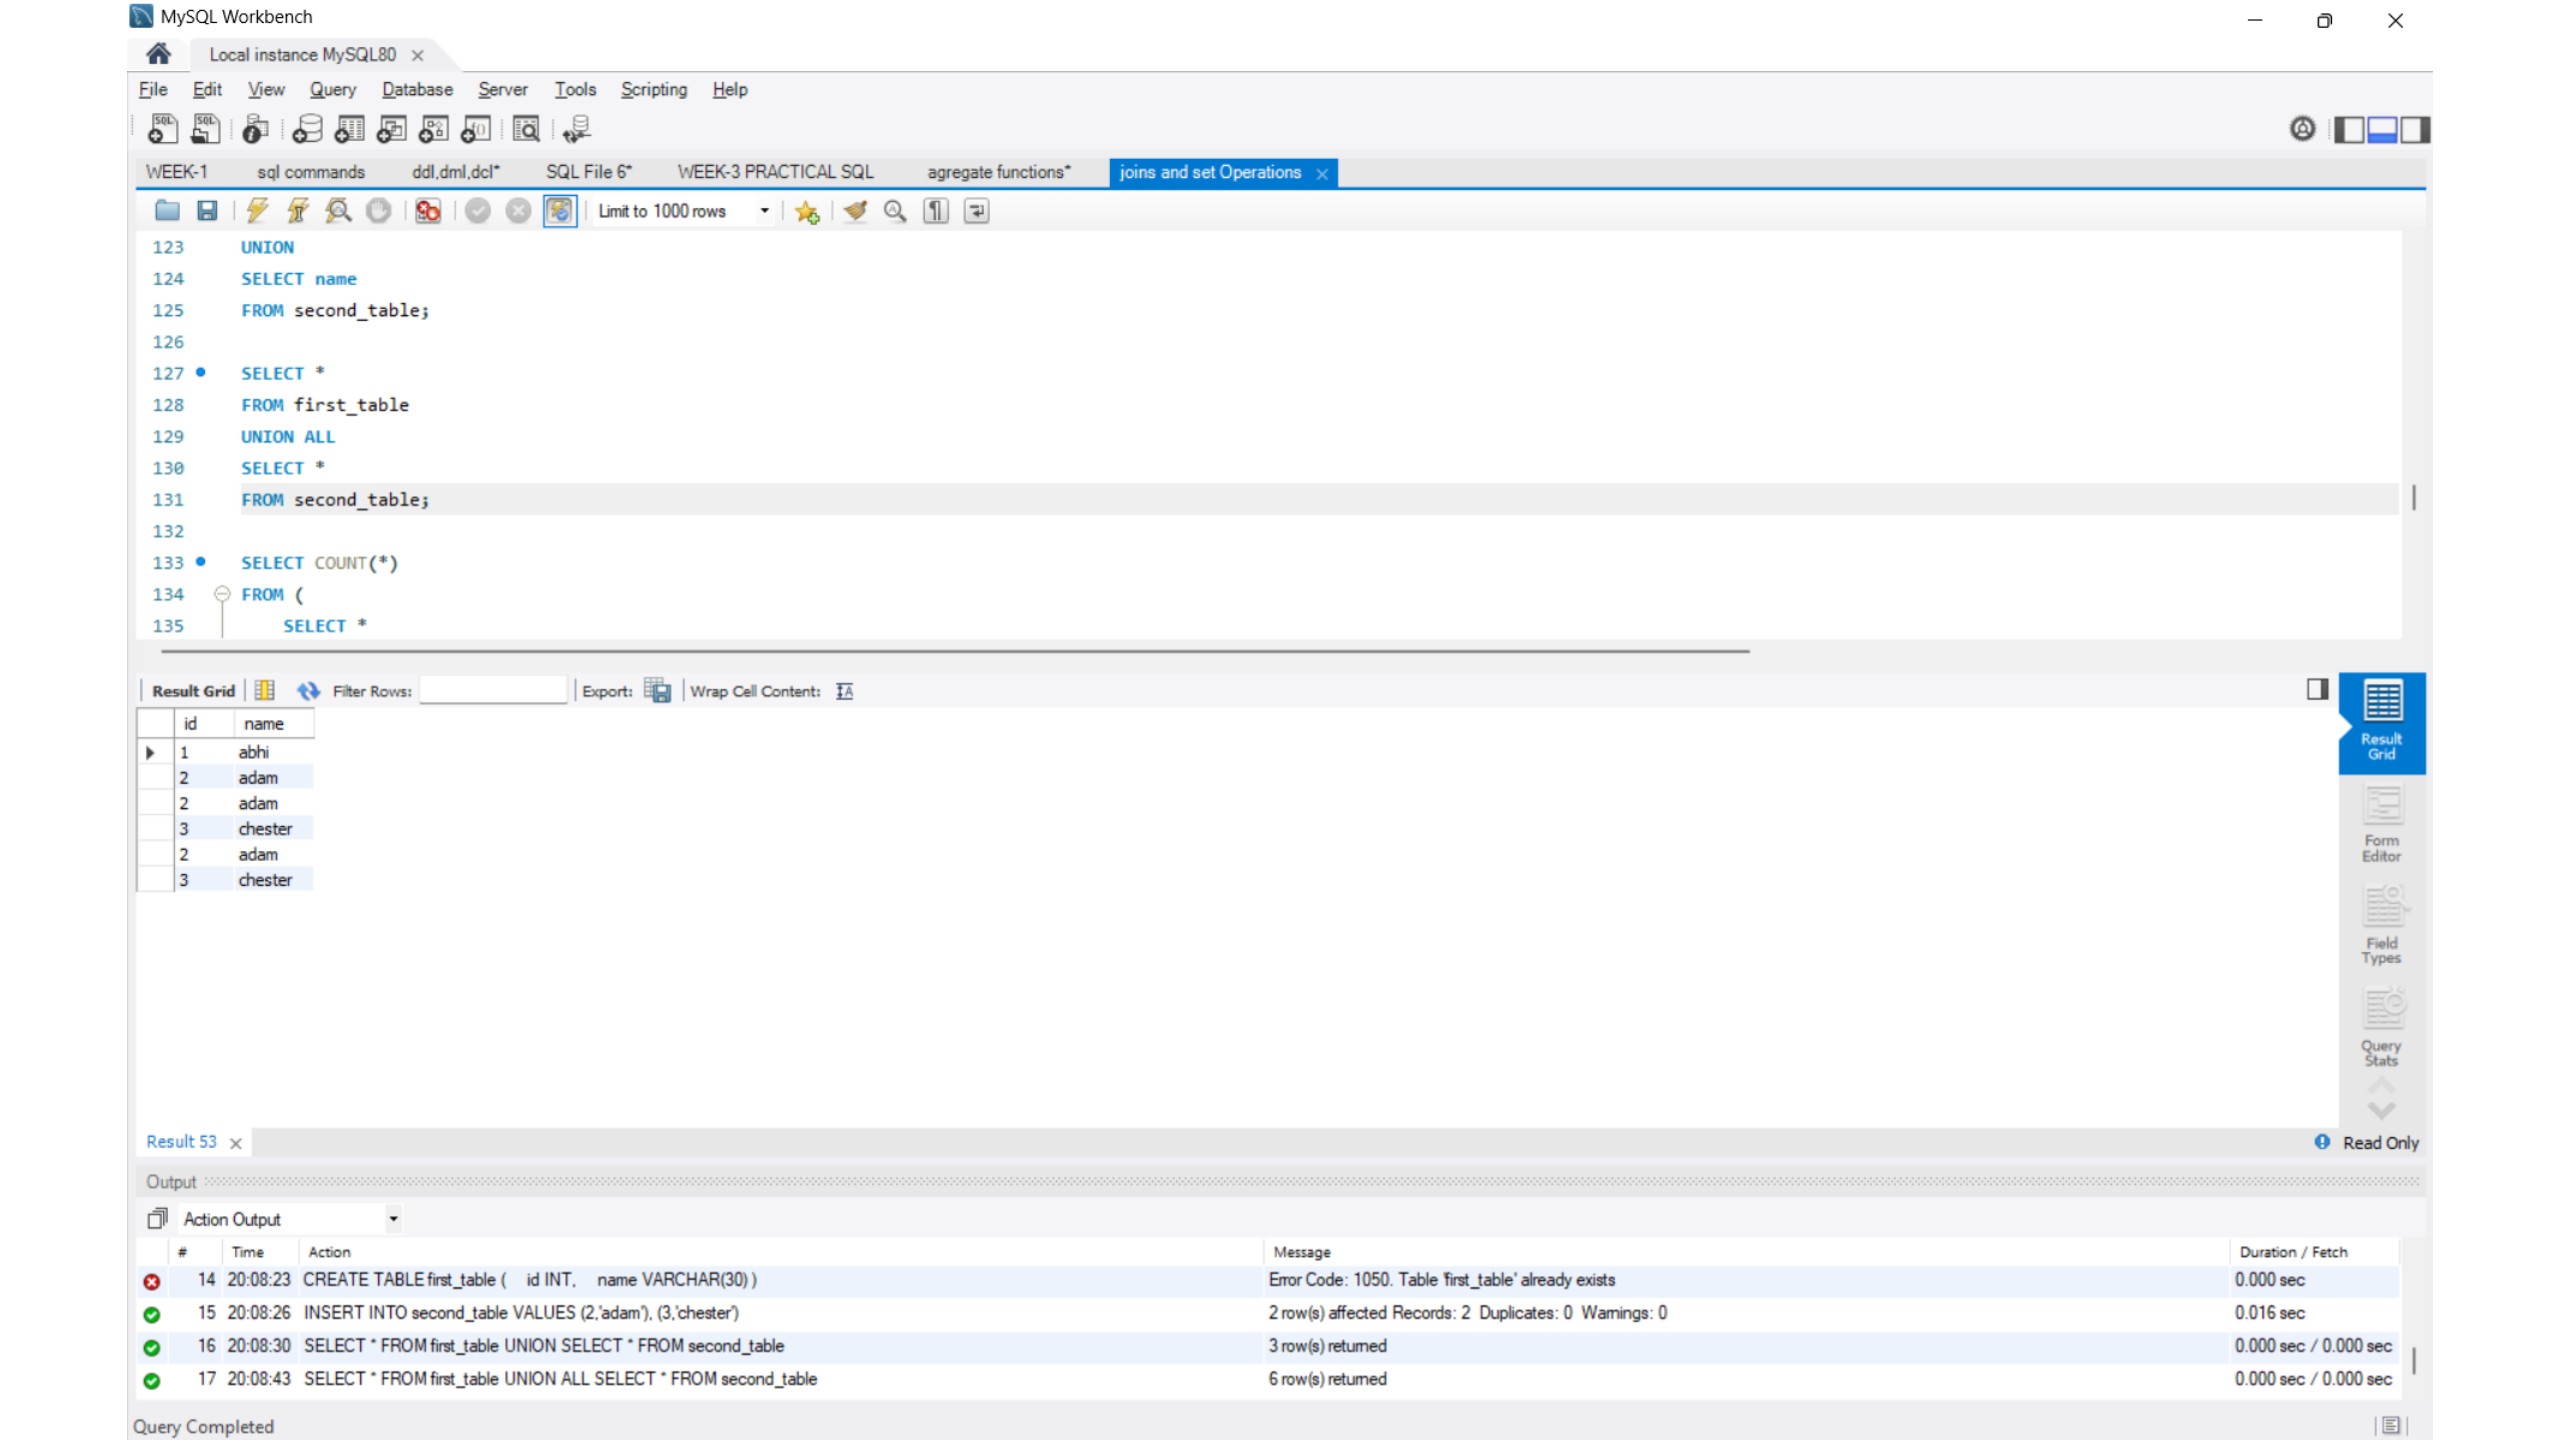
Result 52

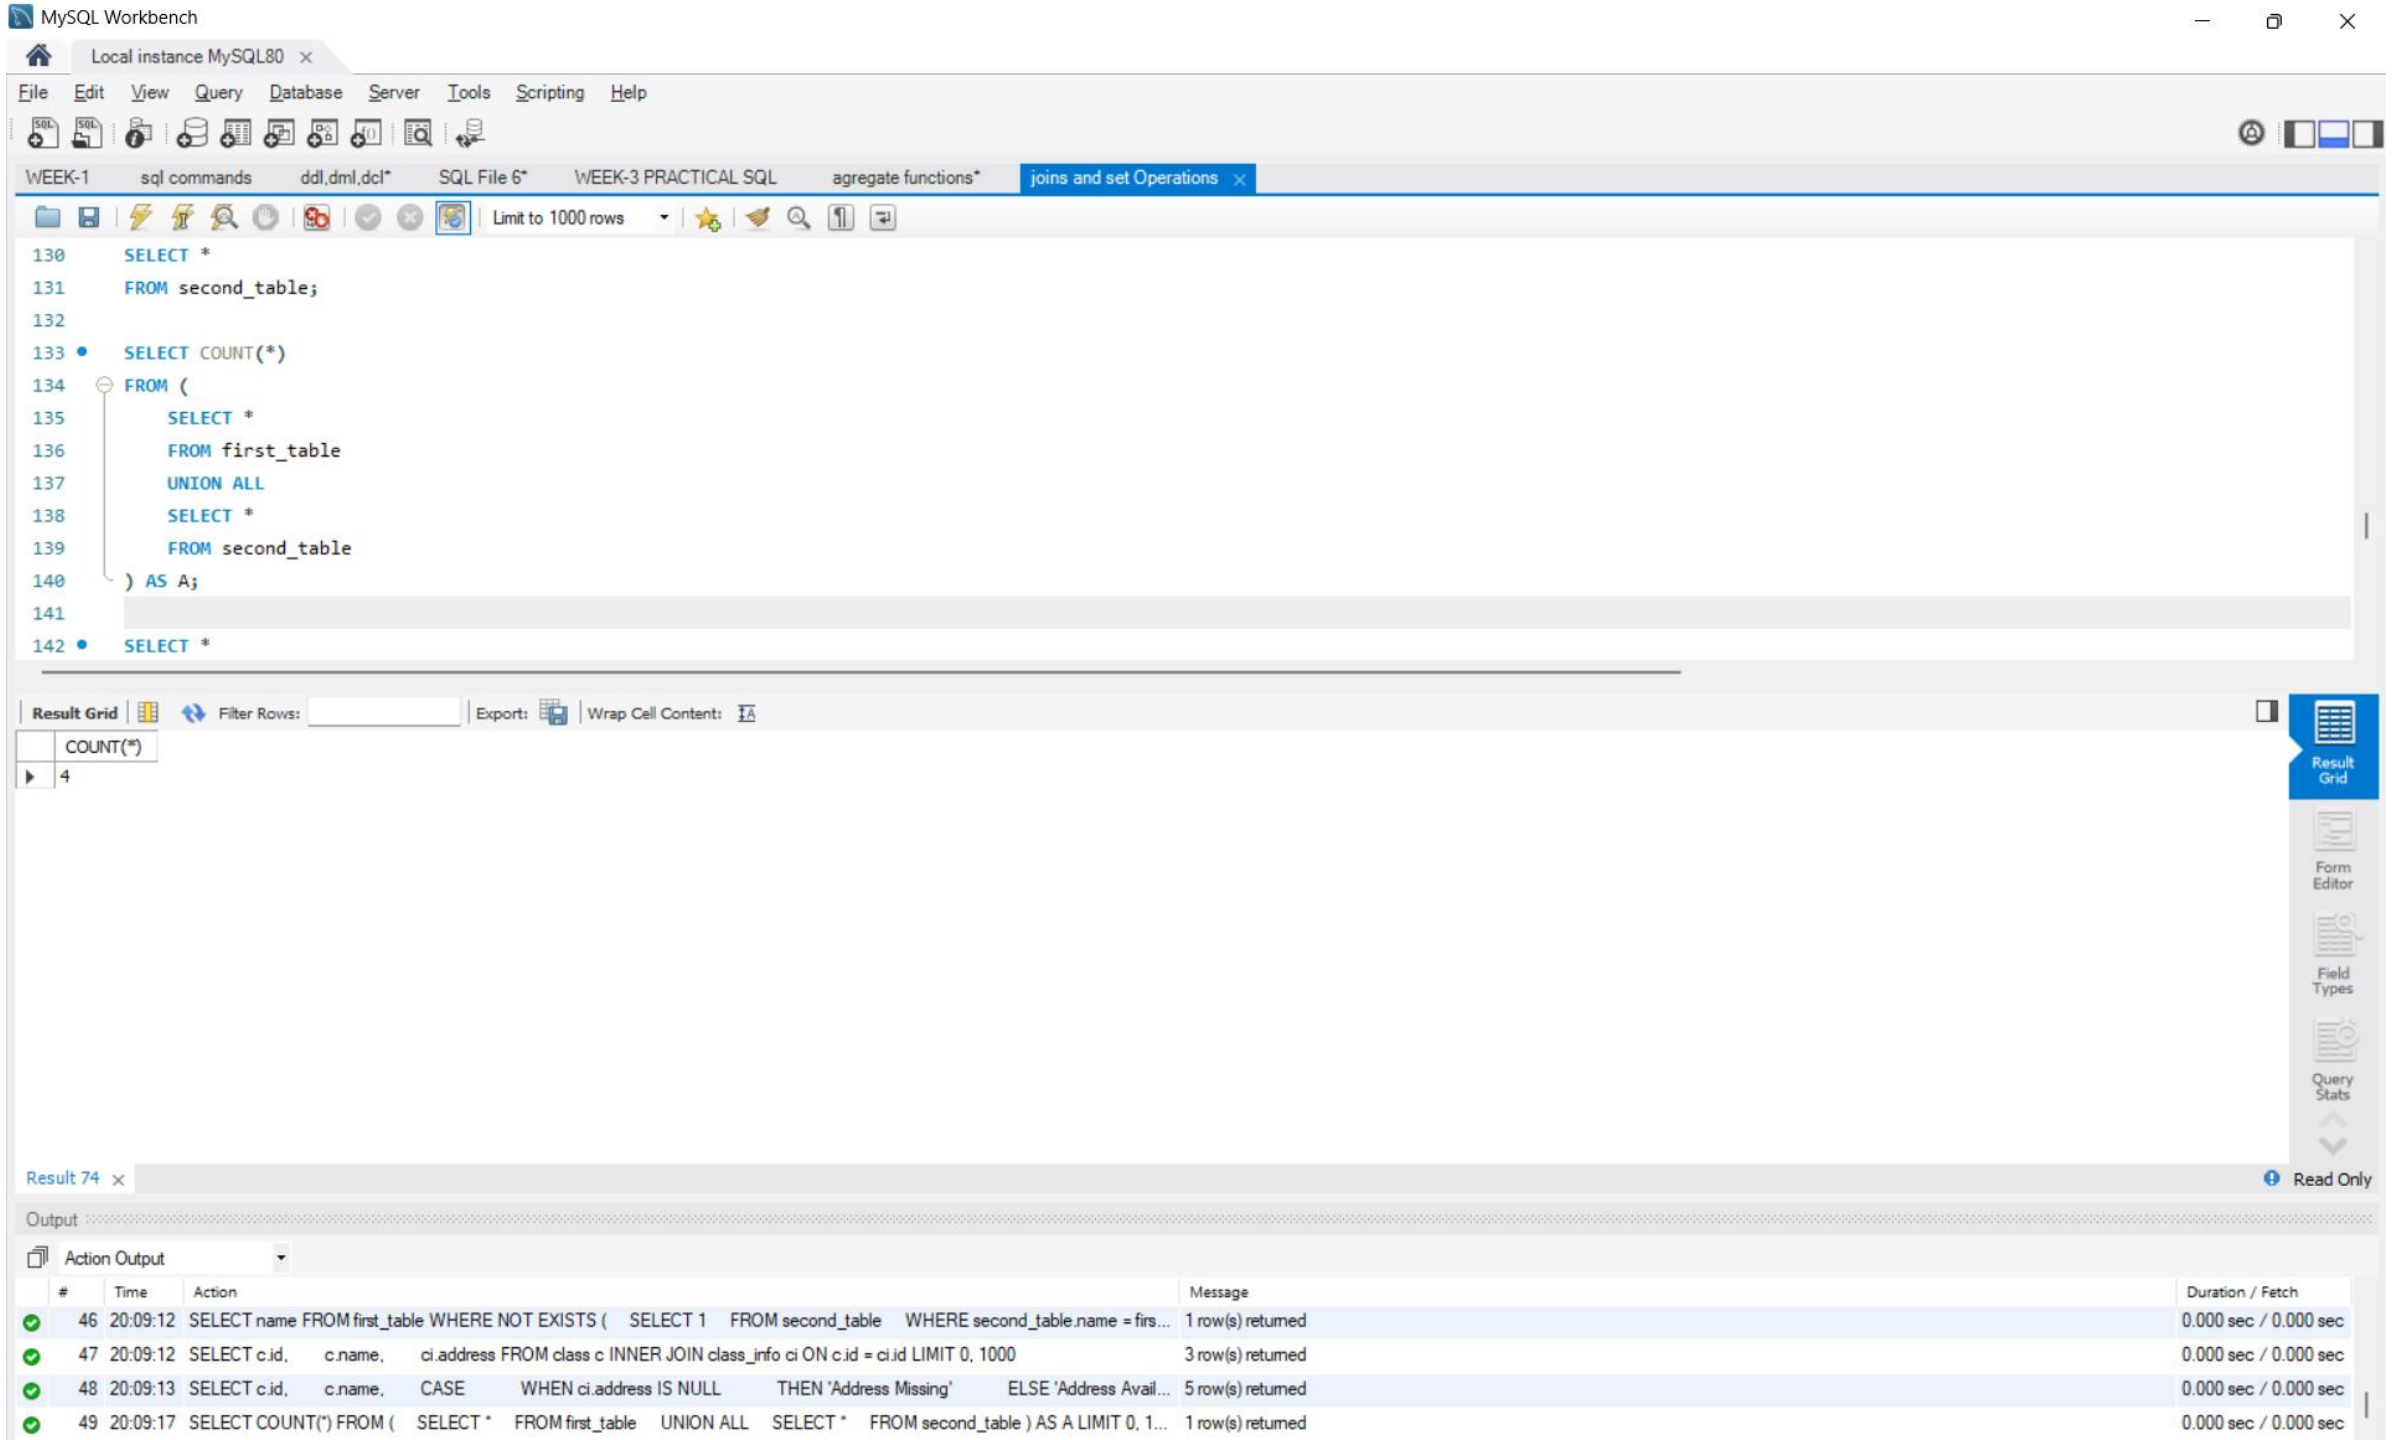
Read Only

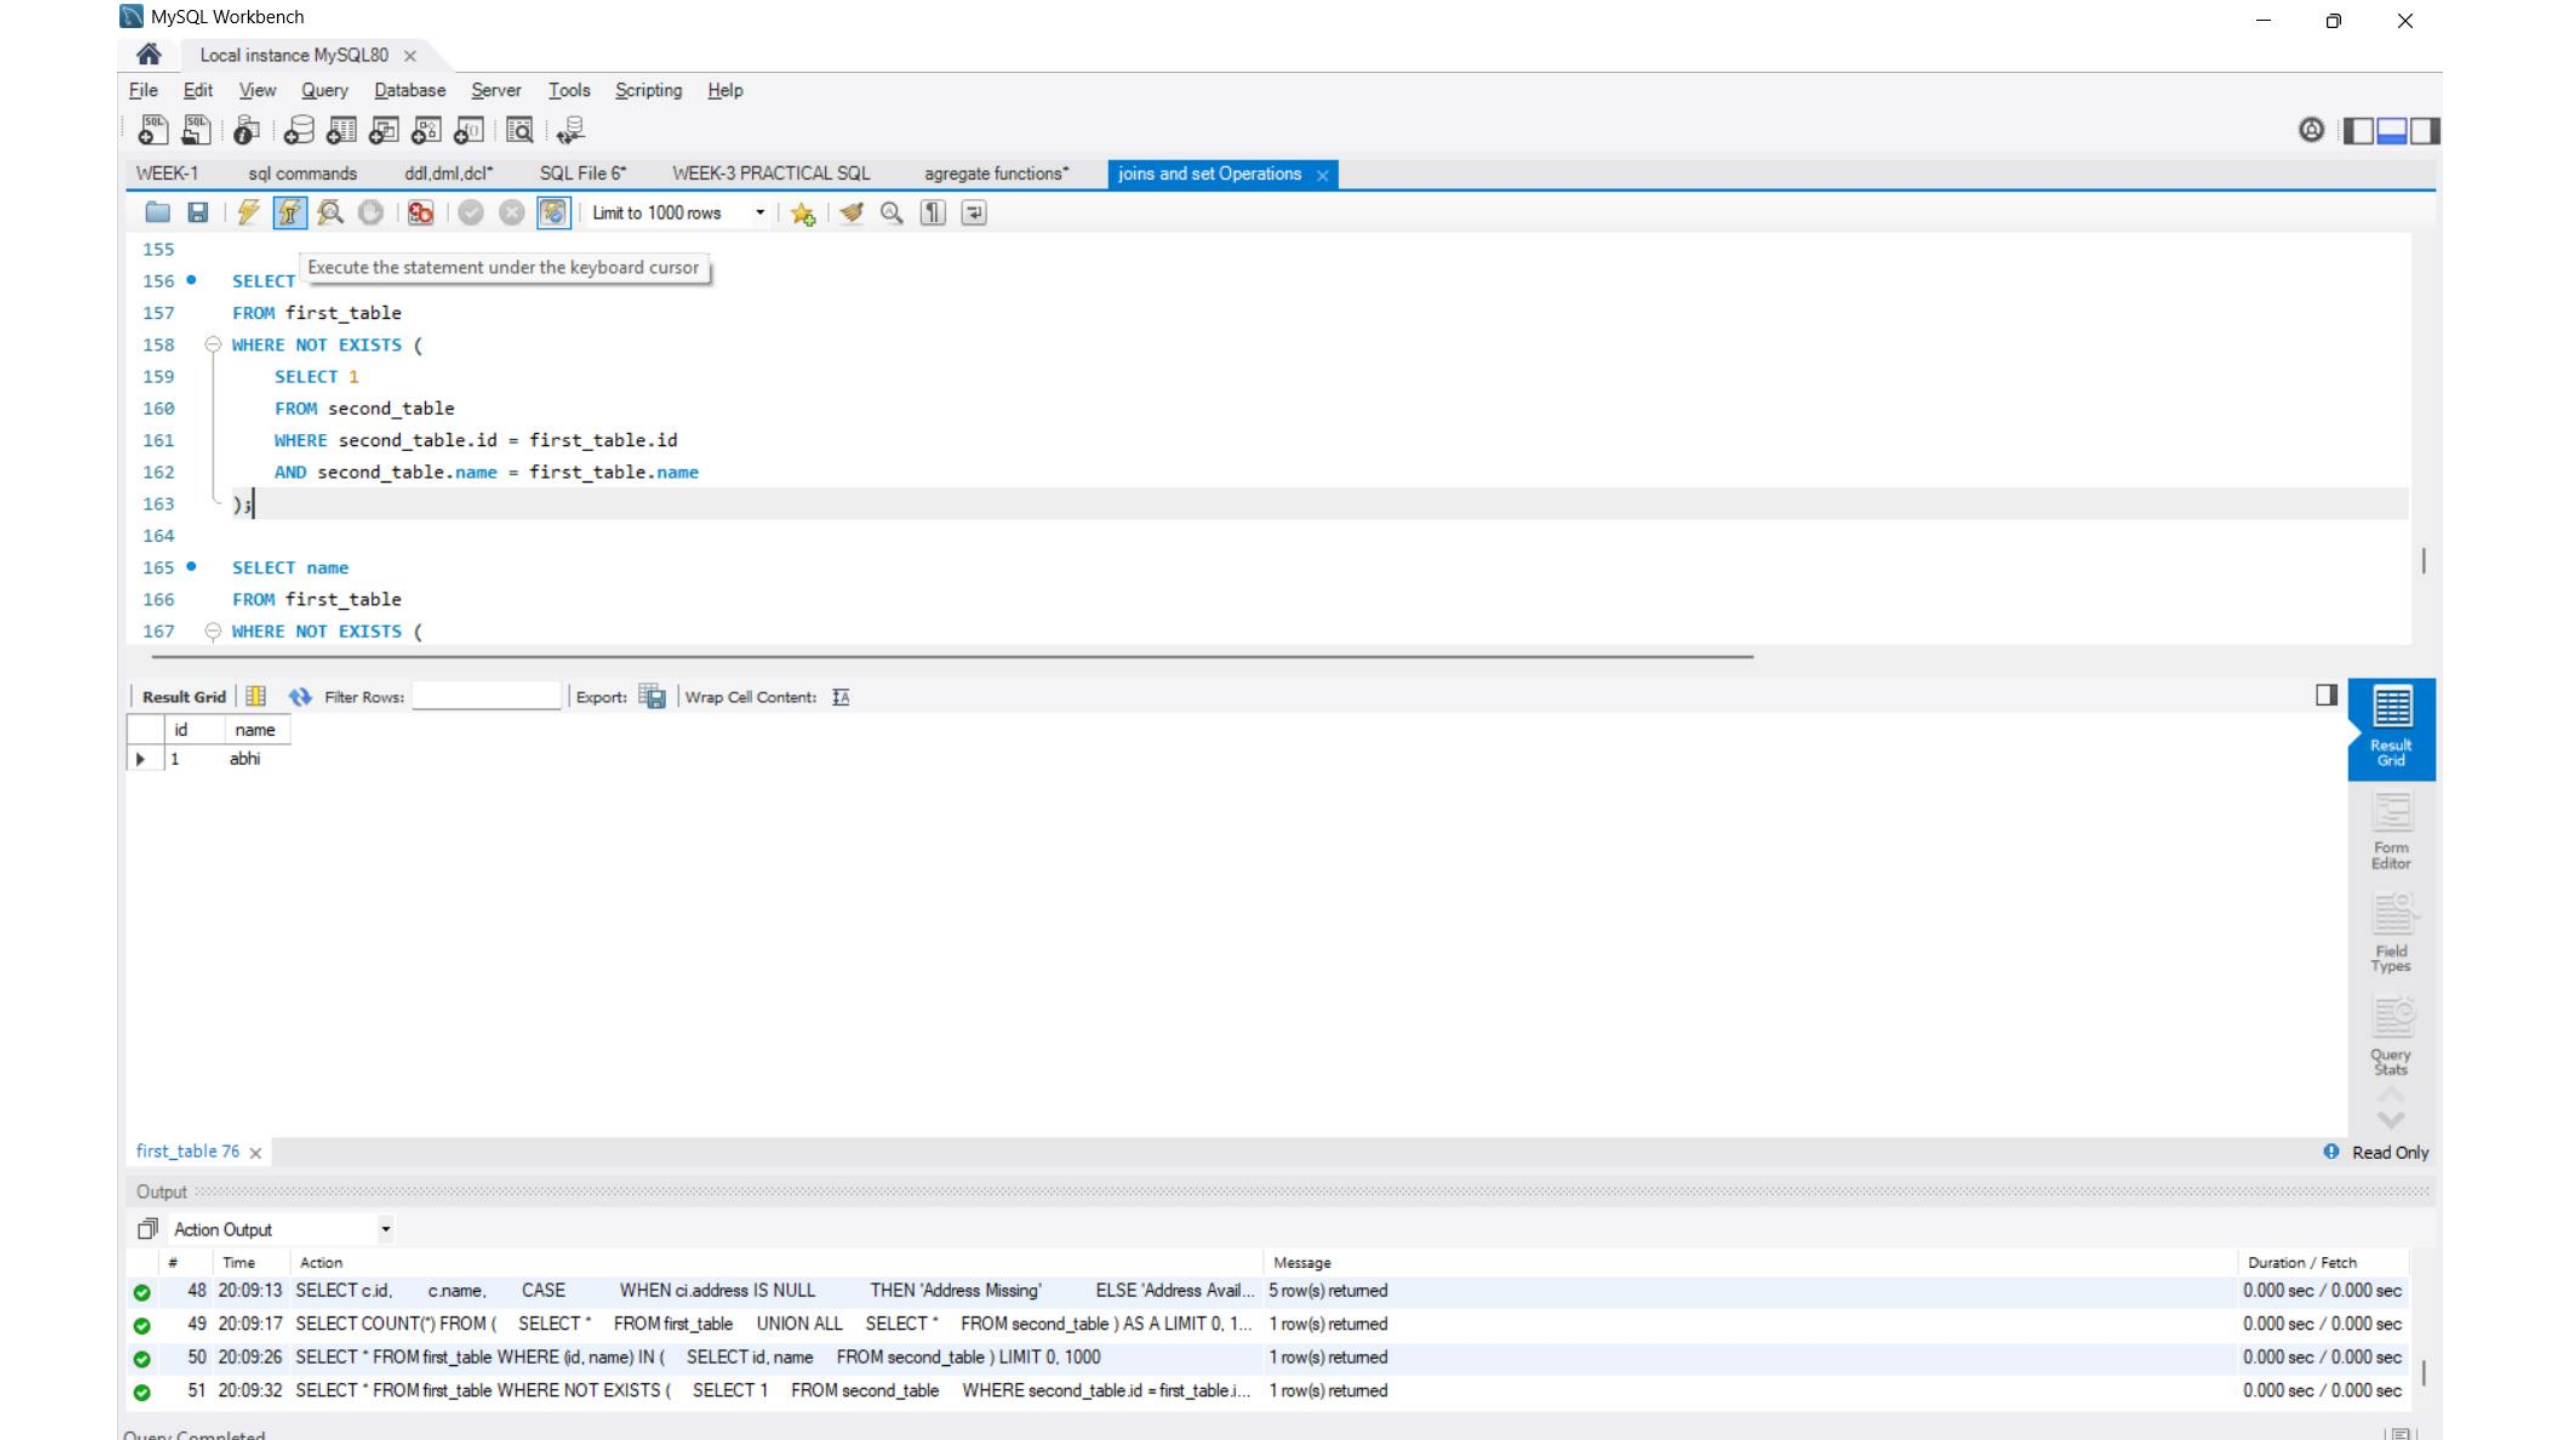
Output

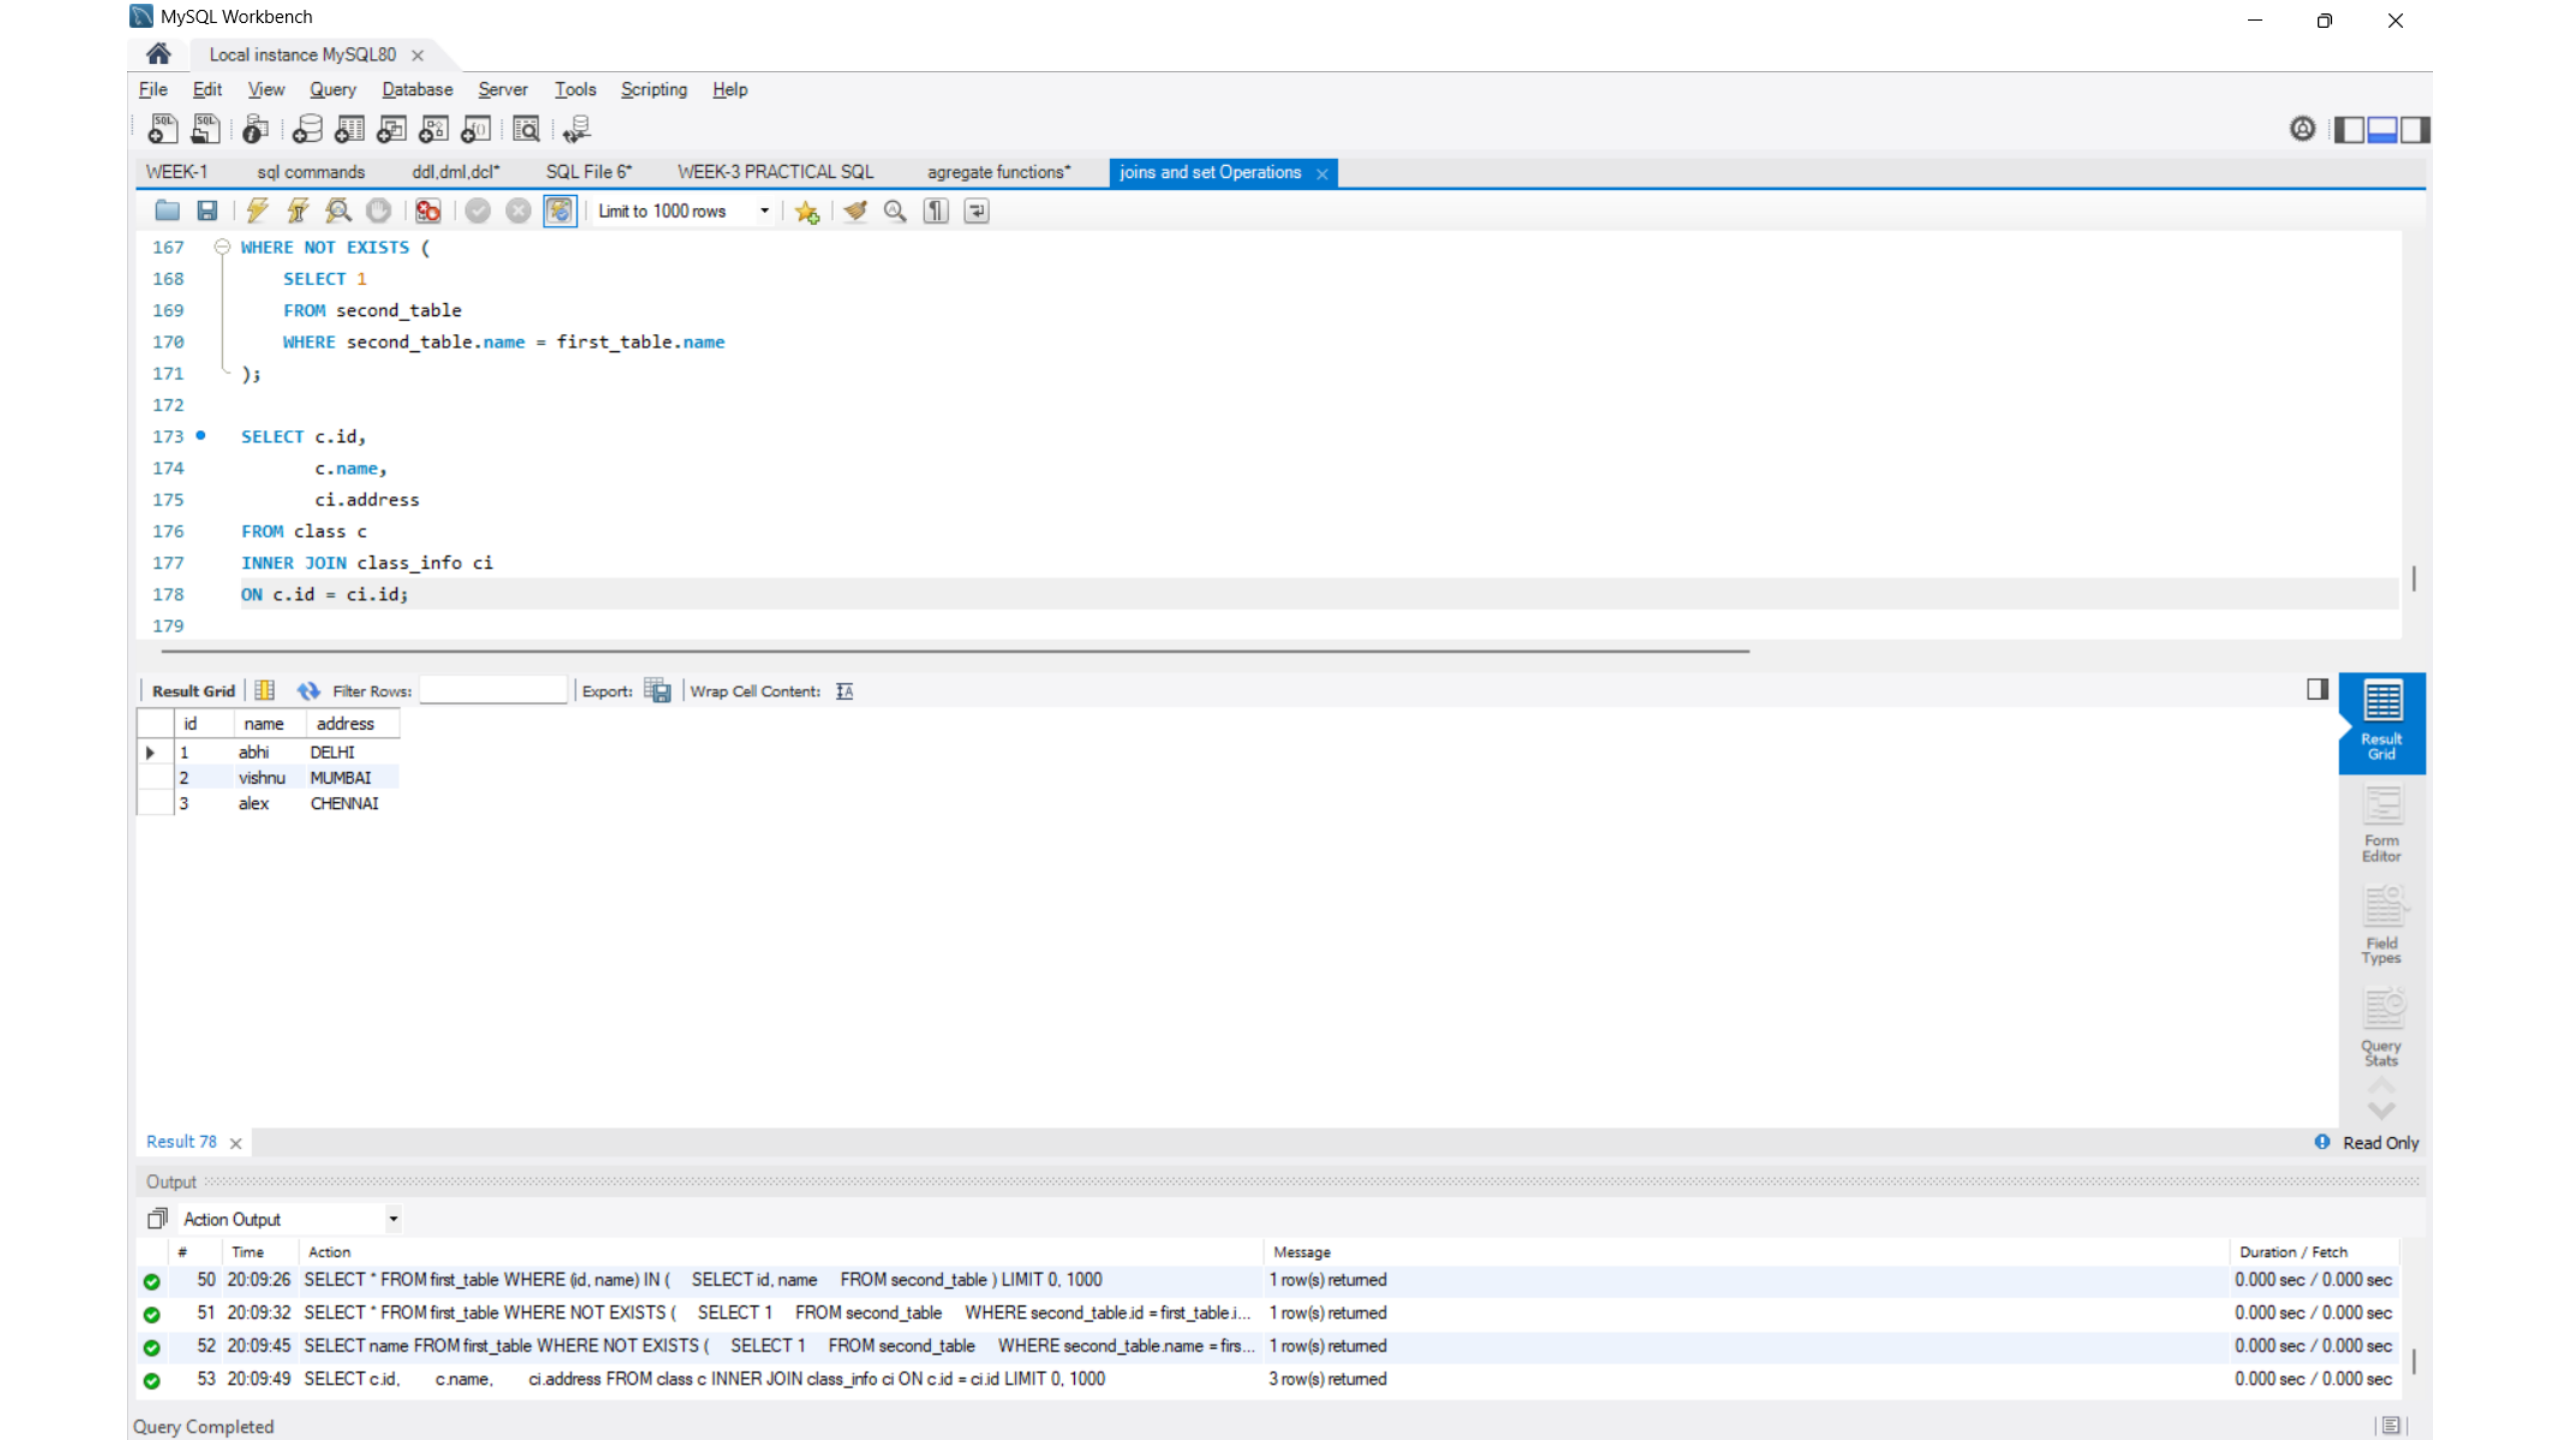
Action Output

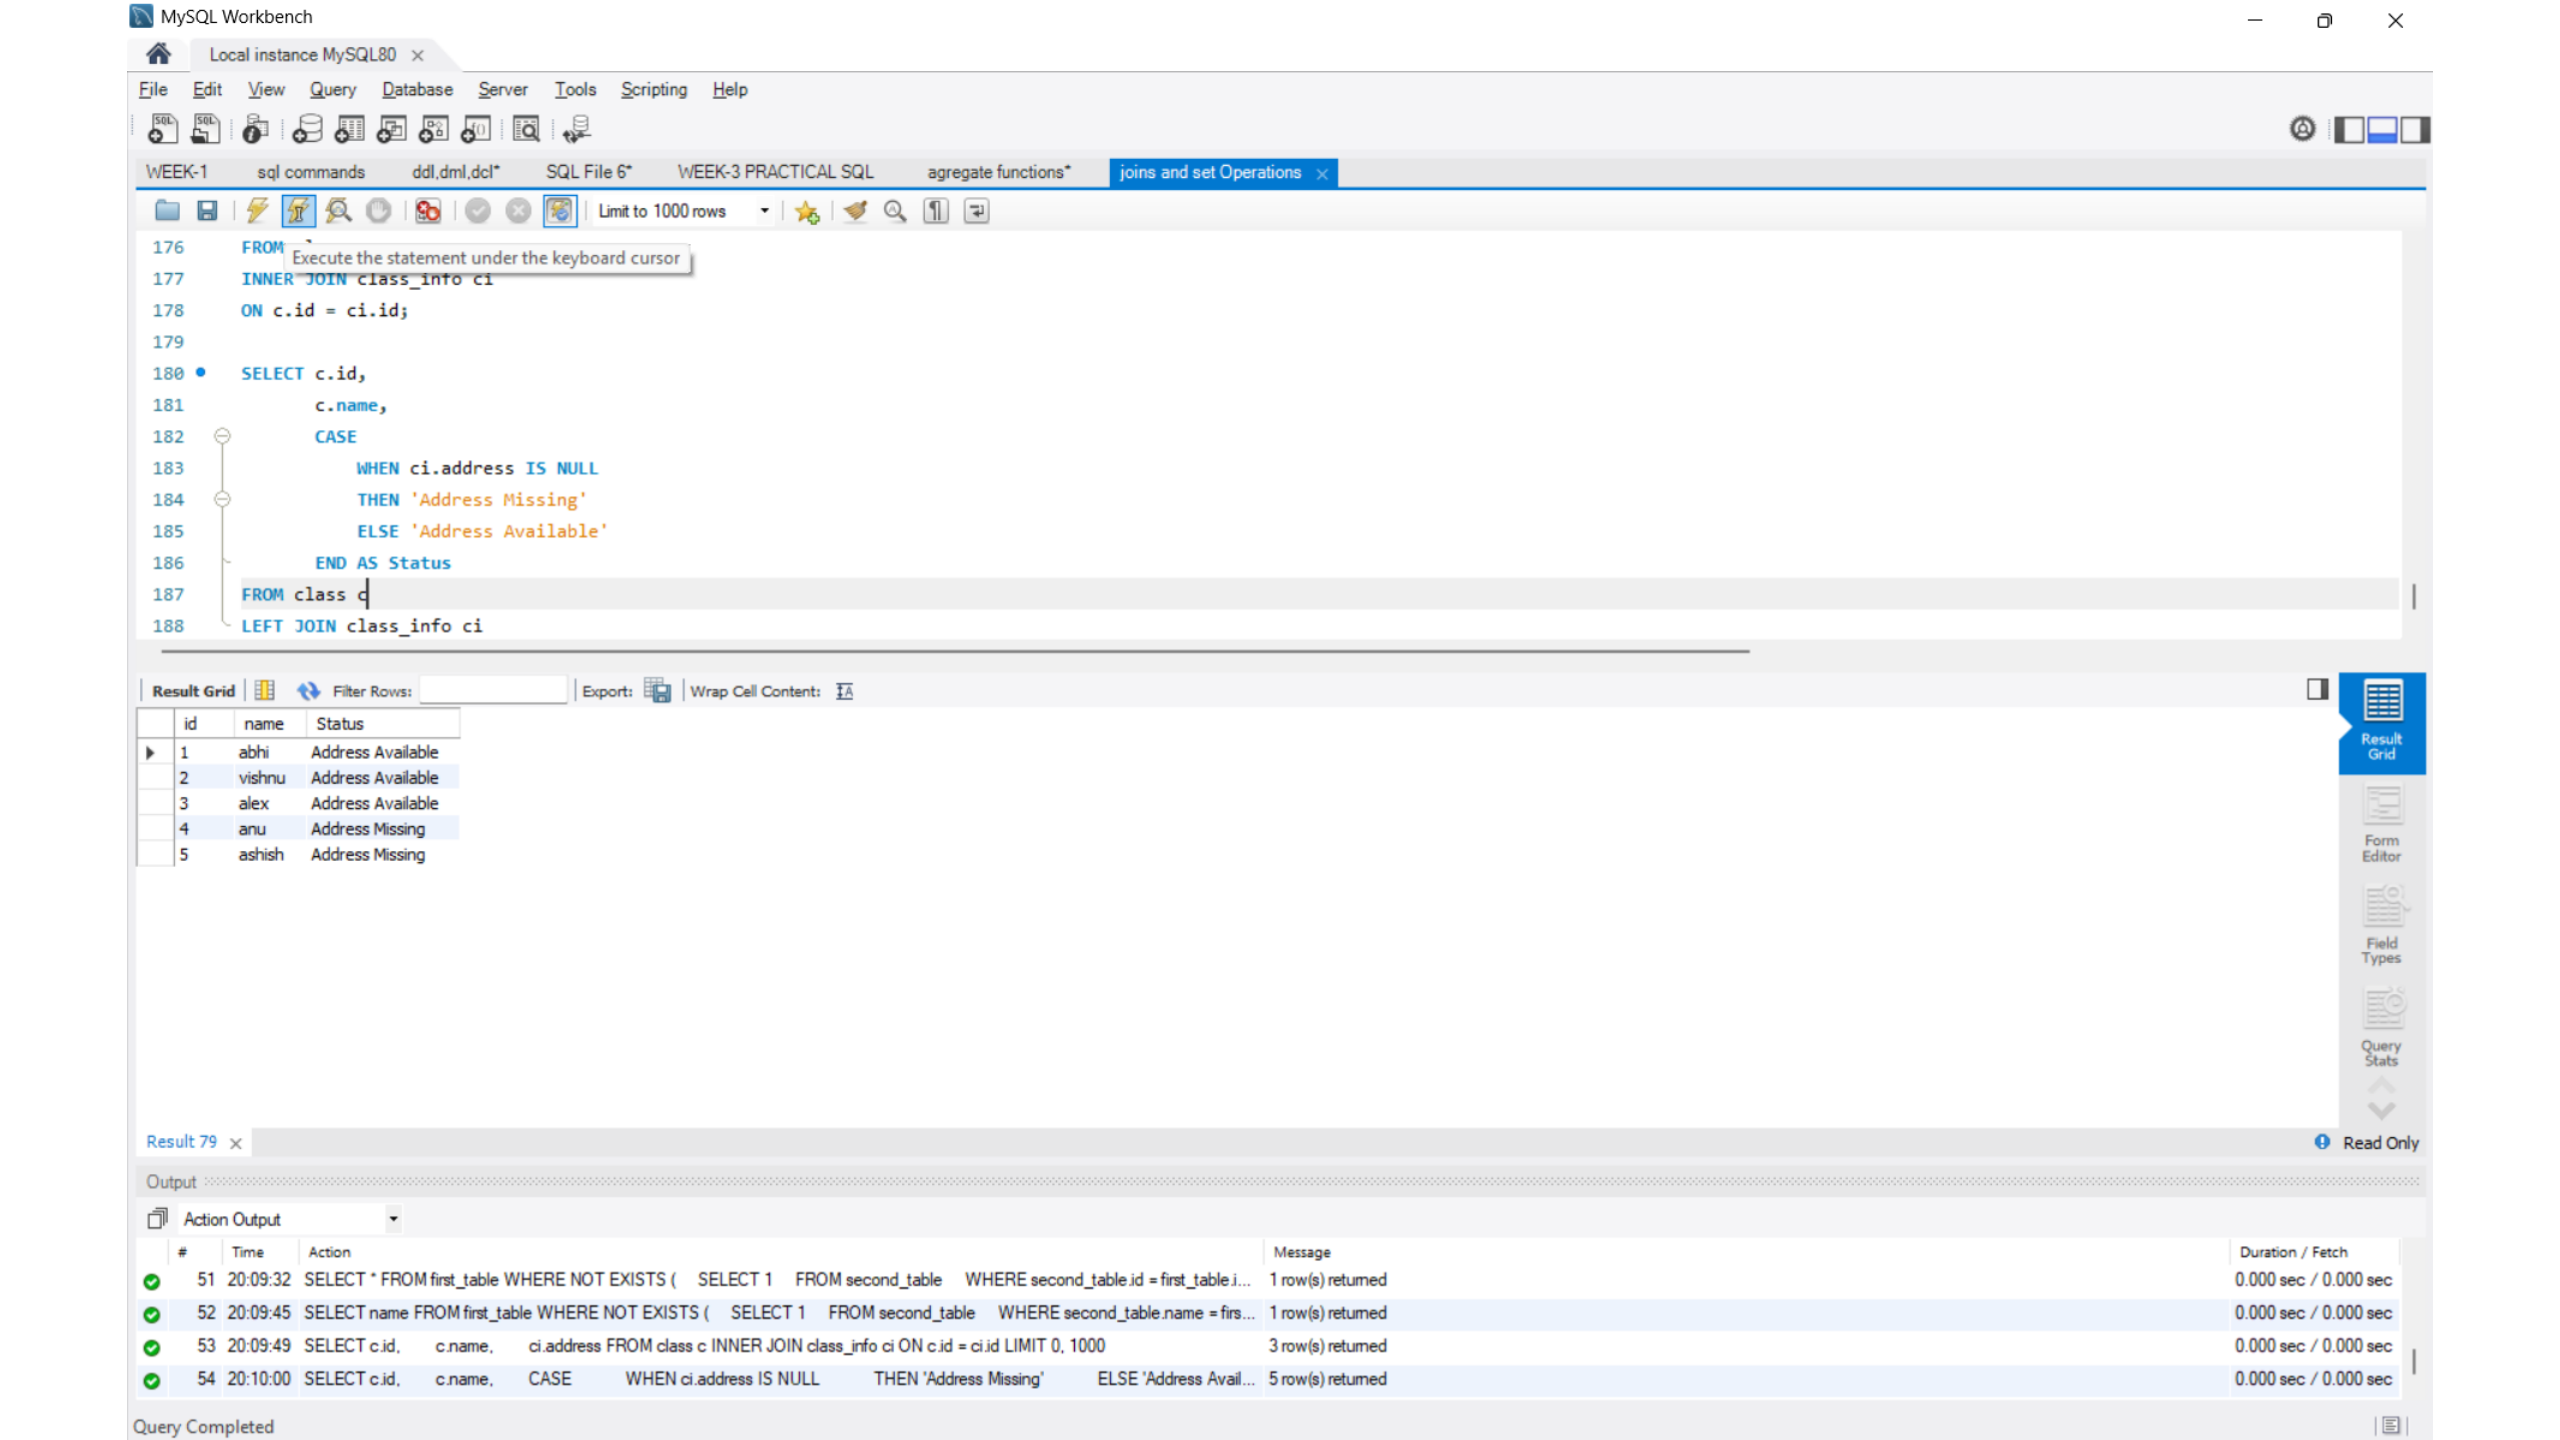
#	Time	Action	Message	Duration / Fetch
13	20:08:20	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL UNION SELECT * FROM class...	2 row(s) returned	0.000 sec / 0.000 sec
14	20:08:23	CREATE TABLE first_table (id INT, name VARCHAR(30))	Error Code: 1050. Table 'first_table' already exists	0.000 sec
15	20:08:26	INSERT INTO second_table VALUES (2,'adam'), (3,'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
16	20:08:30	SELECT * FROM first_table UNION SELECT * FROM second_table	3 row(s) returned	0.000 sec / 0.000 sec

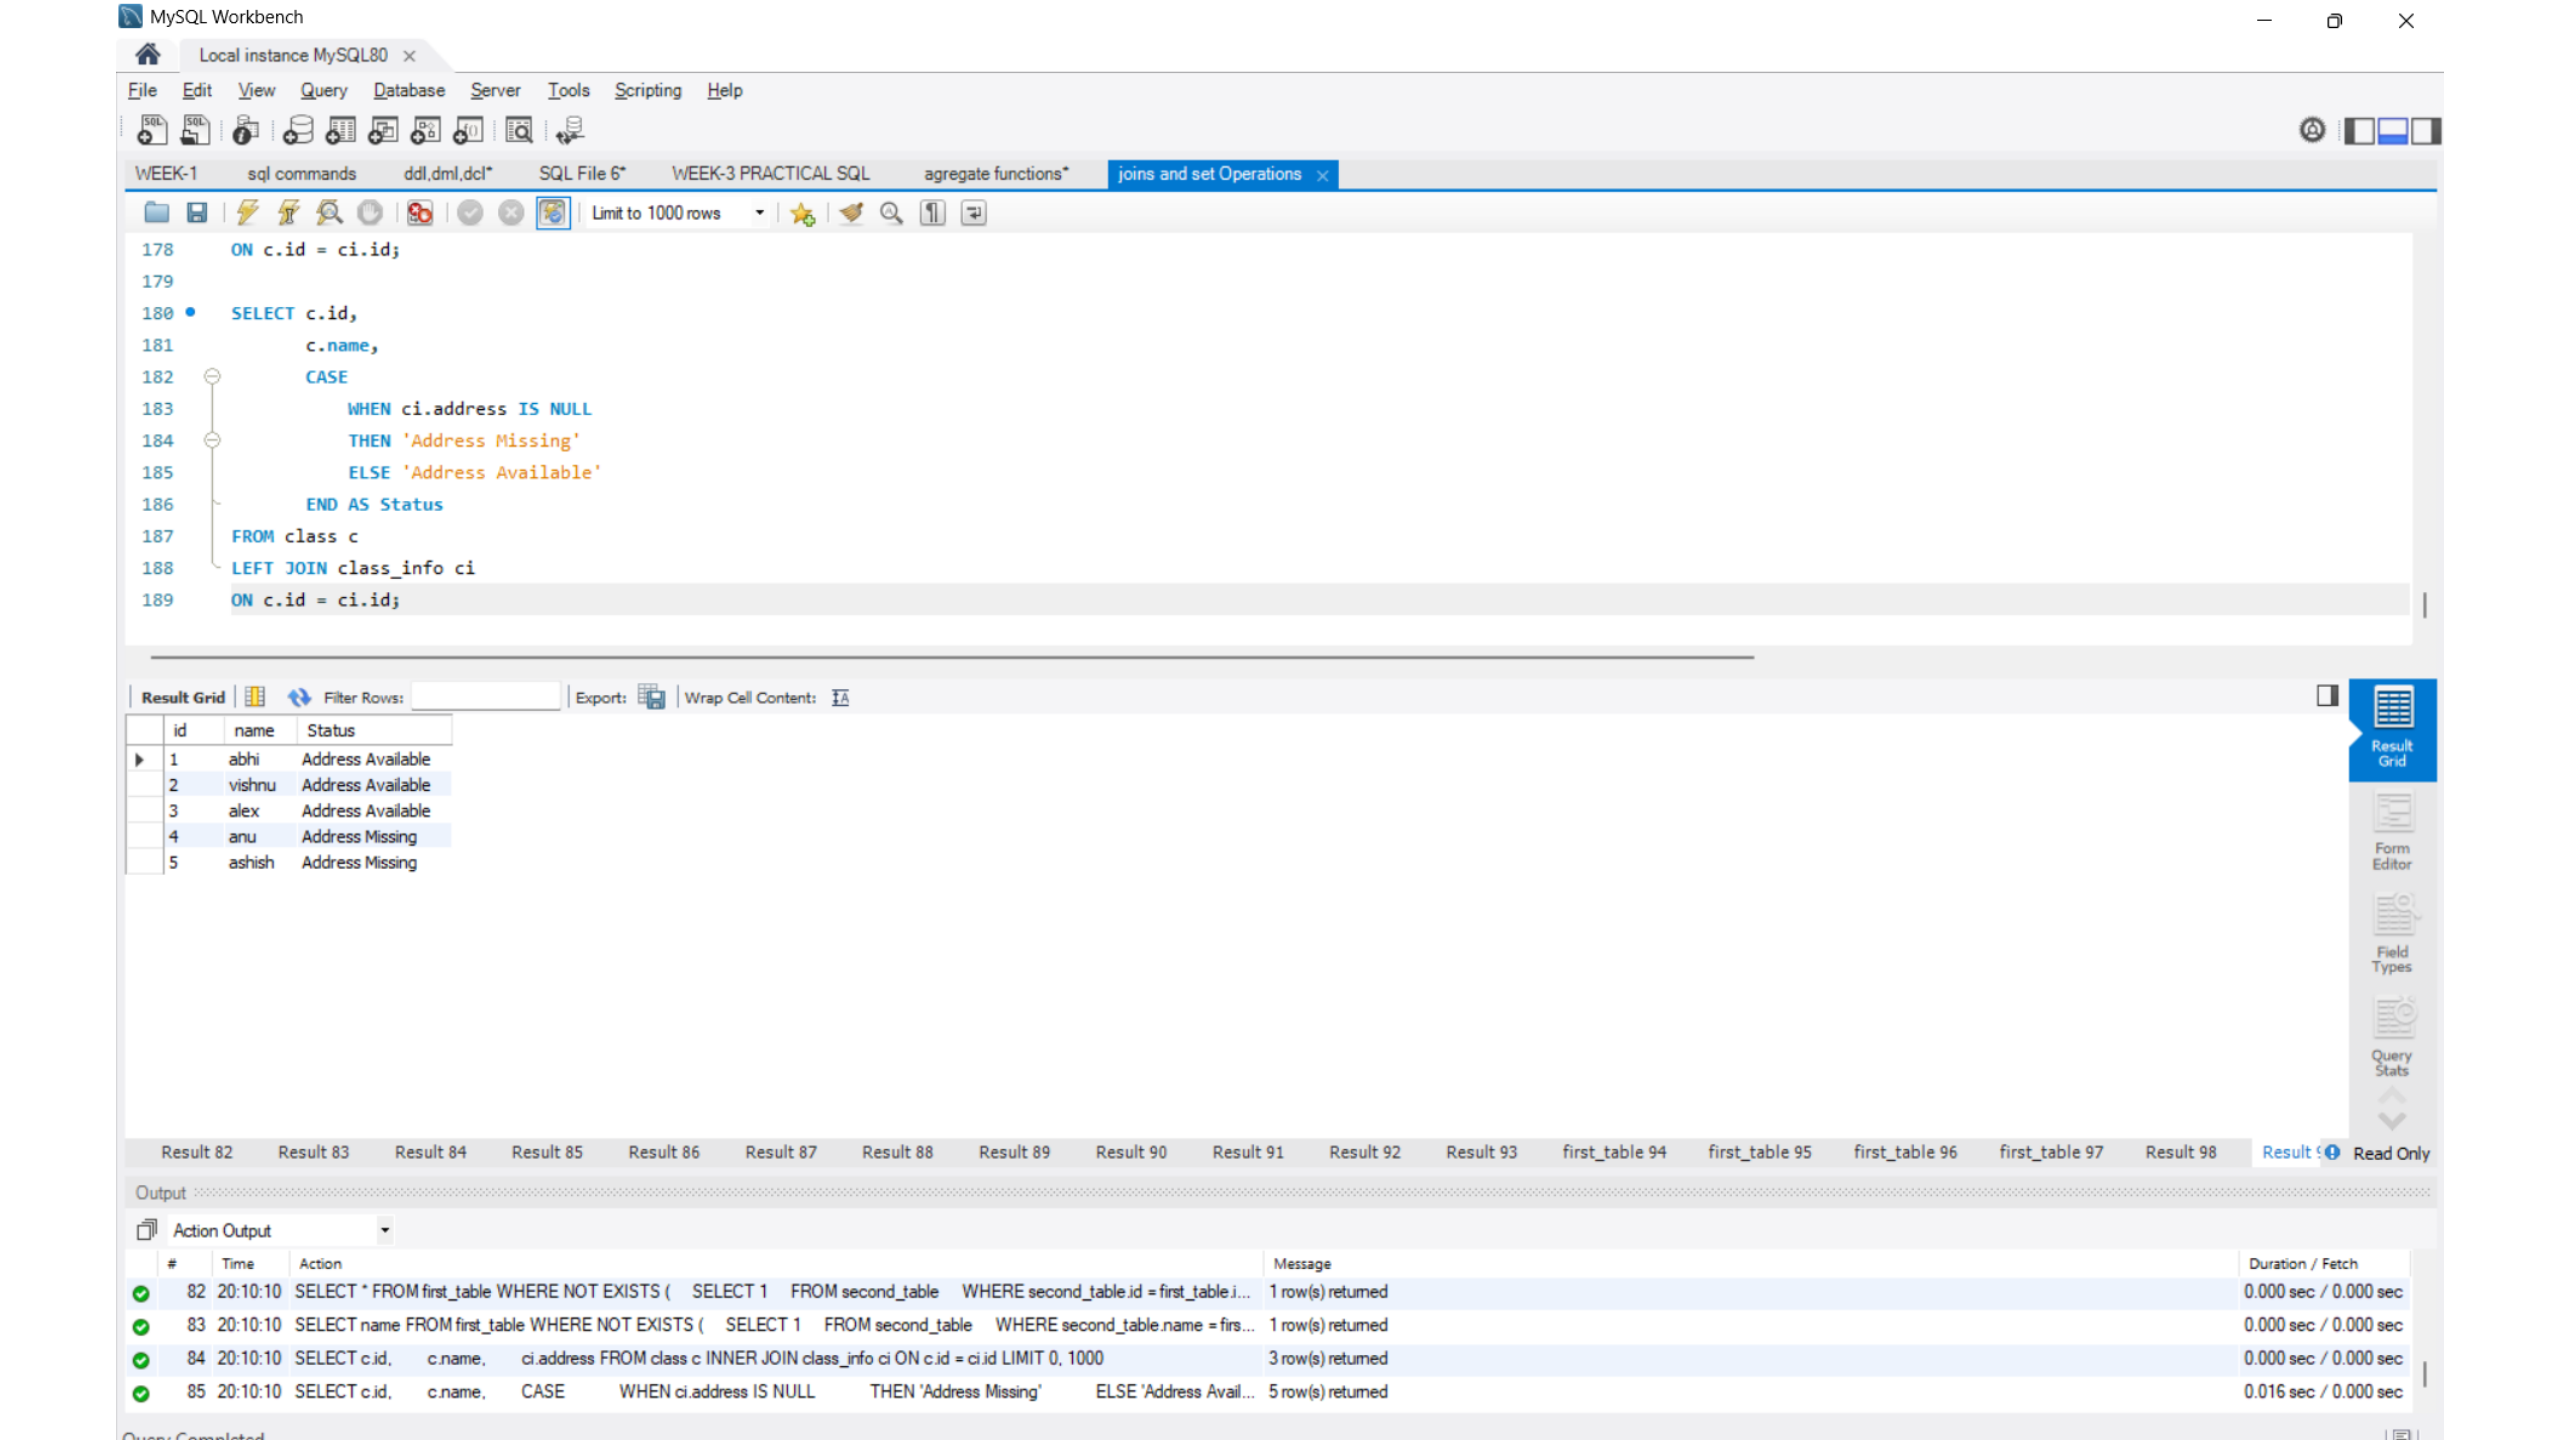

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
123 UNION
124 SELECT name
125 FROM second_table;
126
127 SELECT *
128 FROM first_table
129 UNION ALL
130 SELECT *
131 FROM second_table;
132
133 SELECT COUNT(*)
134 FROM (
135 SELECT *
Result Grid Filter Rows: Export: Wrap Cell Content:
id name
1 abhi
2 adam
2 adam
3 chester
2 adam
3 chester
Result Grid
Form Editor
Field Types
Query Stats
Result 53
Read Only
Output
Action Output
Time Action Message Duration / Fetch
14 20:08:23 CREATE TABLE first_table (id INT, name VARCHAR(30)) Error Code: 1050. Table 'first_table' already exists 0.000 sec
15 20:08:26 INSERT INTO second_table VALUES (2,'adam'), (3,'chester') 2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0 0.016 sec
16 20:08:30 SELECT * FROM first_table UNION SELECT * FROM second_table 3 row(s) returned 0.000 sec / 0.000 sec
17 20:08:43 SELECT * FROM first_table UNION ALL SELECT * FROM second_table 6 row(s) returned 0.000 sec / 0.000 sec
Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
130 SELECT *
131 FROM second_table;
132
133 SELECT COUNT(*)
134 FROM (
135 SELECT *
136 FROM first_table
137 UNION ALL
138 SELECT *
139 FROM second_table
140) AS A;
141
142 SELECT *
Result Grid Filter Rows: Export: Wrap Cell Content:
COUNT(*)
4
Result Grid
Form Editor
Field Types
Query Stats
Result 74
Read Only
Output
Action Output
Time Action Message Duration / Fetch
46 20:09:12 SELECT name FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.name = firs... 1 row(s) returned 0.000 sec / 0.000 sec
47 20:09:12 SELECT c.id, c.name, ci.address FROM class c INNER JOIN class_info ci ON c.id = ci.id LIMIT 0, 1000 3 row(s) returned 0.000 sec / 0.000 sec
48 20:09:13 SELECT c.id, c.name, CASE WHEN ci.address IS NULL THEN 'Address Missing' ELSE 'Address Avail... 5 row(s) returned 0.000 sec / 0.000 sec
49 20:09:17 SELECT COUNT(*) FROM (SELECT * FROM first_table UNION ALL SELECT * FROM second_table) AS A LIMIT 0, 1... 1 row(s) returned 0.000 sec / 0.000 sec


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
Execute the statement under the keyboard cursor
155
156 SELECT
157 FROM first_table
158 WHERE NOT EXISTS (
159 SELECT 1
160 FROM second_table
161 WHERE second_table.id = first_table.id
162 AND second_table.name = first_table.name
163);
164
165 SELECT name
166 FROM first_table
167 WHERE NOT EXISTS (
Result Grid Filter Rows: Export: Wrap Cell Content:
id name
1 abhi
Result Grid
Form Editor
Field Types
Query Stats
first_table 76
Read Only
Output
Action Output
Time Action Message Duration / Fetch
48 20:09:13 SELECT c.id, c.name, CASE WHEN ci.address IS NULL THEN 'Address Missing' ELSE 'Address Avail... 5 row(s) returned 0.000 sec / 0.000 sec
49 20:09:17 SELECT COUNT(*) FROM (SELECT * FROM first_table UNION ALL SELECT * FROM second_table) AS A LIMIT 0, 1... 1 row(s) returned 0.000 sec / 0.000 sec
50 20:09:26 SELECT * FROM first_table WHERE (id, name) IN (SELECT id, name FROM second_table) LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
51 20:09:32 SELECT * FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.id = first_table.i... 1 row(s) returned 0.000 sec / 0.000 sec


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
167 WHERE NOT EXISTS (
168 SELECT 1
169 FROM second_table
170 WHERE second_table.name = first_table.name
171);
172
173 SELECT c.id,
174 c.name,
175 ci.address
176 FROM class c
177 INNER JOIN class_info ci
178 ON c.id = ci.id;
179
Result Grid Filter Rows: Export: Wrap Cell Content:
id name address
1 abhi DELHI
2 vishnu MUMBAI
3 alex CHENNAI
Result Grid
Form Editor
Field Types
Query Stats
Result 78
Read Only
Output
Action Output
Time Action Message Duration / Fetch
50 20:09:26 SELECT * FROM first_table WHERE (id, name) IN (SELECT id, name FROM second_table) LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
51 20:09:32 SELECT * FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.id = first_table.i... 1 row(s) returned 0.000 sec / 0.000 sec
52 20:09:45 SELECT name FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.name = firs... 1 row(s) returned 0.000 sec / 0.000 sec
53 20:09:49 SELECT c.id, c.name, ci.address FROM class c INNER JOIN class_info ci ON c.id = ci.id LIMIT 0, 1000 3 row(s) returned 0.000 sec / 0.000 sec
Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
Execute the statement under the keyboard cursor
176 FROM
177 INNER JOIN class_info ci
178 ON c.id = ci.id;
179
180 SELECT c.id,
181 c.name,
182 CASE
183 WHEN ci.address IS NULL
184 THEN 'Address Missing'
185 ELSE 'Address Available'
186 END AS Status
187 FROM class c
188 LEFT JOIN class_info ci
Result Grid Filter Rows: Export: Wrap Cell Content:
id name Status
1 abhi Address Available
2 vishnu Address Available
3 alex Address Available
4 anu Address Missing
5 ashish Address Missing
Result Grid
Form Editor
Field Types
Query Stats
Result 79
Read Only
Output
Action Output
Time Action Message Duration / Fetch
51 20:09:32 SELECT * FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.id = first_table.i... 1 row(s) returned 0.000 sec / 0.000 sec
52 20:09:45 SELECT name FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.name = firs... 1 row(s) returned 0.000 sec / 0.000 sec
53 20:09:49 SELECT c.id, c.name, ci.address FROM class c INNER JOIN class_info ci ON c.id = ci.id LIMIT 0, 1000 3 row(s) returned 0.000 sec / 0.000 sec
54 20:10:00 SELECT c.id, c.name, CASE WHEN ci.address IS NULL THEN 'Address Missing' ELSE 'Address Avail... 5 row(s) returned 0.000 sec / 0.000 sec
Query Completed


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
WEEK-1 sql commands ddl,dml,dcl* SQL File 6* WEEK-3 PRACTICAL SQL agregate functions* joins and set Operations
Limit to 1000 rows
ON c.id = ci.id;
SELECT c.id,
c.name,
CASE
WHEN ci.address IS NULL
THEN 'Address Missing'
ELSE 'Address Available'
END AS Status
FROM class c
LEFT JOIN class_info ci
ON c.id = ci.id;
Result Grid Filter Rows: Export: Wrap Cell Content:
id name Status
1 abhi Address Available
2 vishnu Address Available
3 alex Address Available
4 anu Address Missing
5 ashish Address Missing
Result Grid
Form Editor
Field Types
Query Stats
Result 82 Result 83 Result 84 Result 85 Result 86 Result 87 Result 88 Result 89 Result 90 Result 91 Result 92 Result 93 first_table 94 first_table 95 first_table 96 first_table 97 Result 98
Read Only
Output
Action Output
Time Action Message Duration / Fetch
82 20:10:10 SELECT * FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.id = first_table.i... 1 row(s) returned 0.000 sec / 0.000 sec
83 20:10:10 SELECT name FROM first_table WHERE NOT EXISTS (SELECT 1 FROM second_table WHERE second_table.name = firs... 1 row(s) returned 0.000 sec / 0.000 sec
84 20:10:10 SELECT c.id, c.name, ci.address FROM class c INNER JOIN class_info ci ON c.id = ci.id LIMIT 0, 1000 3 row(s) returned 0.000 sec / 0.000 sec
85 20:10:10 SELECT c.id, c.name, CASE WHEN ci.address IS NULL THEN 'Address Missing' ELSE 'Address Avail... 5 row(s) returned 0.016 sec / 0.000 sec