

Operating system sec-2

2520030199-K. VISHNU

GNU nano 8.7.1

#include <stdio.h>

```
int main()
{
printf("Welcome to operating systems\n");
return 0;
}
```

^G Help
^X Exit

^O Write Out
^R Read File

^F Where Is
^\ **Replace**

^K Cut
^U Paste

^T
^J

First programOUTPUT:

```
vishnu@VISHNU:~/OSlab$ gcc hello.c -o hello
./hello
Welcome to operating systems
vishnu@VISHNU:~/OSlab$ nano hello.c
```

Second code:

```
GNU nano 8.7.1 hel
#include<stdio.h>
int main()
{
char name[30];
printf("Enter your name: ");
scanf("%s",name);
printf("Welcome %s\n",name);
return 0;
}
```

OUTPUT:

```
|
vishnu@VISHNU:~$ nano hello1.c
vishnu@VISHNU:~$ gcc hello1.c -o hello1
vishnu@VISHNU:~$ ./hello1
Enter your name: vishnu
Welcome vishnu
vishnu@VISHNU:~$ |
```

Third code:

GNU nano 8.7.1

#include<stdio.h>

#include<unistd.h>

int main()

{

printf("ProcessID=%d\n",getpid());

return 0;

}

 G	Help
 X	Exit

 O	Write Out
 R	Read File

 F	Where Is
 \	Replace


 K	Cut
 U	Paste

 R	Re
 T	Tr
 J	Jo

OUTPUT:

```
vishnu@VISHNU:~/OSlab$ nano hello.c
vishnu@VISHNU:~/OSlab$ gcc hello.c -o hello
vishnu@VISHNU:~/OSlab$ ./hello
ProcessID=2803
vishnu@VISHNU:~/OSlab$ |
```

Fourth program:

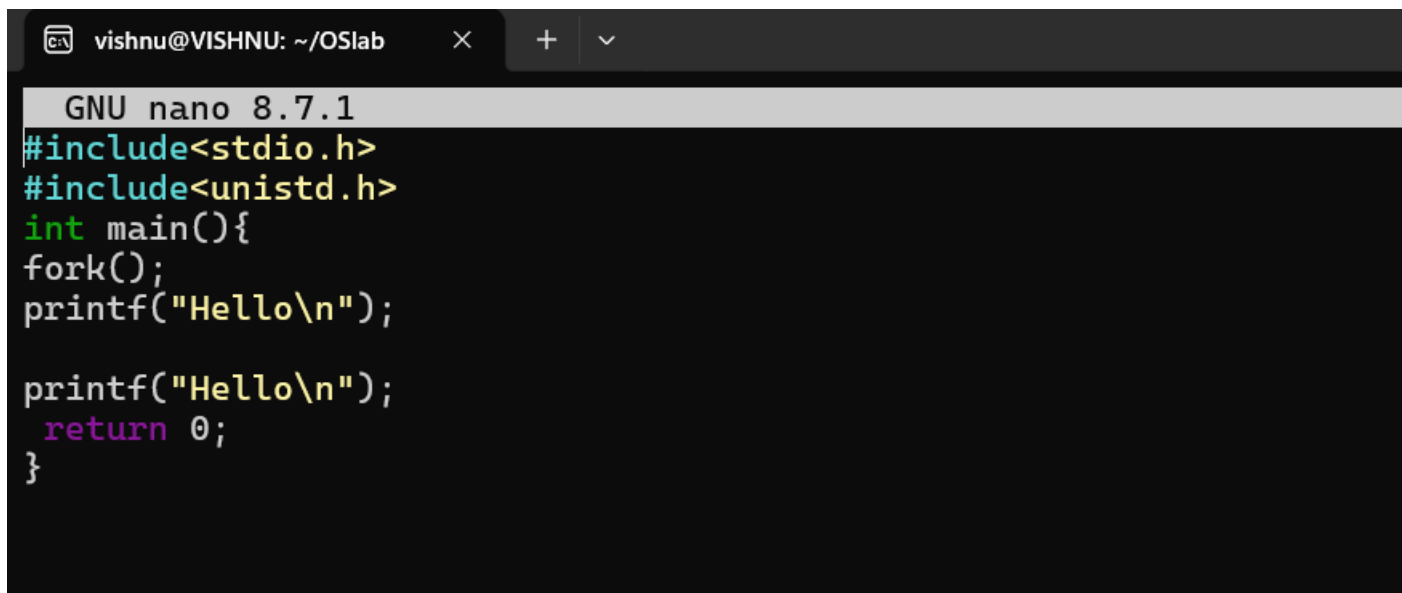

```
vishnu@VISHNU: ~/OSlab × + v
GNU nano 8.7.1
#include<stdio.h>
#include<unistd.h>
int main(){
fork();
printf("Hello\n");

printf("Hello\n");
return 0;
}
```

output:

```
vishnu@VISHNU:~/OSlab$ nano fork.c
vishnu@VISHNU:~/OSlab$ gcc fork.c -o fork
vishnu@VISHNU:~/OSlab$ ./fork
Hello
Hello
Hello
Hello
vishnu@VISHNU:~/OSlab$ |
```