Does Literal-Match Reranker Supervision Improve Generated Answers in RAG? An In-Domain and Transfer Study

Assylkhan Geniyat* Zukhriddin Fakhriddinov Atharv Gulati

Boston University, Boston, Massachusetts, USA
Preprint—not peer reviewed. October 2026

Abstract

Rerankers decide which passages a retrieval-augmented generation (RAG) system shows to its generator, and adapting them requires relevance labels. Document-level labels come free with question–answer data but are coarse: they mark every passage of the correct document as relevant, even when it lacks the answer. Labels that instead reward passages containing the reference answer verbatim look more precise. We put this literal-match supervision to a controlled test, with a fixed generator and a success criterion set in advance: a statistically significant gain of at least one point in answer F1 (word overlap with the reference answer). In neither study does it deliver that gain. On 208 held-out TechQA technical-support questions, it improves passage ranking over hybrid retrieval, but the answer gain is not significant (+0.68 points). Under transfer to support dialogues (Doc2Dial), it ranks evidence worse than document-level labels and gives slightly lower answer F1 (−0.22 points); for the trained adapters, the targeted gain is ruled out. A second finding holds across both studies: clear differences in retrieval quality barely move answer F1, which also tracks response length. Retrieval metrics are therefore an unreliable guide here, and reranker supervision should be judged by the answers it produces, using an answer metric shown to detect retrieval changes.

Keywords: retrieval-augmented generation; reranking; weak supervision; technical support; external transfer; negative results.

1 Introduction

In retrieval-augmented generation (RAG), a language model answers a question from passages selected by a retrieval pipeline (Lewis et al., 2020). In technical-support systems the passages come from product documentation, and the reranker makes the final selection: it reorders a pool of retrieved candidates and decides which few passages the generator sees. Adapting the reranker to the target documentation is therefore a natural way to improve answers. Adaptation needs relevance labels, and existing question–answer data can supply two kinds without new annotation.

The first kind, *document-level labels*, marks every passage of the annotated gold document as relevant. These labels are coarse, because retrieving the right document does not guarantee that the selected passage contains the details a user needs. In the constructed example of Table 1, a passage that lists supported versions counts as just as relevant as the passage that tells the

*Corresponding author: kuromiqo@bu.edu

user to restart the monitoring agent. The second kind, *literal-match labels*, favors passages that contain the reference answer verbatim, a distant-supervision heuristic that has also been used to train dense retrievers (Karpukhin et al., 2020). Literal-match labels therefore look like the more targeted signal. Unlike approaches that obtain the supervision signal for retrieval from a language model, through its feedback (Shi et al., 2024), through joint training of ranking and generation (Yu et al., 2024) or through LLM utility annotations (Zhang et al., 2025a), they involve no language model. This paper tests whether that signal produces better answers.

Three considerations qualify that appeal. First, literal containment is only a lexical proxy for evidential support: it misses paraphrased or scattered evidence and can mishandle numbers, commands and version strings. Second, literal-match labels change the training data, not only the label values. Training is contrastive: each positive passage is scored against a small group of negatives. Under literal-match labels, when a question has a passage that contains the literal answer, gold-document passages that lack it become negatives. In Table 1, for example, passages c_2 and c_3 are positives under document-level labels but negatives under literal-match labels, a reversal we call negative inversion (Section 3.2). The labeling rule also changes how many training groups each question contributes. As a result, a reranker trained with literal-match labels differs in three respects from one trained with document-level labels: which passages it learns to demote, which questions contribute training groups and how often each group is seen. Its effects therefore cannot be attributed to label granularity alone. What we evaluate is the *literal-match supervision pipeline*: the labels together with the training groups and training exposure they induce.

Third, a more targeted label need not produce better answers. Salemi and Zamani (2024) found that query–document relevance labels correlate only weakly with downstream RAG performance, which suggests that a change in reranker supervision should be judged by the answers it produces, not by retrieval metrics alone.

We therefore evaluate literal-match supervision end to end. A candidate passage receives grade 2 if it contains the normalized reference answer, grade 1 if it comes from a gold document but does not contain the answer, and grade 0 otherwise. We compare a reranker adapted with these literal-match labels (L) with one adapted with binary document-level labels (B), and with two baselines that involve no adaptation: hybrid retrieval without reranking (H) and the unadapted reranker (U). The retrieval pipeline and the generator are held fixed. We address three research questions:

RQ1 Does a reranker adapted with literal-match labels improve generated answers over hybrid retrieval on held-out in-domain questions?

RQ2 Under transfer to a different support domain, does literal-match supervision yield better generated answers than document-level supervision?

RQ3 How strongly do differences in retrieval quality propagate to differences in answer F1?

We answer them in two studies, each with a protocol frozen before its own comparative outcomes existed. **Study 1 (in-domain)** adapts the literal-match reranker on TechQA (Castelli et al., 2020) and compares it with H on a reserve set of 208 TechQA questions held out from model selection. This reserve set had been partly exposed in earlier project work, and we could not establish a demonstrably unexposed TechQA evaluation set. **Study 2 (transfer)** therefore trains on the same TechQA development data and evaluates on 273 documents from the Doc2Dial support-dialogue dataset (Feng et al., 2020), one dialogue turn per document, comparing all four methods; B and L are each trained with three seeds and the same number of training updates. Because the two studies differ in comparators, evaluation populations and limitations, we report them separately and neither pool them nor treat them as replications.

Both studies score the generator's answers with token F1 against a reference and use the same prespecified success criterion: an observed gain of at least +1 F1 point with two-sided $p < 0.05$. Neither study met it, but the two outcomes differ. In Study 1 (RQ1), L improved NDCG@4 over hybrid retrieval, yet its answer-level gain was small and not statistically significant; the data neither confirm nor exclude the targeted gain. In Study 2 (RQ2), L had lower NDCG@4 on annotated evidence than B for every training seed and slightly lower answer F1; conditional on the trained adapters (that is, without accounting for variation from retraining with new seeds), the 95% interval for the answer difference excludes the targeted gain. Across both studies (RQ3), clear differences in NDCG@4 came with small or nonsignificant differences in answer F1, and in Study 2 the answer differences tracked response length more closely than retrieval quality. We cannot fully tell whether retrieval differences propagate only weakly to the answers or whether token F1 is too insensitive to register the changes that do occur (Section 6.3).

These answer-level results are specific to the literal-match supervision pipeline as tested, but the weak link between retrieval and answer differences also carries a lesson for evaluation: the results suggest that, in this setting, retrieval metrics alone were not a sufficient guide to answer-level outcomes.

Our contributions are as follows:

- An end-to-end comparison of two reranker supervision pipelines judged by generated answers, with frozen protocols, transfer to a different support domain and, in the transfer study, three paired training seeds.
- Answer-level results for the literal-match supervision pipeline under these protocols: no demonstrated improvement in either study, with an unresolved in-domain effect (RQ1) and, under transfer, an interval that excludes the targeted gain conditional on the trained adapters (RQ2).
- Evidence from both studies on how retrieval quality, answer F1 and response length relate, and on what this implies for evaluating reranker supervision (RQ3).
- A record of the design features that limit interpretation, including the partial prior exposure of the Study 1 reserve set, coupled differences in training exposure and an interval that is conditional on the trained adapters (Section 7). Post hoc analyses are labeled as such, and code and aggregate results are released.

2 Related work

Where the supervision signal comes from. The original RAG framework combines a neural retriever with a generator for knowledge-intensive tasks (Lewis et al., 2020), and several later methods take the training signal for retrieval from a language model. REPLUG keeps a black-box language model frozen and trains a dense retriever toward the documents that most improve that model's likelihood of the reference output (Shi et al., 2024). RankRAG instruction-tunes a single language model both to rank contexts and to generate answers, so the ranker and the generator are the same model (Yu et al., 2024). The utility-focused annotation study of Zhang et al. (2025a) has an LLM judge which passages are useful and trains retrievers on those judgments. In each case the language model takes part in supervising retrieval, through its feedback, through joint training or through its annotations. In our setting it does not: a separate reranker is adapted with fixed, deterministic labels while the generator stays unchanged, so that only the reranker's training differs between methods.

Answer containment as a relevance label. Treating passages that contain the answer as relevant, the idea behind literal-match labels, is a classic way to obtain retrieval supervision without passage annotation. Dense Passage Retrieval uses such passages as positives when gold passages are not annotated (Karpukhin et al., 2020), FILCO selects useful context for RAG with string inclusion, lexical overlap and conditional cross-mutual information before training a context filter (Wang et al., 2023), and part of RankRAG's ranking data treats retrieved contexts that contain the answer as relevant (Yu et al., 2024). In each of these uses, containment stands in for passage annotation within a larger training procedure. The comparison made here is narrower: containment-based labels against document-level labels for adapting a reranker that feeds a fixed generator, judged by the generated answer.

Training with several positives. Containment and document-level labels can both give one question several positives, and how a loss treats them matters: Zhang et al. (2025a) report that the way multiple positives enter the loss affects retrieval quality. They train on MS MARCO-derived data with LLM-generated utility annotations and a loss that accommodates multiple positives through summed marginal likelihood. Our training instead builds a separate group for each highest-grade passage, so each positive is scored only against lower-grade negatives rather than sharing probability mass with the other positives (Section 3.2). Our conclusions therefore concern this literal-match pipeline and the training groups it induces, not LLM utility annotation or semantic support labels in general. The reranker itself is built from existing components, the Qwen3 reranker family (Zhang et al., 2025b) and low-rank adaptation (LoRA) (Hu et al., 2022), and we make no state-of-the-art claim.

Retrieval quality and answer quality. Several studies bear on whether retrieval quality, as measured by relevance labels, predicts answer quality. eRAG responds to the weak correlation between query–document relevance labels and downstream RAG performance by labeling each retrieved document with the quality of the answer generated from it (Salemi and Zamani, 2024). Cuconasu et al. (2024) show that the composition of the retrieved context can itself affect generation quality, and Wang et al. (2024) compare existing retrieval, reranking and other pipeline modules by their effect on end-to-end RAG performance. RAGAs and ARES assess retrieval and context properties separately from answer quality using automated judges (Es et al., 2024; Saad-Falcon et al., 2024). We also keep retrieval quality and answer quality apart, but without model judges: literal containment, NDCG@4 and answer token F1 are reported as separate measurements, and RQ3 asks how differences in retrieval relate to differences in answers.

Testing with dependent evaluation units. Dror et al. (2018) note that NLP test sets often violate independence because examples can come from the same source or document. Our paired bootstrap intervals and sign-flip tests treat the resampled units as independent, and the sign-flip tests also assume that, under the null hypothesis, each unit's paired difference is symmetric around zero. We therefore average the repeated chunker and seed records within each question or document before testing, and in Study 2 we resample and flip signs for whole families of related documents (Section 4.2).

3 Methods

Figure 1 summarizes the design.

3.1 Retrieval and generation pipeline

Every method is run with four fixed chunkers: fixed-length 128 tokens with 19-token overlap, fixed-length 254 tokens with 38-token overlap, recursive 254 tokens with 38-token overlap, and sentence-based 254 tokens without overlap, with token limits from the all-MiniLM-L6-v2 tokenizer. For each query and chunker, sparse BM25 and dense retrieval each return 20 passages; dense retrieval uses BAAI/bge-small-en-v1.5 with its query prefix. Weighted reciprocal-rank fusion (weights 0.4 sparse and 0.6 dense; fusion constant 60) ranks the union of the two lists and keeps a common pool of 20 candidates per query and chunker. Fusion ties and other implementation details are given in Appendix B. In Study 1 the query is the question; in Study 2 it is the dialogue history.

At inference time, the four methods differ only in how they order this common pool. H returns the fused ranking. U reranks the pool with the unadapted Qwen3-Reranker-0.6B, and B and L rerank it with LoRA adapters on the same model. The reranker instruction asks for passages with sufficient answer evidence, but the training labels are not judgments of semantic sufficiency. Each method passes its top four passages to a fixed Qwen3.5-9B generator (greedy decoding, thinking disabled, bfloat16, at most 1,536 input and 512 new tokens, batch size four; model revisions and prompts in Appendix B).

Long inputs are truncated differently at each stage. The dense retriever and the reranker keep the first 512 tokens, so a long dialogue history can lose its most recent turns and an overlength passage loses its end. Training, by contrast, discarded query–passage pairs longer than 512 tokens. The number of truncated retrieval and reranker inputs at inference was not recorded (Appendix B). The generator keeps the full question or history and shortens the context instead.

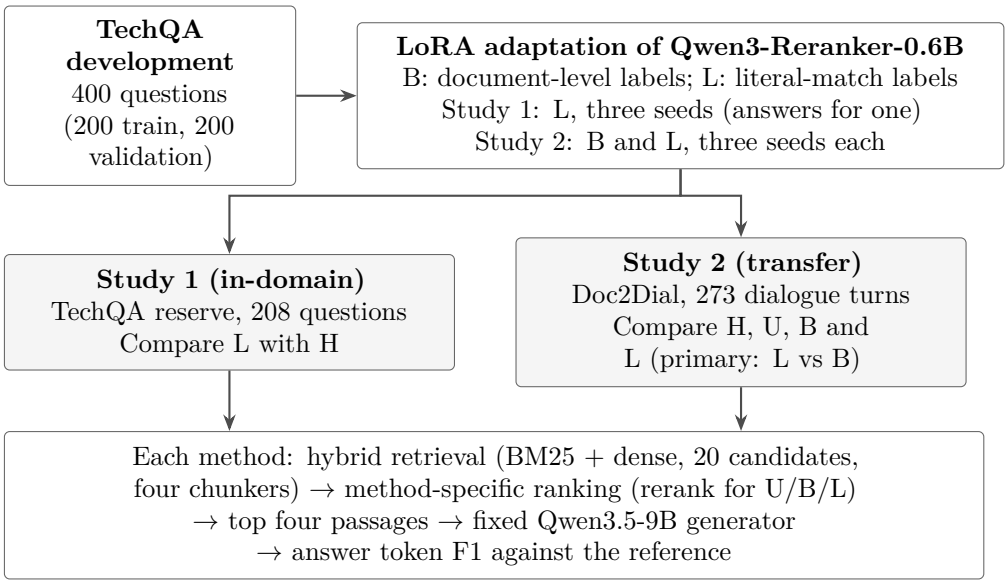


Figure 1: Study design. Rerankers are adapted on TechQA development data and evaluated end to end with the same retrieval pipeline and a fixed generator. Study 1 used an earlier training pipeline and trained L with three seeds, of which only one has generated answers; Study 2 trains B and L under a shared configuration with three seeds each.

3.2 Supervision labels and training groups

The two supervision rules grade candidate passages differently and, as a result, produce different training groups. Table 1 shows the difference on a small constructed pool. Under document-level

supervision, every gold-document passage is a positive and passages from other documents are negatives. Under literal-match supervision, a passage that contains the reference answer is the positive, and gold-document passages without the answer become negatives in its group. We call this reversal *negative inversion*: passages that B treats as positives can be negatives under L.

Formally, let D_q be the annotated gold-document set for TechQA training question q, $d(c)$ the document containing candidate passage c, and $A(q, c)$ an indicator that the normalized reference answer occurs as a contiguous token sequence in c. Document-level supervision assigns

$$b(q, c) = \mathbf{1}\{d(c) \in D_q\}. \tag{1}$$

Literal-match supervision assigns

$$\ell(q, c) = \begin{cases} 2, & A(q, c) = 1, \\ 1, & A(q, c) = 0 \text{ and } d(c) \in D_q, \\ 0, & \text{otherwise.} \end{cases} \tag{2}$$

The literal test takes precedence, so a grade-2 passage need not come from a gold document. Normalization lowercases, deletes ASCII punctuation, removes the articles "a", "an" and "the", and collapses whitespace. It performs no Unicode normalization, stemming or partial matching, so a passage that contains only part of a reference does not satisfy A.

Table 1: Constructed example (not from the data) of how B and L label one candidate pool and which training groups result. The reference answer is "restart the monitoring agent". A group is written as (positive; negatives).

Passage	Content	B	L
c_1	Gold document; contains "restart the monitoring agent"	1	2
c_2	Gold document; describes the agent's log settings	1	1
c_3	Gold document; lists supported versions	1	1
c_4	Other document; contains "restart the monitoring agent"	0	2
c_5	Other document; unrelated product	0	0
B groups:	$(c_1; c_4, c_5)$, $(c_2; c_4, c_5)$, $(c_3; c_4, c_5)$		
L groups:	$(c_1; c_2, c_3, c_5)$, $(c_4; c_2, c_3, c_5)$		

For each question, the highest grade among the candidates defines the positives. Each positive forms its own group with up to seven lower-grade negatives in fused-rank order, and a question without both a positive and a lower-grade negative contributes no group. Under L, gold-document passages without the literal answer are therefore eligible negatives whenever a literal-match passage exists. When no candidate contains the answer but a gold-document passage is present, L falls back to gold-document positives against grade-0 negatives, as in B. In Study 2, candidates from all four chunkers are pooled and deduplicated on normalized text before grouping (ordering, tie-breaking and pruning rules in Appendix B). A group then needs a positive and at least one negative within the 512-token limit.

Because of this fallback, most L groups carry no literal-match signal. Only 22.5% of L's training groups and 23.9% of the groups for its final refits on all 400 development questions have grade-2 positives; within those groups, grade-1 passages fill about half of the negative positions (51.8% and 52.2%). L also produces fewer groups than B: 943 versus 2,103 for training and 1,799 versus 4,019 for the final refits. Literal matches outside the gold document are rare and yield three usable positive groups across two questions in both the training and the refit inventories.

For each group g, positions $j = 0, \ldots, m_g$ index one positive ($j = 0$) and $1 \le m_g \le 7$ surviving lower-grade negatives. With score s_{gj} (the final-token yes-minus-no logit), Study 2

training minimizes

$$\mathcal{L} = -\frac{1}{|\mathcal{G}|} \sum_{g \in \mathcal{G}} \log \frac{\exp(s_{g0})}{\sum_{j=0}^{m_g} \exp(s_{gj})}. \tag{3}$$

Because each positive forms its own group, and training samples groups rather than questions, questions with more positives contribute more groups to training. Groups are shuffled each epoch and drawn until a fixed update budget is reached, so equal budgets do not mean equal training exposure: each final refit draws 1,724 groups (431 updates of four groups), about 0.43 passes over B's 4,019 groups but 0.96 passes over L's 1,799. B and L thus differ in which questions form groups and how often each group is seen, not only in their label values, and we interpret differences between them as differences between complete supervision pipelines.

3.3 Training and model selection

Study 2 uses rank-16 LoRA on all linear layers (alpha 32, dropout 0.05) and AdamW (weight decay 0.01, warmup ratio 0.1, gradient clipping at 1) with four groups per update. Hyperparameters were chosen on TechQA development data only. A grid crossed two learning rates (5×10^{-5} and 10^{-4}) with three update budgets (227, 454 and 681) for both B and L, giving 12 runs with seed 20260904. One configuration was then selected for both methods: the one that maximized the average of B's and L's validation NDCG@4 over 200 validation questions and four chunkers, with ties broken toward fewer updates and then the lower learning rate. This rule selected 10^{-4} with 227 updates. Each method's validation NDCG@4 was computed on its own training grades, binary for B (0.838) and three-level for L (0.810), so the two values are not on a common scale; Section 6 compares the methods on common grades.

The shared rule is part of the tested pipeline; it does not give each method its individually best configuration. Selection on each method's own grades would have kept this configuration for B but chosen 5×10^{-5} with 227 updates for L (0.817 on L's grades), and no transfer results exist for that alternative. Every grid budget gives L about 2.2 times as many passes over its smaller group inventory as B, so the shared rule applies one learning rate to the two methods at different levels of training exposure (Appendix B.4).

The final refits train on all 400 development questions with seeds 20260904, 20260905 and 20260906 and 431 updates. A frozen lookup mapped the grid budgets to refit budgets ($227 \mapsto 431$, $454 \mapsto 862$, $681 \mapsto 1{,}293$); its original derivation was not retained, and a retrospective arithmetic reconstruction is given in Appendix B.

Study 1 used an earlier training pipeline: grade-aware deduplication, deletion of whole groups with overlength inputs, and a different training framework. Its six development adapters crossed two learning rates with one to three epochs, and 10^{-4} with three epochs was selected (validation NDCG@4 0.809). Its comparator, hybrid retrieval, was also chosen on development data. No configuration in either study was chosen using reserve-set or Doc2Dial answer outcomes.

3.4 Use of AI tools in the analysis

The study design, experimental pipeline, model training, evaluation runs and primary analyses were carried out by the authors. AI coding agents (OpenAI Codex, GPT-5.x and GPT-6.x series models, during the earlier revision; Claude Code with Claude Opus 5.5, Anthropic, during the final revision) were used in a supporting role to script the retrospective checks and post hoc diagnostics that recompute values from saved records, such as the sensitivity calculations, split-rule recomputation, exposure breakdown and grade-composition diagnostics (Appendix A, Appendix B, Appendix D, Appendix E). The authors reviewed this code and its outputs.

4 Experimental design

4.1 Study 1: in-domain TechQA

TechQA was introduced for domain-specific technical question answering (Castelli et al., 2020). We use a pinned NVIDIA RAG-oriented distribution whose split sizes differ from those of the original paper; it yields 608 eligible questions and 496 documents, split by a salted-hash rule into 200 training, 200 validation and 208 reserve questions (Appendix B). The reserve set was excluded from training, validation, comparator choice and hyperparameter selection. It was not untouched, however: earlier project work had produced artifacts (retrieval outputs or generated answers) for 152 of the 208 reserve questions (Section 7).

The primary outcome is the per-question difference in answer F1 between L and H, averaged over the four chunkers, where answer F1 is token F1 against the TechQA reference answer. Only training seed 20260904 has generated answers (832 per condition: 208 questions under four chunkers); seeds 20260905 and 20260906 were evaluated on retrieval only. The 95% interval is a percentile interval from 20,000 question-bootstrap draws, and the two-sided p-value comes from 100,000 paired sign flips. Retrieval is summarized by NDCG@4 (Section 4.3) with a corrected normalization against the full candidate pool; the correction does not change rankings, generated answers or F1 (Appendix D).

4.2 Study 2: transfer to Doc2Dial

Because a demonstrably unexposed TechQA evaluation set could not be established, Study 2 evaluates transfer to IBM Doc2Dial v1.0.1, which provides goal-oriented dialogues grounded in support documents (Feng et al., 2020). The evaluation unit is the document. Each Doc2Dial document that appears in the validation dialogues contributes one evaluation case. An eligible transition is a user turn immediately followed by an agent turn with a nonblank response and nonempty grounding references. Every document in the validation dialogues has at least one, and a deterministic salted-hash rule selects one per document. This gives 273 documents, each contributing one dialogue turn (DMV 51, SSA 77, student aid 50, VA 95; rule and salt in Appendix B). Retrieval searches all 488 documents across the four domains, so documents outside the validation population can be retrieved but are not evaluated. The query is the dialogue history up to and including the selected user turn; the target response, later turns, gold-document identifiers and grounding spans are unavailable at inference time. Before the protocol was frozen, only dataset metadata and the selection index had been examined, and no comparative H/U/B/L outcomes existed.

The primary outcome is *response F1*, token F1 between the generated answer and the selected agent utterance; token F1 against the annotated grounding span (*span F1*) is secondary. For retrieval evaluation, a passage receives grade 2 if it contains any nonempty normalized grounding span as a character substring, grade 1 if it belongs to the gold document without containing a span, and grade 0 otherwise. As in TechQA, grade 2 does not require gold-document membership; unlike TechQA's token-sequence test, the substring test can match within a word. We call NDCG@4 under these grades *evidence NDCG@4*.

For document d, the primary statistic averages the $L - B$ response-F1 difference over four chunkers and three paired training seeds:

$$\Delta_d = \frac{1}{12} \sum_{c=1}^{4} \sum_{s=1}^{3} \left(\mathrm{F1}_{L,d,c,s} - \mathrm{F1}_{B,d,c,s} \right), \qquad \widehat{\Delta} = \frac{1}{273} \sum_{d=1}^{273} \Delta_d. \tag{4}$$

Here c indexes chunkers, s training seeds and d documents; these indices are unrelated to the candidate passage c, the score s_{gj} and the document function $d(c)$ of Section 3.2. Within each

domain, documents whose titles match after normalization (lowercasing and removing trailing numbered suffixes) form a dependency family; there are 235 families. The 95% interval uses 20,000 bootstrap draws that resample whole families within domains; each draw divides the resampled document sum by the realized document count N^*, which varies because families differ in size (Appendix A). The two-sided p-value uses 100,000 sign flips with one sign per family. The interval holds the three trained seed pairs fixed, so it does not quantify variation over future training seeds.

4.3 Retrieval metric and analysis tiers

Both studies summarize retrieval with NDCG@4 over the common pool. For returned grades $g_1, \ldots, g_4$ and the four largest pool grades $g_1^*, \ldots, g_4^*$,

$$\mathrm{DCG@4} = \sum_{i=1}^{4} \frac{2^{g_i} - 1}{\log_2(i+1)}, \qquad \mathrm{NDCG@4} = \begin{cases} \mathrm{DCG@4/IDCG@4}, & \mathrm{IDCG@4} > 0, \\ 0, & \text{otherwise}, \end{cases} \tag{5}$$

where IDCG substitutes g_i^* in the same sum; here g_i denotes a grade, not a training group. The ideal ranking is restricted to the common 20-candidate pool, and cells with zero IDCG remain in the mean denominator.

Each study has a single primary test. Prespecified secondary summaries for Study 2 are domain effects, an equal-domain mean, per-seed effects with their spread and leave-one-seed-out values, retrieval metrics and operational measurements; response exact match and span F1 are also reported. As both frozen protocols specify, all secondary summaries are descriptive (Appendix A). Pairwise method contrasts, per-chunker breakdowns, top-four overlap and evidence-flow associations come from an exploratory specification written after the study and dated 8 September 2026, and they carry no p-values. Analyses added later, such as the grade decomposition in Section 5.3 and the validation re-scoring in Section 6, are labeled post hoc.

5 Results

5.1 Primary outcomes

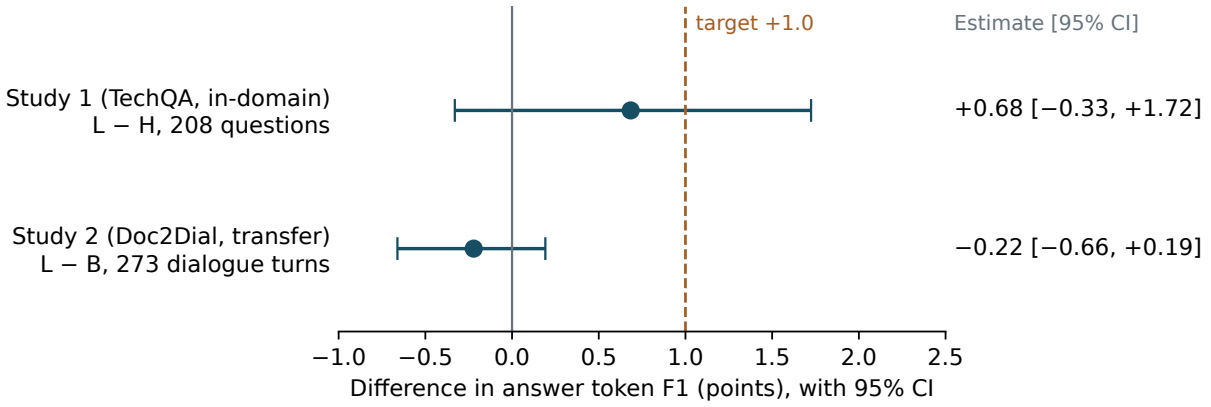


Figure 2: Primary estimates with 95% intervals, in answer token-F1 points. Study 1 averages four chunkers per question with one generation seed (question bootstrap). Study 2 averages four chunkers and three paired training seeds per document (family bootstrap over 235 families). The dashed line marks the targeted +1-point gain.

Neither study met its success criterion (Figure 2). In Study 1, mean answer F1 was 32.01 for H and 32.70 for L, a difference of +0.68 points computed from unrounded means (95% CI −0.33 to

+1.72; $p = 0.20$). Per-question differences were small and mixed: L was better on 115 questions, worse on 86 and tied on 7 (Cohen's $d_z = 0.09$). Exact match was rare (1 of 832 H outputs and 4 of 832 L outputs). Because the interval runs from a small loss to gains above the target, Study 1 neither demonstrates nor excludes a one-point improvement. A post hoc breakdown by prior exposure gives +0.16 points for the 56 reserve questions without a discovered prior artifact and +0.88 for the 152 with one. These subsets are not randomized, so the difference does not establish a contamination effect (Appendix D).

In Study 2, the $L - B$ difference in response F1 was −0.22 points (95% CI −0.66 to +0.19; $p = 0.31$). This is the more decisive negative result: conditional on the trained adapters, a gain of the targeted size lies outside the 95% interval.

5.2 Method means and variation in Study 2

All three reranking methods have higher response F1 than hybrid retrieval, but adaptation adds little beyond the unadapted reranker (Table 2): B exceeds U by only 0.02 points, and L is 0.20 points below U. Evidence NDCG@4 separates L from the other methods more clearly: L (0.612) is below B (0.689), U (0.686) and H (0.650).

The direction of the primary contrast is consistent across domains but not across training seeds. All four domain effects are negative (Table 3), with an equal-domain mean of −0.26 points. The per-seed effects differ in sign (Table 4; standard deviation 0.49 points, range −0.53 to +0.35), although every leave-one-seed-out mean is negative. The positive effect at seed 20260904, which was also the grid-selection seed, reflects B's lowest seed mean (23.61 points, versus 24.42 and 24.11) rather than an unusually high L mean (23.58–23.96 across seeds; Appendix C). The retrieval contrast does not change sign: L's evidence NDCG@4 is below B's for all three seeds. The answer contrast also varies by chunker, from −0.99 points (recursive-254) to +0.41 (sentence-254).

Table 2: Study 2 method means. F1 and exact match (EM) in points; NDCG@4 on the 0–1 scale. H/U: 1,092 records each; B/L: 3,276 each (three training seeds).

Method	Response F1	Span F1	Response EM	NDCG@4
H	23.57	22.65	0.00	0.650
U	24.03	23.30	0.18	0.686
B	24.05	23.24	0.06	0.689
L	23.83	23.12	0.06	0.612

Table 3: Study 2 $L - B$ response-F1 difference by domain (points). The equal-domain mean weights domains equally; the primary estimand weights documents equally.

Domain	Documents	$L - B$ F1
DMV	51	−0.63
SSA	77	−0.11
Student aid	50	−0.18
VA	95	−0.11
Equal-domain mean	273	−0.26

5.3 From retrieval to answers

In both studies, clear differences in NDCG@4 were not matched by clear differences in answer F1. The studies are not replications: they differ in comparator, population and protocol. In

Study 1, L's NDCG@4 on the partly exposed reserve set exceeded that of hybrid retrieval for every training seed (0.807, 0.800 and 0.804 versus 0.769, with the corrected normalization; Appendix D). Its answer-F1 gain for the one seed with generated answers (+0.68 points) remains unresolved rather than absent (Figure 2). In Study 2 the retrieval difference runs the other way: L's evidence NDCG@4 was 0.077 below B's, yet the response-F1 difference was small (−0.22 points) and its interval included zero. For comparison, unadapted reranking (U) raised evidence NDCG@4 over H by 0.036 and response F1 by 0.46 points, less than half the targeted gain (Appendix C).

The remaining analyses examine Study 2, where all four methods were compared. Exploratory analyses locate the retrieval differences in the ranking step rather than in the candidate pools. All methods rank the same pools, and these pools usually contain literal evidence: of 1,092 query–chunker pools, 874 contain at least one passage with a literal annotated grounding span, and 57 contain no graded passage at all. B and L also often choose the same passages: they share on average 67% of their top four passages, and their top-four sets are identical in 20% of paired cells. The fraction of cells whose packed context contains a literal annotated span is 0.704 for B and 0.670 for L (0.658 for H and 0.701 for U). Packing the selected passages into the generator's input loses no selected span: truncation was needed for only five of the 8,736 contexts, and two outputs reached the 512-token output cap (Appendix E). Differences in what the generator receives therefore arise from which passages each method selects for its top four and in what order it ranks them.

Table 4: Study 2 $L - B$ response-F1 differences (points), leave-one-seed-out means, and retrieval NDCG@4 differences (0–1 scale). Seed 20260904 was also used for development-grid selection.

Seed	$L - B$ F1	Without this seed	$L - B$ NDCG@4
20260904	+0.35	−0.51	−0.0827
20260905	−0.48	−0.09	−0.0551
20260906	−0.53	−0.07	−0.0937

A post hoc decomposition shows what L's evidence NDCG@4 deficit consists of (Appendix E). L places fewer gold-document passages without a literal span in its top four than any other method (grade 1: 24.2% of slots, versus 27.2–27.8%) and more passages with no graded evidence (grade 0: 50.8%, versus 46.0–48.1%). Relative to H, L selects slightly more grade-2 passages (0.999 versus 0.986 per top four), yet its evidence NDCG@4 is 0.0379 lower, and grade-1 losses account arithmetically for 82.0% of that gap. Relative to B, the gap comes from both grades in similar measure: 45.1% from grade 1 and 54.9% from grade 2. These decompositions are arithmetic and descriptive; they do not show that negative inversion caused the deficit.

Across the reported post hoc candidate-pool strata, answer differences do not consistently track retrieval differences. L's deficit relative to B is largest in the 161 pools that contain gold-document passages but no literal span (−0.1427 in NDCG@4), yet in those pools L's response F1 is 0.73 points higher than B's. In the 874 pools with a literal span, both differences are negative: −0.0701 in NDCG@4 and −0.39 F1 points.

In Study 2, differences in response F1 track response length more closely than retrieval quality. With each $L - B$ difference first averaged over a document's 12 chunker-by-seed cells, the response-F1 difference correlates weakly with the evidence-NDCG@4 difference (Pearson $r = 0.22$; Spearman $\rho = 0.18$) and more strongly, and negatively, with the difference in generated length ($r = -0.35$; $\rho = -0.47$; all associations in Appendix E). These associations are descriptive and could also reflect question difficulty. Generated answers are much longer than the references. Under the F1 metric's normalized whitespace tokenization, reference utterances average 16.31 tokens (median 14), whereas generated answers average 63.80–65.60 tokens across methods; macro precision is 0.179–0.182 and recall 0.516–0.532. When a response overlaps the

reference, adding nonoverlapping tokens lowers precision and F1 without lowering recall, so token F1 can penalize a longer answer that is no less supported.

5.4 Compute and scoring cost

Study 2 used 46,280 allocated A100-seconds (12.86 A100-hours, within the planned 20-hour budget), including loading, I/O, failures and retries. This total covers 12 grid jobs, 12 validation runs, six final refits, 1,092 retrieval cells, 152,880 reranker scores and 8,736 generated answers, but not development smoke tests or earlier project compute. Adapted reranking was slower than unadapted reranking in our offline measurements: the unadapted reranker scored 164.2 query–passage pairs per second in steady state, and the B and L adapters 91.6–91.7. These are timings of synchronized forward passes after tokenization, not per-request latencies or a matched serving comparison; per-seed measurements, generation throughput and the operational fixes made during the run are reported in Appendix F.

6 Discussion

6.1 What the studies establish

On RQ1 and RQ2, neither study demonstrated, under its prespecified criterion, that the literal-match supervision pipeline improves answer F1. The two studies carry different weight, however. Study 1 compares L with hybrid retrieval on a partly exposed reserve set; its interval includes both zero and the targeted gain, so the in-domain answer effect remains unresolved. Study 2 asks the sharper question, literal-match against document-level supervision under transfer, and its interval excludes the targeted gain conditional on the trained adapters; it provides the more decisive negative result. Two features of the design make both results informative about that pipeline: the retrieval pipeline and generator were held fixed, with the same update budget for B and L in Study 2, and the protocols were frozen before comparative outcomes existed.

The success criterion was also demanding relative to what reranking achieved: the +1-point target was about twice the response-F1 gain of unadapted reranking over hybrid retrieval in Study 2. Under a retrospective normal-reference approximation, the gain detectable with 80% power under the compound rule was 1.47 F1 points for Study 1 and 1.18 for Study 2, and a true one-point gain would have met the rule with a probability of only 47.7% and 50.0%, respectively. Because the rule required an observed gain of at least one point, under this approximation that probability could not exceed one half. These approximations condition on the observed variance; they are not exact power calculations for the sign-flip tests or prospective design claims (Appendix A).

The same design limits what the results can show. B and L are complete pipelines that differ in group composition and training exposure as well as in label values (Section 3.2), so the comparison does not identify the effect of the labels alone. The nonsignificant answer difference between B and L is not evidence that the two pipelines are equivalent. Results from one retrieval setup, one generator and one answer metric also leave open whether literal-match labels would help in other settings and whether reranker adaptation helps in general.

For practitioners, the study gives no reason to prefer literal-match over document-level labels for adapting a reranker in this setting. Under transfer, it also gives no reason to adapt the reranker at all: U attains nearly the same response F1 as B, while adapted scoring was slower in our offline measurements and requires training. These measurements are not matched production benchmarks, and a deployment decision would still require task-specific validation and matched serving measurements.

6.2 Possible explanations for the retrieval deficit

The data are more definite about retrieval than about answers: under transfer, L had the lowest evidence NDCG@4 of the four methods and was below B for every training seed. A post hoc re-scoring suggests that L's deficit relative to B already appears in-domain, before transfer. We re-scored the saved TechQA validation rankings on L's own three-level grades; this uses one training seed and was not in the protocol. At the selected configuration, L scored 0.810 against B's 0.824 (difference −0.013 computed from unrounded values; 95% question-bootstrap CI −0.026 to −0.001), and L was below B in five of the six grid configurations (Appendix B.4). The re-scoring is suggestive rather than confirmatory; if the in-domain deficit is real, an explanation of it should not rest on transfer alone.

Three features of the pipeline and its evaluation could produce such a deficit, and the study does not isolate any of them. The first is negative inversion: when a literal-match passage exists, L trains the reranker to rank gold-document passages without the literal answer below that passage, which may teach the reranker to demote useful passages. The transfer results fit this account descriptively, since L places the fewest grade-1 passages in its top four and its gap to H comes mostly from grade-1 losses (Section 5.3). How much inversion contributes is unclear, however, because fewer than a quarter of L's training groups contain a literal-match positive (Section 3.2); the remaining groups pair grade-1 positives with grade-0 negatives, as in B.

The second is training exposure. With the same update budget, L covers a larger share of its smaller group inventory than B does (0.96 versus 0.43 of a pass; Section 3.2), although at the selected budget neither method completes its first pass, and group construction changes how much weight each question receives. Model selection couples these exposure differences with the learning rate: L's own-grade optimum used the lower learning rate, for which no transfer result exists (Section 3.3).

The third is that transfer changes the evaluation target. Training uses technical-answer strings, Study 2 grades retrieval with grounding-span strings, and response F1 scores conversational agent utterances. The shift in domain and evaluation target may further contribute to the retrieval deficit observed under transfer, but it cannot explain the in-domain deficit that the post hoc re-scoring suggests. Separating these explanations would require new, development-only experiments that hold candidate pools, question weights and exposure fixed while comparing objectives such as multi-positive marginal likelihood (Zhang et al., 2025a) or a graded ranking loss such as LambdaLoss (Wang et al., 2018). Such experiments would also need an evaluation population independent of the observed Doc2Dial outcomes.

6.3 What the retrieval-to-answer gap means for evaluation

For RQ3, clear NDCG@4 differences corresponded to small or nonsignificant differences in answer F1 (Section 5.3). The document-level correlation between NDCG@4 and F1 differences is weak, consistent with what Salemi and Zamani (2024) report for relevance-based retrieval evaluation and downstream RAG performance.

Two explanations fit this pattern, and the experiments cannot fully separate them. Under the first, *weak propagation*, ranking differences change what the generator writes only slightly. Under the second, *limited metric sensitivity*, the answers change more than token F1 can register, for example when a better-supported answer differs from the reference in wording or length. The Study 2 data bear on the second explanation, because token F1 depends on response length in this setting: generated answers are about four times as long as the reference utterances, and document-level F1 differences track length differences more closely than NDCG differences (Section 5.3).

The three comparisons in Section 5.3 differ in whether retrieval metrics alone would have

been a sufficient guide to the answer-level outcome. In Study 2, retrieval and answers both disfavored L relative to B: its evidence NDCG@4 was below B's for every training seed, in the same direction as its slightly lower response F1. In the other two comparisons, retrieval metrics would have been less informative: they favored L over hybrid retrieval in Study 1, where the answer effect remained unresolved, and favored unadapted reranking over hybrid retrieval in Study 2, where the response-F1 gain was a descriptive 0.46 points.

We therefore recommend that evaluations of reranker supervision measure the final answer, check first that the answer metric can register retrieval changes, and report retrieval and answer results side by side. Oracle-context and no-retrieval conditions are examples of such a check; neither condition is included in the present evaluation. This recommendation rests on one retrieval pipeline, one generator and one answer metric; it is not evidence that retrieval quality is unimportant for RAG. Testing it in other settings, including native multi-document dialogue tasks like MultiDoc2Dial (Feng et al., 2021), would require a fresh evaluation split audited for prior exposure.

7 Limitations

Scope. The studies use particular datasets, models, budgets and pipelines. They differ in preprocessing, model selection, comparator, number of seeds and exposure history, so their effects are not pooled or treated as replications. The shared configuration in Study 2 does not equalize which questions form groups or how often groups are seen.

Study 1 reserve exposure. Earlier project work produced artifacts for 152 of the 208 reserve questions (16 with generated answers, 136 with retrieval only); 56 have no known prior artifact. The reserve also contains eight exact normalized duplicate questions, 31 near duplicates at token-set Jaccard ≥ 0.80 (21 at ≥ 0.90, 13 at ≥ 0.95), and 44 questions whose gold documents (40 in total) also appear in development or validation. Artifact presence does not establish that a question was viewed, and its absence does not prove non-exposure. Pretraining exposure of the foundation models to TechQA or Doc2Dial is unknown.

Study 2 design. Training uses single-turn TechQA answers, whereas transfer scores conversational agent utterances and grades retrieval with grounding spans. This changes both domain and target construct. The reranker instruction and generator prompt were written for single technical-support questions and were applied unchanged to serialized dialogue histories. One selected transition per document limits generalization across dialogue turns, and title-based families only approximate dependence between documents. Inference rests on 273 documents in 235 families, not on the 8,736 generated records. The interval resamples families with the three paired sets of trained adapters held fixed and so does not quantify uncertainty over future retraining seeds. Three seeds are insufficient for a precise estimate of that variation; the sign changes in Table 4 remain material. The Doc2Dial evaluation set has now been observed and cannot serve as an untouched test.

Metrics. Token F1 penalizes wording differences and can miss correct paraphrases, and agent utterances can include conversational material beyond the grounding span. In Study 2, generated answers are much longer than the reference utterances, so response F1 also depends on response length (Section 5.3); the weak association between retrieval and answer differences therefore cannot be attributed to weak propagation alone. Literal matching misses paraphrased or scattered evidence and can mishandle punctuation, numbers, commands and version strings. Gold-document membership is coarse, and a literal span in the context does not show that the

generator used it. NDCG@4 reflects the grading convention described above, not an independent judgment of evidence quality. No human evaluation of answer quality is reported, so conclusions rest on automatic reference-based metrics.

Inference. A non-significant result is not evidence of equivalence, and no equivalence test was planned. Secondary, exploratory and post hoc results (including the validation re-scoring in Section 6) are descriptive; the associations are not causal and could reflect confounding by question difficulty or output length.

Reproducibility. Some training timers cover only a resumed session, and a legacy prompt-length field is invalid for 5,958 records (Appendix E). No end-to-end deployment experiment or full-project compute total is available, and the public companion does not contain everything needed to rerun the experiments.

8 Conclusion

We tested whether adapting a reranker to prefer passages that literally contain the reference answer improves the answers of a fixed RAG generator. Neither study demonstrated such an improvement under its prespecified answer-F1 criterion. The more decisive evidence comes from transfer, where the literal-match reranker had slightly lower response F1 than a reranker adapted with document-level labels; conditional on the trained adapters, the 95% interval for that difference excludes the targeted +1-point gain. The literal-match reranker also had the lowest evidence NDCG@4 of the four methods. In-domain, on a partly exposed reserve set, it improved NDCG@4 over hybrid retrieval, but its answer effect remained unresolved. Clear changes in retrieval ranking were not matched by clear changes in answer F1 in either study, and because token F1 also depended on response length, weak propagation and limited metric sensitivity cannot be fully separated.

These results concern the literal-match supervision pipeline as tested, with its training groups and training exposure, one retrieval setup, one generator and token F1 as the answer metric. They do not show that retrieval quality is irrelevant to answer quality or that reranker adaptation cannot help. For evaluating reranker supervision, the practical implication is to measure the final answer, to check first that the answer metric registers retrieval changes, and to report retrieval and answer results together.

Declarations

Excluded rating exercise. An earlier Study 1 human-rating exercise is excluded, and no human-rating results are reported or used.

Data and code availability. Selected source code, aggregate results and the final pre-execution protocol for Study 2 are available at
`https://github.com/zukhriddingit/chunkrag-reranking-study` (release v1.0.1);
release v1.0.0 is archived at DOI 10.5281/zenodo.22695835. The protocol was fixed before any comparative Doc2Dial outcome existed but was released afterward, so it is not a preregistration. The companion supports inspection of the selected source and aggregate results, not complete model-experiment replay: reflecting the chosen release scope, it omits exact split and selection records, per-record outputs, the six final adapters and some executed recovery code. The NVIDIA TechQA-RAG-Eval card lists Apache-2.0 and IBM's Doc2Dial distribution lists

CC-BY-3.0; dataset text should be obtained upstream. Code and configurations are released under Apache-2.0 and aggregates, figures and documentation under CC-BY-4.0, as assigned per file (Appendix G).

Funding and competing interests. This study was self-funded. The authors declare no competing interests. This manuscript is a preprint and has not been accepted for journal publication.

Author contributions (CRediT)

Assylkhan Geniyat: Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Data curation, Visualization, Writing – original draft, Writing – review & editing, Project administration.

Zukhriddin Fakhriddinov: Methodology, Validation, Formal analysis, Writing – review & editing.

Atharv Gulati: Validation, Writing – review & editing.

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the authors used OpenAI Codex (GPT-5.x and GPT-6.x series models) and Claude Code (Anthropic; Claude Opus 5.5) for drafting and language editing, manuscript organization and consistency checks. Two author-supplied Google Deep Review reports were used as review feedback; their suggestions were checked against the code and records. No generative image model was used. After using these tools, the authors reviewed and edited the content as needed and take full responsibility for the content of the publication.

References

Vittorio Castelli, Rishav Chakravarti, Saswati Dana, Anthony Ferritto, Radu Florian, Martin Franz, Dinesh Garg, Dinesh Khandelwal, Scott McCarley, Michael McCawley, Mohamed Nasr, Lin Pan, Cezar Pendus, John Pitrelli, Saurabh Pujar, Salim Roukos, Andrzej Sakrajda, Avi Sil, Rosario Uceda-Sosa, Todd Ward, and Rong Zhang. The TechQA dataset. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1269–1278, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.117. URL https://aclanthology.org/2020.acl-main.117/.

Florin Cuconasu, Giovanni Trappolini, Federico Siciliano, Simone Filice, Cesare Campagnano, Yoelle Maarek, Nicola Tonellotto, and Fabrizio Silvestri. The power of noise: Redefining retrieval for RAG systems. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 719–729, 2024. doi: 10.1145/3626772.3657834.

Rotem Dror, Gili Baumer, Segev Shlomov, and Roi Reichart. The hitchhiker's guide to testing statistical significance in natural language processing. In Iryna Gurevych and Yusuke Miyao, editors, *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1383–1392, Melbourne, Australia, July

2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1128. URL https://aclanthology.org/P18-1128/.

Shahul Es, Jithin James, Luis Espinosa Anke, and Steven Schockaert. RAGAs: Automated evaluation of retrieval augmented generation. In Nikolaos Aletras and Orphee De Clercq, editors, *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 150–158, St. Julians, Malta, March 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.eacl-demo.16. URL https://aclanthology.org/2024.eacl-demo.16/.

Song Feng, Hui Wan, Chulaka Gunasekara, Siva Patel, Sachindra Joshi, and Luis Lastras. doc2dial: A goal-oriented document-grounded dialogue dataset. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8118–8128, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.652. URL https://aclanthology.org/2020.emnlp-main.652/.

Song Feng, Siva Sankalp Patel, Hui Wan, and Sachindra Joshi. MultiDoc2Dial: Modeling dialogues grounded in multiple documents. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6162–6176, 2021. doi: 10.18653/v1/2021.emnlp-main.498. URL https://aclanthology.org/2021.emnlp-main.498/.

Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations (ICLR)*, 2022. URL https://arxiv.org/abs/2106.09685.

Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.550. URL https://aclanthology.org/2020.emnlp-main.550/.

Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. Advances in Neural Information Processing Systems, volume 33, 2020. URL https://proceedings.neurips.cc/paper/2020/hash/6b493230205f780e1bc26945df7481e5-Abstract.html.

Jon Saad-Falcon, Omar Khattab, Christopher Potts, and Matei Zaharia. ARES: An automated evaluation framework for retrieval-augmented generation systems. In Kevin Duh, Helena Gomez, and Steven Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 338–354, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.20. URL https://aclanthology.org/2024.naacl-long.20/.

Alireza Salemi and Hamed Zamani. Evaluating retrieval quality in retrieval-augmented generation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2395–2400, Washington, DC, USA, July 2024. Association for Computing Machinery. doi: 10.1145/3626772.3657957.

Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Richard James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. REPLUG: Retrieval-augmented black-box language models.

In Kevin Duh, Helena Gomez, and Steven Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 8371–8384, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.463. URL https://aclanthology.org/2024.naacl-long.463/.

Xuanhui Wang, Cheng Li, Nadav Golbandi, Michael Bendersky, and Marc Najork. The LambdaLoss framework for ranking metric optimization. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*, pages 1313–1322, 2018. doi: 10.1145/3269206.3271784. URL https://research.google/pubs/the-lambdaloss-framework-for-ranking-metric-optimization/.

Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. Learning to filter context for retrieval-augmented generation. arXiv:2311.08377, 2023. URL https://arxiv.org/abs/2311.08377.

Xiaohua Wang, Zhenghua Wang, Xuan Gao, Feiran Zhang, Yixin Wu, Zhibo Xu, Tianyuan Shi, Zhengyuan Wang, Shizheng Li, Qi Qian, Ruicheng Yin, Changze Lv, Xiaoqing Zheng, and Xuanjing Huang. Searching for best practices in retrieval-augmented generation. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 17716–17736, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.981. URL https://aclanthology.org/2024.emnlp-main.981/.

Yue Yu, Wei Ping, Zihan Liu, Boxin Wang, Jiaxuan You, Chao Zhang, Mohammad Shoeybi, and Bryan Catanzaro. RankRAG: Unifying Context Ranking with Retrieval-Augmented Generation in LLMs. Advances in Neural Information Processing Systems, volume 37, 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/db93ccb6cf392f352570dd5af0a223d3-Abstract.html.

Hengran Zhang, Minghao Tang, Keping Bi, Jiafeng Guo, Shihao Liu, Daiting Shi, Dawei Yin, and Xueqi Cheng. Utility-focused LLM annotation for retrieval and retrieval-augmented generation. In Christos Christodoulopoulos, Tanmoy Chakraborty, Carolyn Rose, and Violet Peng, editors, *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 1683–1702, Suzhou, China, November 2025a. Association for Computational Linguistics. ISBN 979-8-89176-332-6. doi: 10.18653/v1/2025.emnlp-main.88. URL https://aclanthology.org/2025.emnlp-main.88/.

Yanzhao Zhang, Mingxin Li, Dingkun Long, Xin Zhang, Huan Lin, Baosong Yang, Pengjun Xie, An Yang, Dayiheng Liu, Junyang Lin, Fei Huang, and Jingren Zhou. Qwen3 Embedding: Advancing Text Embedding and Reranking Through Foundation Models. arXiv:2506.05176, 2025b. URL https://arxiv.org/abs/2506.05176.

The appendices report implementation details and complete secondary and exploratory results. F1 and exact match use points (×100); NDCG uses the 0–1 scale. L is condition E in the frozen records.

A Analysis register and statistical details

Table 5 lists every analysis and its inferential status: each primary analysis is a single prespecified test, secondary summaries are descriptive, and exploratory and post hoc analyses carry no p-values. Neither study met its success criterion, and the two studies are not pooled.

Table 5: Analysis register.

Analysis	Estimand	Inference
Study 1 primary	Per-question $L - H$ answer F1, averaged over four chunkers (208 questions)	20,000 question-bootstrap draws; 100,000 paired sign flips; one test.
Study 2 primary	Per-document $L - B$ response F1, averaged over four chunkers and three paired seeds (273 documents)	20,000 family-bootstrap draws within domains; 100,000 family sign flips; one test.
Study 2 domains and seeds	Domain effects, equal-domain mean, seed spread and leave-one-seed-out values	Prespecified, descriptive.
Retrieval and operational outcomes	NDCG@4, span F1, exact match, cost	Prespecified, descriptive.
Pairwise contrasts and chunker breakdowns	All six method contrasts; all four chunkers	Exploratory, descriptive.
Evidence flow, overlap and associations	Specification dated 8 September 2026, 02:17:38 UTC	Exploratory; no p-values.
Validation grid on common grades	NDCG@4 of all 12 grid runs on both grade schemes	Post hoc, descriptive; one training seed.
Reserve exposure and design sensitivity	Study 1 exposure strata; normal-reference power and MDE calculations	Post hoc, descriptive; historical planning scenarios identified separately.

The Study 2 bootstrap resamples whole families within domains and computes the document-weighted statistic on each resample; the sign-flip test assigns one sign per family. There are 207 single-document families, 27 two-document families and one 12-document family in the SSA domain (235 families, 273 documents). Families are defined within domains by lowercased, trimmed titles with trailing numbered suffixes removed and whitespace normalized.

Specifically, let $\mathcal{F}_h$ be the set of families in domain h, C_f the documents in family f, and Δ_d the document's mean $L - B$ response-F1 difference over the 12 chunker–seed cells. Each draw independently samples $|\mathcal{F}_h|$ families with replacement within each domain. If w_f^* is the resulting multiplicity of family f, the executed bootstrap statistic is

$$\widehat{\Delta}^* = \frac{\sum_h \sum_{f \in \mathcal{F}_h} w_f^* \sum_{d \in C_f} \Delta_d}{N^*}, \qquad N^* = \sum_h \sum_{f \in \mathcal{F}_h} w_f^* |C_f|. \tag{6}$$

The denominator is the resampled document count N^*, which varies with the sampled family sizes; it is not fixed at 273. Each occurrence of a document has equal weight, rather than each family having equal weight. Domain family counts are fixed by stratification, but domain document counts can vary. For the sign-flip test, the denominator remains 273 and one random sign multiplies all document differences in a family.

The analysis random seeds are 20260907 (bootstrap) and 20260908 (sign flips) for Study 1, and 20260922 and 20260923 for Study 2; they are separate from the training seeds. The success criterion in both studies is an observed mean improvement of at least +1 F1 point with two-sided $p < 0.05$. The Study 2 interval (-0.66 to $+0.19$ points) excludes +1; no equivalence test was planned.

Training-seed scope. The family bootstrap conditions on the three paired sets of trained adapters. It does not cover uncertainty from drawing new training seeds. We report the individual seed effects, their sample standard deviation and leave-one-seed-out means descriptively. No seed-general confidence interval is claimed: combining a document-bootstrap interval with a three-seed variance estimate would require additional assumptions about dependence and the target population.

Planning and retrospective sensitivity. The pre-execution Study 2 planning record used a TechQA development proxy: the per-question generic-reranker minus hybrid F1 difference, averaged over four chunkers ($n = 200$; SD 0.06062 on the 0–1 F1 scale, or 6.06 points). It gave normal-reference power of 77.8% under independence and 70.0% under an assumed family ICC of 0.3 for a true +1-point effect. These calculations concern the two-sided significance requirement alone, use a different dataset and contrast, and do not estimate the probability of satisfying the full compound success rule.

Table 6 reports these sensitivity calculations; neither study's frozen decision rule is changed. For an assumed standard error s, the significance-only calculation uses $\Pr(|Z + \delta/s| > 1.96)$; the compound rule uses the positive-effect threshold $t = \max(1, 1.96s)$, with t and s in F1 points, and approximate power $1 - \Phi((t - \delta)/s)$. Thus its 80% minimum detectable effect (MDE) is $t + \Phi^{-1}(0.8)s$. Study 1's retrospective s is the SD of its 208 question differences divided by $\sqrt{208}$ (0.526 F1 points). Study 2 uses the standard deviation of its reproduced 20,000 frozen family-bootstrap replicates (0.218 points); the reproduction recovers the reported percentile interval. These normal-reference approximations are not exact power calculations for the sign-flip tests, and the retrospective rows condition on the observed variance and trained adapters. In particular, an observed-effect threshold of +1 point yields only about 50% probability of crossing that threshold when the true effect equals it, even when the significance-only power is high.

Table 6: Normal-reference sensitivity. MDEs are F1 points at 80% power; power columns assume a true +1-point effect. Historical planning and retrospective approximations are distinct.

Scenario	MDE (points)		Power (%)	
	p only	Compound	p only	Compound
Study 1, retrospective	1.47	1.47	47.7	47.7
Study 2, planning, independent	1.03	1.31	77.8	50.0
Study 2, planning, ICC 0.3	1.13	1.34	70.0	50.0

Scenario	MDE (points)		Power (%)	
	p only	Compound	p only	Compound
Study 2, retrospective bootstrap scale	0.61	1.18	99.6	50.0

Secondary testing. An earlier planning proposal described $L - U$, $B - U$, $U - H$, $L - H$ and $B - H$ contrasts with one Holm adjustment. Both frozen protocols (preflight v1 and the final pre-execution v2) instead list secondary summaries without that hypothesis family. The executed configuration has SHA-256 `5820ef0c0901689b46e155ab0c2e09d818698a3652a75e3071804ea11c835cb2`; the execution freeze is recorded at 7 September 2026, 03:38:34 UTC, before comparative Doc2Dial outcomes existed. The final protocol has SHA-256 `87cbc55f57526fe31af3931df4157a2216db146038376d42a1b66a1844373a6a`. Secondary outcomes are therefore reported descriptively. No written rationale for dropping the Holm family was retained, and no tests were reclassified after results were seen.

B Implementation details

In the study protocol and the released files, L is named "evidence-specific" (condition E), and the Study 1 system "evidence-aware"; we use L throughout.

B.1 Data

Study 1 uses the NVIDIA TechQA-RAG-Eval training distribution at revision `0b5bbc84b7f07d6d09d063130e90b716d8d4a32a`, split 200/200/208 into training, validation and reserve questions. The split sorts the 608 eligible question identifiers by the SHA-256 digest of the salt `eaai-phase2-techqa-v1`, a NUL byte and the identifier (then by identifier) and assigns the first 200 to training, the next 200 to validation and the last 208 to reserve. A retrospective recomputation of this rule from the identifier list reproduces all 608 saved assignments. The original TechQA paper (Castelli et al., 2020) describes the underlying task; its split sizes do not apply to this distribution. Study 2 uses the official Doc2Dial v1.0.1 archive (`https://doc2dial.github.io/file/doc2dial_v1.0.1.zip`; SHA-256 `94499fa5259f69018d2458cb948552e7a05f424711a95a562bb9e816a515dc23`) (Feng et al., 2020); the one-transition-per-document conversion is specific to this study.

All 488 Doc2Dial documents are searchable, and the evaluation set has 51 DMV, 77 SSA, 50 student-aid and 95 VA cases. Eligibility starts from documents represented in the official validation dialogues: a user turn must be followed immediately by an agent turn with a nonblank utterance and at least one grounding reference. Every one of the 273 validation documents has an eligible transition. Within each document, the transition minimizing SHA-256 of `salt|domain|document_id|dialogue_id|user_turn_id` is chosen; the fixed salt is `eaai-phase4-doc2dial-one-case-per-document-v1-20260906`. Thus the difference between 488 searchable and 273 evaluated documents reflects corpus versus validation-dialogue membership, not selection on comparative outcomes. The query serializes the dialogue history up to the selected user turn, one turn per line, as the uppercase role, a colon and a space, then the utterance. Later turns, the target utterance, gold identifiers, offsets, grounding spans, grades and the reading-comprehension answer field are not used at inference. This supplement reproduces no question, candidate or generated-response text. Exact selection records and per-record outputs are not in the current companion, reflecting its release scope (Section G).

B.2 Models and configuration

Table 7 lists the pinned components.

Table 7: Pinned models and revisions.

Component	Model and revision
Reranker	Qwen/Qwen3-Reranker-0.6B; `e61197ed45024b0ed8a2d74b80b4d909f1255473`
Generator	Qwen/Qwen3.5-9B; `1eb6d84878284892ecfd4c3fb760ffbf34548234`
Dense embedding	BAAI/bge-small-en-v1.5; `5c38ec7c405ec4b44b94cc5a9bb96e735b38267a`
Chunking tokenizer	sentence-transformers/all-MiniLM-L6-v2; `1110a243fdf4706b3f48f1d95db1a4f5529b4d41`

Each dense and BM25 channel retrieves 20 candidates. Reciprocal-rank fusion over their union adds $0.6/(60 + r_{\text{dense}})$ and $0.4/(60 + r_{\text{sparse}})$, with a missing channel rank contributing zero, then retains the top 20; each method returns four passages. Exact fused-score ties preserve insertion order: dense rank order first, followed by previously unseen sparse candidates in sparse rank order. Reranker ties use descending reranker score, ascending fused rank and ascending chunk identifier. The dense query prefix is "Represent this sentence for searching relevant passages: ". The pinned embedding configuration sets a 512-token maximum and lowercasing. SentenceTransformers 3.4.1 tokenizes the combined prefix/query string with `longest_first` truncation; with the tokenizer's default right truncation, overlength inputs retain the beginning and discard the suffix, within 512 total tokens including special tokens. This can remove later dialogue turns, including the selected user turn; the runner implements no turn-aware shortening rule. This behavior is derived from the immutable model configuration and pinned library source, not a replay of per-record tokenization.[1]

Study 2 LoRA uses rank 16, alpha 32, dropout 0.05, all linear target modules and no bias adaptation. AdamW uses weight decay 0.01, warmup over 10% of the update budget (rounded up) and gradient-norm clipping at 1.0. Two groups per device and two accumulation steps give four groups per update; the maximum pair length is 512 tokens. Groups are shuffled with seed equal to the training seed plus 1000003×epoch, and each epoch is completed before reshuffling until the draw budget is reached.

The grid (one seed, two learning rates, three update budgets per method) produces 192,000 validation candidate scores across 12 validation runs. Configuration selection averages B's and L's validation NDCG@4 over all validation questions and chunkers; each method's validation NDCG uses its own training grades (binary for B, three-level for L). The selected shared learning rate is 10^{-4} with 227 updates. The pre-frozen lookup maps 227, 454 and 681 grid updates to 431, 862 and 1,293 refit updates; no derivation formula was preserved in the located records. Retrospectively, these values equal $k\lceil 907/4 \rceil$ and $k\lfloor 1{,}725/4 \rfloor$ for $k = 1, 2, 3$, where 907 and 1,725 are Study 1's surviving training and refit groups (reported below). The lookup therefore corresponds arithmetically to one to three Study 1 epochs at four groups per update, matching Study 1's one-to-three-epoch grid. Because the rounding direction differs (up for training, down for refits) and no located record states this rule, the correspondence is a reconstruction, not the documented derivation. All six final B/L refits use 431 updates. Retrospective inspection of the complete saved grid shows that independent selection on each method's own grades would retain

[1] See the pinned embedding configuration, SentenceTransformers 3.4.1 tokenization, and Transformers 5.16.1 defaults.

$10^{-4}/227$ for B but choose $5 \times 10^{-5}/227$ for L (0.817378 versus 0.810474 at the shared choice). The corresponding independently selected L transfer experiment was not run. Generation uses bfloat16, greedy decoding (temperature zero, one beam), no thinking, a 1,536-token input limit, a 512-token output limit and batch size four.

B.3 Prompts

The reranker scores each query–passage pair with the Qwen3-Reranker template below; the score is the final-token logit for "yes" minus that for "no". In Study 2 the query is the serialized dialogue history.

```
<|im_start|>system
Judge whether the Document meets the requirements based on the Query and the Instruct provided.
     Note that the answer can only be "yes" or "no".<|im_end|>
<|im_start|>user
<Instruct>: Given a technical-support question, rank passages by whether they contain
    sufficient evidence to answer it.
<Query>: {query}
<Document>: {passage}<|im_end|>
<|im_start|>assistant
<think>

</think>
```

The generator receives two chat messages, rendered with the model's chat template with thinking disabled. The context lists the top four passages in ranked order as `[1]` ... `[4]`, separated by blank lines. If the prompt exceeds 1,536 tokens, binary search finds the longest decoded token prefix of this concatenated context that fits, preserving the complete query/history and fixed prompt. This removes the context suffix, may cut a passage midway, and gives earlier ranked passages priority; no early dialogue turn is evicted. If the query and fixed prompt alone cannot fit, the function raises an error. The same prompt function is used by the Study 1 generation code. Reranker inference is separate: it reserves the Qwen prefix and suffix tokens and tokenizes the combined instruction/query/document body with `truncation=True` to the remaining 512-token budget. The runner sets padding side but leaves truncation side to the pinned tokenizer default; the pinned tokenizer configuration sets none, so the library's right-side default applies. Because the body is ordered instruction, query, document, an overlength pair loses the end of the passage first and, for a long enough dialogue history, the whole passage or the end of the query. Training pruned pairs over 512 tokens instead, so inference truncates inputs of a kind that training excluded. The numbers of overlength dense queries and reranker pairs were not recorded; counting them requires replaying the pinned tokenizers on the saved queries and candidate pools.

```
system: You are a grounded question answering assistant. Use only the provided context. Give a
     concise but complete answer containing the information needed to resolve the question. Do
     not explain your reasoning or add citations. If the answer is not fully supported, reply
    with exactly 'unanswerable'.
user: Answer the following question using only the context.

Question: {question}

Context passages:
{context}

Return only the final answer.
```

Before scoring, outputs are stripped of a leading passage marker (`[n]`) and prefixes such as "Answer:" or "The answer is".

B.4 Validation grid on common grades (post hoc)

During model selection, each method's validation NDCG@4 used its own training grades, so B and L were not scored on the same scale. After the study, we re-scored the saved validation rankings of all 12 grid runs on both grade schemes, using the frozen validation labels and the saved reranker scores; no model was retrained or invoked. A separate retrospective recomputation reproduces all 12 recorded own-grade selection values from the saved scores and verifies their file hashes against the run summaries (maximum numerical discrepancy 1.2×10^{-16}). Table 8 reports the results, with the hybrid order as a reference.

On L's own grades, L is below B at the selected configuration (0.810 vs 0.824; per-question difference −0.013, 95% CI −0.026 to −0.001 from 10,000 paired question-bootstrap draws with seed 20261007; L lower on 75 and higher on 42 of 200 questions). L is also lower in five of the six matched configurations; the exception is 5×10^{-5} with 227 updates (L 0.817, B 0.799), the only grid configuration in which L exceeds B on both grade schemes (0.826 vs 0.809 on B grades). Moving from 5×10^{-5} to 10^{-4} at 227 updates raised B's own-grade score by 0.029 and lowered L's by 0.007, so the shared average favored B's optimum. At 5×10^{-5}, L's own-grade score falls as updates increase (0.817, 0.799, 0.790), which is consistent with, but does not demonstrate, sensitivity to the additional passes over its smaller inventory. On B's grades, the selected-configuration difference is −0.021 (−0.033 to −0.008). This analysis was not part of the protocol and uses a single training seed.

Table 8: Study 2 development grid: TechQA validation NDCG@4 for every run, scored on both grade schemes (post hoc, one training seed, 200 questions). Model selection used each method's own grades (B column for B runs, L column for L runs); the selected configuration is 10^{-4} with 227 updates.

Method	LR	Updates	B grades	L grades
H (hybrid order)	–	–	0.780	0.767
B	5×10^{-5}	227	0.809	0.799
B	5×10^{-5}	454	0.822	0.810
B	5×10^{-5}	681	0.817	0.805
B	10^{-4}	227	0.838	0.824
B	10^{-4}	454	0.831	0.819
B	10^{-4}	681	0.835	0.821
L	5×10^{-5}	227	0.826	0.817
L	5×10^{-5}	454	0.804	0.799
L	5×10^{-5}	681	0.797	0.790
L	10^{-4}	227	0.817	0.810
L	10^{-4}	454	0.790	0.786
L	10^{-4}	681	0.800	0.798

B.5 Training groups and Study 1 differences

In Study 2, label-blind deduplication precedes grouping and removes normalization-empty candidates. Within each question/normalized-text key, representatives minimize fused rank, then chunker priority (fixed-128, fixed-254, recursive-254, sentence-254), then chunk identifier. Near-identical passages remain distinct if their normalized texts differ. Candidates are then ordered by fused rank and chunk identifier, and each highest-grade positive forms a group with the first up to seven lower-grade candidates. If a grade-2 candidate exists, grade-1 candidates are eligible negatives; otherwise L falls back to grade-1 positives. Pairs include the complete Qwen template: positives over 512 tokens remove their groups; negatives over 512 are pruned individually, with no replacement. A group needs an in-limit positive and at least one surviving negative. Highest

grade is determined before pair pruning; groups are not rebuilt with grade-1 positives if every literal-positive group is removed. The loss is group-level cross entropy with the positive at index zero, using yes-minus-no logits at temperature one. Weighting groups equally does not weight questions equally.

Table 9 summarizes a retrospective audit of the frozen usable group inventories. L's usable questions are a subset of B's: there are two B-only training questions and three B-only refit questions. Most L groups use grade-1 fallback rather than literal-positive supervision. Training B groups per retained question range from 2 to 59 (median 8), versus 1 to 53 for L (median 3); refit ranges are 1–59 (median 8) and 1–53 (median 3). Table 26 reports further exposure and cost information.

Table 9: Retrospective audit of Study 2's frozen usable group inventories. Questions are those yielding at least one surviving group. Grade columns count group positives; passes are total group draws divided by inventory size at the selected budget, not equal question exposure.

Split	Method	Questions	Groups	Grade 2	Grade 1	Passes
Train (200)	B	189	2,103	0	2,103	0.432
	L	187	943	212	731	0.963
Refit (400)	B	379	4,019	0	4,019	0.429
	L	376	1,799	430	1,369	0.958

Grade-2 positives account for 22.5% of L's training groups and 23.9% of its refit groups. Within these grade-2 groups, grade-1 passages occupy 759 of 1,466 negative positions in training (51.8%) and 1,551 of 2,971 positions in refitting (52.2%). At least one grade-1 negative appears in 186 of 212 grade-2 training groups and 361 of 430 refit groups. Position counts repeat the shared negatives once per positive group and describe the full usable inventory, not realized optimizer draws. Four raw out-of-document grade-2 candidate rows across two questions produce three usable literal-positive groups, in both the training and refit inventories. Raw candidate counts include cross-chunker duplicates. These audits quantify coupled mechanisms without isolating their causal effects.

At 227 updates, 908 group draws correspond to 0.432 B and 0.963 L training passes; at 454 updates these are 0.864 and 1.926, and at 681 updates 1.295 and 2.889. The selected refits draw 1,724 groups (431 updates), corresponding to 0.429 B and 0.958 L passes.

Study 1's earlier pipeline chooses normalized-text duplicate representatives by higher grade first, then lower fused rank, chunker priority and chunk identifier; it deletes the whole group when the positive or any negative exceeds 512 tokens. Of 995 saved training groups, 907 survive; of 1,903 refit groups, 1,725 survive. Of 191 training questions represented before length filtering, 178 remain, and one question supplies up to 53 surviving groups. Study 1 used MS-SWIFT and an epoch grid; Study 2 explicitly batches intact groups under fixed update budgets and uses pair-level pruning fixed before execution. The studies therefore evaluate different training pipelines.

B.6 Metric definitions

Answer normalization lowercases text, removes ASCII punctuation and the articles "a", "an" and "the", and collapses whitespace. Token F1 uses multiset overlap and takes the maximum over reference answers where several exist; two empty strings score one, and one empty string scores zero. Exact match tests normalized equality. For TechQA supervision, literal matching tests a complete nonempty normalized reference as a contiguous token sequence. If a reference is longer than a passage or split across passages, partial containment does not yield grade 2; any complete alternative reference may qualify. In the executed Doc2Dial retrieval grading function, the same

normalization is followed instead by a character-substring test for any nonempty annotated grounding span, which can match within a normalized word. Neither implementation requires gold-document membership for grade 2. Neither applies Unicode normalization, casefolding or fuzzy matching. These literal tests are deterministic proxies rather than semantic sufficiency labels. For returned grades g_i and pool grades sorted descending g_i^*,

$$\mathrm{DCG@4} = \sum_{i=1}^{4} \frac{2^{g_i} - 1}{\log_2(i+1)}, \qquad \mathrm{IDCG@4} = \sum_{i=1}^{4} \frac{2^{g_i^*} - 1}{\log_2(i+1)}.$$

NDCG@4 is their ratio when IDCG@4 is positive and zero otherwise; zero-IDCG cells remain in the averaging denominator. The ideal uses the best four of the complete 20-candidate pool. Study 2 evaluation methods share that pool and three-level grading within each query–chunker cell, whereas development selection used method-specific grades. In Doc2Dial, agent-response F1 and grounding-span F1 are separate targets.

C Complete Study 2 results

Tables 10–12 report every method by domain, chunker and training seed; Table 13 gives the $L - B$ effect by chunker, Table 14 all six method contrasts, and Figure 3 the overall method means. H and U do not depend on the training seed and are not repeated in the seed table. Exact match is near zero for all methods and is omitted from the breakdowns; it is available in the released CSV files.

Table 10: Study 2 method means by domain. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Domain	Method	Resp. F1	Span F1	NDCG@4	Span at 4
DMV	H	26.95	24.39	0.652	0.706
DMV	U	27.71	26.92	0.726	0.789
DMV	B	28.27	26.10	0.726	0.788
DMV	L	27.64	25.78	0.656	0.747
SSA	H	20.97	21.71	0.571	0.565
SSA	U	21.77	21.84	0.586	0.594
SSA	B	20.86	21.54	0.611	0.619
SSA	L	20.75	21.35	0.525	0.592
Student aid	H	22.68	21.04	0.686	0.675
Student aid	U	22.37	20.40	0.751	0.725
Student aid	B	22.66	20.87	0.737	0.712
Student aid	L	22.48	20.65	0.675	0.700
VA	H	24.33	23.34	0.693	0.697
VA	U	24.77	24.06	0.710	0.726
VA	B	25.10	24.32	0.706	0.725
VA	L	24.98	24.42	0.625	0.677

Table 11: Study 2 method means by chunker. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Chunker	Method	Resp. F1	Span F1	NDCG@4	Span at 4
fixed_128	H	23.71	22.81	0.589	0.509
fixed_128	U	24.46	24.06	0.647	0.601
fixed_128	B	24.77	23.80	0.653	0.604
fixed_128	L	24.51	23.74	0.558	0.565
fixed_254	H	23.41	22.38	0.669	0.696
fixed_254	U	23.37	22.73	0.714	0.740
fixed_254	B	23.76	22.67	0.707	0.735
fixed_254	L	23.72	23.03	0.619	0.697
recursive_254	H	23.73	22.84	0.664	0.667
recursive_254	U	24.22	23.00	0.683	0.674
recursive_254	B	24.03	23.49	0.692	0.686
recursive_254	L	23.04	22.34	0.621	0.659
sentence_254	H	23.43	22.58	0.676	0.758
sentence_254	U	24.08	23.41	0.698	0.788
sentence_254	B	23.63	22.98	0.704	0.791
sentence_254	L	24.04	23.35	0.648	0.759

Table 12: Study 2 method means by seed. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Seed	Method	Resp. F1	Span F1	NDCG@4	Span at 4
20260904	B	23.61	23.02	0.697	0.708
20260904	L	23.96	23.21	0.615	0.678
20260905	B	24.42	23.43	0.681	0.700
20260905	L	23.94	23.08	0.626	0.679
20260906	B	24.11	23.25	0.689	0.705
20260906	L	23.58	23.06	0.595	0.655

Table 13: Study 2 $L - B$ response-F1 difference by chunker (points; exploratory).

Chunker	$L - B$ F1
fixed_128	−0.26
fixed_254	−0.04
recursive_254	−0.99
sentence_254	+0.41

Table 14: All six Study 2 method contrasts (exploratory). F1 differences in points; NDCG@4 differences on the 0–1 scale. Only $L - B$ response F1 is the confirmatory test.

Contrast	Resp. F1	Span F1	NDCG@4
U − H	+0.46	+0.64	+0.036
B − H	+0.48	+0.58	+0.039
L − H	+0.26	+0.46	−0.038
B − U	+0.02	−0.06	+0.003
L − U	−0.20	−0.18	−0.074
L − B	−0.22	−0.12	−0.077

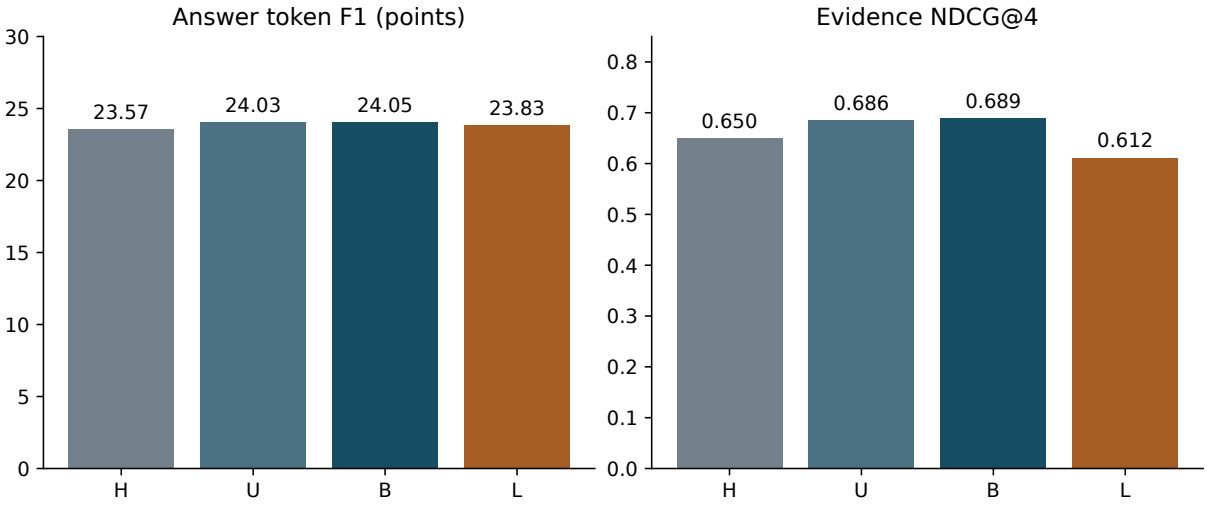


Figure 3: Study 2 method means: answer token F1 in points (left) and evidence NDCG@4 (right). H/U: 1,092 records each; B/L: 3,276 each over three training seeds.

D Study 1: NDCG correction and evidence flow

The original Study 1 reserve code normalized NDCG using only the returned top four passages, whereas validation normalized against the full candidate pool. For a pool with grades $[1, 1, 1, 1, 2]$ followed by 15 zeros, returning the first four gives an original NDCG of 1.000 but a corrected value of 0.562. The correction recomputes the metric from the saved rankings and grades and does not change checkpoints, the comparator, candidate order, grades, contexts, generated answers or F1. Regression tests cover this example, ideal rankings, zero relevance, short pools, consistency with validation and the zero-IDCG convention. Table 15 reports both values.

Table 15: Study 1 reserve NDCG@4 before and after the normalization correction. Only seed 20260904 has generated answers.

System	Original NDCG@4	Corrected NDCG@4
H	0.850	0.769
L, seed 20260904	0.864	0.807
L, seed 20260905	0.861	0.800
L, seed 20260906	0.864	0.804

Separately, a missing import (a `NameError`) in the Study 1 analysis command-line wrapper was fixed by importing the frozen analysis function; data, thresholds, seeds and results were unaffected.

Historical reserve exposure (post hoc). We matched the 208 saved question-level primary outcomes to the three historical canonical artifact collections whose hashes were verified in the exposure audit. Table 16 gives the descriptive split. "No prior artifact found" is limited to that search; it does not establish absence of all exposure. Artifact presence does not establish which records authors inspected, and whether historical findings influenced early design choices remains unresolved. These are neither randomized subgroups nor a new held-out test, and the 56-question subgroup does not replace the frozen 208-question analysis.

Table 16: Study 1 exposure sensitivity, post hoc. Means and differences are F1 points, each question averaging four chunkers.

Prior outcome artifacts	Questions	H	L	$L - H$
No prior artifact found	56	30.99	31.15	+0.16
Prior artifact found	152	32.39	33.27	+0.88

Retrieval-only seed checks. Common-pool corrected NDCG@4 is 0.768768 for H and 0.807202, 0.800252 and 0.803948 for L at seeds 20260904, 20260905 and 20260906, respectively (832 query–chunker records per condition and seed). Their $L - H$ differences are +0.038434, +0.031484 and +0.035180. Only seed 20260904 has complete generation; the other two seeds cannot establish answer-quality robustness.

Table 17 reports literal visibility of the reference answer. The reference appears literally in 28.4% of candidate pools, and no selected literal is lost during packing. It appears in only 2.2% of H answers and 2.6% of L answers; this strict lexical test does not imply that other answers lack support. Four outputs (two per condition) reach the token cap.

Table 17: Study 1 literal visibility of the normalized reference answer in the candidate pool, the selected four passages and the packed context (exploratory).

Condition	Records	Pool	Selected	Packed
H	832	0.284	0.244	0.244
L	832	0.284	0.252	0.252

E Exploratory Study 2 diagnostics

E.1 Definitions

Tables 18 and 19 and Figure 4 summarize evidence flow and overlap over all 1,092 query–chunker pools. Grade 2 means that a normalized annotated grounding span occurs contiguously in a passage; grade 1 means membership in the gold document without grade 2. No grade-2 candidate is available in 218 pools, and 57 have no graded candidate. Pools contain 1.84 grade-2 candidates on average. These grades are evaluation annotations, not information available at query time.

Grade-2 recall divides the selected grade-2 candidates by the number in the pool; it is undefined (not zero) for pools without grade-2 candidates, so its mean uses the 874 pools that have one. Selected and packed availability record whether any annotated span occurs literally. Full-target visibility asks whether the entire agent utterance occurs literally, which is much rarer. B/L overlap compares candidate identifiers in paired document–chunker–seed cells: intersection divided by four, Jaccard similarity, identical sets and identical order. These definitions were fixed before the calculation.

Table 18: Study 2 literal evidence flow (exploratory). Recall is computed over the 874 pools that contain a grade-2 candidate; full target means the complete agent utterance occurs literally in the packed context.

Method	Recall	Pool	Selected	Packed	Full target
H	0.701	0.800	0.658	0.658	0.108
U	0.762	0.800	0.701	0.701	0.103
B	0.762	0.800	0.704	0.704	0.109
L	0.719	0.800	0.670	0.670	0.101

Table 19: Top-four overlap between B and L over 3,276 paired document–chunker–seed cells (exploratory).

Measure	Mean
Intersection / 4	0.675
Jaccard	0.556
Identical set	0.200
Identical order	0.054

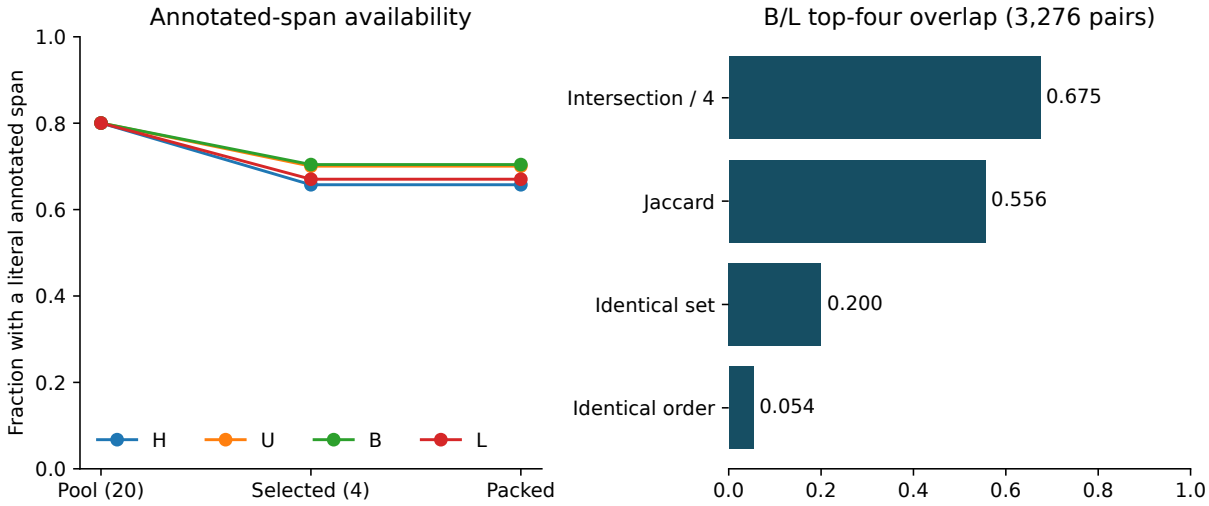


Figure 4: Left: fraction of cells with a literal annotated span in the 20-candidate pool, the selected four and the packed context. Right: top-four overlap between B and L over 3,276 paired cells.

E.2 Grade composition and candidate-pool strata (post hoc)

This post hoc analysis uses only the saved candidate pools, top-four rankings and generation-metric records; no model was invoked. File identities, all 8,736 ranking/metric keys, the full seed matrix and the saved overall and per-seed means were verified before the summaries were computed. Each B/L quantity is first averaged over its three paired seeds within a query–chunker cell and then uniformly over cells; H/U have one record per cell. The cells are dependent observations, and these summaries introduce no additional inferential tests.

Table 20 reports selection shares for all three grades. To distinguish their contributions to graded NDCG, let

$$C_g = \frac{1}{\mathrm{IDCG@4}} \sum_{i=1}^{4} \frac{\mathbf{1}\{g_i = g\}(2^g - 1)}{\log_2(i+1)}, \qquad g \in \{1, 2\},$$

with both components set to zero for zero IDCG. Thus $C_1 + C_2 = \mathrm{NDCG@4}$ for every record; the same identity holds for averages and paired differences. This is an arithmetic decomposition, not evidence of a causal optimization mechanism or semantic answer sufficiency.

Table 20: Top-four passage grade composition and normalized DCG contributions (post hoc). Shares are percentages of selected positions; $C_1 + C_2$ equals NDCG@4. All 1,092 cells are included. NDCG components retain six decimals for this audit.

Method	Grade 0 (%)	Grade 1 (%)	Grade 2 (%)	C_1	C_2	NDCG@4
H	48.12	27.22	24.66	0.215738	0.433897	0.649635
U	46.11	27.50	26.40	0.216897	0.468632	0.685529
B	45.96	27.82	26.23	0.219515	0.469391	0.688906
L	50.82	24.19	24.98	0.184682	0.427070	0.611752

L selected fewer grade-1 passages than B (24.19% versus 27.82% of positions) and more grade-0 passages (50.82% versus 45.96%). Its −0.077154 NDCG difference from B decomposes into −0.034832 from grade 1 and −0.042321 from grade 2, or 45.1% and 54.9% of the observed drop. Relative to H, L selected slightly more grade-2 passages (24.98% versus 24.66%), yet its NDCG difference was −0.037883: −0.031056 from grade 1 and −0.006828 from grade 2 (82.0% and

18.0%). Selection counts ignore rank and pool-specific normalization, so this is consistent with the slightly higher binary grade-2 availability reported above.

The original 1,092 pools partition into 874 with a grade-2 candidate, 161 with grade-1 positives but no grade-2 candidate, and 57 with no positive grade. Tables 21 and 22 retain all three strata. L's NDCG difference from B is negative in both positive-grade strata; the grade-1-only stratum contributes −0.021035 to the population mean, or 27.3% of the overall NDCG drop. Its response-F1 difference is positive within that stratum (+0.73 points), compared with −0.39 points in grade-2-available pools and −0.34 points in zero-grade pools. These post hoc differences do not establish a general relation between lexical retrieval grades and response quality. Zero-grade pools have NDCG zero by definition while their generated answers can still have nonzero token F1.

Table 21: Retrieval and response F1 within candidate-pool strata (post hoc). Response F1 is in points; NDCG@4 is on the 0–1 scale. B/L uniformly average the three paired seeds within each cell before cells are averaged.

Pool stratum	Cells	Method	Response F1	NDCG@4
Grade 2 available	874	H	25.15	0.689
Grade 2 available	874	U	25.36	0.728
Grade 2 available	874	B	25.66	0.731
Grade 2 available	874	L	25.27	0.661
Grade 1 only	161	H	18.55	0.666
Grade 1 only	161	U	19.22	0.699
Grade 1 only	161	B	18.26	0.704
Grade 1 only	161	L	19.00	0.561
Zero grade	57	H	13.53	0.000
Zero grade	57	U	17.19	0.000
Zero grade	57	B	15.70	0.000
Zero grade	57	L	15.36	0.000

Table 22: Within-stratum $L - B$ differences and additive NDCG decomposition (post hoc). F1 differences are in points. The three stratum differences, weighted by their cell counts divided by 1,092, reproduce the overall differences.

Pool stratum	Cells	ΔF1	ΔNDCG@4	ΔC_1	ΔC_2
All pools	1092	−0.22	−0.077154	−0.034832	−0.042321
Grade 2 available	874	−0.39	−0.070116	−0.017239	−0.052878
Grade 1 only	161	+0.73	−0.142674	−0.142674	+0.000000
Zero grade	57	−0.34	+0.000000	+0.000000	+0.000000

E.3 Associations and generation records

Table 24 reports document-level associations. For F1, NDCG@4 and generated-token length, each method's value is uniformly averaged over the same four chunkers and three paired training seeds within each document before subtracting B from L. The reported NDCG/F1 ($r = 0.222451$, $\rho = 0.176168$) and length/F1 ($r = -0.350358$, $\rho = -0.470186$) associations therefore use 273 paired $L - B$ document differences, each built from 12 cells. Grade-2 recall instead uses the 250 documents where it is defined; all other rows use 273. Predictors are $L - B$ differences, except overlap, which is the raw B/L overlap. Question difficulty, passage selection and output length can co-vary, so these associations do not identify a mechanism. Table 25 reports generation records.

The 273 reference agent utterances contain a mean of 16.31 tokens (median 14; 95th percentile 37) under the frozen answer-normalization and whitespace-tokenization rule; one becomes empty after normalization. Before normalization, their mean whitespace length is 17.58 tokens. These are lexical metric tokens, not generator subwords. Token F1 also has a mechanical length dependence: for nonempty normalized token sequences, $F1 = 2o/(n_{\text{pred}} + n_{\text{ref}})$, where o is multiset overlap. With positive overlap, adding prediction tokens absent from the reference holds overlap and recall fixed while reducing precision and F1. This does not establish that a longer response is less supported or that shortening it would improve semantic correctness. The saved generation-length field counts generator subword tokens (including EOS when encountered), whereas F1 uses normalized whitespace-separated tokens; these units should not be conflated.

Table 23 provides a post hoc, unit-matched diagnostic from the saved cleaned outputs. Generated answers average 63.80–65.60 normalized metric tokens, compared with 16.31 for the references. Precision and recall are computed per record from the same multiset overlap used in F1, then averaged; the F1 column independently reproduces the frozen means. An empty reference or prediction scores zero unless both are empty, matching the F1 empty-sequence convention. Mean F1 is the mean of record-level harmonic means, not the harmonic mean of the displayed mean precision and recall. These lexical diagnostics do not measure factual accuracy or support.

Table 23: Saved-output lexical diagnostics (post hoc). Length uses normalized whitespace metric tokens; precision and recall are percentages, and F1 is in points.

Method	Records	Mean length	Precision	Recall	F1
H	1,092	63.80	17.94	51.65	23.57
U	1,092	65.60	18.22	53.22	24.03
B	3,276	64.43	18.23	52.90	24.05
L	3,276	64.57	18.09	52.80	23.83

Table 24: Document-level associations with the $L - B$ response-F1 difference (exploratory). Predictors are $L - B$ differences, except top-four overlap, which is the raw B/L overlap.

Predictor	N	Pearson r	Spearman ρ
NDCG@4	273	0.22	0.18
Grade-2 recall	250	0.26	0.23
Selected grade-2 count	273	0.25	0.22
Selected annotated span	273	0.29	0.23
Packed annotated span	273	0.29	0.23
Packed full target	273	0.09	0.07
Generated tokens	273	−0.35	−0.47
Length capped	273	−0.05	−0.07
Top-four overlap	273	−0.06	−0.07

Table 25: Study 2 generation records. Truncated refers to the context; capped to the 512-token output limit. Legacy 2 counts records with the invalid historical prompt-length value (Section E).

Method	Records	Mean tokens	Truncated	Capped	Legacy 2
H	1092	88.5	1	0	745
U	1092	91.3	1	0	745
B	3276	89.8	2	1	2234
L	3276	90.0	1	1	2234

The saved prompt-length field contains the value 2 in 5,958 records (745 of 1,092 H, 745 of 1,092 U, 2,234 of 3,276 B and 2,234 of 3,276 L) because a legacy helper counted a returned mapping rather than its token dimension. These values are not prompt lengths. The recorded compatibility audit reconstructed all 8,736 planned packing cases from the frozen rankings with Qwen/Qwen3.5-9B's pinned tokenizer, including the 5,958 cases whose answers had already been recovered. It found a maximum corrected and rendered input length of 1,536, no count mismatches, and five contexts requiring truncation (one H, one U, two B and one L). None of those five had been generated at the time of the repair, so no completed answer required regeneration. The final saved truncation flags also total five. These figures come from the recorded full-matrix budget audit; no new tokenizer replay was performed. Tensor-width checks enforced the limit during generation, and the saved records were not modified. Reproduction should use the executed (repaired) generation code rather than the older packing helper.

F Cost, environment and technical fixes

F.1 Compute

Tables 26–28 report recorded component measurements. The Study 2 allocation ledger totals 46,280 seconds (12.86 A100-hours), 7.14 hours under the planned 20-hour budget. It includes loading, I/O, failed attempts and retries, and excludes development smoke tests and earlier project compute. Training timers may cover only a resumed session of a job and should not be summed as a GPU-hour estimate.

Table 26: All 12 grid and six refit jobs. Passes = group draws divided by available groups. Session time may cover only the last resumed session of a job.

Stage	Method	Seed	LR	Updates	Groups	Passes	Session (s)
grid	B	20260904	5×10^{-5}	227	2103	0.43	352.1
grid	B	20260904	5×10^{-5}	454	2103	0.86	700.1
grid	B	20260904	5×10^{-5}	681	2103	1.30	1048.0
grid	B	20260904	10^{-4}	227	2103	0.43	351.6
grid	B	20260904	10^{-4}	454	2103	0.86	397.2
grid	B	20260904	10^{-4}	681	2103	1.30	1048.9
grid	L	20260904	5×10^{-5}	227	943	0.96	345.5
grid	L	20260904	5×10^{-5}	454	943	1.93	692.0
grid	L	20260904	5×10^{-5}	681	943	2.89	1040.3
grid	L	20260904	10^{-4}	227	943	0.96	346.6
grid	L	20260904	10^{-4}	454	943	1.93	694.4
grid	L	20260904	10^{-4}	681	943	2.89	1041.3
refit	B	20260904	10^{-4}	431	4019	0.43	670.1
refit	B	20260905	10^{-4}	431	4019	0.43	670.4
refit	B	20260906	10^{-4}	431	4019	0.43	672.5
refit	L	20260904	10^{-4}	431	1799	0.96	670.2
refit	L	20260905	10^{-4}	431	1799	0.96	669.5
refit	L	20260906	10^{-4}	431	1799	0.96	669.2

Table 27: Batched reranker scoring (batch size 32). Pairs and scoring seconds cover all batches; pairs/s excludes the first 32-pair batch and uses 21,808 pairs per instance. Loading is separate. These are synchronized forward-pass measurements, not request latency.

Instance	Pairs	Base load (s)	Adapter load (s)	Scoring (s)	Pairs/s
U	21840	1.05	0.00	133.0	164.2
B, seed 20260904	21840	1.02	0.44	238.2	91.7
B, seed 20260905	21840	1.03	0.47	238.3	91.7
B, seed 20260906	21840	1.07	0.44	238.3	91.7
L, seed 20260904	21840	1.03	0.44	238.3	91.7
L, seed 20260905	21840	1.04	0.45	238.3	91.6
L, seed 20260906	21840	1.03	0.46	238.3	91.6

Table 28: Retrieval component timings per query–chunker cell (milliseconds). Index construction and model loading are excluded.

Component	Cells	Mean	Median	95th pct
BM25	1092	87.20	77.35	206.35
Dense	1092	14.50	14.38	15.53
Fusion	1092	0.06	0.06	0.07
Total	1092	101.76	91.75	221.22

Each reranker instance scored the same 21,840 query–passage pairs at batch size 32. The recorded steady scoring rate excludes the first 32-pair batch, so its denominator is 21,808 pairs per instance, not 21,840. The rates are 164.23 pairs/s for U, 91.65–91.67 for the three B adapters, and 91.64–91.66 for the three L adapters. Pooling timed scoring seconds within method gives 91.66 and 91.65 pairs/s for B and L, respectively (65,424 steady pairs each; 65,520 total pairs per adapted method and 131,040 adapted pairs in total). Base loading took 1.05 seconds for U, 1.02–1.07 for B and 1.03–1.04 for L; adapter loading additionally took 0.44–0.47 seconds for B and 0.44–0.46 for L. Scoring timers surround synchronized GPU forward passes, after CPU tokenization and transfer, and exclude loading, full retrieval, generation and other service overheads. These offline component timings are not end-to-end serving latency or evidence that the measured ratios would hold in another deployment. The final generation session processed 300 records in 75 batches and produced 29,912 tokens in 614.5 seconds (48.7 tokens/s; 0.49 records/s), with 231.4 seconds of model loading and a peak allocation of 18.2 GiB. These values describe that session only, not the full 8,736-record run, per-request latency or a matched serving comparison. No time-to-first-token, network, queueing or deployment measurements are available.

F.2 Software environment and technical fixes

The recorded Study 2 environment is Python 3.13.15, PyTorch 2.11.0+cu128, Transformers 5.16.1, PEFT 0.20.0, Accelerate 1.14.0, NumPy 2.1.3 and Hugging Face Hub 1.28.0 on an NVIDIA A100-SXM4-40GB, with faiss-cpu 1.14.3, langchain-text-splitters 0.3.11, rank-bm25 0.2.2, sentence-transformers 3.4.1 and spaCy 3.8.14 for retrieval. Newer default environments may not reproduce the experiment exactly.

Two development smoke tests failed before the full run: one at a split-membership precheck before model loading, and one before any optimizer update because an unused dependency (torchao) was incompatible. After removing that dependency, the next smoke test succeeded. The full-run recovery scripts, the generation token-budget audit and the finalization scripts are part of the reproduction dependencies. The completed outputs passed 28 finalization, recovery and contract tests and a 17-check final verification.

G Reproduction dependencies

The public companion provides selected source, configuration, pre-execution protocol and aggregate results. The first release (v1.0.0) is archived at DOI 10.5281/zenodo.22695835; subsequent documentation is identified as release v1.0.1 at `https://github.com/zukhriddingit/chunk rag-reranking-study`. The protocol was fixed before comparative Doc2Dial outcomes but released afterward; it is not a public preregistration. Code/configuration use Apache-2.0 and designated author-owned aggregates/documentation use CC-BY-4.0, as assigned per file; these licenses do not replace third-party terms.

Table 29: Artifact access and replay limits of the current companion.

Artifact	Current access	Consequence
Dataset text	Upstream TechQA-RAG-Eval (card: Apache-2.0) and IBM Doc2Dial (card: CC-BY-3.0); pinned versions in Appendix B	Dataset availability does not reproduce the selected cases or trained adapters.
Exact splits and turn selections	Not included in the companion; deterministic hash rule and salt specified here	ID-only exports can improve auditability without redistributing dialogue/answer text; a local candidate is not a public release.
Saved rankings, generations and per-record metrics	Not included in the companion	Aggregate checks are possible; independent raw-record recomputation requires the saved records. No claim of an established blanket redistribution prohibition is made.
Six final adapters	Not included; base model and revision identified	Published weights do not recreate our fitted adapters. No public adapter endpoint or on-request access mechanism is promised.
Training/evaluation and recovery code	Selected source is included; complete executed repair/runtime dependencies remain necessary	The companion is not a one-command or complete model-experiment replay package.

Upstream cards are https://huggingface.co/datasets/nvidia/TechQA-RAG-Eval and https://huggingface.co/datasets/IBM/doc2dial. These exclusions reflect release scope; the paper does not establish that benchmark identifiers, non-human outputs or adapter weights are legally unshareable. Any expanded release should identify the exact files, preserve the relevant notices and document its access conditions.