Does literal-match reranker supervision improve support-answer generation? A controlled study with external transfer

Assylkhan Geniyat* Zukhriddin Fakhriddinov Atharv Gulati

Boston University, Boston, Massachusetts, USA
Preprint—not peer reviewed. October 2026

Abstract

Rerankers in retrieval-augmented generation (RAG) systems for technical support are often adapted with weak labels derived from question–answer data. We evaluate whether one answer-aware labeling rule—ranking passages that literally contain the reference answer above other passages from the gold document—improves the answers produced by a fixed generator. We adapt Qwen3-Reranker-0.6B with LoRA on TechQA and evaluate the complete pipeline end to end with a fixed Qwen3.5-9B generator over four chunking strategies, under protocols frozen before comparative outcomes existed. On a 208-question TechQA reserve set held out from model selection (Study 1), the literal-match reranker did not significantly outperform hybrid retrieval (+0.68 token-F1 points; 95% CI −0.33 to +1.72; $p = 0.20$). In a prespecified transfer study on 273 Doc2Dial dialogue turns with three training seeds (Study 2), it was slightly worse than a reranker adapted with standard document-level labels under the same update budget (−0.22 points; 95% CI −0.66 to +0.19; $p = 0.31$) and had lower evidence NDCG@4 (0.612 vs 0.689). Neither study met its prespecified success criterion, and for these training runs the transfer interval excludes the targeted +1-point gain. Large differences in retrieval metrics translated into small differences in answer F1. The results provide no evidence that this answer-containment recipe improves generated answers in the studied setting, and they indicate that evaluations of reranker supervision should measure the final answer directly. Code and aggregate results are publicly available.

Keywords: retrieval-augmented generation; reranking; weak supervision; technical support; external transfer; negative results.

1 Introduction

Retrieval-augmented generation (RAG) systems for technical support retrieve passages from product documentation and pass them to a language model that composes the answer (Lewis et al., 2020). In such systems the reranker decides which retrieved passages reach the generator, so adapting it to the target domain is a natural way to improve answer quality. Adaptation requires relevance labels, and the cheapest labels are those derived from existing question–answer data. Two derivations are common. Document-level labels mark every passage from the annotated gold document as relevant. Literal-match labels favor passages that contain the reference answer verbatim, a distant-supervision heuristic that has also been used to train dense retrievers (Karpukhin et al., 2020).

*Corresponding author: kuromiqo@bu.edu

Literal-match labels appear to offer a more targeted signal, because retrieving the right document does not guarantee that the selected passage contains the details a user needs. Literal containment is, however, only a lexical proxy for evidential support, and the way graded labels enter training also matters: when they are turned into contrastive training groups, gold-document passages that lack the literal answer can become negatives, and the number and weighting of groups change with the labeling rule. Whether such labels lead to better generated answers, rather than merely to different retrieval metrics, is therefore an empirical question. Related work has derived utility signals from language models or trained ranking and generation jointly (Shi et al., 2024; Yu et al., 2024; Zhang et al., 2025a), and has shown that query–document relevance labels can correlate only weakly with downstream RAG performance (Salemi and Zamani, 2024). Both lines of work motivate testing weak reranker supervision against the final answer rather than against retrieval metrics alone.

We test one such recipe under controlled conditions. A candidate passage receives grade 2 if it literally contains the normalized reference answer, grade 1 if it comes from a gold document but does not contain the reference, and grade 0 otherwise. Training groups pair the highest-grade passages for a question with lower-grade negatives, so gold-document passages without the literal answer can become negatives. We call this *literal-match supervision* (L) and compare it with binary *document-level supervision* (B), which uses gold-document membership only. Holding the retrieval pipeline, the generator and the adaptation budget fixed, we address three research questions:

RQ1 Does a reranker adapted with literal-match labels improve generated answers over hybrid retrieval on held-out in-domain questions?

RQ2 Under transfer to a different support domain, does literal-match supervision yield better generated answers than document-level supervision?

RQ3 How strongly do differences in retrieval quality propagate to differences in answer F1?

We answer these questions in two studies, each with a protocol frozen before its own comparative outcomes existed. **Study 1 (in-domain)** adapts the reranker on TechQA and compares it with hybrid retrieval on a 208-question TechQA reserve set. **Study 2 (transfer)** trains on the same TechQA development data and evaluates on 273 Doc2Dial support dialogues. It compares four methods: hybrid retrieval (H), an unadapted reranker (U), and reranker adaptation with document-level (B) or literal-match (L) labels, the latter two with three training seeds each. Both studies score the final answer from a fixed generator, and both prespecified the same success criterion: an observed gain of at least +1 token-F1 point with two-sided $p < 0.05$.

Neither study met its criterion. Because the retrieval pipeline, generator and update budget are held fixed, these negative results are informative about the recipe itself, and the Study 2 interval excludes the targeted gain for the trained adapters. Our contributions are (i) a controlled end-to-end comparison of literal-match and document-level reranker supervision, with prespecified answer-level endpoints, transfer to a different support domain and three paired training seeds; (ii) evidence that this literal-match recipe yields lower evidence NDCG@4 than document-level supervision for every training seed, without a detectable answer-level benefit (RQ1–RQ2); (iii) diagnostics showing that large differences in retrieval metrics produced small differences in answer F1, together with a decomposition of the NDCG difference by evidence grade (RQ3); and (iv) full reporting of the unfavorable results, with post hoc analyses labeled as such and code and aggregate results released.

2 Related work

2.1 Retrieval utility and supervision

The original RAG framework combines a neural retriever with a generator for knowledge-intensive tasks (Lewis et al., 2020). Later work couples retrieval more tightly to the language model: REPLUG trains the retriever with feedback from a frozen black-box language model (Shi et al., 2024), and RankRAG instruction-tunes a single language model for both context ranking and answer generation (Yu et al., 2024). These approaches tie retrieval supervision to generation, either through model feedback or through joint training. We instead adapt a separate reranker with fixed, deterministic weak labels and leave the generator unchanged, so that the downstream model stays fixed while the supervision rule varies.

Answer containment is a classic distant-supervision signal. Dense Passage Retrieval uses passages that contain the answer as positives when gold passages are not annotated (Karpukhin et al., 2020), and FILCO selects useful context for RAG with string inclusion, lexical overlap and conditional cross-mutual information before training a context filter (Wang et al., 2023). eRAG shows that query–document relevance labels correlate only weakly with downstream RAG performance and instead labels each retrieved document by the quality of the answer generated from it (Salemi and Zamani, 2024), which implies that relevance labels and downstream utility can diverge. Our study applies the containment heuristic to reranker adaptation and tests directly whether it improves the generated answer.

The closest supervision comparison is the utility-focused annotation study of Zhang et al. (2025a), which trains on MS MARCO-derived data with LLM-generated utility annotations and a loss that accommodates multiple positives through summed marginal likelihood. Our labels are deterministic string-match proxies, and our training builds a separate positive-first group for each highest-grade candidate, so each positive is scored only against lower-grade negatives in its own group rather than sharing probability mass with the other positives in a single objective. Our non-significant answer-level result therefore concerns this particular literal-match recipe and the training groups it induces, not LLM utility annotation or semantic support supervision in general.

We build on existing components, the Qwen3 reranker family (Zhang et al., 2025b) and low-rank adaptation (LoRA) (Hu et al., 2022), and make no state-of-the-art claim. Wang et al. (2024) examine configuration choices across a broader RAG pipeline, and Cuconasu et al. (2024) show that the composition of the retrieved context can itself affect generation quality. Our study is narrower and complementary: a controlled comparison of reranker supervision with an answer-level primary outcome.

2.2 Datasets and evaluation

TechQA was introduced for domain-specific technical question answering (Castelli et al., 2020); we use a pinned NVIDIA RAG-oriented distribution with 608 eligible questions, whose split sizes differ from those of the original paper. Doc2Dial provides document-grounded support dialogues (Feng et al., 2020). We select one user-to-agent transition per document, use the next agent utterance as the generation reference, and keep the annotated grounding spans as a separate retrieval target.

RAGAs and ARES assess retrieval and context properties separately from generated-answer quality using automated judges (Es et al., 2024; Saad-Falcon et al., 2024). We likewise keep these constructs apart but use no model-judge scores: literal containment, answer token F1 and grounding-span overlap are reported as distinct measurements. Following Dror et al. (2018), our statistical tests treat the question or document, not the repeated chunker and seed records, as

the unit of analysis.

3 Methods

Figure 1 summarizes the design. The following subsections describe the shared retrieval and generation pipeline, the two supervision rules and the training groups they induce, training and model selection, and the supporting use of AI tools.

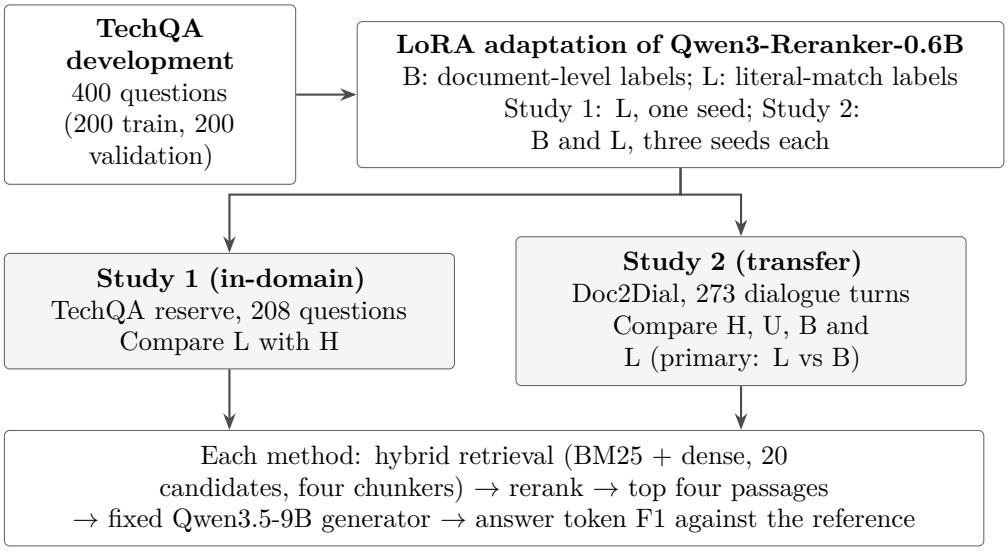


Figure 1: Study design. Rerankers are adapted on TechQA development data and evaluated end to end with the same retrieval pipeline and a fixed generator. Study 1 used an earlier training pipeline and one seed; Study 2 trains B and L under a shared configuration with three seeds each.

3.1 Retrieval and generation pipeline

For each question (Study 1) or dialogue-history query (Study 2), sparse BM25 and dense retrieval are combined by weighted reciprocal-rank fusion (weights 0.4 sparse and 0.6 dense; fusion constant 60). Dense retrieval uses BAAI/bge-small-en-v1.5 with its query prefix. Each channel retrieves 20 passages; fusion ranks their union, with a missing channel contributing zero, and retains a common pool of 20 per query and chunker. Exact fusion ties preserve dense-channel insertion order, followed by sparse-only candidates. Four fixed chunkers are evaluated: fixed 128 tokens with 19-token overlap, fixed 254 tokens with 38-token overlap, recursive 254 tokens with 38-token overlap, and sentence-based 254 tokens without overlap, with token limits from the all-MiniLM-L6-v2 tokenizer.

At inference, the methods differ only in how they order this common pool. H returns the hybrid ranking; U reranks the pool with the unadapted Qwen3-Reranker-0.6B; B and L rerank it with LoRA adapters on the same model. Each method passes its top four passages to a fixed Qwen3.5-9B generator (greedy decoding, thinking disabled, bfloat16, at most 1,536 input and 512 new tokens, batch size four). The reranker instruction asks for passages with sufficient answer evidence; this wording does not make the training labels semantic sufficiency judgments. Exact model revisions are listed in Appendix B.

Long inputs are handled differently at each stage. Dense queries are truncated on the right at 512 tokens, including special tokens, so a long history can lose its latest turns. Reranker inputs

are also right-truncated to 512 tokens, which cuts the end of an overlength passage first, whereas training pruned such pairs. Generator packing instead preserves the full history and removes the context suffix. The numbers of truncated retrieval and reranker inputs were not recorded (Appendix B).

3.2 Supervision labels and training groups

The two supervision rules differ in how they grade candidate passages and, as a consequence, in the training groups they induce. Let D_q be the annotated gold-document set for TechQA training question q, $d(c)$ the document containing candidate passage c, and $A(q, c)$ an indicator that the normalized reference answer occurs as a contiguous token sequence in c. Document-level supervision is

$$b(q, c) = \mathbf{1}\{d(c) \in D_q\}. \tag{1}$$

Normalization lowercases, deletes ASCII punctuation, removes the English articles "a", "an" and "the", and collapses whitespace; it does not perform Unicode normalization, stemming or partial-reference matching. A chunk containing only part of every reference does not satisfy A. Literal-match supervision assigns

$$\ell(q, c) = \begin{cases} 2, & A(q, c) = 1, \\ 1, & A(q, c) = 0 \text{ and } d(c) \in D_q, \\ 0, & \text{otherwise.} \end{cases} \tag{2}$$

The literal test takes precedence, so grade 2 does not also require gold-document membership. In the study protocol and the released files, L is named "evidence-specific" (condition E), and the Study 1 system "evidence-aware"; we use L throughout.

Training groups are built from the pooled candidates of all four chunkers, which are deduplicated on exact normalized text. Representatives are chosen by fused rank, then chunker priority (fixed-128, fixed-254, recursive-254, sentence-254), then identifier; group construction orders candidates by fused rank, then identifier. Nonidentical overlapping passages remain separate. The highest grade present defines the positives, and lower-grade candidates supply up to seven negatives in fused-rank order. Each positive forms its own group with these negatives; questions without both a positive and a lower-grade negative form no group. Under L, gold-document passages are therefore eligible negatives whenever a literal-match passage exists; when none exists, L falls back to grade-1 positives. In Study 2, deduplication ignores labels, pairs exceeding 512 tokens under the actual training template are pruned, and a group needs an in-limit positive and at least one surviving negative. Table 1 illustrates the difference on a small constructed pool.

The resulting inventories contain 2,103 B and 943 L training groups and 4,019 B and 1,799 L groups for the final refits. A retrospective inventory audit found usable groups for 189/187 of 200 training questions and 379/376 of 400 refit questions (B/L). Only 22.5% of L training groups and 23.9% of L refit groups have grade-2 positives; the rest use grade-1 fallback. In those grade-2 groups, grade-1 passages occupy 51.8% and 52.2% of negative positions, respectively. Out-of-document literal matches produce three usable positive groups across two questions in each split (full counts in Appendix B).

For each group g, positions $j = 0, \ldots, m_g$ index one positive ($j = 0$) and $1 \le m_g \le 7$ surviving lower-grade negatives. With score s_{gj} (the final-token yes-minus-no logit), Study 2 minimizes

$$\mathcal{L} = -\frac{1}{|\mathcal{G}|} \sum_{g \in \mathcal{G}} \log \frac{\exp(s_{g0})}{\sum_{j=0}^{m_g} \exp(s_{gj})}. \tag{3}$$

Table 1: Constructed example (not from the data) of how B and L label one candidate pool and which training groups result. The reference answer is "restart the monitoring agent". A group is written as (positive; negatives).

Passage	Content	B	L
c_1	Gold document; contains "restart the monitoring agent"	1	2
c_2	Gold document; describes the agent's log settings	1	1
c_3	Gold document; lists supported versions	1	1
c_4	Other document; contains "restart the monitoring agent"	0	2
c_5	Other document; unrelated product	0	0
B groups:	$(c_1; c_4, c_5)$, $(c_2; c_4, c_5)$, $(c_3; c_4, c_5)$		
L groups:	$(c_1; c_2, c_3, c_5)$, $(c_4; c_2, c_3, c_5)$		

Groups are shuffled each epoch and drawn until a fixed update budget is reached, so questions with more positives contribute more groups. Equal budgets therefore do not imply equal exposure: each final refit draws 1,724 groups (431 updates of four groups), about 0.43 passes over B's 4,019 groups but 0.96 passes over L's 1,799. B and L thus differ in which questions form groups and how often each group is seen, not only in their label values. We compare these complete supervision pipelines and do not isolate the effect of the labels alone.

3.3 Training and model selection

Study 2 uses rank-16 LoRA (alpha 32, dropout 0.05, all linear layers), AdamW with weight decay 0.01, warmup ratio 0.1, gradient clipping at 1 and four groups per update. A development grid crosses two learning rates (5×10^{-5}, 10^{-4}), three update budgets (227, 454, 681) and B/L, giving 12 jobs with seed 20260904. The selected configuration maximizes the average of the B and L validation NDCG@4 over 200 validation questions and four chunkers, with ties broken toward fewer updates and then the lower learning rate. Each method's validation NDCG uses its own training grades (binary for B, three-level for L), so the two values are not directly comparable; Section 7 compares them on common grades. The selected configuration is 10^{-4} with 227 updates (validation NDCG@4 0.838 for B and 0.810 for L, each on its own grades). Independent own-grade selection would retain this configuration for B but choose 5×10^{-5} with 227 updates for L (0.817 on L grades); no transfer outcomes exist for that alternative refit. The shared-budget rule is therefore part of the tested pipeline, not evidence of individually optimal training. Because every grid budget gives L about 2.2 times as many passes over its smaller group inventory as B, shared selection also couples the learning rate with exposure (Appendix B.4).

A frozen lookup sets the final-refit updates ($227 \mapsto 431$, $454 \mapsto 862$, $681 \mapsto 1{,}293$); its original derivation was not retained. Retrospectively, the values equal $k\lceil 907/4 \rceil$ and $k\lfloor 1{,}725/4 \rfloor$ for $k = 1, 2, 3$, that is, one to three passes of four-group updates over Study 1's surviving training and refit groups. This arithmetic correspondence is a reconstruction, not a recovered record, and it rounds up for training but down for refits (Appendix B). Final refits on all 400 development questions used seeds 20260904, 20260905 and 20260906.

Study 1 used an earlier training pipeline: grade-aware deduplication, deletion of whole groups with overlength inputs, and a different training framework. Its six development adapters cross two learning rates and one to three epochs; 10^{-4} and three epochs were selected (validation NDCG@4 0.809). Its comparator is hybrid retrieval, chosen on development data, rather than B. No configuration in either study was chosen using reserve or Doc2Dial answer outcomes.

3.4 Use of AI tools in the analysis

The study design, experimental pipeline, model training, evaluation runs and primary analyses were carried out by the authors. AI coding agents (OpenAI Codex, GPT-5.x and GPT-6.x series models, during the earlier revision; Claude Code with Claude Opus 5.5, Anthropic, during the final revision) were used in a supporting role to script the retrospective checks and post hoc diagnostics that recompute values from saved records, such as the sensitivity calculations, split-rule recomputation, exposure breakdown and grade-composition diagnostics (Appendix A, Appendix B, Appendix D, Appendix E). The authors reviewed this code and its outputs.

4 Experimental design

4.1 Study 1: in-domain TechQA

The pinned TechQA distribution yields 608 eligible questions and 496 documents, split by a salted-hash rule into 200 training, 200 validation and 208 reserve questions (Appendix B). The reserve was excluded from Study 1 training, validation, comparator choice and hyperparameter selection. It was not untouched, however: earlier project work had produced artifacts for 152 of the 208 reserve questions (Section 8).

The primary outcome is the per-question difference in answer token F1 between L and H, averaged over the four chunkers. Only training seed 20260904 has complete answer generation (832 outputs per condition); seeds 20260905 and 20260906 have retrieval results only. The 95% interval is a percentile interval from 20,000 question-bootstrap draws, and the two-sided p-value comes from 100,000 paired sign flips. A post hoc exposure breakdown gives +0.16 F1 points for the 56 questions without a discovered prior artifact and +0.88 for the 152 with prior artifacts; because these subsets are not randomized, the difference does not establish a contamination effect (Appendix D). Reserve NDCG values use a corrected normalization (Appendix D); the correction does not change rankings, generated answers or F1.

4.2 Study 2: transfer to Doc2Dial

Because a demonstrably unexposed TechQA evaluation set could not be established, Study 2 evaluates transfer to IBM Doc2Dial v1.0.1. A deterministic salted-hash rule selects one eligible user turn and the following agent response from each eligible validation document, giving 273 documents (DMV 51, SSA 77, student aid 50, VA 95; rule and salt in Appendix B). An eligible transition has a user turn immediately followed by an agent turn with a nonblank response and nonempty grounding references; every document represented in the validation dialogues has one. Retrieval searches all 488 documents across the four domains; documents outside the validation population are searchable but not evaluated. The query is the dialogue history up to and including the selected user turn; the target response, later turns, gold-document identifiers and grounding spans are unavailable at inference time.

The primary reference is the selected agent utterance, and token F1 against it (response F1) is the primary outcome; F1 against the grounding span (span F1) is secondary. For retrieval evaluation, a passage receives grade 2 if it contains any nonempty normalized grounding span as a character substring, without requiring gold-document membership; unlike TechQA's token-subsequence test, this can match within a word. Otherwise it receives grade 1 if it belongs to the gold document, and 0 otherwise. We refer to NDCG@4 under these grades as evidence NDCG@4. Before the protocol was frozen, only dataset metadata and the selection index had been examined; no comparative H/U/B/L outcomes existed.

For document d, the primary statistic averages the $L - B$ F1 difference over four chunkers

$c \in \{1, \ldots, 4\}$ and three paired training seeds $s \in \{1, \ldots, 3\}$:

$$\Delta_d = \frac{1}{12} \sum_{c=1}^{4} \sum_{s=1}^{3} \left(\mathrm{F1}_{L,d,c,s} - \mathrm{F1}_{B,d,c,s} \right), \qquad \widehat{\Delta} = \frac{1}{273} \sum_{d=1}^{273} \Delta_d. \tag{4}$$

Within each domain, documents whose titles match after normalization (lowercasing and removing trailing numbered suffixes) form a dependency family; there are 235 families. The 95% interval uses 20,000 bootstrap draws that resample whole families within domains; each draw divides the resampled document sum by the realized document count N^*, which varies as unequal-size families are repeated (Appendix A). The two-sided p-value uses 100,000 sign flips with one sign per family.

4.3 Secondary and exploratory analyses

Prespecified secondary summaries for Study 2 are domain effects, an equal-domain mean, per-seed effects with their spread and leave-one-seed-out values, retrieval metrics and operational measurements; response exact match and span F1 are also reported. All are descriptive. An earlier planning proposal described a five-comparison Holm family, but both frozen protocols list descriptive secondary summaries instead, and we follow the frozen protocols (Appendix A). All pairwise method contrasts, per-chunker breakdowns, top-four overlap and evidence-flow associations come from a post-study exploratory specification dated 8 September 2026 and carry no p-values.

For returned grades $g_1, \ldots, g_4$ and the four largest pool grades $g_1^*, \ldots, g_4^*$,

$$\mathrm{DCG@4} = \sum_{i=1}^{4} \frac{2^{g_i} - 1}{\log_2(i+1)}, \qquad \mathrm{NDCG@4} = \begin{cases} \mathrm{DCG@4/IDCG@4}, & \mathrm{IDCG@4} > 0, \\ 0, & \text{otherwise}, \end{cases} \tag{5}$$

where IDCG substitutes g_i^* in the same sum. Zero-IDCG cells remain in the mean denominator. The ideal ranking is restricted to the common 20-candidate pool. A retrospective normal-reference sensitivity analysis gives approximate 80%-power detectable gains of 1.47 F1 points for Study 1 and 1.18 for Study 2 under the compound success rule. These conditional, observed-variance approximations are not exact sign-flip-test power or prospective design claims; Appendix A separates them from the original planning assumptions.

5 Results

5.1 Primary outcomes

Neither study met its success criterion (Figure 2); the two studies are not pooled. In Study 1, mean answer F1 was 32.01 for H and 32.70 for L, a difference of +0.68 points computed from unrounded means (95% CI −0.33 to +1.72; $p = 0.20$). The per-question differences were small and mixed: L was better on 115 questions, worse on 86 and tied on 7 (Cohen's $d_z = 0.09$). Neither the +1-point threshold nor the significance condition was met, and exact match was rare (1 of 832 H outputs and 4 of 832 L outputs). Because the interval extends from a small loss to gains above the target, Study 1 neither demonstrates nor excludes a one-point improvement.

In Study 2, the $L - B$ difference in response F1 was −0.22 points (95% CI −0.66 to +0.19; $p = 0.31$). The success criterion was not met, and the interval, which conditions on the three trained seed pairs, excludes the targeted +1-point gain. Study 2 therefore gives the more decisive negative result: conditional on these trained adapters, a gain of the targeted size lies outside the 95% interval, although the interval does not establish that the two supervision rules are equivalent.

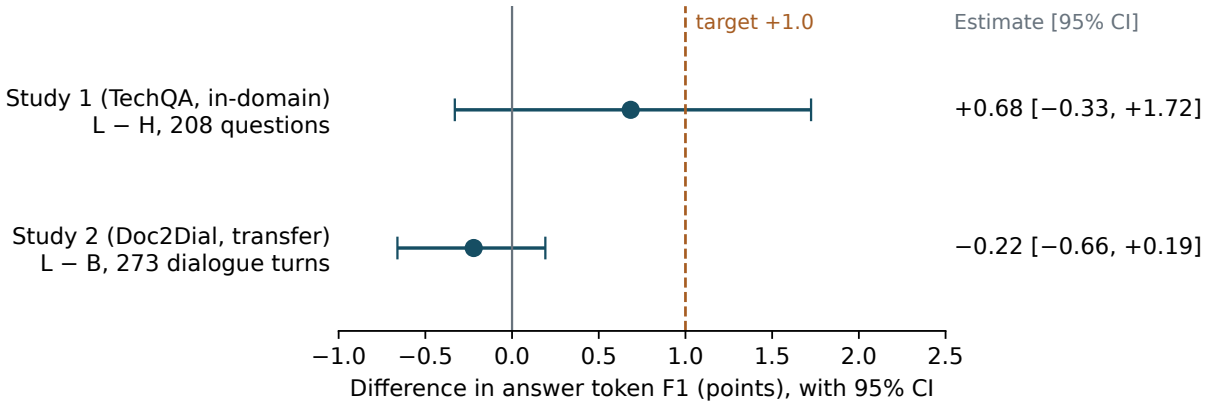


Figure 2: Primary estimates with 95% intervals, in answer token-F1 points. Study 1 averages four chunkers per question with one generation seed (question bootstrap). Study 2 averages four chunkers and three paired training seeds per document (family bootstrap over 235 families). The dashed line marks the targeted +1-point gain.

5.2 Method means and variation in Study 2

Table 2 reports all four Study 2 methods. All three reranking methods exceed H in response F1, but adaptation adds little beyond the unadapted reranker: B exceeds U by only 0.02 response-F1 points, and L is 0.20 points below U. Evidence NDCG@4 separates L from the other methods more clearly: L (0.612) is below B (0.689), U (0.686) and H (0.650). These descriptive differences show no answer-quality benefit of either adaptation recipe over the unadapted reranker, although they do not establish equivalence.

Table 2: Study 2 method means. F1 and exact match (EM) in points; NDCG@4 on the 0–1 scale. H/U: 1,092 records each; B/L: 3,276 each (three training seeds).

Method	Response F1	Span F1	Response EM	NDCG@4
H	23.57	22.65	0.00	0.650
U	24.03	23.30	0.18	0.686
B	24.05	23.24	0.06	0.689
L	23.83	23.12	0.06	0.612

The direction of the primary contrast is consistent across domains but not across seeds. All four domain effects are negative (Table 3), with an equal-domain mean of −0.26 points. The per-seed effects differ in sign (Table 4; standard deviation 0.49 points, range −0.53 to +0.35), yet every leave-one-seed-out mean is negative. The positive effect at seed 20260904, which was also the grid-selection seed, reflects B's lowest seed mean (23.61 points, versus 24.42 and 24.11) rather than an unusually high L mean (23.58–23.96 across seeds; Appendix C). By contrast, the $L - B$ NDCG contrast is negative for all three seeds, so the sign change in answer F1 is not accompanied by a sign change in retrieval NDCG. Chunker effects are −0.26 (fixed-128), −0.04 (fixed-254), −0.99 (recursive-254) and +0.41 (sentence-254) points. Full method means by domain, chunker and seed are in Appendix C.

5.3 From retrieval to answers

Differences in retrieval metrics translate into much smaller differences in answer F1. Reranking itself ($U - H$) raises evidence NDCG@4 by 0.036 but answer F1 by only 0.46 points, and the 0.077 NDCG@4 deficit of L relative to B corresponds to an F1 difference of only −0.22 points

Table 3: Study 2 $L - B$ response-F1 difference by domain (points). The equal-domain mean weights domains equally; the primary estimand weights documents equally.

Domain	Documents	$L - B$ F1
DMV	51	−0.63
SSA	77	−0.11
Student aid	50	−0.18
VA	95	−0.11
Equal-domain mean	273	−0.26

Table 4: Study 2 $L - B$ response-F1 differences (points), leave-one-seed-out means, and retrieval NDCG@4 differences (0–1 scale). Seed 20260904 was also used for development-grid selection.

Seed	$L - B$ F1	Without this seed	$L - B$ NDCG@4
20260904	+0.35	−0.51	−0.0827
20260905	−0.48	−0.09	−0.0551
20260906	−0.53	−0.07	−0.0937

(Appendix C). Three descriptive observations help characterize these differences.

First, B and L select from pools that usually contain literal evidence, and they choose broadly similar passages. Of 1,092 query–chunker pools, 874 contain at least one passage with a literal annotated grounding span, and 57 contain no graded passage at all. B and L share on average 67% of their top four; the sets are identical in 20% of paired cells and the order in 5%. The fraction of packed contexts with a literal annotated span is 0.658 for H, 0.701 for U, 0.704 for B and 0.670 for L, and no selected span is lost when passages are packed into the prompt.

Second, a post hoc analysis of the saved rankings shows that L selects fewer gold-document passages without a literal span (grade 1) and more passages without any graded evidence (grade 0). Grade-1 passages occupy 27.2%, 27.5%, 27.8% and 24.2% of the top-four slots for H, U, B and L; grade-0 shares are 48.1%, 46.1%, 46.0% and 50.8%. L selects slightly more grade-2 passages than H (mean 0.999 vs 0.986 per top four), yet its NDCG is lower: grade-1 normalized-DCG losses account arithmetically for 82.0% of the −0.0379 $L - H$ difference (four-decimal values in this paragraph are computed from unrounded means; Appendix E). Against B, grade-1 and grade-2 contributions are −0.0348 and −0.0423, jointly accounting for the −0.0772 difference (0.689 vs 0.612 after rounding). In the 161 grade-1-only pools, the $L - B$ NDCG difference is −0.1427 while the F1 difference is +0.73 points; in the 874 grade-2-available pools the differences are −0.0701 and −0.39 points. The 57 zero-grade pools contribute zero NDCG but remain in F1 summaries. These are descriptive decompositions, not evidence that negative inversion caused the deficit (full strata and seed-weighting rules in Appendix E).

Third, at the document level, answer-F1 differences track generated length more closely than retrieval quality. For each of the 273 documents, we first average each $L - B$ metric difference uniformly over its 12 chunker-by-seed cells. Across those paired document means, the NDCG@4 difference correlates only weakly with the response-F1 difference (Pearson $r = 0.22$; Spearman $\rho = 0.18$), whereas the difference in generated length is more strongly and negatively associated with it ($r = -0.35$; $\rho = -0.47$). With the F1 metric's normalized whitespace tokenizer, reference utterances average 16.31 tokens (median 14), while generated answers average 63.80, 65.60, 64.43 and 64.57 tokens for H, U, B and L. In these metric tokens, macro precision is 0.179–0.182 and recall 0.516–0.532 (Appendix E). For token F1 with positive reference overlap, adding nonoverlapping tokens lowers precision and F1 without lowering recall; the length association therefore need not indicate worse semantic support. These associations are descriptive, and all of them are listed in Appendix E.

The generation records are consistent with the prompt budget. Mean generated lengths are 88.5, 91.3, 89.8 and 90.0 Qwen tokenizer tokens for H, U, B and L (a different unit from the metric tokens above); two outputs (one each for B and L) reach the 512-token cap. The prompt-budget audit covered all 8,736 packing cases: five contexts were truncated and none exceeded 1,536 input tokens. The audit reconstructed input lengths rather than relying on a legacy saved field, which is invalid for 5,958 records (H/U: 745 each; B/L: 2,234 each; Appendix E).

6 Compute cost

Study 2 used 46,280 allocated A100-seconds (12.86 A100-hours, within the planned 20-hour budget), including loading, I/O, failures and retries. This total covers 12 grid jobs, 12 validation runs, six final refits, 1,092 retrieval cells, 152,880 reranker scores and 8,736 generated answers; development smoke tests and earlier project compute are not included. Batched unadapted reranking scored 164.2 steady-state pairs/s, excluding the first 32 of 21,840 scored pairs (1.05 s base loading). Each adapted run also scored 21,840 pairs (21,808 in its steady-state denominator): B and L achieved 91.6–91.7 pairs/s, with base loading of 1.02–1.07 s and adapter loading of 0.44–0.47 s per instance (131,040 adapted pairs in total; full per-seed measurements in Appendix F). The final generation session produced 29,912 tokens for 300 records in 614.5 s (48.7 tokens/s), with 231.4 s of model loading reported separately. The reranker timers cover synchronized forward passes after tokenization and device transfer. These are component measurements, not per-request latencies or a matched serving comparison. Operational fixes made during the run are documented in Appendix F.

7 Discussion

What the experiments establish. The two studies answer RQ1 and RQ2 consistently: literal-match supervision did not produce a demonstrable improvement in generated answers. Study 1 yields a small positive estimate against hybrid retrieval (+0.68 points), but its interval includes zero, its criterion fails and its reserve was partly exposed in earlier work. Study 2 asks the sharper question, literal-match versus document-level labels under transfer, and gives a slightly negative estimate (−0.22 points) whose interval excludes the targeted gain. Retrieval quality did not improve either: L had the lowest evidence NDCG@4 of the four methods, and its deficit relative to B appeared for every training seed. Because the retrieval pipeline, generator and update budget were held fixed and the protocols were frozen before comparative outcomes existed, these negative results are informative about this recipe; they do not, however, establish that the two supervision rules are equivalent.

Possible explanations for the retrieval deficit. L's retrieval deficit already appears in-domain, before transfer. In a post hoc re-scoring of the saved TechQA validation rankings on L's own three-level grades, L was below B at the selected configuration (NDCG@4 0.810 vs 0.824; difference −0.013, 95% question-bootstrap CI −0.026 to −0.001; L lower on 75 and higher on 42 of 200 questions) and in five of the six grid configurations; the best L run (0.817) was also below the best B run (0.824) (Appendix B.4). This analysis uses one training seed and was not in the protocol, so it is suggestive rather than confirmatory. Two features of the recipe could explain such a deficit. First, under L, grade-1 gold-document passages that lack the literal answer are eligible negatives, which may teach the reranker to demote useful passages. Only 22.5% of L's training groups (23.9% of refit groups) have such grade-2 positives; the rest fall back to grade-1 positives against grade-0 negatives, as in B, so most L groups carry no literal-match signal. The lower share of grade-1 passages in L's top four under transfer (24.2% versus

27.8% for B; Section 5.3) is consistent with this mechanism but, as a descriptive decomposition, does not establish it. Second, the fixed budget covers a larger fraction of L's smaller group set (0.96 vs 0.43 passes); at the selected budget neither method completes its first pass. The group construction also changes question weights. These exposure differences prevent attributing the contrast to label granularity alone, and the shared selection rule couples them with the learning rate: L's own-grade optimum used the lower learning rate, for which no transfer outcome exists (Section 3.3). Transfer also changes the literal proxy from technical-answer strings to grounding-span strings, while answer F1 targets conversational utterances; this construct shift may add to the in-domain deficit. The study does not isolate these explanations. A future development-only comparison could hold candidate pools, question weights and exposure fixed while comparing multi-positive marginal likelihood (Zhang et al., 2025a) or a graded ranking objective such as LambdaLoss (Wang et al., 2018). Such ablations would require new experiments and an evaluation population independent of the observed Doc2Dial outcomes.

Weak propagation from retrieval to answers. The answer metric responds weakly to retrieval (RQ3). Reranking as a whole moved F1 by less than half a point, so the +1-point target was demanding: it was about twice the gain from reranking itself. Under the retrospective normal-reference approximation, even a true one-point gain would have met the compound success rule with a probability of only approximately 47.7% in Study 1 and 50.0% in Study 2 (Appendix A). The negative association between length and F1 differences suggests that token F1 here is also sensitive to verbosity, and the weak document-level correlation between NDCG and F1 differences ($r = 0.22$) is consistent with the finding that relevance-based retrieval evaluation correlates only weakly with downstream RAG performance (Salemi and Zamani, 2024). Future studies of reranker supervision would benefit from calibrating the answer metric first, for example with oracle-context and no-retrieval conditions, before choosing a target effect. Native multi-document dialogue tasks such as MultiDoc2Dial (Feng et al., 2021) would test a different conversational setting but require a fresh, exposure-audited evaluation split; we report no such experiment here.

Implications for weak supervision and practice. For practitioners, this study gives no reason to prefer literal-match over document-level labels for adapting a reranker in this setting. It does not show that B is the best choice in general, that adaptation always helps, or that other evidence-based supervision methods fail. U already attains nearly the same answer F1 as B, while the recorded adapted scoring passes are slower and require training. The logs therefore give no quality–cost reason to adapt in this setting; they are not matched production benchmarks, and a deployment decision would still require task-specific validation and matched serving measurements. For research on weak supervision in RAG, the results show that a labeling rule that appears more targeted can coincide with lower graded retrieval quality and no measurable answer gain; such rules should therefore be validated against the final answer and not only against retrieval metrics.

8 Limitations

Scope. The studies use particular datasets, models, budgets and pipelines. They differ in preprocessing, model selection, comparator, number of seeds and exposure history, so their effects are not pooled or treated as replications. The shared configuration in Study 2 does not equalize which questions form groups or how often groups are seen.

Study 1 reserve exposure. Earlier project work produced artifacts for 152 of the 208 reserve questions (16 with generated answers, 136 with retrieval only); 56 have no known prior artifact. The reserve also contains eight exact normalized duplicate questions, 31 near duplicates at token-set Jaccard ≥ 0.80 (21 at ≥ 0.90, 13 at ≥ 0.95), and 44 questions whose gold documents (40 in total) also appear in development or validation. Artifact presence does not establish that a question was viewed, and its absence does not prove non-exposure. Pretraining exposure of the foundation models to TechQA or Doc2Dial is unknown.

Study 2 design. Training uses single-turn TechQA answers, whereas transfer scores conversational agent utterances and grades retrieval with grounding spans. This changes both domain and target construct. The reranker instruction and generator prompt were written for single technical-support questions and were applied unchanged to serialized dialogue histories. One selected transition per document limits generalization across dialogue turns, and title-based families only approximate dependence between documents. Inference rests on 273 documents in 235 families, not on the 8,736 generated records. The interval resamples families with the three paired sets of trained adapters held fixed and so does not quantify uncertainty over future retraining seeds. Three seeds are insufficient for a precise estimate of that variation; the sign changes in Table 4 remain material. The Doc2Dial evaluation set has now been observed and cannot serve as an untouched test.

Metrics. Token F1 penalizes wording differences and can miss correct paraphrases, and agent utterances can include conversational material beyond the grounding span. Literal matching misses paraphrased or scattered evidence and can mishandle punctuation, numbers, commands and version strings. Gold-document membership is coarse, and a literal span in the context does not show that the generator used it. NDCG@4 reflects the grading convention described above, not an independent judgment of evidence quality. No human evaluation of answer quality is reported, so conclusions rest on automatic reference-based metrics; an excluded earlier rating exercise is described in the Declarations.

Inference. A non-significant result is not evidence of equivalence, and no equivalence test was planned. Secondary, exploratory and post hoc results (including the validation re-scoring in Section 7) are descriptive; the associations are not causal and could reflect confounding by question difficulty or output length.

Reproducibility. Some training timers cover only a resumed session, and a legacy prompt-length field is invalid for 5,958 records (Appendix E). No end-to-end deployment experiment or full-project compute total is available, and the public companion does not contain everything needed to rerun the experiments.

9 Conclusion

This study tested whether a simple literal-match labeling rule for reranker adaptation improves the answers of a fixed RAG generator. It did not demonstrate such an improvement. In-domain, the literal-match reranker did not significantly outperform hybrid retrieval; under transfer, it was slightly worse than document-level supervision, with an interval that excludes the targeted +1-point gain, and it had the lowest evidence NDCG@4 of the four methods. Large retrieval differences produced small answer differences. These findings do not show that reranker adaptation is unhelpful in general or that the two supervision rules are equivalent, but they do show that, for this recipe, answer containment did not translate into better generated answers. Evaluations

of reranker supervision should therefore measure the final answer, check that the answer metric can detect retrieval changes, and report unfavorable retrieval results alongside the answer-level outcome.

Declarations

Excluded rating exercise. An earlier Study 1 human-rating exercise is excluded, and no human-rating results are reported or used. Its retained score vectors matched earlier excluded files, one of which contained AI-assessment notes. This conflicts with the authors' attestation of independent scoring; the conflict was not resolved, and how the retained scores were produced is not established. No institutional ethics determination was obtained, and no approval, exemption or waiver is claimed. Excluding the results does not resolve historical consent, storage or retention questions, on which institutional guidance is pending.

Data and code availability. Selected source code, aggregate results and the final pre-execution protocol for Study 2 are available at
`https://github.com/zukhriddingit/chunkrag-reranking-study` (release v1.0.1);
release v1.0.0 is archived at DOI 10.5281/zenodo.22695835. The protocol was fixed before any comparative Doc2Dial outcome existed but was released afterward, so it is not a preregistration. The companion supports inspection of the selected source and aggregate results, not complete model-experiment replay: reflecting the chosen release scope, it omits exact split and selection records, per-record outputs, the six final adapters and some executed recovery code. The NVIDIA TechQA-RAG-Eval card lists Apache-2.0 and IBM's Doc2Dial distribution lists CC-BY-3.0; dataset text should be obtained upstream. Human records are excluded. Code and configurations are released under Apache-2.0 and aggregates, figures and documentation under CC-BY-4.0, as assigned per file (Appendix G).

Funding and competing interests. This study was self-funded. The authors declare no competing interests. This manuscript is a preprint and has not been accepted for journal publication.

Author contributions (CRediT)

Assylkhan Geniyat: Conceptualization, Methodology, Software, Validation, Formal analysis, Investigation, Data curation, Visualization, Writing – original draft, Writing – review & editing, Project administration.

Zukhriddin Fakhriddinov: Methodology, Validation, Formal analysis, Writing – review & editing.

Atharv Gulati: Validation, Writing – review & editing.

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the authors used OpenAI Codex (GPT-5.x and GPT-6.x series models) and Claude Code (Anthropic; Claude Opus 5.5) for drafting and language editing, manuscript organization and consistency checks. Two author-supplied Google Deep Review reports were used as review feedback; their suggestions were checked against the code

and records. No generative image model was used. After using these tools, the authors reviewed and edited the content as needed and take full responsibility for the content of the publication.

References

Vittorio Castelli, Rishav Chakravarti, Saswati Dana, Anthony Ferritto, Radu Florian, Martin Franz, Dinesh Garg, Dinesh Khandelwal, Scott McCarley, Michael McCawley, Mohamed Nasr, Lin Pan, Cezar Pendus, John Pitrelli, Saurabh Pujar, Salim Roukos, Andrzej Sakrajda, Avi Sil, Rosario Uceda-Sosa, Todd Ward, and Rong Zhang. The TechQA dataset. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1269–1278, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.117. URL https://aclanthology.org/2020.acl-main.117/.

Florin Cuconasu, Giovanni Trappolini, Federico Siciliano, Simone Filice, Cesare Campagnano, Yoelle Maarek, Nicola Tonellotto, and Fabrizio Silvestri. The power of noise: Redefining retrieval for RAG systems. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 719–729, 2024. doi: 10.1145/3626772.3657834.

Rotem Dror, Gili Baumer, Segev Shlomov, and Roi Reichart. The hitchhiker's guide to testing statistical significance in natural language processing. In Iryna Gurevych and Yusuke Miyao, editors, *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1383–1392, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1128. URL https://aclanthology.org/P18-1128/.

Shahul Es, Jithin James, Luis Espinosa Anke, and Steven Schockaert. RAGAs: Automated evaluation of retrieval augmented generation. In Nikolaos Aletras and Orphee De Clercq, editors, *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 150–158, St. Julians, Malta, March 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.eacl-demo.16. URL https://aclanthology.org/2024.eacl-demo.16/.

Song Feng, Hui Wan, Chulaka Gunasekara, Siva Patel, Sachindra Joshi, and Luis Lastras. doc2dial: A goal-oriented document-grounded dialogue dataset. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8118–8128, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.652. URL https://aclanthology.org/2020.emnlp-main.652/.

Song Feng, Siva Sankalp Patel, Hui Wan, and Sachindra Joshi. MultiDoc2Dial: Modeling dialogues grounded in multiple documents. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6162–6176, 2021. doi: 10.18653/v1/2021.emnlp-main.498. URL https://aclanthology.org/2021.emnlp-main.498/.

Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations (ICLR)*, 2022. URL https://arxiv.org/abs/2106.09685.

Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In

Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.550. URL https://aclanthology.org/2020.emnlp-main.550/.

Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. Advances in Neural Information Processing Systems, volume 33, 2020. URL https://proceedings.neurips.cc/paper/2020/hash/6b493230205f780e1bc26945df7481e5-Abstract.html.

Jon Saad-Falcon, Omar Khattab, Christopher Potts, and Matei Zaharia. ARES: An automated evaluation framework for retrieval-augmented generation systems. In Kevin Duh, Helena Gomez, and Steven Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 338–354, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.20. URL https://aclanthology.org/2024.naacl-long.20/.

Alireza Salemi and Hamed Zamani. Evaluating retrieval quality in retrieval-augmented generation. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2395–2400, Washington, DC, USA, July 2024. Association for Computing Machinery. doi: 10.1145/3626772.3657957.

Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Richard James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. REPLUG: Retrieval-augmented black-box language models. In Kevin Duh, Helena Gomez, and Steven Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 8371–8384, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.463. URL https://aclanthology.org/2024.naacl-long.463/.

Xuanhui Wang, Cheng Li, Nadav Golbandi, Michael Bendersky, and Marc Najork. The LambdaLoss framework for ranking metric optimization. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*, pages 1313–1322, 2018. doi: 10.1145/3269206.3271784. URL https://research.google/pubs/the-lambdaloss-framework-for-ranking-metric-optimization/.

Zhiruo Wang, Jun Araki, Zhengbao Jiang, Md Rizwan Parvez, and Graham Neubig. Learning to filter context for retrieval-augmented generation. arXiv:2311.08377, 2023. URL https://arxiv.org/abs/2311.08377.

Xiaohua Wang, Zhenghua Wang, Xuan Gao, Feiran Zhang, Yixin Wu, Zhibo Xu, Tianyuan Shi, Zhengyuan Wang, Shizheng Li, Qi Qian, Ruicheng Yin, Changze Lv, Xiaoqing Zheng, and Xuanjing Huang. Searching for best practices in retrieval-augmented generation. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 17716–17736, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.981. URL https://aclanthology.org/2024.emnlp-main.981/.

Yue Yu, Wei Ping, Zihan Liu, Boxin Wang, Jiaxuan You, Chao Zhang, Mohammad Shoeybi, and Bryan Catanzaro. RankRAG: Unifying Context Ranking with Retrieval-Augmented Generation in LLMs. Advances in Neural Information Processing Systems, volume 37, 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/db93ccb6cf392f352570dd5af0a223d3-Abstract.html.

Hengran Zhang, Minghao Tang, Keping Bi, Jiafeng Guo, Shihao Liu, Daiting Shi, Dawei Yin, and Xueqi Cheng. Utility-focused LLM annotation for retrieval and retrieval-augmented generation. In Christos Christodoulopoulos, Tanmoy Chakraborty, Carolyn Rose, and Violet Peng, editors, *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 1683–1702, Suzhou, China, November 2025a. Association for Computational Linguistics. ISBN 979-8-89176-332-6. doi: 10.18653/v1/2025.emnlp-main.88. URL https://aclanthology.org/2025.emnlp-main.88/.

Yanzhao Zhang, Mingxin Li, Dingkun Long, Xin Zhang, Huan Lin, Baosong Yang, Pengjun Xie, An Yang, Dayiheng Liu, Junyang Lin, Fei Huang, and Jingren Zhou. Qwen3 Embedding: Advancing Text Embedding and Reranking Through Foundation Models. arXiv:2506.05176, 2025b. URL https://arxiv.org/abs/2506.05176.

The appendices report implementation details and complete secondary and exploratory results. F1 and exact match use points (×100); NDCG uses the 0–1 scale. L is condition E in the frozen records.

A Analysis register and statistical details

Table 5 lists every analysis and its inferential status: each primary analysis is a single prespecified test, secondary summaries are descriptive, and exploratory and post hoc analyses carry no p-values. Neither study met its success criterion, and the two studies are not pooled.

Table 5: Analysis register.

Analysis	Estimand	Inference
Study 1 primary	Per-question $L - H$ answer F1, averaged over four chunkers (208 questions)	20,000 question-bootstrap draws; 100,000 paired sign flips; one test.
Study 2 primary	Per-document $L - B$ response F1, averaged over four chunkers and three paired seeds (273 documents)	20,000 family-bootstrap draws within domains; 100,000 family sign flips; one test.
Study 2 domains and seeds	Domain effects, equal-domain mean, seed spread and leave-one-seed-out values	Prespecified, descriptive.
Retrieval and operational outcomes	NDCG@4, span F1, exact match, cost	Prespecified, descriptive.
Pairwise contrasts and chunker breakdowns	All six method contrasts; all four chunkers	Exploratory, descriptive.
Evidence flow, overlap and associations	Specification dated 8 September 2026, 02:17:38 UTC	Exploratory; no p-values.
Validation grid on common grades	NDCG@4 of all 12 grid runs on both grade schemes	Post hoc, descriptive; one training seed.
Reserve exposure and design sensitivity	Study 1 exposure strata; normal-reference power and MDE calculations	Post hoc, descriptive; historical planning scenarios identified separately.

The Study 2 bootstrap resamples whole families within domains and computes the document-weighted statistic on each resample; the sign-flip test assigns one sign per family. There are 207 single-document families, 27 two-document families and one 12-document family in the SSA domain (235 families, 273 documents). Families are defined within domains by lowercased, trimmed titles with trailing numbered suffixes removed and whitespace normalized.

Specifically, let $\mathcal{F}_h$ be the set of families in domain h, C_f the documents in family f, and Δ_d the document's mean $L - B$ response-F1 difference over the 12 chunker–seed cells. Each draw independently samples $|\mathcal{F}_h|$ families with replacement within each domain. If w_f^* is the resulting multiplicity of family f, the executed bootstrap statistic is

$$\widehat{\Delta}^* = \frac{\sum_h \sum_{f \in \mathcal{F}_h} w_f^* \sum_{d \in C_f} \Delta_d}{N^*}, \qquad N^* = \sum_h \sum_{f \in \mathcal{F}_h} w_f^* |C_f|. \tag{6}$$

The denominator is the resampled document count N^*, which varies with the sampled family sizes; it is not fixed at 273. Each occurrence of a document has equal weight, rather than each family having equal weight. Domain family counts are fixed by stratification, but domain document counts can vary. For the sign-flip test, the denominator remains 273 and one random sign multiplies all document differences in a family.

The analysis random seeds are 20260907 (bootstrap) and 20260908 (sign flips) for Study 1, and 20260922 and 20260923 for Study 2; they are separate from the training seeds. The success criterion in both studies is an observed mean improvement of at least +1 F1 point with two-sided $p < 0.05$. The Study 2 interval (-0.66 to $+0.19$ points) excludes +1; no equivalence test was planned.

Training-seed scope. The family bootstrap conditions on the three paired sets of trained adapters. It does not cover uncertainty from drawing new training seeds. We report the individual seed effects, their sample standard deviation and leave-one-seed-out means descriptively. No seed-general confidence interval is claimed: combining a document-bootstrap interval with a three-seed variance estimate would require additional assumptions about dependence and the target population.

Planning and retrospective sensitivity. The pre-execution Study 2 planning record used a TechQA development proxy: the per-question generic-reranker minus hybrid F1 difference, averaged over four chunkers ($n = 200$; SD 0.06062 on the 0–1 F1 scale, or 6.06 points). It gave normal-reference power of 77.8% under independence and 70.0% under an assumed family ICC of 0.3 for a true +1-point effect. These calculations concern the two-sided significance requirement alone, use a different dataset and contrast, and do not estimate the probability of satisfying the full compound success rule.

Table 6 reports these sensitivity calculations; neither study's frozen decision rule is changed. For an assumed standard error s, the significance-only calculation uses $\Pr(|Z + \delta/s| > 1.96)$; the compound rule uses the positive-effect threshold $t = \max(1, 1.96s)$, with t and s in F1 points, and approximate power $1 - \Phi((t - \delta)/s)$. Thus its 80% minimum detectable effect (MDE) is $t + \Phi^{-1}(0.8)s$. Study 1's retrospective s is the SD of its 208 question differences divided by $\sqrt{208}$ (0.526 F1 points). Study 2 uses the standard deviation of its reproduced 20,000 frozen family-bootstrap replicates (0.218 points); the reproduction recovers the reported percentile interval. These normal-reference approximations are not exact power calculations for the sign-flip tests, and the retrospective rows condition on the observed variance and trained adapters. In particular, an observed-effect threshold of +1 point yields only about 50% probability of crossing that threshold when the true effect equals it, even when the significance-only power is high.

Table 6: Normal-reference sensitivity. MDEs are F1 points at 80% power; power columns assume a true +1-point effect. Historical planning and retrospective approximations are distinct.

Scenario	MDE (points)		Power (%)	
	p only	Compound	p only	Compound
Study 1, retrospective	1.47	1.47	47.7	47.7
Study 2, planning, independent	1.03	1.31	77.8	50.0
Study 2, planning, ICC 0.3	1.13	1.34	70.0	50.0

Scenario	MDE (points)		Power (%)	
	p only	Compound	p only	Compound
Study 2, retrospective bootstrap scale	0.61	1.18	99.6	50.0

Secondary testing. An earlier planning proposal described $L - U$, $B - U$, $U - H$, $L - H$ and $B - H$ contrasts with one Holm adjustment. Both frozen protocols (preflight v1 and the final pre-execution v2) instead list secondary summaries without that hypothesis family. The executed configuration has SHA-256 `5820ef0c0901689b46e155ab0c2e09d818698a3652a75e3071804ea11c835cb2`; the execution freeze is recorded at 7 September 2026, 03:38:34 UTC, before comparative Doc2Dial outcomes existed. The final protocol has SHA-256 `87cbc55f57526fe31af3931df4157a2216db146038376d42a1b66a1844373a6a`. Secondary outcomes are therefore reported descriptively. No written rationale for dropping the Holm family was retained, and no tests were reclassified after results were seen.

B Implementation details

B.1 Data

Study 1 uses the NVIDIA TechQA-RAG-Eval training distribution at revision `0b5bbc84b7f07d6d09d063130e90b716d8d4a32a`, split 200/200/208 into training, validation and reserve questions. The split sorts the 608 eligible question identifiers by the SHA-256 digest of the salt `eaai-phase2-techqa-v1`, a NUL byte and the identifier (then by identifier) and assigns the first 200 to training, the next 200 to validation and the last 208 to reserve. A retrospective recomputation of this rule from the identifier list reproduces all 608 saved assignments. The original TechQA paper (Castelli et al., 2020) describes the underlying task; its split sizes do not apply to this distribution. Study 2 uses the official Doc2Dial v1.0.1 archive (`https://doc2dial.github.io/file/doc2dial_v1.0.1.zip`; SHA-256 `94499fa5259f69018d2458cb948552e7a05f424711a95a562bb9e816a515dc23`) (Feng et al., 2020); the one-transition-per-document conversion is specific to this study.

All 488 Doc2Dial documents are searchable, and the evaluation set has 51 DMV, 77 SSA, 50 student-aid and 95 VA cases. Eligibility starts from documents represented in the official validation dialogues: a user turn must be followed immediately by an agent turn with a nonblank utterance and at least one grounding reference. Every one of the 273 validation documents has an eligible transition. Within each document, the transition minimizing SHA-256 of `salt|domain|document_id|dialogue_id|user_turn_id` is chosen; the fixed salt is `eaai-phase4-doc2dial-one-case-per-document-v1-20260906`. Thus the difference between 488 searchable and 273 evaluated documents reflects corpus versus validation-dialogue membership, not selection on comparative outcomes. The query serializes the dialogue history up to the selected user turn, one turn per line, as the uppercase role, a colon and a space, then the utterance. Later turns, the target utterance, gold identifiers, offsets, grounding spans, grades and the reading-comprehension answer field are not used at inference. This supplement reproduces no question, candidate or generated-response text. Exact selection records and per-record outputs are not in the current companion, reflecting its release scope (Section G).

B.2 Models and configuration

Table 7 lists the pinned components.

Table 7: Pinned models and revisions.

Component	Model and revision
Reranker	Qwen/Qwen3-Reranker-0.6B; `e61197ed45024b0ed8a2d74b80b4d909f1255473`
Generator	Qwen/Qwen3.5-9B; `1eb6d84878284892ecfd4c3fb760ffbf34548234`
Dense embedding	BAAI/bge-small-en-v1.5; `5c38ec7c405ec4b44b94cc5a9bb96e735b38267a`
Chunking tokenizer	sentence-transformers/all-MiniLM-L6-v2; `1110a243fdf4706b3f48f1d95db1a4f5529b4d41`

Each dense and BM25 channel retrieves 20 candidates. Reciprocal-rank fusion over their union adds $0.6/(60 + r_{\text{dense}})$ and $0.4/(60 + r_{\text{sparse}})$, with a missing channel rank contributing zero, then retains the top 20; each method returns four passages. Exact fused-score ties preserve insertion order: dense rank order first, followed by previously unseen sparse candidates in sparse rank order. Reranker ties use descending reranker score, ascending fused rank and ascending chunk identifier. The dense query prefix is "Represent this sentence for searching relevant passages: ". The pinned embedding configuration sets a 512-token maximum and lowercasing. SentenceTransformers 3.4.1 tokenizes the combined prefix/query string with `longest_first` truncation; with the tokenizer's default right truncation, overlength inputs retain the beginning and discard the suffix, within 512 total tokens including special tokens. This can remove later dialogue turns, including the selected user turn; the runner implements no turn-aware shortening rule. This behavior is derived from the immutable model configuration and pinned library source, not a replay of per-record tokenization.[1]

Study 2 LoRA uses rank 16, alpha 32, dropout 0.05, all linear target modules and no bias adaptation. AdamW uses weight decay 0.01, warmup over 10% of the update budget (rounded up) and gradient-norm clipping at 1.0. Two groups per device and two accumulation steps give four groups per update; the maximum pair length is 512 tokens. Groups are shuffled with seed equal to the training seed plus 1000003×epoch, and each epoch is completed before reshuffling until the draw budget is reached.

The grid (one seed, two learning rates, three update budgets per method) produces 192,000 validation candidate scores across 12 validation runs. Configuration selection averages B's and L's validation NDCG@4 over all validation questions and chunkers; each method's validation NDCG uses its own training grades (binary for B, three-level for L). The selected shared learning rate is 10^{-4} with 227 updates. The pre-frozen lookup maps 227, 454 and 681 grid updates to 431, 862 and 1,293 refit updates; no derivation formula was preserved in the located records. Retrospectively, these values equal $k\lceil 907/4 \rceil$ and $k\lfloor 1{,}725/4 \rfloor$ for $k = 1, 2, 3$, where 907 and 1,725 are Study 1's surviving training and refit groups (reported below). The lookup therefore corresponds arithmetically to one to three Study 1 epochs at four groups per update, matching Study 1's one-to-three-epoch grid. Because the rounding direction differs (up for training, down for refits) and no located record states this rule, the correspondence is a reconstruction, not the documented derivation. All six final B/L refits use 431 updates. Retrospective inspection of the complete saved grid shows that independent selection on each method's own grades would retain $10^{-4}/227$ for B but choose $5 \times 10^{-5}/227$ for L (0.817378 versus 0.810474 at the shared choice). The corresponding independently selected L transfer experiment was not run. Generation uses bfloat16, greedy decoding (temperature zero, one beam), no thinking, a 1,536-token input limit, a 512-token output limit and batch size four.

[1] See the pinned embedding configuration, SentenceTransformers 3.4.1 tokenization, and Transformers 5.16.1 defaults.

B.3 Prompts

The reranker scores each query–passage pair with the Qwen3-Reranker template below; the score is the final-token logit for "yes" minus that for "no". In Study 2 the query is the serialized dialogue history.

```
<|im_start|>system
Judge whether the Document meets the requirements based on the Query and the Instruct provided.
     Note that the answer can only be "yes" or "no".<|im_end|>
<|im_start|>user
<Instruct>: Given a technical-support question, rank passages by whether they contain
    sufficient evidence to answer it.
<Query>: {query}
<Document>: {passage}<|im_end|>
<|im_start|>assistant
<think>

</think>
```

The generator receives two chat messages, rendered with the model's chat template with thinking disabled. The context lists the top four passages in ranked order as `[1]` ... `[4]`, separated by blank lines. If the prompt exceeds 1,536 tokens, binary search finds the longest decoded token prefix of this concatenated context that fits, preserving the complete query/history and fixed prompt. This removes the context suffix, may cut a passage midway, and gives earlier ranked passages priority; no early dialogue turn is evicted. If the query and fixed prompt alone cannot fit, the function raises an error. The same prompt function is used by the Study 1 generation code. Reranker inference is separate: it reserves the Qwen prefix and suffix tokens and tokenizes the combined instruction/query/document body with `truncation=True` to the remaining 512-token budget. The runner sets padding side but leaves truncation side to the pinned tokenizer default; the pinned tokenizer configuration sets none, so the library's right-side default applies. Because the body is ordered instruction, query, document, an overlength pair loses the end of the passage first and, for a long enough dialogue history, the whole passage or the end of the query. Training pruned pairs over 512 tokens instead, so inference truncates inputs of a kind that training excluded. The numbers of overlength dense queries and reranker pairs were not recorded; counting them requires replaying the pinned tokenizers on the saved queries and candidate pools.

```
system: You are a grounded question answering assistant. Use only the provided context. Give a
     concise but complete answer containing the information needed to resolve the question. Do
     not explain your reasoning or add citations. If the answer is not fully supported, reply
    with exactly 'unanswerable'.
user: Answer the following question using only the context.

Question: {question}

Context passages:
{context}

Return only the final answer.
```

Before scoring, outputs are stripped of a leading passage marker (`[n]`) and prefixes such as "Answer:" or "The answer is".

B.4 Validation grid on common grades (post hoc)

During model selection, each method's validation NDCG@4 used its own training grades, so B and L were not scored on the same scale. After the study, we re-scored the saved validation rank-

ings of all 12 grid runs on both grade schemes, using the frozen validation labels and the saved reranker scores; no model was retrained or invoked. A separate retrospective recomputation reproduces all 12 recorded own-grade selection values from the saved scores and verifies their file hashes against the run summaries (maximum numerical discrepancy 1.2×10^{-16}). Table 8 reports the results, with the hybrid order as a reference.

On L's own grades, L is below B at the selected configuration (0.810 vs 0.824; per-question difference −0.013, 95% CI −0.026 to −0.001 from 10,000 paired question-bootstrap draws with seed 20261007; L lower on 75 and higher on 42 of 200 questions). L is also lower in five of the six matched configurations; the exception is 5×10^{-5} with 227 updates (L 0.817, B 0.799), the only grid configuration in which L exceeds B on both grade schemes (0.826 vs 0.809 on B grades). Moving from 5×10^{-5} to 10^{-4} at 227 updates raised B's own-grade score by 0.029 and lowered L's by 0.007, so the shared average favored B's optimum. At 5×10^{-5}, L's own-grade score falls as updates increase (0.817, 0.799, 0.790), which is consistent with, but does not demonstrate, sensitivity to the additional passes over its smaller inventory. On B's grades, the selected-configuration difference is −0.021 (−0.033 to −0.008). This analysis was not part of the protocol and uses a single training seed.

Table 8: Study 2 development grid: TechQA validation NDCG@4 for every run, scored on both grade schemes (post hoc, one training seed, 200 questions). Model selection used each method's own grades (B column for B runs, L column for L runs); the selected configuration is 10^{-4} with 227 updates.

Method	LR	Updates	B grades	L grades
H (hybrid order)	–	–	0.780	0.767
B	5×10^{-5}	227	0.809	0.799
B	5×10^{-5}	454	0.822	0.810
B	5×10^{-5}	681	0.817	0.805
B	10^{-4}	227	0.838	0.824
B	10^{-4}	454	0.831	0.819
B	10^{-4}	681	0.835	0.821
L	5×10^{-5}	227	0.826	0.817
L	5×10^{-5}	454	0.804	0.799
L	5×10^{-5}	681	0.797	0.790
L	10^{-4}	227	0.817	0.810
L	10^{-4}	454	0.790	0.786
L	10^{-4}	681	0.800	0.798

B.5 Training groups and Study 1 differences

In Study 2, label-blind deduplication precedes grouping and removes normalization-empty candidates. Within each question/normalized-text key, representatives minimize fused rank, then chunker priority (fixed-128, fixed-254, recursive-254, sentence-254), then chunk identifier. Near-identical passages remain distinct if their normalized texts differ. Candidates are then ordered by fused rank and chunk identifier, and each highest-grade positive forms a group with the first up to seven lower-grade candidates. If a grade-2 candidate exists, grade-1 candidates are eligible negatives; otherwise L falls back to grade-1 positives. Pairs include the complete Qwen template: positives over 512 tokens remove their groups; negatives over 512 are pruned individually, with no replacement. A group needs an in-limit positive and at least one surviving negative. Highest grade is determined before pair pruning; groups are not rebuilt with grade-1 positives if every literal-positive group is removed. The loss is group-level cross entropy with the positive at index zero, using yes-minus-no logits at temperature one. Weighting groups equally does not weight questions equally.

Table 9 summarizes a retrospective audit of the frozen usable group inventories. L's usable questions are a subset of B's: there are two B-only training questions and three B-only refit questions. Most L groups use grade-1 fallback rather than literal-positive supervision. Training B groups per retained question range from 2 to 59 (median 8), versus 1 to 53 for L (median 3); refit ranges are 1–59 (median 8) and 1–53 (median 3). Table 26 reports further exposure and cost information.

Table 9: Retrospective audit of Study 2's frozen usable group inventories. Questions are those yielding at least one surviving group. Grade columns count group positives; passes are total group draws divided by inventory size at the selected budget, not equal question exposure.

Split	Method	Questions	Groups	Grade 2	Grade 1	Passes
Train (200)	B	189	2,103	0	2,103	0.432
	L	187	943	212	731	0.963
Refit (400)	B	379	4,019	0	4,019	0.429
	L	376	1,799	430	1,369	0.958

Grade-2 positives account for 22.5% of L's training groups and 23.9% of its refit groups. Within these grade-2 groups, grade-1 passages occupy 759 of 1,466 negative positions in training (51.8%) and 1,551 of 2,971 positions in refitting (52.2%). At least one grade-1 negative appears in 186 of 212 grade-2 training groups and 361 of 430 refit groups. Position counts repeat the shared negatives once per positive group and describe the full usable inventory, not realized optimizer draws. Four raw out-of-document grade-2 candidate rows across two questions produce three usable literal-positive groups, in both the training and refit inventories. Raw candidate counts include cross-chunker duplicates. These audits quantify coupled mechanisms without isolating their causal effects.

At 227 updates, 908 group draws correspond to 0.432 B and 0.963 L training passes; at 454 updates these are 0.864 and 1.926, and at 681 updates 1.295 and 2.889. The selected refits draw 1,724 groups (431 updates), corresponding to 0.429 B and 0.958 L passes.

Study 1's earlier pipeline chooses normalized-text duplicate representatives by higher grade first, then lower fused rank, chunker priority and chunk identifier; it deletes the whole group when the positive or any negative exceeds 512 tokens. Of 995 saved training groups, 907 survive; of 1,903 refit groups, 1,725 survive. Of 191 training questions represented before length filtering, 178 remain, and one question supplies up to 53 surviving groups. Study 1 used MS-SWIFT and an epoch grid; Study 2 explicitly batches intact groups under fixed update budgets and uses pair-level pruning fixed before execution. The studies therefore evaluate different training pipelines.

B.6 Metric definitions

Answer normalization lowercases text, removes ASCII punctuation and the articles "a", "an" and "the", and collapses whitespace. Token F1 uses multiset overlap and takes the maximum over reference answers where several exist; two empty strings score one, and one empty string scores zero. Exact match tests normalized equality. For TechQA supervision, literal matching tests a complete nonempty normalized reference as a contiguous token sequence. If a reference is longer than a passage or split across passages, partial containment does not yield grade 2; any complete alternative reference may qualify. In the executed Doc2Dial retrieval grading function, the same normalization is followed instead by a character-substring test for any nonempty annotated grounding span, which can match within a normalized word. Neither implementation requires gold-document membership for grade 2. Neither applies Unicode normalization, casefolding or fuzzy matching. These literal tests are deterministic proxies rather than semantic sufficiency

labels. For returned grades g_i and pool grades sorted descending g_i^*,

$$\text{DCG@4} = \sum_{i=1}^{4} \frac{2^{g_i} - 1}{\log_2(i+1)}, \qquad \text{IDCG@4} = \sum_{i=1}^{4} \frac{2^{g_i^*} - 1}{\log_2(i+1)}.$$

NDCG@4 is their ratio when IDCG@4 is positive and zero otherwise; zero-IDCG cells remain in the averaging denominator. The ideal uses the best four of the complete 20-candidate pool. Study 2 evaluation methods share that pool and three-level grading within each query–chunker cell, whereas development selection used method-specific grades. In Doc2Dial, agent-response F1 and grounding-span F1 are separate targets.

C Complete Study 2 results

Tables 10–12 report every method by domain, chunker and training seed; Table 13 gives the $L - B$ effect by chunker, Table 14 all six method contrasts, and Figure 3 the overall method means. H and U do not depend on the training seed and are not repeated in the seed table. Exact match is near zero for all methods and is omitted from the breakdowns; it is available in the released CSV files.

Table 10: Study 2 method means by domain. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Domain	Method	Resp. F1	Span F1	NDCG@4	Span at 4
DMV	H	26.95	24.39	0.652	0.706
DMV	U	27.71	26.92	0.726	0.789
DMV	B	28.27	26.10	0.726	0.788
DMV	L	27.64	25.78	0.656	0.747
SSA	H	20.97	21.71	0.571	0.565
SSA	U	21.77	21.84	0.586	0.594
SSA	B	20.86	21.54	0.611	0.619
SSA	L	20.75	21.35	0.525	0.592
Student aid	H	22.68	21.04	0.686	0.675
Student aid	U	22.37	20.40	0.751	0.725
Student aid	B	22.66	20.87	0.737	0.712
Student aid	L	22.48	20.65	0.675	0.700
VA	H	24.33	23.34	0.693	0.697
VA	U	24.77	24.06	0.710	0.726
VA	B	25.10	24.32	0.706	0.725
VA	L	24.98	24.42	0.625	0.677

Table 11: Study 2 method means by chunker. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Chunker	Method	Resp. F1	Span F1	NDCG@4	Span at 4
fixed_128	H	23.71	22.81	0.589	0.509
fixed_128	U	24.46	24.06	0.647	0.601
fixed_128	B	24.77	23.80	0.653	0.604
fixed_128	L	24.51	23.74	0.558	0.565
fixed_254	H	23.41	22.38	0.669	0.696
fixed_254	U	23.37	22.73	0.714	0.740
fixed_254	B	23.76	22.67	0.707	0.735
fixed_254	L	23.72	23.03	0.619	0.697
recursive_254	H	23.73	22.84	0.664	0.667
recursive_254	U	24.22	23.00	0.683	0.674
recursive_254	B	24.03	23.49	0.692	0.686
recursive_254	L	23.04	22.34	0.621	0.659
sentence_254	H	23.43	22.58	0.676	0.758
sentence_254	U	24.08	23.41	0.698	0.788
sentence_254	B	23.63	22.98	0.704	0.791
sentence_254	L	24.04	23.35	0.648	0.759

Table 12: Study 2 method means by seed. F1 in points; NDCG@4 and span-at-4 on the 0–1 scale. Span at 4 is the fraction of cells whose top four passages contain an annotated grounding span literally.

Seed	Method	Resp. F1	Span F1	NDCG@4	Span at 4
20260904	B	23.61	23.02	0.697	0.708
20260904	L	23.96	23.21	0.615	0.678
20260905	B	24.42	23.43	0.681	0.700
20260905	L	23.94	23.08	0.626	0.679
20260906	B	24.11	23.25	0.689	0.705
20260906	L	23.58	23.06	0.595	0.655

Table 13: Study 2 $L - B$ response-F1 difference by chunker (points; exploratory).

Chunker	$L - B$ F1
fixed_128	−0.26
fixed_254	−0.04
recursive_254	−0.99
sentence_254	+0.41

Table 14: All six Study 2 method contrasts (exploratory). F1 differences in points; NDCG@4 differences on the 0–1 scale. Only $L - B$ response F1 is the confirmatory test.

Contrast	Resp. F1	Span F1	NDCG@4
U − H	+0.46	+0.64	+0.036
B − H	+0.48	+0.58	+0.039
L − H	+0.26	+0.46	−0.038
B − U	+0.02	−0.06	+0.003
L − U	−0.20	−0.18	−0.074
L − B	−0.22	−0.12	−0.077

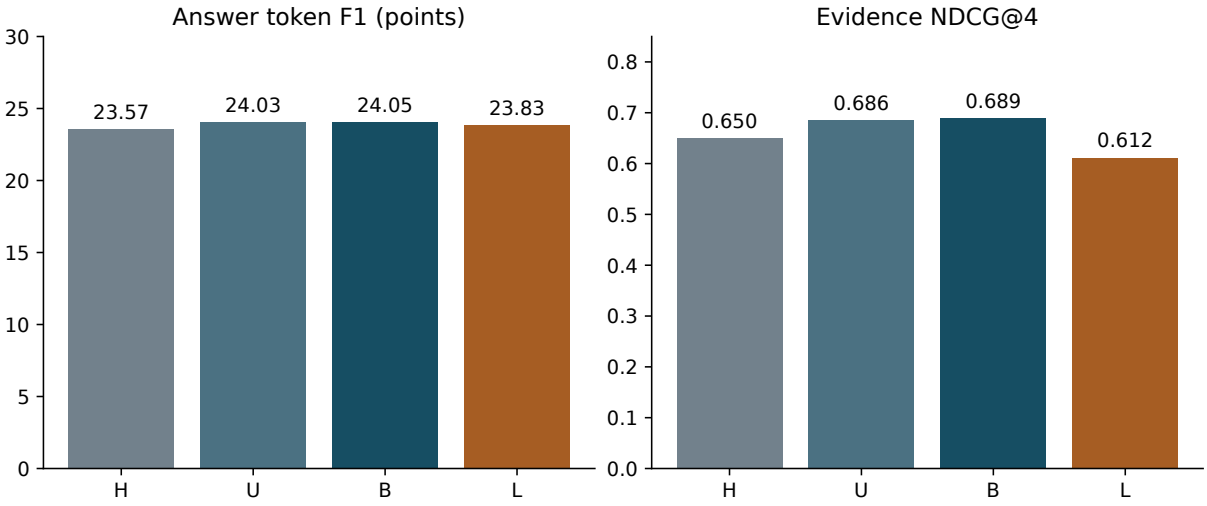


Figure 3: Study 2 method means: answer token F1 in points (left) and evidence NDCG@4 (right). H/U: 1,092 records each; B/L: 3,276 each over three training seeds.

D Study 1: NDCG correction and evidence flow

The original Study 1 reserve code normalized NDCG using only the returned top four passages, whereas validation normalized against the full candidate pool. For a pool with grades $[1, 1, 1, 1, 2]$ followed by 15 zeros, returning the first four gives an original NDCG of 1.000 but a corrected value of 0.562. The correction recomputes the metric from the saved rankings and grades and does not change checkpoints, the comparator, candidate order, grades, contexts, generated answers or F1. Regression tests cover this example, ideal rankings, zero relevance, short pools, consistency with validation and the zero-IDCG convention. Table 15 reports both values.

Table 15: Study 1 reserve NDCG@4 before and after the normalization correction. Only seed 20260904 has generated answers.

System	Original NDCG@4	Corrected NDCG@4
H	0.850	0.769
L, seed 20260904	0.864	0.807
L, seed 20260905	0.861	0.800
L, seed 20260906	0.864	0.804

Separately, a missing import (a `NameError`) in the Study 1 analysis command-line wrapper was fixed by importing the frozen analysis function; data, thresholds, seeds and results were unaffected.

Historical reserve exposure (post hoc). We matched the 208 saved question-level primary outcomes to the three historical canonical artifact collections whose hashes were verified in the exposure audit. Table 16 gives the descriptive split. "No prior artifact found" is limited to that search; it does not establish absence of all exposure. Artifact presence does not establish which records authors inspected, and whether historical findings influenced early design choices remains unresolved. These are neither randomized subgroups nor a new held-out test, and the 56-question subgroup does not replace the frozen 208-question analysis.

Table 16: Study 1 exposure sensitivity, post hoc. Means and differences are F1 points, each question averaging four chunkers.

Prior outcome artifacts	Questions	H	L	$L - H$
No prior artifact found	56	30.99	31.15	+0.16
Prior artifact found	152	32.39	33.27	+0.88

Retrieval-only seed checks. Common-pool corrected NDCG@4 is 0.768768 for H and 0.807202, 0.800252 and 0.803948 for L at seeds 20260904, 20260905 and 20260906, respectively (832 query–chunker records per condition and seed). Their $L - H$ differences are +0.038434, +0.031484 and +0.035180. Only seed 20260904 has complete generation; the other two seeds cannot establish answer-quality robustness.

Table 17 reports literal visibility of the reference answer. The reference appears literally in 28.4% of candidate pools, and no selected literal is lost during packing. It appears in only 2.2% of H answers and 2.6% of L answers; this strict lexical test does not imply that other answers lack support. Four outputs (two per condition) reach the token cap.

Table 17: Study 1 literal visibility of the normalized reference answer in the candidate pool, the selected four passages and the packed context (exploratory).

Condition	Records	Pool	Selected	Packed
H	832	0.284	0.244	0.244
L	832	0.284	0.252	0.252

E Exploratory Study 2 diagnostics

E.1 Definitions

Tables 18 and 19 and Figure 4 summarize evidence flow and overlap over all 1,092 query–chunker pools. Grade 2 means that a normalized annotated grounding span occurs contiguously in a passage; grade 1 means membership in the gold document without grade 2. No grade-2 candidate is available in 218 pools, and 57 have no graded candidate. Pools contain 1.84 grade-2 candidates on average. These grades are evaluation annotations, not information available at query time.

Grade-2 recall divides the selected grade-2 candidates by the number in the pool; it is undefined (not zero) for pools without grade-2 candidates, so its mean uses the 874 pools that have one. Selected and packed availability record whether any annotated span occurs literally. Full-target visibility asks whether the entire agent utterance occurs literally, which is much rarer. B/L overlap compares candidate identifiers in paired document–chunker–seed cells: intersection divided by four, Jaccard similarity, identical sets and identical order. These definitions were fixed before the calculation.

Table 18: Study 2 literal evidence flow (exploratory). Recall is computed over the 874 pools that contain a grade-2 candidate; full target means the complete agent utterance occurs literally in the packed context.

Method	Recall	Pool	Selected	Packed	Full target
H	0.701	0.800	0.658	0.658	0.108
U	0.762	0.800	0.701	0.701	0.103
B	0.762	0.800	0.704	0.704	0.109
L	0.719	0.800	0.670	0.670	0.101

Table 19: Top-four overlap between B and L over 3,276 paired document–chunker–seed cells (exploratory).

Measure	Mean
Intersection / 4	0.675
Jaccard	0.556
Identical set	0.200
Identical order	0.054

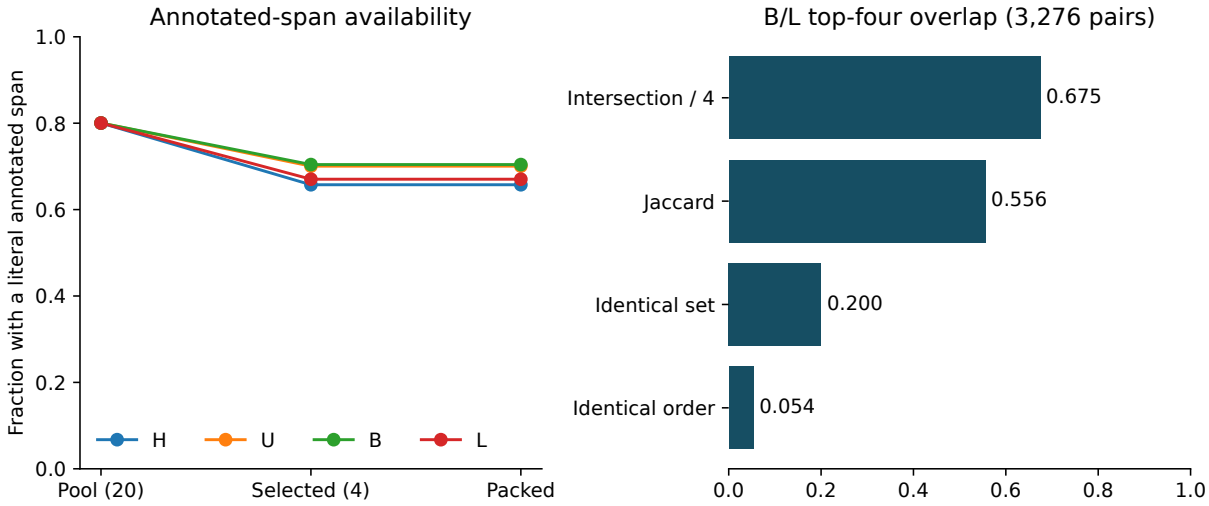


Figure 4: Left: fraction of cells with a literal annotated span in the 20-candidate pool, the selected four and the packed context. Right: top-four overlap between B and L over 3,276 paired cells.

E.2 Grade composition and candidate-pool strata (post hoc)

This post hoc analysis uses only the saved candidate pools, top-four rankings and generation-metric records; no model was invoked. File identities, all 8,736 ranking/metric keys, the full seed matrix and the saved overall and per-seed means were verified before the summaries were computed. Each B/L quantity is first averaged over its three paired seeds within a query–chunker cell and then uniformly over cells; H/U have one record per cell. The cells are dependent observations, and these summaries introduce no additional inferential tests.

Table 20 reports selection shares for all three grades. To distinguish their contributions to graded NDCG, let

$$C_g = \frac{1}{\mathrm{IDCG@4}} \sum_{i=1}^{4} \frac{\mathbf{1}\{g_i = g\}(2^g - 1)}{\log_2(i+1)}, \qquad g \in \{1, 2\},$$

with both components set to zero for zero IDCG. Thus $C_1 + C_2 = \mathrm{NDCG@4}$ for every record; the same identity holds for averages and paired differences. This is an arithmetic decomposition, not evidence of a causal optimization mechanism or semantic answer sufficiency.

Table 20: Top-four passage grade composition and normalized DCG contributions (post hoc). Shares are percentages of selected positions; $C_1 + C_2$ equals NDCG@4. All 1,092 cells are included. NDCG components retain six decimals for this audit.

Method	Grade 0 (%)	Grade 1 (%)	Grade 2 (%)	C_1	C_2	NDCG@4
H	48.12	27.22	24.66	0.215738	0.433897	0.649635
U	46.11	27.50	26.40	0.216897	0.468632	0.685529
B	45.96	27.82	26.23	0.219515	0.469391	0.688906
L	50.82	24.19	24.98	0.184682	0.427070	0.611752

L selected fewer grade-1 passages than B (24.19% versus 27.82% of positions) and more grade-0 passages (50.82% versus 45.96%). Its −0.077154 NDCG difference from B decomposes into −0.034832 from grade 1 and −0.042321 from grade 2, or 45.1% and 54.9% of the observed drop. Relative to H, L selected slightly more grade-2 passages (24.98% versus 24.66%), yet its NDCG difference was −0.037883: −0.031056 from grade 1 and −0.006828 from grade 2 (82.0% and

18.0%). Selection counts ignore rank and pool-specific normalization, so this is consistent with the slightly higher binary grade-2 availability reported above.

The original 1,092 pools partition into 874 with a grade-2 candidate, 161 with grade-1 positives but no grade-2 candidate, and 57 with no positive grade. Tables 21 and 22 retain all three strata. L's NDCG difference from B is negative in both positive-grade strata; the grade-1-only stratum contributes −0.021035 to the population mean, or 27.3% of the overall NDCG drop. Its response-F1 difference is positive within that stratum (+0.73 points), compared with −0.39 points in grade-2-available pools and −0.34 points in zero-grade pools. These post hoc differences do not establish a general relation between lexical retrieval grades and response quality. Zero-grade pools have NDCG zero by definition while their generated answers can still have nonzero token F1.

Table 21: Retrieval and response F1 within candidate-pool strata (post hoc). Response F1 is in points; NDCG@4 is on the 0–1 scale. B/L uniformly average the three paired seeds within each cell before cells are averaged.

Pool stratum	Cells	Method	Response F1	NDCG@4
Grade 2 available	874	H	25.15	0.689
Grade 2 available	874	U	25.36	0.728
Grade 2 available	874	B	25.66	0.731
Grade 2 available	874	L	25.27	0.661
Grade 1 only	161	H	18.55	0.666
Grade 1 only	161	U	19.22	0.699
Grade 1 only	161	B	18.26	0.704
Grade 1 only	161	L	19.00	0.561
Zero grade	57	H	13.53	0.000
Zero grade	57	U	17.19	0.000
Zero grade	57	B	15.70	0.000
Zero grade	57	L	15.36	0.000

Table 22: Within-stratum $L - B$ differences and additive NDCG decomposition (post hoc). F1 differences are in points. The three stratum differences, weighted by their cell counts divided by 1,092, reproduce the overall differences.

Pool stratum	Cells	ΔF1	ΔNDCG@4	ΔC_1	ΔC_2
All pools	1092	−0.22	−0.077154	−0.034832	−0.042321
Grade 2 available	874	−0.39	−0.070116	−0.017239	−0.052878
Grade 1 only	161	+0.73	−0.142674	−0.142674	+0.000000
Zero grade	57	−0.34	+0.000000	+0.000000	+0.000000

E.3 Associations and generation records

Table 24 reports document-level associations. For F1, NDCG@4 and generated-token length, each method's value is uniformly averaged over the same four chunkers and three paired training seeds within each document before subtracting B from L. The reported NDCG/F1 ($r = 0.222451$, $\rho = 0.176168$) and length/F1 ($r = -0.350358$, $\rho = -0.470186$) associations therefore use 273 paired $L - B$ document differences, each built from 12 cells. Grade-2 recall instead uses the 250 documents where it is defined; all other rows use 273. Predictors are $L - B$ differences, except overlap, which is the raw B/L overlap. Question difficulty, passage selection and output length can co-vary, so these associations do not identify a mechanism. Table 25 reports generation records.

The 273 reference agent utterances contain a mean of 16.31 tokens (median 14; 95th percentile 37) under the frozen answer-normalization and whitespace-tokenization rule; one becomes empty after normalization. Before normalization, their mean whitespace length is 17.58 tokens. These are lexical metric tokens, not generator subwords. Token F1 also has a mechanical length dependence: for nonempty normalized token sequences, $F1 = 2o/(n_{\text{pred}} + n_{\text{ref}})$, where o is multiset overlap. With positive overlap, adding prediction tokens absent from the reference holds overlap and recall fixed while reducing precision and F1. This does not establish that a longer response is less supported or that shortening it would improve semantic correctness. The saved generation-length field counts generator subword tokens (including EOS when encountered), whereas F1 uses normalized whitespace-separated tokens; these units should not be conflated.

Table 23 provides a post hoc, unit-matched diagnostic from the saved cleaned outputs. Generated answers average 63.80–65.60 normalized metric tokens, compared with 16.31 for the references. Precision and recall are computed per record from the same multiset overlap used in F1, then averaged; the F1 column independently reproduces the frozen means. An empty reference or prediction scores zero unless both are empty, matching the F1 empty-sequence convention. Mean F1 is the mean of record-level harmonic means, not the harmonic mean of the displayed mean precision and recall. These lexical diagnostics do not measure factual accuracy or support.

Table 23: Saved-output lexical diagnostics (post hoc). Length uses normalized whitespace metric tokens; precision and recall are percentages, and F1 is in points.

Method	Records	Mean length	Precision	Recall	F1
H	1,092	63.80	17.94	51.65	23.57
U	1,092	65.60	18.22	53.22	24.03
B	3,276	64.43	18.23	52.90	24.05
L	3,276	64.57	18.09	52.80	23.83

Table 24: Document-level associations with the $L - B$ response-F1 difference (exploratory). Predictors are $L - B$ differences, except top-four overlap, which is the raw B/L overlap.

Predictor	N	Pearson r	Spearman ρ
NDCG@4	273	0.22	0.18
Grade-2 recall	250	0.26	0.23
Selected grade-2 count	273	0.25	0.22
Selected annotated span	273	0.29	0.23
Packed annotated span	273	0.29	0.23
Packed full target	273	0.09	0.07
Generated tokens	273	−0.35	−0.47
Length capped	273	−0.05	−0.07
Top-four overlap	273	−0.06	−0.07

Table 25: Study 2 generation records. Truncated refers to the context; capped to the 512-token output limit. Legacy 2 counts records with the invalid historical prompt-length value (Section E).

Method	Records	Mean tokens	Truncated	Capped	Legacy 2
H	1092	88.5	1	0	745
U	1092	91.3	1	0	745
B	3276	89.8	2	1	2234
L	3276	90.0	1	1	2234

The saved prompt-length field contains the value 2 in 5,958 records (745 of 1,092 H, 745 of 1,092 U, 2,234 of 3,276 B and 2,234 of 3,276 L) because a legacy helper counted a returned mapping rather than its token dimension. These values are not prompt lengths. The recorded compatibility audit reconstructed all 8,736 planned packing cases from the frozen rankings with Qwen/Qwen3.5-9B's pinned tokenizer, including the 5,958 cases whose answers had already been recovered. It found a maximum corrected and rendered input length of 1,536, no count mismatches, and five contexts requiring truncation (one H, one U, two B and one L). None of those five had been generated at the time of the repair, so no completed answer required regeneration. The final saved truncation flags also total five. These figures come from the recorded full-matrix budget audit; no new tokenizer replay was performed. Tensor-width checks enforced the limit during generation, and the saved records were not modified. Reproduction should use the executed (repaired) generation code rather than the older packing helper.

F Cost, environment and technical fixes

F.1 Compute

Tables 26–28 report recorded component measurements. The Study 2 allocation ledger totals 46,280 seconds (12.86 A100-hours), 7.14 hours under the planned 20-hour budget. It includes loading, I/O, failed attempts and retries, and excludes development smoke tests and earlier project compute. Training timers may cover only a resumed session of a job and should not be summed as a GPU-hour estimate.

Table 26: All 12 grid and six refit jobs. Passes = group draws divided by available groups. Session time may cover only the last resumed session of a job.

Stage	Method	Seed	LR	Updates	Groups	Passes	Session (s)
grid	B	20260904	5×10^{-5}	227	2103	0.43	352.1
grid	B	20260904	5×10^{-5}	454	2103	0.86	700.1
grid	B	20260904	5×10^{-5}	681	2103	1.30	1048.0
grid	B	20260904	10^{-4}	227	2103	0.43	351.6
grid	B	20260904	10^{-4}	454	2103	0.86	397.2
grid	B	20260904	10^{-4}	681	2103	1.30	1048.9
grid	L	20260904	5×10^{-5}	227	943	0.96	345.5
grid	L	20260904	5×10^{-5}	454	943	1.93	692.0
grid	L	20260904	5×10^{-5}	681	943	2.89	1040.3
grid	L	20260904	10^{-4}	227	943	0.96	346.6
grid	L	20260904	10^{-4}	454	943	1.93	694.4
grid	L	20260904	10^{-4}	681	943	2.89	1041.3
refit	B	20260904	10^{-4}	431	4019	0.43	670.1
refit	B	20260905	10^{-4}	431	4019	0.43	670.4
refit	B	20260906	10^{-4}	431	4019	0.43	672.5
refit	L	20260904	10^{-4}	431	1799	0.96	670.2
refit	L	20260905	10^{-4}	431	1799	0.96	669.5
refit	L	20260906	10^{-4}	431	1799	0.96	669.2

Table 27: Batched reranker scoring (batch size 32). Pairs and scoring seconds cover all batches; pairs/s excludes the first 32-pair batch and uses 21,808 pairs per instance. Loading is separate. These are synchronized forward-pass measurements, not request latency.

Instance	Pairs	Base load (s)	Adapter load (s)	Scoring (s)	Pairs/s
U	21840	1.05	0.00	133.0	164.2
B, seed 20260904	21840	1.02	0.44	238.2	91.7
B, seed 20260905	21840	1.03	0.47	238.3	91.7
B, seed 20260906	21840	1.07	0.44	238.3	91.7
L, seed 20260904	21840	1.03	0.44	238.3	91.7
L, seed 20260905	21840	1.04	0.45	238.3	91.6
L, seed 20260906	21840	1.03	0.46	238.3	91.6

Table 28: Retrieval component timings per query–chunker cell (milliseconds). Index construction and model loading are excluded.

Component	Cells	Mean	Median	95th pct
BM25	1092	87.20	77.35	206.35
Dense	1092	14.50	14.38	15.53
Fusion	1092	0.06	0.06	0.07
Total	1092	101.76	91.75	221.22

Each reranker instance scored the same 21,840 query–passage pairs at batch size 32. The recorded steady scoring rate excludes the first 32-pair batch, so its denominator is 21,808 pairs per instance, not 21,840. The rates are 164.23 pairs/s for U, 91.65–91.67 for the three B adapters, and 91.64–91.66 for the three L adapters. Pooling timed scoring seconds within method gives 91.66 and 91.65 pairs/s for B and L, respectively (65,424 steady pairs each; 65,520 total pairs per adapted method). Base loading took 1.05 seconds for U, 1.02–1.07 for B and 1.03–1.04 for L; adapter loading additionally took 0.44–0.47 seconds for B and 0.44–0.46 for L. Scoring timers surround synchronized GPU forward passes, after CPU tokenization and transfer, and exclude loading, full retrieval, generation and other service overheads. These offline component timings are not end-to-end serving latency or evidence that the measured ratios would hold in another deployment. The final generation session processed 300 records in 75 batches and produced 29,912 tokens in 614.5 seconds (48.7 tokens/s; 0.49 records/s), with 231.4 seconds of model loading and a peak allocation of 18.2 GiB. These values describe that session only, not the full 8,736-record run, per-request latency or a matched serving comparison. No time-to-first-token, network, queueing or deployment measurements are available.

F.2 Software environment and technical fixes

The recorded Study 2 environment is Python 3.13.15, PyTorch 2.11.0+cu128, Transformers 5.16.1, PEFT 0.20.0, Accelerate 1.14.0, NumPy 2.1.3 and Hugging Face Hub 1.28.0 on an NVIDIA A100-SXM4-40GB, with faiss-cpu 1.14.3, langchain-text-splitters 0.3.11, rank-bm25 0.2.2, sentence-transformers 3.4.1 and spaCy 3.8.14 for retrieval. Newer default environments may not reproduce the experiment exactly.

Two development smoke tests failed before the full run: one at a split-membership precheck before model loading, and one before any optimizer update because an unused dependency (torchao) was incompatible. After removing that dependency, the next smoke test succeeded. The full-run recovery scripts, the generation token-budget audit and the finalization scripts are part of the reproduction dependencies. The completed outputs passed 28 finalization, recovery and contract tests and a 17-check final verification.

G Reproduction dependencies

The public companion provides selected source, configuration, pre-execution protocol and aggregate results. The first release (v1.0.0) is archived at DOI 10.5281/zenodo.22695835; subsequent documentation is identified as release v1.0.1 at `https://github.com/zukhriddingit/chunk rag-reranking-study`. The protocol was fixed before comparative Doc2Dial outcomes but released afterward; it is not a public preregistration. Code/configuration use Apache-2.0 and designated author-owned aggregates/documentation use CC-BY-4.0, as assigned per file; these licenses do not replace third-party terms.

Table 29: Artifact access and replay limits of the current companion.

Artifact	Current access	Consequence
Dataset text	Upstream TechQA-RAG-Eval (card: Apache-2.0) and IBM Doc2Dial (card: CC-BY-3.0); pinned versions in Appendix B	Dataset availability does not reproduce the selected cases or trained adapters.
Exact splits and turn selections	Not included in the companion; deterministic hash rule and salt specified here	ID-only exports can improve auditability without redistributing dialogue/answer text; a local candidate is not a public release.
Saved rankings, generations and per-record metrics	Not included in the companion	Aggregate checks are possible; independent raw-record recomputation requires the saved records. No claim of an established blanket redistribution prohibition is made.
Six final adapters	Not included; base model and revision identified	Published weights do not recreate our fitted adapters. No public adapter endpoint or on-request access mechanism is promised.
Training/evaluation and recovery code	Selected source is included; complete executed repair/runtime dependencies remain necessary	The companion is not a one-command or complete model-experiment replay package.
Human records	Excluded; no numerical human evaluation is reported	These records are outside reproducibility of the automatic primary endpoints; historical governance questions remain outstanding.

Upstream cards are `https://huggingface.co/datasets/nvidia/TechQA-RAG-Eval` and `https://huggingface.co/datasets/IBM/doc2dial`. These exclusions reflect release scope; the paper does not establish that benchmark identifiers, non-human outputs or adapter weights are legally unshareable. Any expanded release should identify the exact files, preserve the relevant notices and document its access conditions.