Estimates vs true O-information: linear view

Mixed Gaussian, N=10, dim U=1, dim V=2, n=1000, k=16

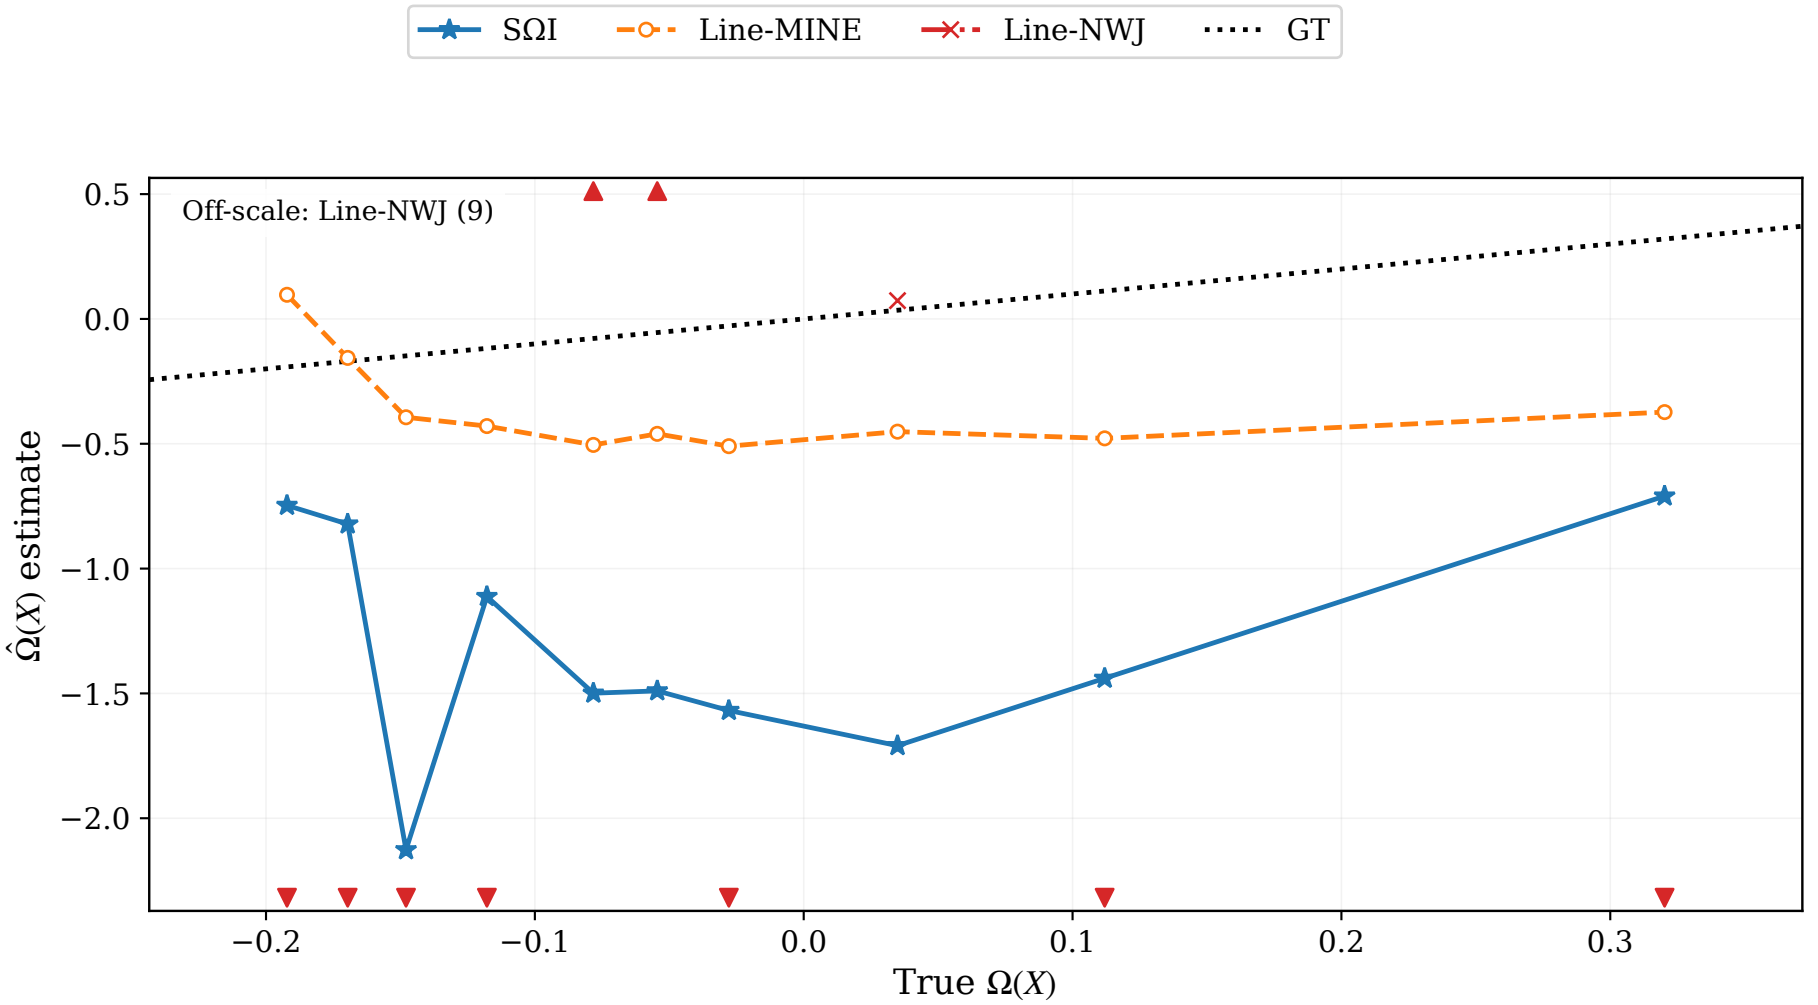

Linear close-up. Triangles at the boundary indicate off-scale estimates, not their values. The next page shows the full range. Line-NWJ: 9 off scale

Validation-loss plateau is a stopping rule, not proof of accurate O-information.

Estimates vs true O-information: full range

Mixed Gaussian, N=10, dim U=1, dim V=2, n=1000, k=16

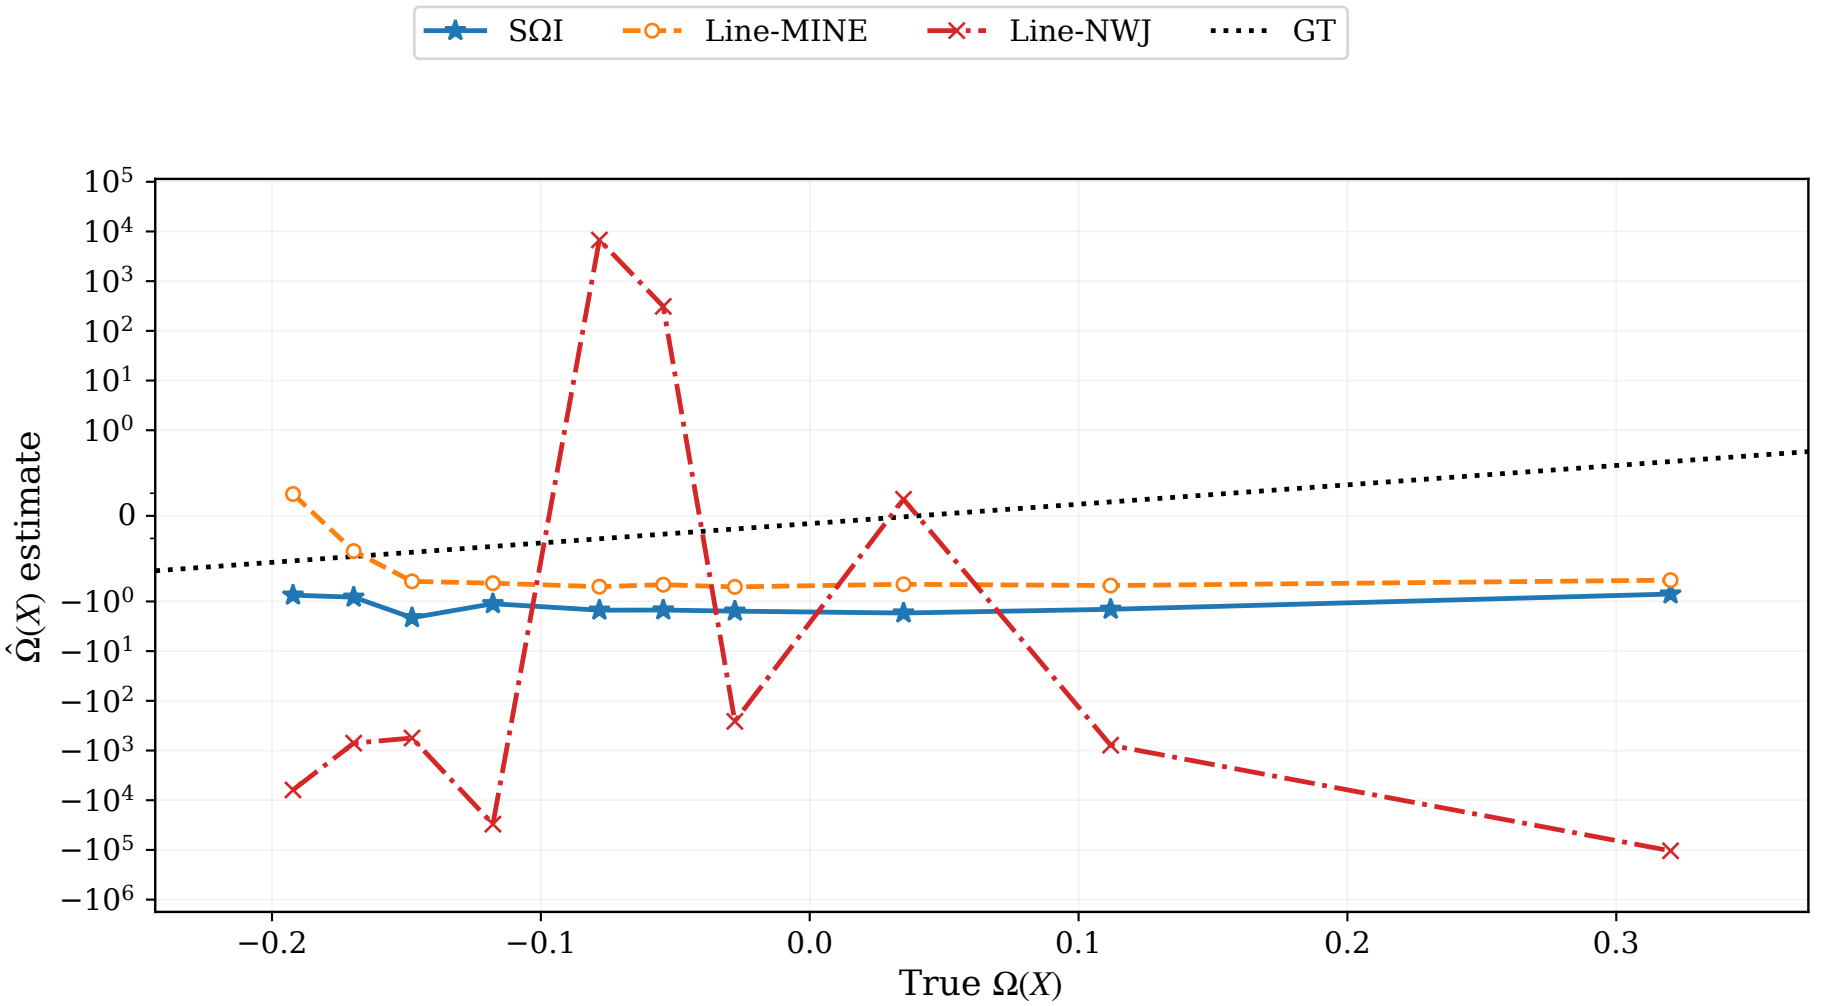

Full range: all finite curve values are shown (repeated seeds averaged). Y uses symlog: linear for |estimate| ≤ 0.245, logarithmic outside; signs and zeros are preserved.

Validation-loss plateau is a stopping rule, not proof of accurate O-information.

Accuracy against analytic ground truth

Mixed Gaussian, N=10, dim U=1, dim V=2, n=1000, k=16

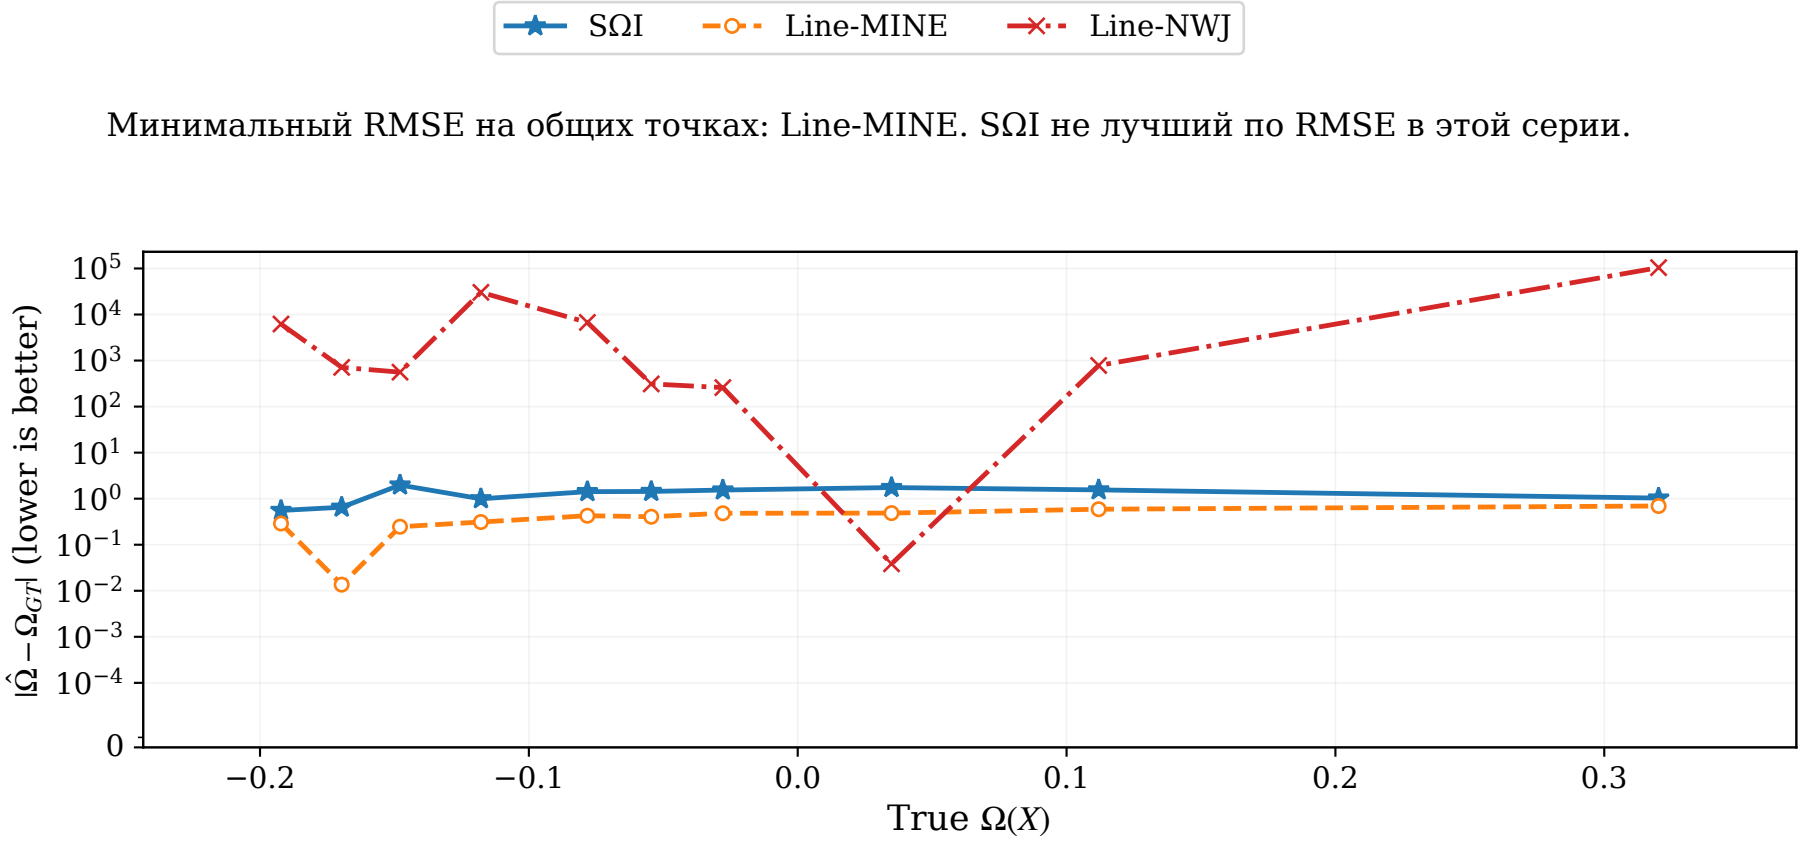

Минимальный RMSE на общих точках: Line-MINE. SΩI не лучший по RMSE в этой серии.

Method	MAE ↓	RMSE ↓	Max error ↓	Wins / ties	Failed
SΩI	1.29016	1.36374	1.97858	0 / 0	0
Line-MINE	0.394373	0.43421	0.693381	9 / 0	0
Line-NWJ	15018	34471.5	104302	1 / 0	0

Matched support: 10 true values, 10 point/seed combinations; 0 incomplete combinations excluded. Wins use pointwise mean absolute error. Curves and metrics average absolute errors, not the absolute error of averaged estimates. Y uses symlog to retain both tiny errors and extreme failures.

Результат относится к этой серии. Универсальная оптимальность метода не доказана.