

Factory Method and Abstract Factory compared

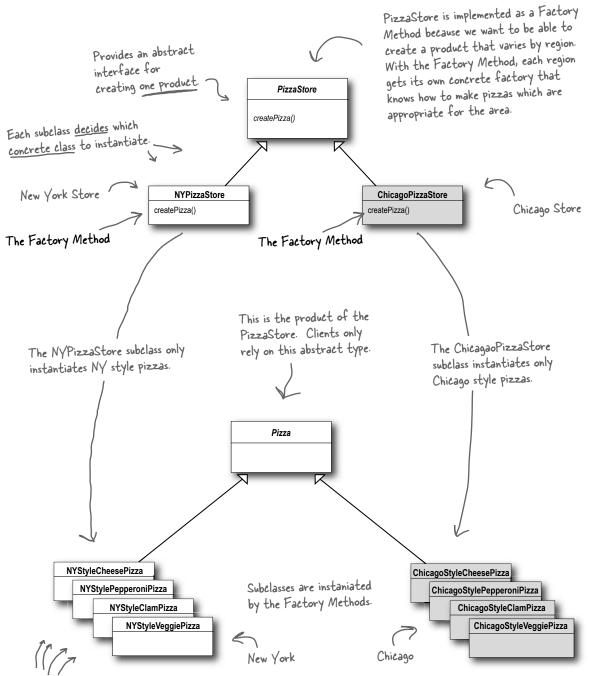

The createPizza() method is parameterized by pizza type, so we can return many types of pizza products.

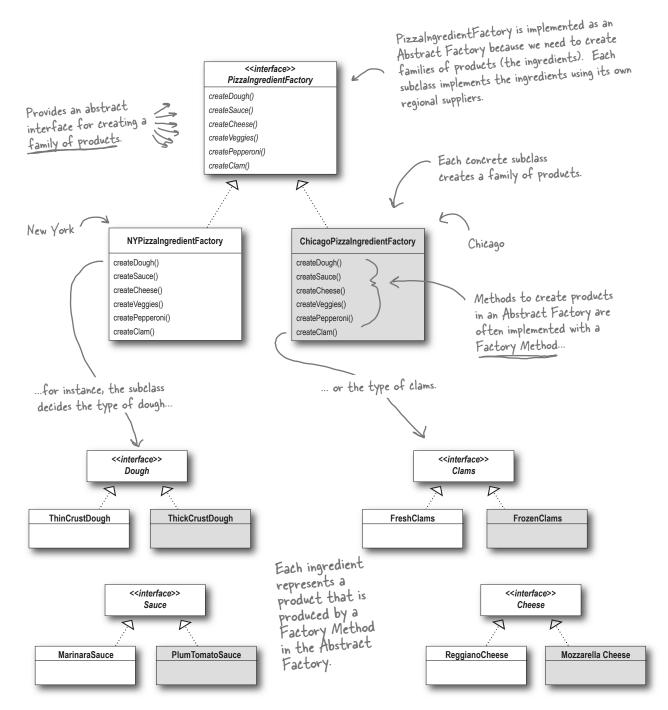

The product subclasses create parallel sets of product families. Here we have a New York ingredient family and a Chicago family.