

{title}

{title}

Start with Why?


Test111

Start with Why?

Test111

Text2

Start with Why?

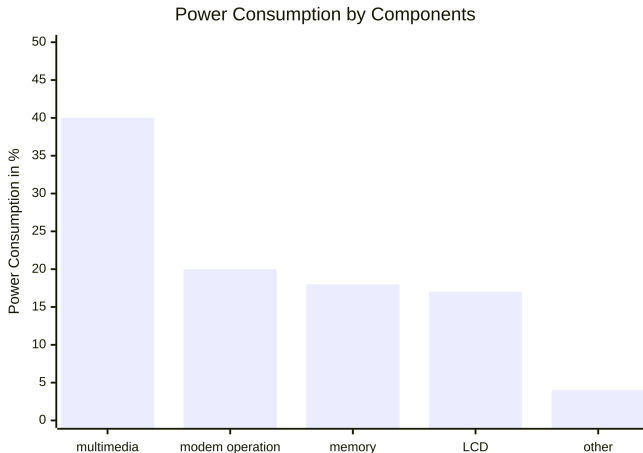

Slide 3

Test3

Neue Section

Twocols

This is how to specify several cols on a slide:
contents... contents...

Code Blocks

```
/*  
way too much code....  
way too much code....  
way too much code....  
way too much code....  
way too much code....  
way too much code....  
*/
```

Ref Example

“some quote” [1] [2]

End

References

- [1] F. Gao, G. Tziantzioulis, and D. Wentzlaff, "ComputeDRAM: In-memory compute using off-the-shelf DRAMs," in *Proceedings of the 52nd annual IEEE/ACM international symposium on microarchitecture*, in MICRO '52. New York, NY, USA: Association for Computing Machinery, Oct. 2019, pp. 100–113. doi: 10.1145/3352460.3358260.
- [2] F. Gao, G. Tziantzioulis, and D. Wentzlaff, "ComputeDRAM: In-Memory Compute Using Off-the-Shelf DRAMs," in *Proceedings of the 52nd Annual IEEE/ACM International Symposium on Microarchitecture*, in MICRO '52. New York, NY, USA: Association for Computing Machinery, Oct. 2019, pp. 100–113. doi: 10.1145/3352460.3358260.