

title

Start with Why?

Test1


Start with Why?

Test1


Text2

Start with Why?

Power Consumption by Components

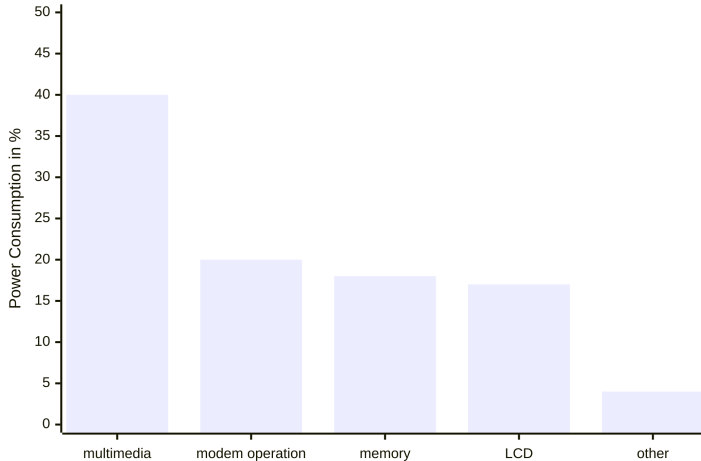

Slide 3



And svg:

Test3

Small Font

Tiny text..

Neue Section

Twocols

This is how to specify several cols on a slide:
contents... contents...

Extra Symbols

- ✓ , 
- Other alphabets: □, Я

“my quote” [1]

Mermaid

```
graph TD;
    A[Start] --> B{Is it sunny?};
    B -- Yes --> C[Go outside];
    B -- No --> D[Stay inside];
    C --> E[Have fun];
    D --> E;
```

LaTeX algorithm2e Package

Algorithm 1: Example algorithm

Data: Logic Network

Result: SubarrayAssignment:

$$NodeId \rightarrow \mathcal{P}(S)$$

initialization;

while *condition* **do**

 | instructions;

end

End

End

References I

- [1] F. Gao, G. Tziantzioulis, and D. Wentzlaff, "ComputeDRAM: In-memory compute using off-the-shelf DRAMs," in *Proceedings of the 52nd annual IEEE/ACM international symposium on microarchitecture*, in MICRO '52. New York, NY, USA: Association for Computing Machinery, Oct. 2019, pp. 100–113. doi: 10.1145/3352460.3358260. Available: <https://dl.acm.org/doi/10.1145/3352460.3358260>. [Accessed: Jul. 16, 2025]