


Express Server with Custom Logger

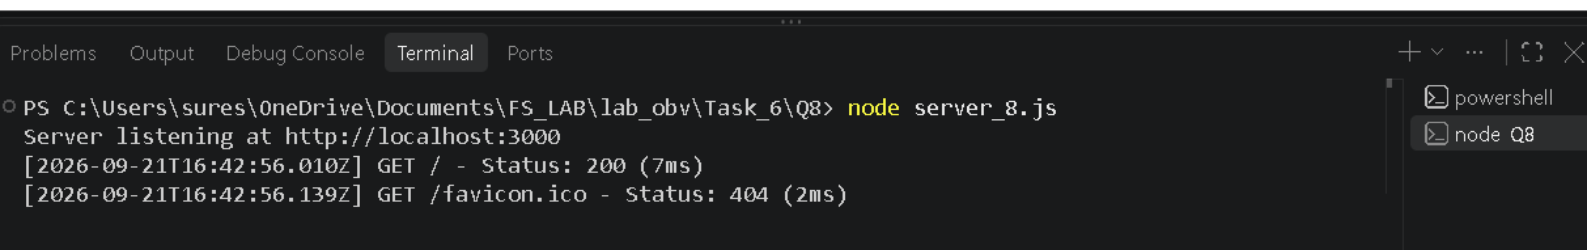

The screenshot shows a VS Code interface with a terminal window open. The terminal has tabs for 'Problems', 'Output', 'Debug Console', 'Terminal', and 'Ports'. The 'Terminal' tab is active. The terminal output shows the command 'node server_8.js' being executed in a PowerShell session. The server starts listening on http://localhost:3000. It then receives two requests: a GET request to '/' with a 200 status and a 7ms response time, and a GET request to '/favicon.ico' with a 404 status and a 2ms response time. The terminal window also shows a sidebar with a 'powershell' session and a 'node Q8' session.

```
PS C:\Users\sures\OneDrive\Documents\FS_LAB\lab_obv\Task_6\Q8> node server_8.js
Server listening at http://localhost:3000
[2026-09-21T16:42:56.010Z] GET / - Status: 200 (7ms)
[2026-09-21T16:42:56.139Z] GET /favicon.ico - Status: 404 (2ms)
```