

-- 1. Koji je ukupan broj porudžbina u bazi?

SELECT

COUNT(DISTINCT(orders.order_id))

FROM

Orders

Result Grid	Filter Rows:
COUNT(DISTINCT(orders.order_id))	
▶ 21350	

-- 2. Koji je prosečan prihod po porudžbini?

SELECT ROUND(AVG(order_total), 2) FROM (

SELECT o.order_id, SUM(od.quantity * p.price) AS order_total

FROM orders o

JOIN order_details od ON o.order_id = od.order_id

JOIN pizzas p ON od.pizza_id = p.pizza_id

GROUP BY o.order_id

) AS per_order;

Result Grid	Filter Rows:
ROUND(AVG(order_total), 2)	
▶ 38.31	

-- 3. Koliko ukupno prihoda je ostvareno po tipu pice?

SELECT

pt.category,

ROUND(SUM(od.quantity*p.price),2) AS Total_Revenue

FROM

orders o

JOIN

```

        order_details od

ON o.order_id = od.order_id

JOIN

        pizzas p

ON od.pizza_id = p.pizza_id

JOIN

        pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id

GROUP BY

        pt.category

ORDER BY

        ROUND(SUM(od.quantity*p.price),2) DESC

```

Result Grid			Filter Rows:
	category	Total_Revenue	
▶	Classic	220053.1	
	Supreme	208197	
	Chicken	195919.5	
	Veggie	193690.45	

-- 4. Koji su top 5 najprodavanijih artikala po količini?

```

SELECT

        pt.name,

        SUM(od.quantity) AS Total_Quantity

FROM

        orders o

JOIN

        order_details od

ON o.order_id = od.order_id

JOIN

        pizzas p

ON od.pizza_id = p.pizza_id

JOIN

        pizza_types pt

```

ON p.pizza_type_id = pt.pizza_type_id


GROUP BY

pt.name

ORDER BY

SUM(od.quantity) DESC

LIMIT 5

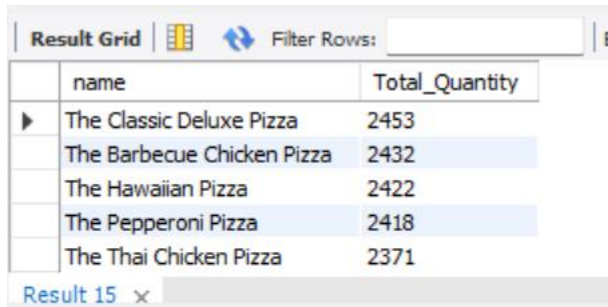

The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The grid contains two columns: 'name' and 'Total_Quantity'. The data is as follows:

name	Total_Quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

At the bottom of the window, it says 'Result 15' with a close button.

-- 5. Koji je dan sa najviše porudžbina?

SELECT

DAYNAME(o.formatted_date) AS DayOfWeek,

COUNT(DISTINCT o.order_id) AS Number_of_orders

FROM


orders o

GROUP BY

DAYNAME(o.formatted_date)

ORDER BY

Number_of_orders DESC;

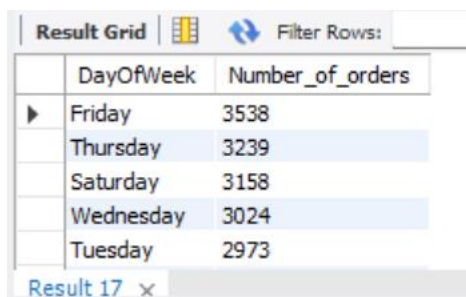

The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The grid contains two columns: 'DayOfWeek' and 'Number_of_orders'. The data is as follows:

DayOfWeek	Number_of_orders
Friday	3538
Thursday	3239
Saturday	3158
Wednesday	3024
Tuesday	2973

At the bottom of the window, it says 'Result 17' with a close button.

-- 6. Koliko porudžbina je bilo po svakoj vrsti veličine pice?

SELECT

p.size,
SUM(od.quantity) AS Total_Qty

FROM

orders o

JOIN

order_details od

ON o.order_id = od.order_id

JOIN

pizzas p

ON od.pizza_id = p.pizza_id

JOIN

pizza_types pt


ON p.pizza_type_id = pt.pizza_type_id

GROUP BY

p.size

ORDER BY

SUM(od.quantity) DESC

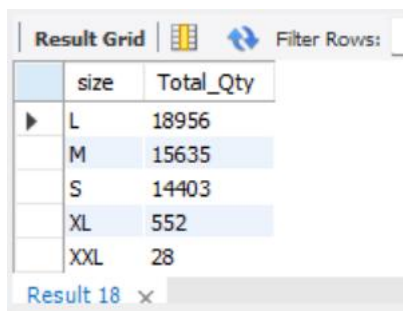

The screenshot shows a 'Result Grid' window with a table containing two columns: 'size' and 'Total_Qty'. The data is sorted in descending order of 'Total_Qty'. The rows are: L (18956), M (15635), S (14403), XL (552), and XXL (28). The window title is 'Result 18'.

	size	Total_Qty
▶	L	18956
	M	15635
	S	14403
	XL	552
	XXL	28

-- 7. Koji su najčešći dodaci (toppings) koji se nalaze na picama koje su naručene više od 1000 puta?

SELECT

pt.ingredients,
COUNT(od.pizza_id) AS Orders_of_Pizzas_Number

FROM

```

        orders o

JOIN

        order_details od

ON o.order_id = od.order_id

JOIN

        pizzas p

ON od.pizza_id = p.pizza_id

JOIN

        pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id

GROUP BY

        pt.ingredients

HAVING

        COUNT(od.pizza_id) > 1000

ORDER BY

        COUNT(od.pizza_id) DESC

```

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
	ingredients	Orders_of_Pizzas_Number			
▶	Pepperoni, Mushrooms, Red Onions, Red Peppers, Bacon	2416			
	Barbecued Chicken, Red Peppers, Green Peppers, Tomatoes, Red Onions, Barbec...	2372			
	Sliced Ham, Pineapple, Mozzarella Cheese	2370			
	Mozzarella Cheese, Pepperoni	2369			
	Chicken, Pineapple, Tomatoes, Red Peppers, Thai Sweet Chilli Sauce	2315			

-- 8. Koliko je ukupno pica prodato po vrstama pice?

```

SELECT

        pt.name,

        SUM(od.quantity) AS TotalQTY

FROM

        orders o

JOIN

        order_details od

ON o.order_id = od.order_id

JOIN

        pizzas p

```

```

ON od.pizza_id = p.pizza_id

JOIN

    pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id

GROUP BY

    pt.name

ORDER BY

    SUM(od.quantity) DESC

```

Result Grid   Filter Rows:		
	name	TotalQTY
▶	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371

Result 20 

-- 9. Koliki je udeo svake vrste pice u ukupnom prihodu?

```

WITH SummedTotal_Revenue AS(

SELECT

    SUM(od.quantity*p.price) AS SummedTotalRevenue

FROM

    orders o

JOIN

    order_details od

ON o.order_id = od.order_id

JOIN

    pizzas p

ON od.pizza_id = p.pizza_id

JOIN

    pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id)

```

SELECT

pt.name,

ROUND(SUM(od.quantity*p.price),2) AS Total_Pizza_Revenue,

str.SummedTotalRevenue AS SummedTotalRevenue,

ROUND(SUM(od.quantity * p.price) / str.SummedTotalRevenue * 100, 2) AS Percent_in_TOTAL

FROM

orders o

JOIN

order_details od

ON o.order_id = od.order_id

JOIN

pizzas p

ON od.pizza_id = p.pizza_id

JOIN

pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id

JOIN

SummedTotal_Revenue str

GROUP BY

pt.name, str.SummedTotalRevenue

ORDER BY

ROUND(SUM(od.quantity * p.price) / str.SummedTotalRevenue * 100, 2) DESC

Result Grid  Filter Rows: Export:  Wrap Cell Content: 				
	name	Total_Pizza_Revenue	SummedTotalRevenue	Percent_in_TOTAL
▶	The Thai Chicken Pizza	43434.25	817860.0499999932	5.31
	The Barbecue Chicken Pizza	42768	817860.0499999932	5.23
	The California Chicken Pizza	41409.5	817860.0499999932	5.06
	The Classic Deluxe Pizza	38180.5	817860.0499999932	4.67
	The Spicy Italian Pizza	34831.25	817860.0499999932	4.26
Result 21 				


-- 10. Koji je prosečan broj pica po porudžbini?

```
WITH TotalQuantityPerOrder AS (  
    SELECT  
        od.order_id,  
        SUM(od.quantity) AS TotalQtyPerOrder  
    FROM  
        orders o  
    JOIN  
        order_details od  
    ON o.order_id = od.order_id  
    JOIN  
        pizzas p  
    ON od.pizza_id = p.pizza_id  
    JOIN  
        pizza_types pt  
    ON p.pizza_type_id = pt.pizza_type_id  
    GROUP BY  
        od.order_id)  
    SELECT  
        AVG(tqpo.TotalQtyPerOrder) AS AverageTotalQtyPerOrder  
    FROM  
        TotalQuantityPerOrder tqpo
```

Result Grid		Filter Rows:
	AverageTotalQtyPerOrder	
▶	2.3220	

-- 11. Pronađi porudžbine koje su imale više od 5 različitih pica.

```
WITH TotalQuantityPerOrder AS (  
    SELECT  
        od.order_id,  
        SUM(od.quantity) AS TotalQtyPerOrder  
    FROM  
        orders o  
    JOIN  
        order_details od  
    ON o.order_id = od.order_id  
    JOIN  
        pizzas p  
    ON od.pizza_id = p.pizza_id  
    JOIN  
        pizza_types pt  
    ON p.pizza_type_id = pt.pizza_type_id  
    GROUP BY  
        od.order_id)  
SELECT o.order_id  
FROM orders o  
JOIN order_details od ON o.order_id = od.order_id  
GROUP BY o.order_id  
HAVING COUNT(DISTINCT od.pizza_id) > 5;
```



The screenshot shows a 'Result Grid' window with a table containing the following data:

order_id
9
17
78
92
143

At the bottom of the window, it says 'Result 23' with a close button.

-- 12. Koji mesec ima najviši ukupan prihod i koliki je taj prihod?

SELECT

MONTH(o.formatted_date),

ROUND(SUM(od.quantity*p.price),2) AS Total_Pizza_Revenue

FROM

orders o

JOIN

order_details od

ON o.order_id = od.order_id

JOIN

pizzas p

ON od.pizza_id = p.pizza_id

JOIN

pizza_types pt

ON p.pizza_type_id = pt.pizza_type_id

GROUP BY

MONTH(o.formatted_date)

ORDER BY

ROUND(SUM(od.quantity*p.price),2) DESC

LIMIT 1

Result Grid			Filter Rows:
	MONTH(o.formatted_date)	Total_Pizza_Revenue	
▶	7	72557.9	

-- 13. Koja je prosečna cena po komadu pice po tipu (npr. veggie, clAssic, supreme)?

SELECT

pt.category,

ROUND(SUM(od.quantity * p.price) / SUM(od.quantity), 2) AS Avg_Price_Per_Piece

FROM orders o

JOIN order_details od ON o.order_id = od.order_id

JOIN pizzas p ON od.pizza_id = p.pizza_id

JOIN pizza_types pt ON p.pizza_type_id = pt.pizza_type_id

GROUP BY pt.category;

Result Grid	Filter Rows:
category	Avg_Price_Per_Piece
Classic	14.78
Chicken	17.73
Veggie	16.63
Supreme	17.37

-- 14. Koji je odnos porudžbina koje sadrže supreme pize u odnosu na sve porudžbine?

WITH TotalOrders AS (

SELECT

COUNT(o.order_id) AS TotalOrders

FROM

orders o)

SELECT

pt.category,

COUNT(o.order_id) AS Total_Pizza_Orders,

tor.TotalOrders,

COUNT(o.order_id)/tor.TotalOrders*100 AS Percent_of_Category

FROM

orders o

JOIN

order_details od

ON o.order_id = od.order_id

JOIN

```

        pizzas p
ON od.pizza_id = p.pizza_id
JOIN
        pizza_types pt
ON p.pizza_type_id = pt.pizza_type_id
JOIN
        TotalOrders tor
WHERE pt.category = 'Supreme'
GROUP BY
        pt.category, tor.TotalOrders

```

Result Grid					Filter Rows:	Export:	Wrap Cell Content:
	category	Total_Pizza_Orders	TotalOrders	Percent_of_Category			
▶	Supreme	11777	21350	55.1616			

-- 15. Napravi rang listu pica po prihodima, koristeći RANK() funkciju.

```

SELECT
        pt.name,
        ROUND(SUM(od.quantity*p.price),2) AS Total_Revenue,
        RANK() OVER(ORDER BY ROUND(SUM(od.quantity*p.price),2) DESC) AS RevenueRANK
FROM
        orders o
JOIN
        order_details od
ON o.order_id = od.order_id
JOIN
        pizzas p
ON od.pizza_id = p.pizza_id
JOIN
        pizza_types pt
ON p.pizza_type_id = pt.pizza_type_id
GROUP BY

```

pt.name

ORDER BY

ROUND(SUM(od.quantity*p.price),2) DESC

Result Grid			
		Filter Rows:	
		Export:	
		Wrap Cell Content:	
	name	Total_Revenue	RevenueRANK
▶	The Thai Chicken Pizza	43434.25	1
	The Barbecue Chicken Pizza	42768	2
	The California Chicken Pizza	41409.5	3
	The Classic Deluxe Pizza	38180.5	4
	The Spicy Italian Pizza	34831.25	5

Result 27 x

-- 16. Koji dan u nedelji ima najviši prosek prihoda po porudžbini?

SELECT

WEEKDAY(order_revenues.formatted_date) AS day_of_week,

ROUND(AVG(order_total), 2) AS avg_order_revenue

FROM (

SELECT

o.order_id,

o.formatted_date,

SUM(od.quantity * p.price) AS order_total

FROM orders o

JOIN order_details od ON o.order_id = od.order_id

JOIN pizzas p ON od.pizza_id = p.pizza_id

GROUP BY o.order_id, o.formatted_date

) AS order_revenues

GROUP BY WEEKDAY(order_revenues.formatted_date)

ORDER BY avg_order_revenue DESC;

Result Grid		
		Filter Rows:
	day_of_week	avg_order_revenue
▶	5	39.01
	4	38.46
	0	38.41
	1	38.39
	3	38.14

Result 28 x

-- 17. PROCEDURA koja poziva kategoriju grupisanja po ukupnim kolicinama koje su prodate :

DELIMITER \$\$

```
CREATE PROCEDURE GetPizzasalesByAttribute(  
    IN group_column VARCHAR(100)  
)  
BEGIN  
    SET @sql = CONCAT(  
        'SELECT', group_column, ' AS Attribute, '  
        'SUM(od.quantity) AS TotalQTY',  
        'FROM orders o ',  
        'JOIN order_details od ON o.order_id = od.order_id ',  
        'JOIN pizzas p ON od.pizza_id = p.pizza_id ',  
        'JOIN pizza_types pt ON p.pizza_type_id = pt.pizza_type_id ',  
        'GROUP BY', group_column, ', ',  
        'ORDER BY SUM(od.quantity) DESC'  
    );  
  
    PREPARE stmt FROM @sql;  
    EXECUTE stmt;  
    DEALLOCATE PREPARE stmt;  
END$$
```

DELIMITER ;

-- CALLING PROCEDURE WITH p.size:

CALL GetPizzasalesByAttribute('p.size')

Result Grid			Filter Rows:
	Attribute	TotalQTY	
▶	L	18956	
	M	15635	
	S	14403	
	XL	552	
	XXL	28	

Result 29 ×

-- CALLING PROCEDURE WITH pt.category:

CALL GetPizzasalesByAttribute('pt.category')

Result Grid			Filter Rows:
	Attribute	TotalQTY	
▶	Classic	14888	
	Supreme	11987	
	Veggie	11649	
	Chicken	11050	

Result 30 ×

-- CALLING PROCEDURE WITH pt.name:

CALL GetPizzasalesByAttribute('pt.name')

Result Grid			Filter Rows:
	Attribute	TotalQTY	
▶	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	

Result 31 ×

-- 18. PROCEDURA za posmatranje prodaje po danima u nedelji, mesecima, kvartalima:

DELIMITER \$\$

```
CREATE PROCEDURE TotalRevenuePerMonthQuarterWeekDay (  
    IN group_column VARCHAR(100)  
)  
BEGIN  
    SET @sql = CONCAT(  
        'SELECT', group_column, ' AS GroupedValue, ',  
        'ROUND(SUM(od.quantity * p.price), 2) AS Total_Pizza_Revenue ',  
        'FROM orders o ',  
        'JOIN order_details od ON o.order_id = od.order_id ',  
        'JOIN pizzas p ON od.pizza_id = p.pizza_id ',  
        'JOIN pizza_types pt ON p.pizza_type_id = pt.pizza_type_id ',  
        'GROUP BY', group_column, ', ',  
        'ORDER BY Total_Pizza_Revenue DESC'  
    );  
  
    PREPARE stmt FROM @sql;  
    EXECUTE stmt;  
    DEALLOCATE PREPARE stmt;  
END$$
```

DELIMITER ;

-- -- CALLING PROCEDURE WITH MONTH():

```
CALL TotalRevenuePerMONTHQuarterWeekDay('MONTH(o.formatted_date)');
```

Result Grid		Filter Rows:
	GroupedValue	Total_Pizza_Revenue
▶	7	72557.9
	5	71402.75
	3	70397.1
	11	70395.35
	1	69793.3

Result 32

-- -- CALLING PROCEDURE WITH QUARTER():

```
CALL TotalRevenuePerMONTHQuarterWeekDay('QUARTER(o.formatted_date)')
```

Result Grid 			Filter Rows:	
	GroupedValue	Total_Pizza_Revenue		
▶	2	208369.75		
	1	205350		
	3	205016.2		
	4	199124.1		

-- -- CALLING PROCEDURE WITH WEEKDAY():

```
CALL TotalRevenuePerMONTHQuarterWeekDay('DAYNAME(o.formatted_date)');
```

Result Grid			Filter Rows:	
	GroupedValue	Total_Pizza_Revenue		
▶	Friday	136073.9		
	Thursday	123528.5		
	Saturday	123182.4		
	Wednesday	114408.4		
	Tuesday	114133.8		
Result 34 				

-- 19. Ispisati sve unikatne sASTojke na picama

U jednoj celiji svi sASTojci...

SELECT

```
GROUP_CONCAT(DISTINCT jt.ingredient ORDER BY jt.ingredient SEPARATOR ',') AS all_unique_ingredients
```


FROM pizza_types pt,

JSON_TABLE(

```
  CONCAT('["', REPLACE(pt.ingredients, ',', '","'), "']"),
```

```
  '$[*]' COLUMNS (ingredient VARCHAR(100) PATH '$')
```

) AS jt;

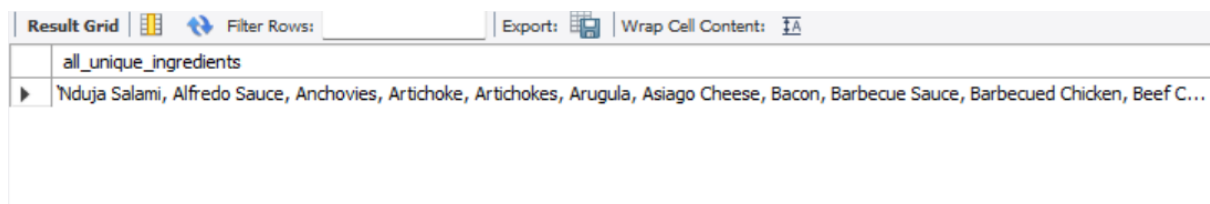

all_unique_ingredients
'Nduja Salami, Alfredo Sauce, Anchovies, Artichoke, Artichokes, Arugula, Asiago Cheese, Bacon, Barbecue Sauce, Barbecued Chicken, Beef C...

U jednoj kolONI svi sASTojci...

SELECT DISTINCT jt.ingredient

FROM pizza_types pt,


JSON_TABLE(

```
  CONCAT('["', REPLACE(pt.ingredients, ',', '","'), "']"),
```

```
  '$[*]' COLUMNS (ingredient VARCHAR(100) PATH '$')
```

) AS jt

ORDER BY jt.ingredient;



ingredient
'Nduja Salami
Alfredo Sauce
Anchovies
Artichoke
Artichokes

Result 36 x

-- 20. Ispisati sve pizze za koje se koristi sASTojak

SELECT

jt.ingredient,

GROUP_CONCAT(DISTINCT pt.name ORDER BY pt.name SEPARATOR ', ') AS pizzas_with_ingredient

FROM

pizza_types pt,

JSON_TABLE(

CONCAT('["', REPLACE(pt.ingredients, ',', '","'), "']"), -- kolona iz tabele pizza_types koja sadži sastojke kao tekstualni niz, a REPLACE Menja sve pojave ", " u "'" što efektivno pravi niz od sastojaka sa navodnicima između dok CONCAT dodaje početni "[" i završni "]" da se dobije validan JSON niz

'\$[*]' COLUMNS (ingredient VARCHAR(100) PATH '\$') -- Ova funkcija pretvara JSON niz u virtuelnu tabelu. '['*' označava da se uzimaju svi elementi niza. Za svaki element, pravi kolonu ingredient tipa VARCHAR(100) sa vrednošću iz JSON elementa (PATH '\$')

) AS jt

GROUP BY

jt.ingredient

ORDER BY

jt.ingredient;

Result Grid			Filter Rows:	Export:	Wrap Cell Content:
	ingredient	pizzas_with_ingredient			
▶	Nduja Salami	The Calabrese Pizza			
	Alfredo Sauce	The Chicken Alfredo Pizza			
	Anchovies	The Napolitana Pizza			
	Artichoke	The California Chicken Pizza			
	Artichokes	The Italian Vegetables Pizza, The Mediterranean Pizza, The Spicy Italian Pizza, The Spinach Pesto Pizza, ...			

Result 37 x