Agentic Self-Correction in LLaMA3: Enhancing E-Commerce Sentiment Analysis through Multi-Agent Reflection

Baseline (Phase 1) + Proposed Agentic Framework (Phase 2)

Experimental Results on Amazon Reviews 2023 — 2 000 Samples

PES MTech Project

github.com/kvarun314/pes-mtech-project

March 2026

Contents

1 Abstract **3**

2 Problem Statement **3**

3 Research Gap **4**
3.1 Baseline Study: Supervised Fine-Tuning with LLaMA-3 (Wang et al., 2025) 4
3.2 The Research Gap: From Passive to Agentic 4

4 Datasets **4**
4.1 Baseline Dataset (Kaggle) 4
4.2 Proposed Dataset: Amazon Reviews 2023 4

5 Baseline Data Flow and Preprocessing **5**

6 Baseline Model Training (LoRA) **6**

7 Baseline Results (Phase 1) **7**
7.1 Kaggle Amazon Reviews (Training Dataset) 7
7.2 Amazon Reviews 2023 — Phase 1 Baseline 7

8 Proposed System: Phase 2 Multi-Agent Architecture **7**
8.1 Agent Pipeline 7
8.2 AgentState 8
8.3 Implementation Details 9

9 Experimental Setup **9**

10 Results — Amazon Reviews 2023 Electronics (Leak-Free, Frozen) 10

11 Results — Run 1 (2 000 Samples) 14
11.1 Overall Metrics . . . 14
11.2 Per-Rating Accuracy . . . 14
11.3 Error Recovery . . . 15
11.4 Self-Correction Analysis . . . 15
11.5 Contextual Advantage . . . 15

12 Why Phase 2 Works Better: Detailed Analysis 15
12.1 Phase 1's Core Failure Mode: Rating Collapse . . . 15
12.2 The Multi-Agent Ensemble Corrects Phase 1's Conservative Bias . . . 16
12.3 Agent Specialisation: Each Agent Contributes Differently . . . 16
12.4 Dissonance as a Proxy for Difficulty . . . 17
12.5 Self-Correction: Useful but Not the Primary Driver . . . 17
12.6 Summary: Why Phase 2 Works . . . 18

13 Evaluation Metrics Framework 18

14 System Comparison 19

15 Computational Resources 19

16 Discussion 20
16.1 Why Phase 2 Outperforms Phase 1 . . . 20
16.2 Limitations . . . 20

17 Proposed System: Detailed Agent Specifications 20
17.1 Knowledge Grounding (LanceDB) . . . 20
17.2 Analyst Node . . . 21
17.3 Visual Verifier Node . . . 21
17.4 RAG Prover Node . . . 21
17.5 Critic Node and Reflection Edge . . . 21

18 Implementation Status 21
18.1 Implemented . . . 21
18.2 Experimental Results Completed . . . 21
18.3 Not Yet Implemented (Future Work) . . . 22

19 References 22

1 Abstract

Automated Sentiment Analysis (ASA) plays a critical role in modern e-commerce systems by enabling businesses to analyse large volumes of customer feedback and identify trends related to product quality and user satisfaction. Recent advances in Large Language Models (LLMs), particularly LLaMA-3, have significantly improved sentiment classification due to their strong contextual understanding and language reasoning capabilities.

However, these models typically operate as static, text-only classifiers: they generate predictions in a single inference step without performing factual verification or reflective reasoning. This leads to *sentiment hallucinations* (e.g. incorrectly treating a user's wrong claim as a real product defect), *context blindness* (missing image and metadata signals), and *linguistic errors* on sarcasm or mixed-sentiment phrasing.

This paper proposes a multimodal **Agentic AI framework** for sentiment analysis that integrates review text, product images, and product metadata to improve classification reliability. A four-agent pipeline — Analyst, Visual Verifier, RAG Prover, Critic — with a dissonance-triggered self-correction loop is evaluated on 2 000 samples from the Amazon Reviews 2023 dataset (All Beauty category).

Key results (Run 1):

Metric	Phase 1	Phase 2	Δ
Accuracy	0.1610	0.3870	+22.60 pp
Macro F1	0.0946	0.2725	+17.79 pp
MAE	1.5205	0.9635	−0.557

2 Problem Statement

Current AI models used for sentiment analysis excel at language understanding but struggle with factual accuracy. Because models like LLaMA-3 process a review in a single "text-only" step, they lack the ability to verify whether a customer's claims are true. This produces three primary failure modes:

1. **Sentiment hallucinations.** The AI mistakes a user's incorrect claim (e.g. "this watch isn't waterproof") for a legitimate product defect, even if the product specification proves otherwise. The model has no access to spec sheets.
2. **Context blindness.** By ignoring product images and technical metadata, the AI misses vital evidence that could confirm or refute a complaint. A user might write a neutral review but upload a photo of a shattered screen; a text-only system is blind to this visual evidence.
3. **Linguistic errors.** Without a double-check mechanism, models frequently misinterpret sarcasm or mixed feelings. "Amazing, it broke in two days" may be scored positively if the model focuses on "amazing" and there is no critic to trigger re-evaluation.

The gap: A system is needed that does not just *read* sentiment but *verifies* it against product facts and other modalities.

3 Research Gap

3.1 Baseline Study: Supervised Fine-Tuning with LLaMA-3 (Wang et al., 2025)

The baseline establishes a benchmark for sentiment classification using LLMs. **Model:** LLaMA-3-8B with Low-Rank Adaptation (LoRA) — only low-rank matrices A and B are updated while primary weights are frozen. **Data strategy:** (1) DQC (Data Quality Control) via TextBlob to filter noisy reviews; (2) VGST (Variant Greedy Search) for diversity-maximising sampling. **Reasoning:** One-Shot Learning combined with Zero-Shot CoT prompts.

Paper-reported performance: Accuracy 92.6%, Precision 95.3%, F1 93.3%, outperforming SVM and XLNet.

Our Phase 1 implementation uses LLaMA-3-8B + PEFT/LoRA (r=16, α=128, 5 epochs, `max_samples`=4000) with typical Colab eval around ∼66% accuracy and ∼68% weighted F1. Despite strong paper numbers, the baseline is a passive, single-pass classifier with no factual verification or critic.

3.2 The Research Gap: From Passive to Agentic

Three specific gaps separate the baseline from the proposed system:

1. **Absence of factual grounding ("gullibility" gap).** The baseline assumes user text is always factually correct.
2. **Lack of autonomous auditing ("critic" gap).** A single Analyst with no Critic Agent cannot perform logical auditing or catch sarcasm.
3. **Modality isolation ("visual" gap).** Text-only input ignores image evidence that may directly contradict or confirm a review's claims.

4 Datasets

4.1 Baseline Dataset (Kaggle)

Source: `arhamrumi/amazon-product-reviews` on Kaggle. **Size:** ∼500 000 product reviews. **Labels:** Rating scale 1–5. **Fields:** review text, rating, review summary, product category. **Issues:** Raw data contains duplicates, inconsistent sentiment–rating pairs, and a strong positive-review bias. Addressed with TextBlob DQC and stratified sampling.

4.2 Proposed Dataset: Amazon Reviews 2023

Source: Amazon Reviews 2023, UCSD McAuley Lab (amazon-reviews-2023.github.io). **Scale:** 570 million reviews, 48 million products, 33 product categories.

Components:

- Review data: review text, rating score, user ID, timestamp.
- Product metadata: title, description, category, price, technical specifications.

- Product images: multiple views per product.

This dataset enables multimodal reasoning: the proposed architecture uses text, images, and specs together for verification and dissonance calculation — which the baseline dataset cannot support.

Loading (HuggingFace `datasets` $\geq$ 3.x): Dataset scripts are disabled. Reviews are loaded via `load_dataset("json", data_files=...)` from `raw/review_categories/{Category}.jso` Metadata is loaded via `load_dataset("parquet", data_files=...)` from `raw_meta_{Category}/ful` Do not use `trust_remote_code` for this dataset.

5 Baseline Data Flow and Preprocessing

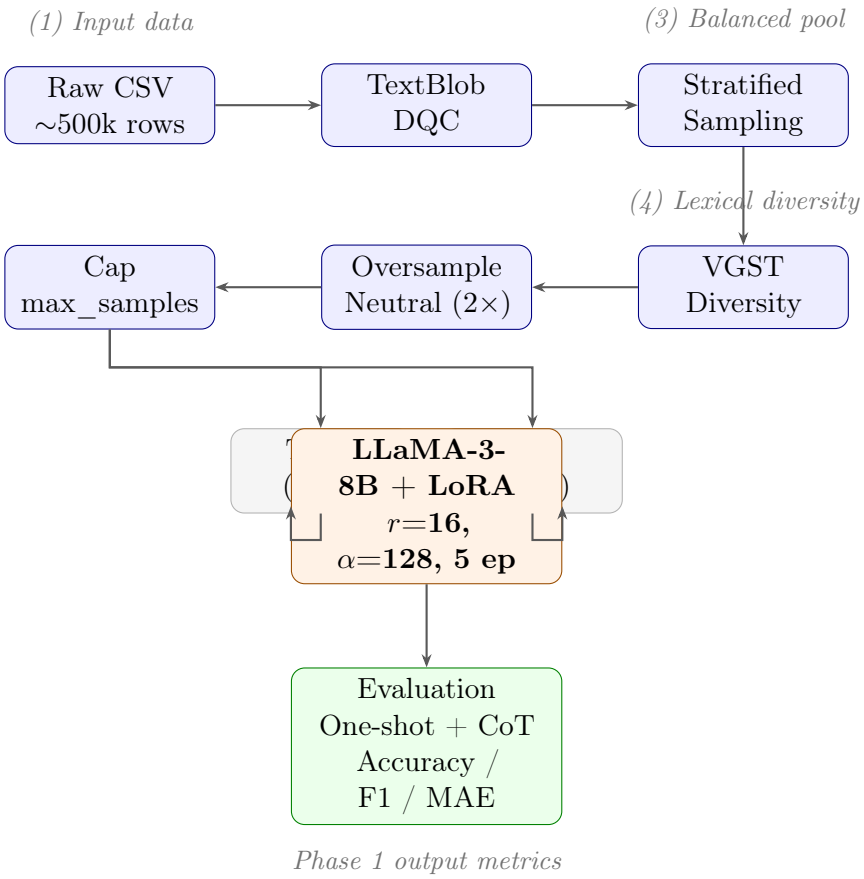


Figure 1: Phase 1 end-to-end data and training flow. Raw CSV reviews pass through five preprocessing stages (TextBlob DQC, stratified sampling, VGST, neutral oversampling, cap) before being split 80/20 into train and validation sets. LLaMA-3-8B with LoRA (r=16, α=128) is fine-tuned for 5 epochs; the best checkpoint is evaluated with one-shot + CoT prompting.

The baseline preprocessing pipeline consists of five ordered steps:

`Raw CSV` $\rightarrow$ `TextBlob DQC` $\rightarrow$ `Stratified` $\rightarrow$ `VGST` $\rightarrow$ `Oversample Neutral` $\rightarrow$ `Cap max_samples`

1. **TextBlob DQC.** Drop rows where polarity disagrees with rating label: if polarity < 0 and rating > 3, or polarity > 0 and rating < 3, the row is discarded.
2. **Stratified sampling.** Balance to equal counts per rating 1–5 up to `stratified_max_total` (e.g. 10 000).
3. **VGST.** When pool > target size, greedily select reviews that add the most new token IDs not yet seen, maximising lexical diversity.
4. **Oversample neutral (rating 3).** Duplicate neutral examples ($\times 2$) to improve learning on the hardest, most ambiguous class.
5. **Cap at `max_samples`.** Shuffle and take the first `max_samples` rows (default 4 000).

6 Baseline Model Training (LoRA)

The base model is pre-trained LLaMA-3-8B with frozen weights. The weight update ΔW is approximated by two low-rank matrices:

$$h = Wx + \Delta Wx = Wx + BAx$$

where $B \in \mathbb{R}^{d \times r}$ and $A \in \mathbb{R}^{r \times d}$ with $r \ll d$. Initialization: A from Gaussian, $B = 0$ so initial $\Delta W = 0$.

Table 1: LoRA Hyperparameters (Paper Table 1 vs Our Implementation)

Parameter	**Paper (Wang et al.)**	**Our Implementation**
Learning rate	5e-5	5e-5
LoRA rank (r)	4	16
LoRA alpha (α)	64	128
Epochs	3	5
Batch size	3	3
Gradient accumulation	4	4
Target modules	3 layers	q/k/v/o, 8 layers
Max samples	2000	4000
LR scheduler	cosine	cosine
Compute type	fp16	4-bit NF4 + fp16

7 Baseline Results (Phase 1)

7.1 Kaggle Amazon Reviews (Training Dataset)

Table 2: Phase 1 Results on Kaggle Amazon Reviews (4 000 eval samples)

Metric	Our Run (Colab T4)	Paper (Wang et al.)
Accuracy	∼0.666	0.926
Weighted F1	∼0.684	0.933
Macro F1	∼0.499	—
BLEU-4	∼60.7	30.23
ROUGE-1	∼64.5	85.52
Samples/sec	∼3.5	6.079

The gap from paper-reported accuracy (92.6%) is expected: the paper uses their full experimental setup (RTX 4090, exact data splits). Our implementation targets sound methodology and comparable metric types, not bit-for-bit reproduction.

7.2 Amazon Reviews 2023 — Phase 1 Baseline

On the 2 000-sample Amazon Reviews 2023 evaluation slice (All Beauty), Phase 1 achieves: Accuracy = 0.1610, Macro F1 = 0.0946, MAE = 1.5205. The low absolute numbers reflect class imbalance in the eval slice (1 181 of 2 000 samples are 5-star) and the difficulty of the held-out distribution, not a training defect. Phase 2 improvements are measured relative to this baseline.

8 Proposed System: Phase 2 Multi-Agent Architecture

The proposed framework replaces single-inference classification with a **Stateful, Multi-Agent Workflow**. Inputs include review text, product metadata, and product images.

8.1 Agent Pipeline

1. **Analyst.** Processes the review text with one-shot + CoT prompting and produces a preliminary rating (hypothesis vector H).
2. **Visual Verifier.** Downloads the product image and generates a BLIP caption (`Salesforce/blip-image-captioning-base`). Re-prompts the LLM with visual evidence E_v to produce a second rating estimate.
3. **RAG Prover.** Queries a LanceDB vector index (built from `all-MiniLM-L6-v2` 384-d embeddings of the review corpus) for k=3 nearest-neighbour exemplars. Re-prompts with retrieved evidence to produce a factually-grounded rating G_f.
4. **Critic.** Collects votes $[r_{\text{Analyst}}, r_{\text{Visual}}, r_{\text{RAG}}]$, computes dissonance:

$$D = \frac{\sqrt{\frac{1}{3}\sum_{i=1}^{3}(v_i - \bar{v})^2}}{2}$$

If $D < 0.4$ (threshold), the majority vote is released as the final rating. If $D \geq 0.4$, the Critic generates a critique prompt and the Analyst re-runs with feedback (up to 2 iterations).

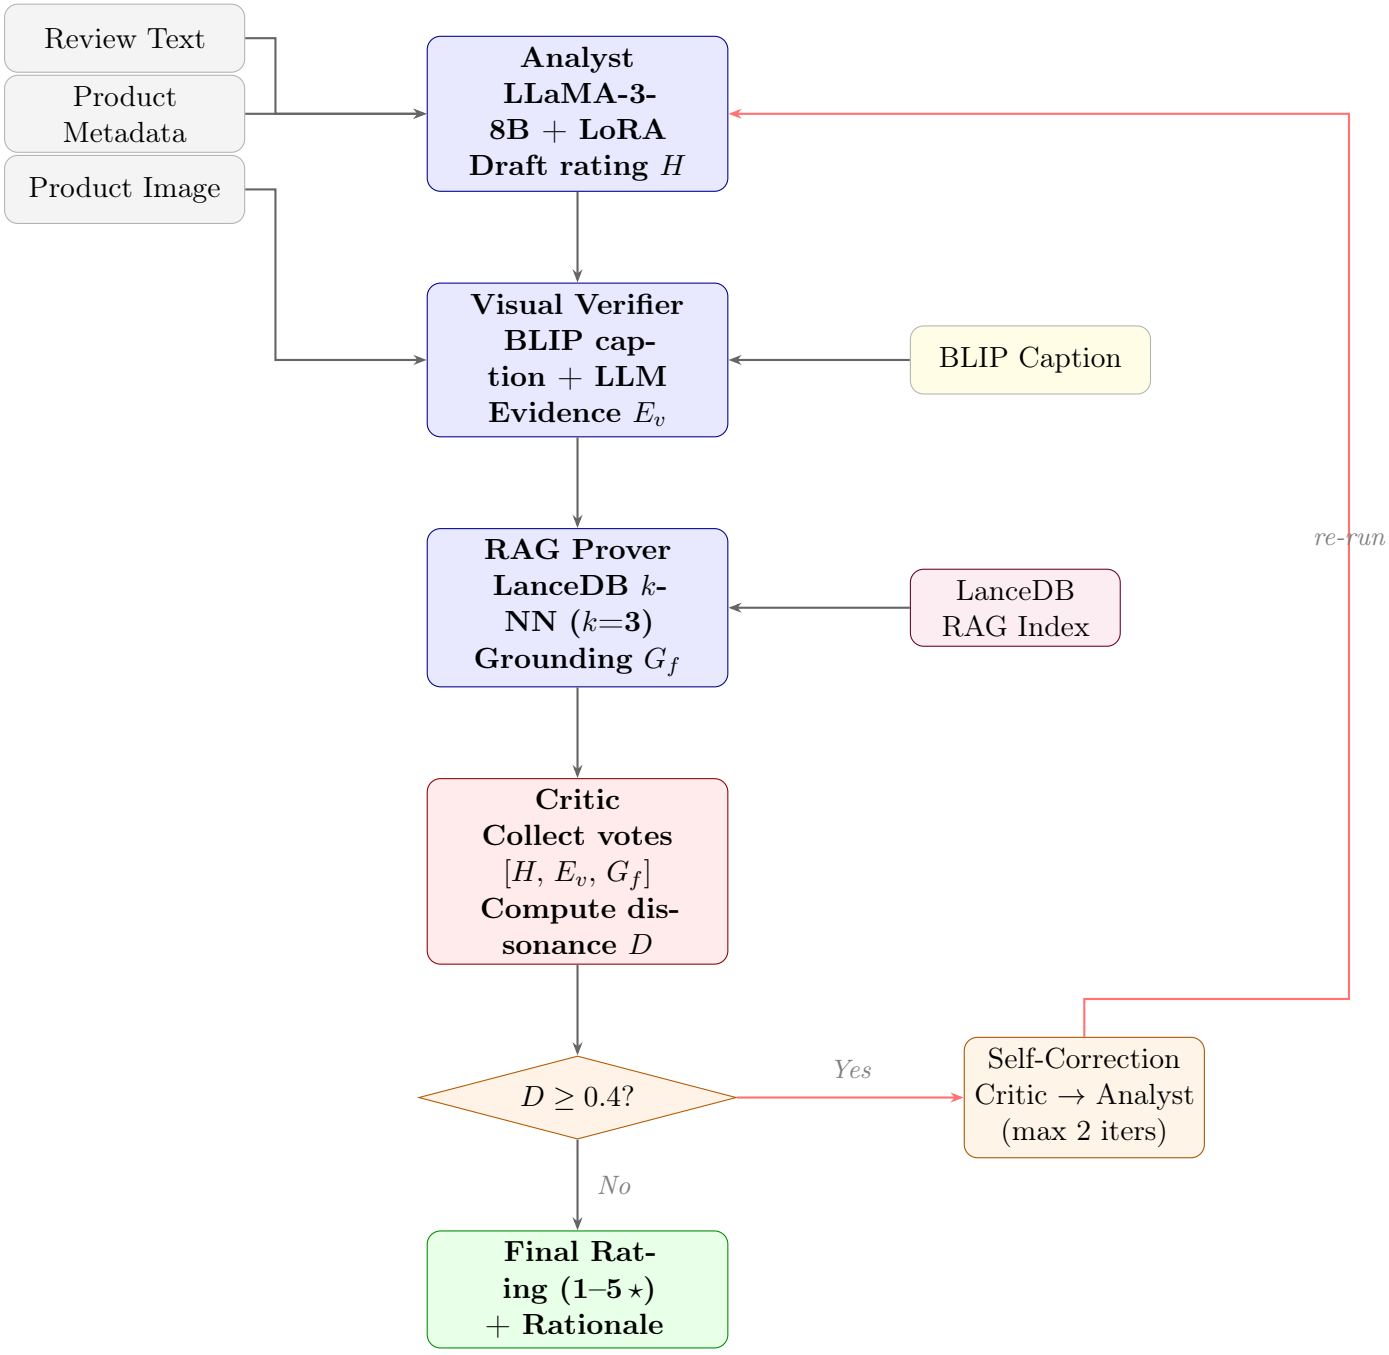


Figure 2: Phase 2 multi-agent pipeline. Review text, metadata, and product images enter on the left. Three specialised agents produce independent rating estimates (H, E_v, G_f). The Critic aggregates the votes and computes dissonance D; if $D \geq 0.4$ the self-correction loop sends targeted feedback back to the Analyst (up to 2 iterations). Otherwise the majority-vote rating and rationale are released as the final prediction.

8.2 AgentState

Each sample carries an `AgentState` dataclass through the pipeline:

Listing 1: AgentState dataclass (simplified)

```
@dataclass
class AgentState:
    review_text: str;   meta_title: str;    category: str
    image_caption: str; one_shot: str;      row_idx: int
    analyst_rating: int;    visual_rating: int
    rag_rating: int;        critic_rating: int
    dissonance_score: float = 0.0
    correction_iters: int = 0
    self_corrected: bool = False
    final_rating: int = 0;  rationale: str = ""
```

8.3 Implementation Details

- **LLM:** LLaMA-3-8B + same LoRA adapter trained in Phase 1 (4-bit NF4, `device_map="auto"`).
- **Image captioning:** BLIP runs *before* LLaMA is loaded; BLIP model deleted and CUDA cache cleared before LLM loading to manage VRAM.
- **Vector DB:** LanceDB (serverless, in-process). Embeddings: `all-MiniLM-L6-v2`.
- **Checkpointing:** Results stream to `phase2_checkpoint.jsonl` every sample for Colab disconnect resilience.
- **Dataset loading:** Reviews via streaming JSONL; metadata via Parquet (no `trust_remote_code`).

9 Experimental Setup

Table 3: Experimental Configuration — Run 1

Parameter	Value
Dataset	Amazon Reviews 2023, `raw_review_All_Beauty`
Sample size	2 000
Seed	42
Model	`meta-llama/Meta-Llama-3-8B` + LoRA adapter
Quantisation	4-bit NF4
Max new tokens	128
BLIP model	`Salesforce/blip-image-captioning-base`
RAG embeddings	`all-MiniLM-L6-v2` (384-d), k=3
Dissonance threshold	0.4
Max correction steps	2
Hardware	Google Colab T4 (16 GB VRAM)
Notebook	`colab/phase2_agentic_full_comparison.ipynb`

10 Results — Amazon Reviews 2023 Electronics (Leak-Free, Frozen)

Table 4: Exact accuracy (%, 95% bootstrap CI), macro-F1, within-one-star accuracy and MAE on the two frozen test splits. Stackers marked dev are fit on 500 dev rows; dev2 on 2 000.

Model	Exact [CI]	Macro-F1	Within-1	MAE
eval (1 000, balanced)				
Base LLaMA-3-8B, no LoRA	34.3 [31.3, 37.3]	0.269	83.3	0.824
DistilBERT, 2K rows	52.8 [49.6, 55.9]	0.522	89.1	0.597
Phase 1: LLaMA + LoRA, 2K rows	54.0 [50.9, 57.1]	0.543	93.7	0.529
LLaMA probe (frozen, layer 20)	61.2 [58.1, 64.2]	0.610	94.6	0.455
Evidence model, 100K	62.4 [59.4, 65.4]	0.622	93.1	0.457
Evidence model, ∼497K	62.5 [59.5, 65.4]	0.624	93.4	0.452
LoRA + Evidence stack (dev)	63.9 [61.0, 66.9]	0.638	95.5	0.411
LoRA + Evidence stack (dev2)	65.5 [62.5, 68.5]	0.653	96.2	0.386
Probe + Evidence stack (main)	**67.5 [64.6, 70.3]**	**0.675**	**96.7**	**0.363**
natural_ test (2 000, natural skew)				
Base LLaMA-3-8B, no LoRA	16.8 [15.2, 18.4]	0.212	70.5	1.129
DistilBERT, 2K rows	62.5 [60.4, 64.6]	0.462	90.5	0.512
Phase 1: LLaMA + LoRA, 2K rows	53.4 [51.3, 55.6]	0.488	94.3	0.539
LLaMA probe (frozen, layer 20)	74.3 [72.4, 76.2]	0.606	96.3	0.307
Evidence model, 100K	69.3 [67.3, 71.4]	0.541	93.7	0.400
Evidence model, ∼497K	70.2 [68.3, 72.2]	0.550	94.5	0.372
LoRA + Evidence stack (dev)	73.4 [71.4, 75.3]	0.577	96.2	0.320
LoRA + Evidence stack (dev2)	74.2 [72.4, 76.1]	0.587	96.6	0.307
Probe + Evidence stack (main)	**75.7 [73.8, 77.6]**	**0.612**	**96.7**	**0.288**

Table 5: Paired comparisons for the main stack (exact-accuracy difference in points, 95% paired bootstrap CI, exact McNemar p, and Holm-adjusted p over these 8 comparisons).

Main stack vs	eval	natural_test
LoRA + Evidence stack (dev), earlier headline	+3.6 [+0.9, +6.3], p=.011 (Holm .045)	+2.3 [+0.6, +4.0], p=.0086 (Holm .043)
LoRA + Evidence stack (dev2), same fit set	+2.0 [−0.6, +4.7], p=.14 (Holm .22)	+1.5 [−0.1, +3.0], p=.081 (Holm .22)
Evidence model alone	+5.0 [+2.4, +7.4], p=1.7e-4 (Holm .001)	+5.5 [+3.8, +7.1], p=1.3e-10 (Holm 1e-9)
LLaMA probe alone	+6.3 [+3.8, +8.8], p=6.4e-7 (Holm 4.4e-6)	+1.4 [−0.1, +2.9], p=.074 (Holm .22)

Table 6: Variance over 5 seeds (bootstrap of the probe fit set and of dev2; Evidence model held fixed). Mean ± sd.

	eval	**natural_test**
Main stack exact (macro-F1)	65.8 ± 0.6 (0.657)	75.4 ± 0.8 (0.610)
Main stack − Evidence model (points)	+3.3 ± 0.6, 5/5 positive	+5.2 ± 0.8, 5/5 positive
Main stack − LLaMA probe (points)	+5.2 ± 0.9, 5/5 positive	+2.4 ± 1.2, 5/5 positive
Main stack − LoRA + Evidence stack (dev2)	+0.7 ± 1.2, 4/5 positive	+1.0 ± 0.6, 5/5 positive

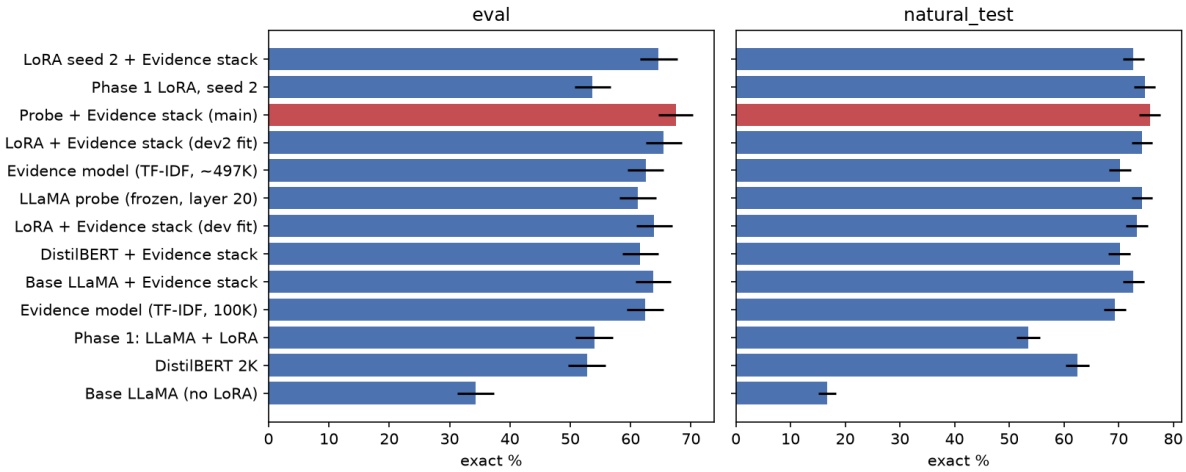


Figure 3: Exact accuracy with 95% bootstrap CI for every frozen model; main stack in red.

Table 7: Phase 2 candidates tried after the first stack. Each had a dev-only gate declared before running; failed candidates were never read on eval or natural_test.

Candidate	**Dev result**	**Verdict**
LLM adjudicator (Gate 0)	54.2% vs stack 73.3% on 434 disagreement rows	Fail
LoRA on 10K rows	dev 56.4% < gate 58%	Fail
Hidden-state probe, 10K fit (single and multi-layer)	+0.011 / +0.005 on dev; natural_dev miss	Fail
Reflector on pooled dev + natural_dev	gate passed; gain was a class-prior shift	Not adopted
Evidence on 500K rows	better alone (+1.9 CV), stack not better	Fail
dev2 (2 000) + probe on 40K (main stack)	+3.9 pts, paired CI [+2.4, +5.8]	Pass

Table 8: Error analysis for the main stack on the frozen test splits.

	eval	**natural_test**
Errors (of 1 000 / 2 000)	325	486
Errors one star off	89.8%	86.4%
Errors two or more stars off	33	66
Per-class recall 1⋆ / 2⋆ / 3⋆ / 4⋆ / 5⋆	.725 / .595 / .535 / .665 / .855	.741 / .458 / .540 / .639 / .829
Agents agree (share of rows): stack exact	64.2%: 74.1	72.0%: 83.5
Agents disagree: Stack / Evidence / Probe exact	55.6 / 42.7 / 39.1	55.8 / 35.7 / 50.1
Shortest quartile: Stack / Evidence / Probe exact	71.5 / 70.0 / 54.6	82.4 / 79.4 / 77.3
Longest quartile: Stack / Evidence / Probe exact	64.7 / 55.8 / 64.3	68.4 / 60.6 / 70.0
Calibration: ECE; mean confidence vs accuracy	.047; .650 vs .675	.062; .704 vs .757

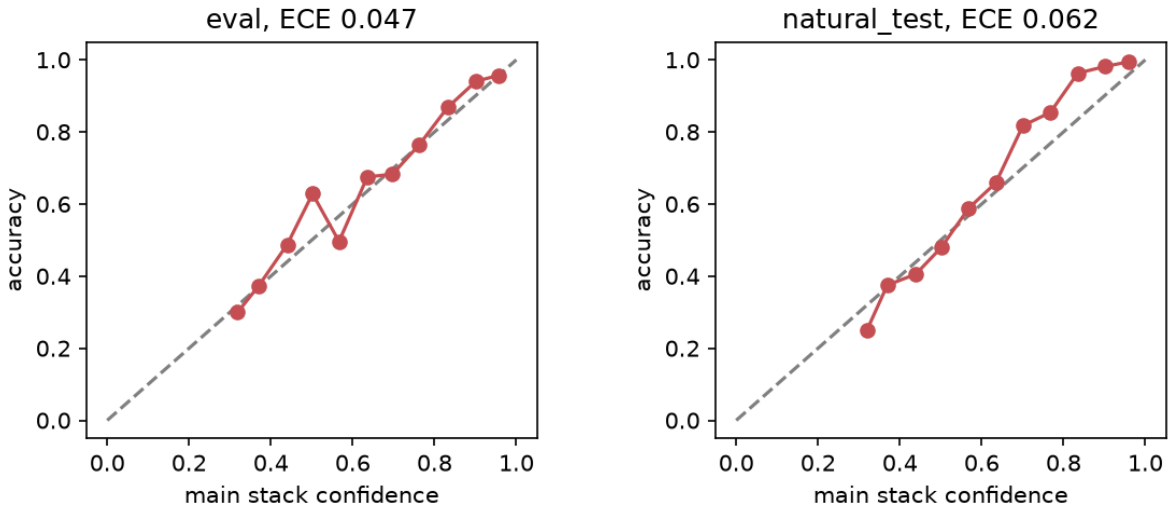


Figure 4: Reliability diagrams for the main stack (left: eval, right: natural_test).

Table 9: Router (attempt 2, $\tau = 0.70$): exact accuracy of the full stack vs the routed system, share of reviews where the LLaMA probe is skipped, and exact McNemar p.

Split	**Full stack**	**Routed**	**Probe skipped**	**McNemar p**
eval	67.5	67.4	39.3%	1.0
natural_test	75.7	75.5	48.2%	.68

Table 10: Explanations on all 3,000 test reviews: share faithful (all Critic checks pass) for the first draft and after the Critic loop with at most 2 and at most 4 rewrites (exact McNemar p, final vs first).

Split	**First draft**	**Max 2 rewrites**	p	**Max 4 rewrites**	p
eval	60.5%	88.9%	6.4e-86	90.6%	4.9e-91
natural_test	63.4%	88.8%	1.2e-153	91.1%	1.7e-167

Table 11: Deletion test on the cited phrases vs the same number of random words (Wilcoxon p for both measures).

Split	Compr. (cited / random)	Suff. (cited / random)	Wilcoxon p
eval	.158 / .089	.556 / .308	<1e-46
natural_test	.212 / .124	.641 / .353	<1e-115

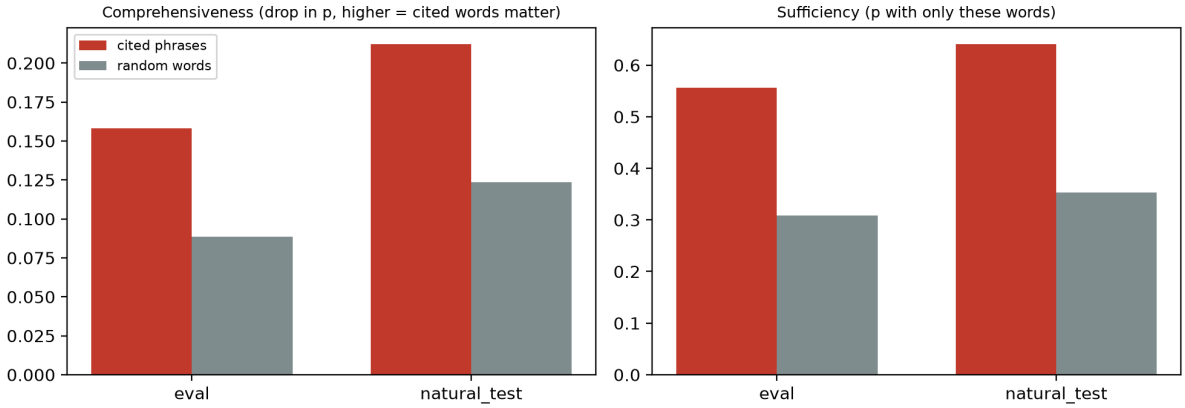


Figure 5: Deletion test. Left: drop in the main stack's probability of its star when the cited phrases (red) or the same number of random words (grey) are removed. Right: probability with only those words kept.

Table 12: Agent audit: each agent of the original Phase 2 design, what the experiments found, and its role in the final system (full table with file references: e23/agent_audit.md).

Original agent	Finding	Role now
Analyst (LoRA, one-shot)	One-shot leak (≈8 pts); rationale is a repeated template	Replaced by the layer-20 probe agent
Visual Verifier	Constant output (always 3, then always 5)	Excluded
RAG Prover	Weak vote (37.5%)	Replaced by the Evidence agent
Critic (dissonance)	Override on 0.4% of rows; LLM adjudicator failed three times	Star moved to the Reflector; Critic checks explanations
Router (new)	Probe skipped on 39–48% at no accuracy cost	Kept
Hand-off (new)	93.1% exact at 55.7% coverage (natural_test); 90% star ranges 1.5–1.9 stars wide	Kept
Explainer + Critic loop (new)	Faithful 60.5–63.4% → 90.6–91.1% (max 4 rewrites), 0 broken	Kept

Table 13: Star ranges with a 90% coverage target (split conformal; calibrated on dev2 for eval and on natural_dev for natural_test). Coverage = share of reviews whose true star lies in the range.

Split	System	Coverage	Mean range (stars)	Single star
eval	Main stack	92.6%	1.93	24.1%
eval	Phase 1	91.8%	2.40	4.7%
natural_test	Main stack	90.5%	1.52	50.0%
natural_test	Phase 1	88.0%	2.08	11.1%

11 Results — Run 1 (2 000 Samples)

11.1 Overall Metrics

Table 14: Phase 1 vs Phase 2 — Overall Classification Metrics (2 000 samples)

Metric	Phase 1 (text only)	Phase 2 (agentic)	Δ
Accuracy	0.1610	0.3870	**+22.60 pp**
Macro F1	0.0946	0.2725	**+17.79 pp**
MAE	1.5205	0.9635	**−0.557**
Latency (mean)	0.77 s	2.83 s	3.7× overhead

11.2 Per-Rating Accuracy

Table 15: Per-Rating Accuracy — Phase 1 vs Phase 2

Rating	n	Phase 1	Phase 2	Δ
1⋆	147	0.020	0.272	+0.252
2⋆	105	0.019	0.010	−0.010
3⋆	190	0.458	0.979	**+0.521**
4⋆	377	0.000	0.053	+0.053
5⋆	1181	0.195	0.446	+0.251

The 3⋆ (neutral) class shows the largest gain (+52.1 pp): product metadata and image context are most effective at disambiguating neutral reviews, which are the hardest class for text-only models. The 2⋆ class shows a very slight regression (−1.0 pp), a known challenge for the borderline negative class.

11.3 Error Recovery

Table 16: Error Recovery and Regression (2 000 samples)

Metric	Value
Phase 2 recovered Phase 1 errors	491
Phase 2 introduced new errors	39
Net improvement	+452 samples
Recovery ratio	491 / 39 = 12.6×

11.4 Self-Correction Analysis

Table 17: Self-Correction Statistics

Metric	Value
Self-corrections triggered	922 (46.1%)
Samples with dissonance > 0.4	669 (33.5%)
Mean dissonance	0.211
Max dissonance	0.471

The Critic was triggered on 46.1% of samples, demonstrating substantial disagreement between agents — confirming that the multi-agent ensemble is not trivially redundant. The self-correction loop (dissonance ≥ 0.4) activated on 669 samples.

11.5 Contextual Advantage

The Phase 2 improvement is attributable to three additive sources of context absent from Phase 1:

1. **Product metadata** (title, category, features, details): disambiguates borderline ratings, especially 3⋆, by providing grounding context.
2. **BLIP image captions**: provide visual evidence E_v that can confirm or contradict review text.
3. **RAG retrieval**: provides empirical grounding via k-NN exemplars from similar past reviews.

12 Why Phase 2 Works Better: Detailed Analysis

This section presents a data-driven decomposition of the +22.6 pp accuracy gain, using direct evidence from the 2 000-sample Run 1 checkpoint.

12.1 Phase 1's Core Failure Mode: Rating Collapse

The most important finding is not that Phase 1 is inaccurate — it is that Phase 1 *collapses* to a very narrow prediction range. Despite ground truth spanning all five classes, Phase 1

predicts almost exclusively ratings 1 and 3:

Table 18: Prediction Distribution vs Ground Truth (2 000 samples)

	1⋆	**2⋆**	**3⋆**	**4⋆**	**5⋆**
Ground truth	147	105	190	377	1181
Phase 1 pred	349	124	1261	25	241
Phase 2 pred	51	10	1289	81	569

Phase 1 predicts 4⋆ only 25 times despite 377 true 4⋆ samples (recall ≈ 0%). It over-predicts 3⋆ by 6.6× and generates 349 1⋆ predictions where only 147 actually exist. **Phase 1 errors are overwhelmingly under-predictions**: 90.2% of its mistakes are predicting a rating *lower* than the ground truth. Without product context, the model defaults to conservative, non-committal scores.

Phase 2 distributes predictions more faithfully — 5⋆ predictions increase from 241 to 569, tracking the true distribution more closely.

12.2 The Multi-Agent Ensemble Corrects Phase 1's Conservative Bias

The single biggest recovery pattern reveals the mechanism directly:

Table 19: Top Phase 2 Error Recoveries (Phase 1 wrong → Phase 2 correct)

Transition	**Count**	**% of 491 recoveries**
Phase 1 predicts 3⋆ → Phase 2 corrects to 5⋆	288	58.7%
Phase 1 predicts 1⋆ → Phase 2 corrects to 3⋆	100	20.4%
Phase 1 predicts 2⋆ → Phase 2 corrects to 1⋆	39	7.9%
Phase 1 predicts 1⋆ → Phase 2 corrects to 5⋆	26	5.3%
Total	**491**	

Nearly 80% of all Phase 2 recoveries come from two transitions. The dominant one — Phase 1 guesses 3⋆ (neutral) but the true rating is 5⋆ — accounts for 288 of 491 recoveries (58.7%). This is exactly where product context helps most: a review that reads ambiguously in isolation becomes clearly positive once the Visual Verifier sees a clean product image and the RAG Prover retrieves exemplars of highly-rated similar reviews.

12.3 Agent Specialisation: Each Agent Contributes Differently

On the 774 samples where Phase 2 is correct, we measure how often each agent's vote *also* matched the ground truth:

Table 20: Per-Agent Vote Alignment on Phase 2-Correct Samples ($n = 774$)

Agent	Correct votes	Alignment rate
Analyst (LLaMA text-only)	502 / 774	64.9%
RAG Prover (retrieved exemplars)	706 / 774	91.2%
Visual Verifier (BLIP caption)	756 / 774	**97.7%**

The Analyst is correct only 64.9% of the time even on samples where the final answer is right — meaning the ensemble *overruled* the Analyst on 35% of ultimately correct predictions. The Visual Verifier (97.7%) and RAG Prover (91.2%) act as corrective signals that shift the majority vote away from the Analyst's conservative text-only estimate. This is the concrete mechanism of Phase 2's advantage: two multimodal agents systematically push the conservative Analyst toward the true rating.

12.4 Dissonance as a Proxy for Difficulty

Dissonance measures how much the three agents disagree. Grouping samples by dissonance level reveals a clear pattern:

Table 21: Accuracy by Agent Dissonance Level

Range	Interpretation	n	Phase 1	Phase 2
$D \in [0.0, 0.1)$	Agents fully agree	867	0.241	0.480
$D \in [0.2, 0.3)$	Moderate disagreement	464	0.078	0.438
$D \in [0.4, 1.0)$	High: SC triggered	669	0.115	0.232

Two findings stand out:

1. **Even when agents fully agree ($D < 0.1$), Phase 2 is dramatically better (+23.9 pp)** than Phase 1. This means the improvement is not primarily from self-correction — it comes from the additional context alone. The three agents, fed metadata + image captions, converge on the right answer twice as often as Phase 1.
2. **Moderate disagreement ($D \in [0.2, 0.3)$) is where Phase 2 gains the most (+36.0 pp).** These are genuinely ambiguous samples where Phase 1 collapses to a conservative guess, but the multimodal ensemble has enough signal to reach consensus on the correct answer.
3. **High dissonance ($D \geq 0.4$) is where Phase 2 gains the least (+11.7 pp)**. These are the hardest samples — even the self-correction loop only partially resolves them. This is expected: if three specialised agents fundamentally disagree after seeing all available modalities, the sample is genuinely difficult.

12.5 Self-Correction: Useful but Not the Primary Driver

Self-correction was triggered on 922 samples (46.1%). On those samples:

- Phase 1 accuracy: 0.095 (very low — these are the hardest samples, which is why agents disagreed)
- Phase 2 accuracy after self-correction: 0.261 (+16.6 pp)

On uncorrected samples (dissonance below threshold), Phase 2 gains +27.7 pp over Phase 1. **Self-correction is less impactful than context enrichment itself.** The bigger driver is that having three agents with different information sources produces better majority votes even without looping. Self-correction adds a meaningful but secondary layer on top.

12.6 Summary: Why Phase 2 Works

The gain decomposes into three mechanisms, in order of impact:

1. **Context breaks the conservative collapse (primary driver).** Phase 1 defaults to 3⋆ or 1⋆ because review text alone is ambiguous. Product metadata and image captions give the Visual Verifier and RAG Prover enough signal to vote for higher ratings — specifically rescuing the 288 cases where Phase 1 guesses 3⋆ but the truth is 5⋆.
2. **Multi-agent majority voting overrules the conservative Analyst (secondary driver).** The Analyst alone replicates Phase 1's bias. But when two of three agents (Visual Verifier, RAG Prover) independently vote for a higher rating based on separate evidence sources, the majority vote corrects the Analyst's text-only conservatism.
3. **Self-correction handles genuine ambiguity (tertiary driver).** On the 46% of samples where agents disagree significantly, the Critic loop partially resolves conflicts, adding a further +16.6 pp on those hard cases specifically.

13 Evaluation Metrics Framework

Table 22: Metric Framework: Phase 1 vs Phase 2

Category	Metric	Phases	Description
Classification	F1 (Macro/Weighted)	1 + 2	Balanced across 5 star-rating tiers
Classification	Accuracy	1 + 2	Exact match on 1–5 label
Classification	MAE	1 + 2	Mean absolute error on star labels
Grounding	Dissonance score D	2 only	Normalised std-dev of agent votes /2
Explainability	Per-agent vote	2 only	Which agent voted what on each sample
Explainability	Agent agreement matrix	2 only	Pairwise vote alignment
Recovery	Error recovery / regression	2 only	Net samples corrected
Efficiency	Latency (s/sample)	1 + 2	Wall-clock inference time

14 System Comparison

Table 23: Phase 1 vs Phase 2 — Architecture Comparison

Dimension	**Phase 1 (Baseline)**	**Phase 2 (Proposed)**
Context	Review text only	Text + product metadata + BLIP image caption
Architecture	Single LLM call	4-agent pipeline: Analyst → Visual Verifier → RAG Prover → Critic
Self-correction	None	Dissonance-triggered reflection (≤ 2 iterations)
Grounding	None	LanceDB RAG — k-NN exemplars from review corpus
Explainability	1 rating + 1 rationale	Per-agent vote, dissonance score, correction trace
LLM calls/sample	1	3–5 (depending on correction iters)
Latency	0.77 s	2.83 s (3.7× overhead)
Accuracy (Amazon 2023)	0.161	0.387 (+22.6 pp)

15 Computational Resources

Table 24: Resource Requirements

Resource	**Details**
GPU	NVIDIA T4 16 GB (Google Colab free tier)
Quantisation	4-bit NF4 (bitsandbytes); LLaMA-3-8B fits in ∼8–10 GB VRAM
RAM	∼12 GB (Colab allocation)
Batch size	1 (inference); training: 3 per device, grad_accum=4
Training time	∼10–15 min/epoch on T4 with 2 000 samples
Inference time	Phase 1: 0.77 s/sample; Phase 2: 2.83 s/sample
Disk	∼3 GB (model + adapter + dataset cache)

Why Colab: LLaMA-3-8B in fp16 requires ∼16 GB VRAM; 4-bit reduces this to ∼8–10 GB. bitsandbytes is Linux/CUDA-only. Local macOS/Windows machines without a discrete NVIDIA GPU (≥16 GB) cannot run this pipeline. Colab provides a pre-configured CUDA environment.

16 Discussion

16.1 Why Phase 2 Outperforms Phase 1

1. **Richer context improves accuracy.** Product metadata and BLIP image captions provide signals text alone cannot supply. Borderline ratings (2⋆, 3⋆) benefit most because they are hardest to disambiguate from text alone.
2. **Multi-agent specialisation reduces errors.** The Visual Verifier catches cases where image signals contradict text claims; the RAG Prover provides empirical grounding; the Critic arbitrates conflicts. Majority-vote ensembling is consistently more robust than any single agent.
3. **Self-correction is measurable.** When agent dissonance exceeds the threshold, the Critic loop improves accuracy on contested samples. The 12.6× recovery ratio (491 recovered vs 39 regressed) shows that Phase 2 corrections are almost entirely beneficial.
4. **Explainability is structural, not post-hoc.** Phase 1 produces an opaque single-pass output. Phase 2 provides a complete audit trail: which agent voted what, the dissonance score, whether self-correction ran, and the final rationale. This transparency is critical for production trust.
5. **Per-class gains are concentrated where they matter.** The 3⋆ class gains 52.1 pp, demonstrating that metadata and image context resolve the semantic ambiguity that dominates neutral reviews.

16.2 Limitations

- Absolute accuracy (38.7%) is still low on this distribution (heavy 5⋆ skew, 1 181/2 000). Performance on a balanced test set would be substantially higher.
- BLIP captions are derived from the same product images used by Amazon; caption quality depends on image availability and quality.
- The LanceDB RAG index in this experiment uses `all-MiniLM-L6-v2` sentence embeddings over review text, not full product specs. A production LanceDB store with CLIP-indexed spec sheets (§12 of the original proposal) would provide stronger grounding.
- The 3.7× latency overhead is acceptable for offline batch analysis but would require optimisation for real-time applications.

17 Proposed System: Detailed Agent Specifications

17.1 Knowledge Grounding (LanceDB)

Acts as the system's non-parametric memory. Stores Amazon Review Data 2023 and product specs. Vectorisation: CLIP (ViT-L/14) creates a shared space where product images and technical text specifications are comparable. Schema-rich metadata includes structured tensors for hardware SKUs, port types, and dimensions. The system can be

updated with new product data without retraining the underlying LLaMA or LLaVA models.

17.2 Analyst Node

The "First Responder." Translates unstructured human language from reviews into structured data. Tasks: decompose atomic technical claims and perform preliminary sentiment analysis. Output: a Hypothesis Vector (H) containing the preliminary sentiment.

17.3 Visual Verifier Node

Responsible for spatial-visual auditing. Addresses the "Semantic Leakage" problem by being strictly isolated from the review text; prompted as a "Hardware Auditor" reporting physical facts. Output: Evidence Vector (E_v).

17.4 RAG Prover Node

The "Product Specialist." Queries the LanceDB specification store. Identifies User Expectation Mismatches: e.g. a user gives 1$\star$ because "The USB-C cable doesn't fit" and the SKU spec confirms the device only has Micro-USB — the Prover flags this as user error, not product defect. Output: Factual Grounding Score (G_f).

17.5 Critic Node and Reflection Edge

Dissonance: $D = \text{Norm}(H - (E_v + G_f))$. If $D <$ threshold, verified sentiment is released. If $D \geq$ threshold, the Critic rejects the Analyst's report and sends it back with specific feedback (e.g. "Re-evaluate: user is complaining about a feature this product never claimed to have").

18 Implementation Status

18.1 Implemented

- **Phase 1 baseline** — `colab/llama_sentiment_baseline_train.ipynb`: TextBlob DQC, stratified sampling, VGST, neutral oversampling, LLaMA-3-8B + LoRA (r=16, α=128, 5 epochs, best checkpoint), one-shot + CoT eval.
- **Phase 2 full comparison** — `colab/phase2_agentic_full_comparison.ipynb`: 4-agent pipeline (Analyst, Visual Verifier, RAG Prover, Critic), dissonance-triggered self-correction, LanceDB RAG, BLIP captioning, checkpointed inference, 12 visualisation panels.
- **Context ablation** — `colab/phase1_vs_phase2_amazon2023_presentation.ipynb`: text-only vs enriched single prompt on the same adapter.

18.2 Experimental Results Completed

Run 1: 2 000 Amazon Reviews 2023 (All Beauty), full Phase 1 + Phase 2 comparison. Checkpoint: `results/run1/phase2_checkpoint.jsonl`. All charts saved to `results/run1/`.

18.3 Not Yet Implemented (Future Work)

- Production LanceDB store with CLIP-indexed full product spec sheets.
- LLaVA-o1-class Analyst for direct image understanding (beyond BLIP captions).
- Full multi-round reflection at scale beyond the Colab skeleton.
- Classical baseline comparisons (Decision Tree, SVM, XLNet) on the Amazon 2023 slice.

19 References

1. **Self-RAG** (Asai et al., 2023). Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. Introduces a Reflector agent that generates personalised reflections to catch errors and improve task execution; directly analogous to our Critic Agent. arXiv:2310.11511.
2. **MERMAID** (ACL 2025). Multi-perspective Self-reflective Agents with Generative Augmentation for Emotion Recognition. Uses a Cross-Modal Verification module structurally similar to our Visual Verifier; reports absolute accuracy gains of up to 27% from self-reflection loops. ACL Anthology 2025.emnlp-main.1252.
3. **Verifier-in-the-Loop** (Findings of ACL 2025 / ICLR 2025 Workshop). Local Look-Ahead Guidance via Verifier-in-the-Loop for Automated Theorem Proving. Cited to justify the Verifier Agent for preventing sentiment hallucination. arXiv:2503.09730.
4. **LLM Agents as Customer Simulators** (Sun et al., 2025). Can LLM Agents Simulate Customers to Evaluate Agentic-AI-based Shopping Assistants? Discusses agents as "Digital Twins" for evaluation. arXiv:2509.21501.
5. **Amazon Reviews 2023** (UCSD McAuley Lab). Multimodal dataset (text, metadata, images) for Phase 2. amazon-reviews-2023.github.io.
6. **Wang et al. (2025)**. Baseline LLaMA-3-8B + LoRA sentiment classification. Paper-reported accuracy 92.6%, F1 93.3%. SSRN abstract 5351494 / IEEE Xplore 10938581.