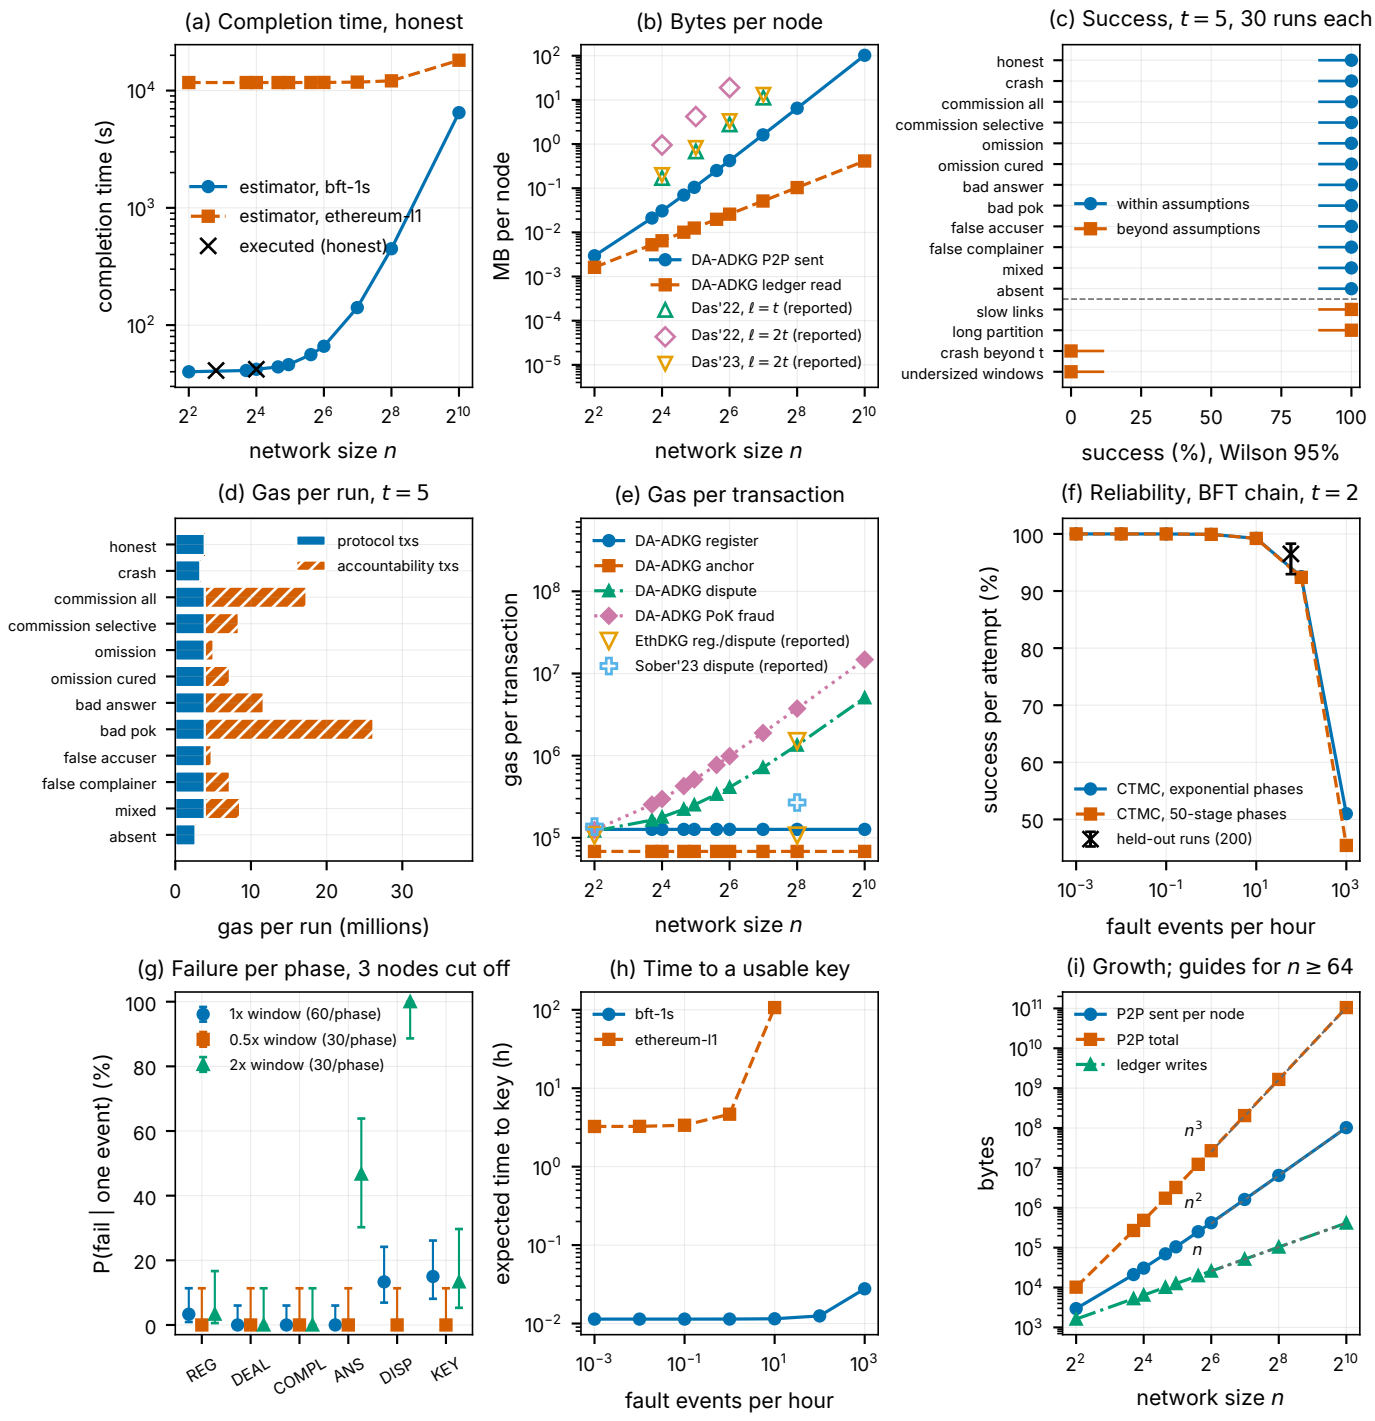
(a) Completion time, honest
completion time (s)
network size n
estimator, bft-1s
estimator, ethereum-l1
executed (honest)
(b) Bytes per node
MB per node
network size n
DA-ADKG P2P sent
DA-ADKG ledger read
Das'22, $\ell = t$ (reported)
Das'22, $\ell = 2t$ (reported)
Das'23, $\ell = 2t$ (reported)
(c) Success, $t = 5$, 30 runs each
honest
crash
commission all
commission selective
omission
omission cured
bad answer
bad pok
false accuser
false complainer
mixed
absent
slow links
long partition
crash beyond t
undersized windows
within assumptions
beyond assumptions
success (%), Wilson 95%
(d) Gas per run, $t = 5$
protocol txs
accountability txs
gas per run (millions)
(e) Gas per transaction
gas per transaction
network size n
DA-ADKG register
DA-ADKG anchor
DA-ADKG dispute
DA-ADKG PoK fraud
EthDKG reg./dispute (reported)
Sober'23 dispute (reported)
(f) Reliability, BFT chain, $t = 2$
success per attempt (%)
fault events per hour
CTMC, exponential phases
CTMC, 50-stage phases
held-out runs (200)
(g) Failure per phase, 3 nodes cut off
P(fail | one event) (%)
1x window (60/phase)
0.5x window (30/phase)
2x window (30/phase)
REG
DEAL
COMPL
ANS
DISP
KEY
(h) Time to a usable key
expected time to key (h)
fault events per hour
bft-1s
ethereum-l1
(i) Growth; guides for $n \geq 64$
bytes
network size n
P2P sent per node
P2P total
ledger writes
n^3
n^2
n