

Parent API

11 Plus

Map API Key: AlzaSyDyhkXCXAY_WqqgEMPvIVVI8hnq_-A7ozl

Base URLs

Auth Base URL: <https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/>

Quiz Base URL: <https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/>

Parent Registration Flow

Register → Verify Email → Referral → Login

I have read & agreed to 11 Plus [Terms and Conditions](#) and [Privacy Policy](#).

I consent to receiving promotional offers and updates from 11 Plus.

1. Register

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/register	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com", "firstName": "Test", "lastName": "User", "mobileNumber": "+447412345678", "password": "Test@123", "subscribed": true, "platform": "iOS/Android" }</pre>	<pre>responseCode: 1 / 2 / 0 responseStatus: SUCCESS / FAILED responseMessage: String 0 - User Already Exist 2 - User Exist but Email Not Verified 1 - User Registered</pre>

2. Verify Email

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/verifyEmail	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com", "code": "597376" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

3. Validate Referral

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/validateReferral	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com", "referral": "62PLE6H94OL" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

4. Login

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/login	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com", "password": "Test@123" }</pre>	<pre>responseCode: 1 / 0 / 2 responseStatus: SUCCESS / FAILED responseMessage: String token: String</pre>

5. Get LoggedIn User

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/currentUser	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
		<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String user: JSON Object</pre>

6. Complete / Update User Profile

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/updateProfile	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{</pre>	<pre>responseCode: 1 / 0</pre>

	<pre> "userID": "my.mail@email.com", "firstName": "Test", "lastName": "User", "mobileNumber": "+447412345678", "dob": "1975-01-01", "gender": "Male", "completed": true, "rewardPoints": 100, "address": { "addressLine": "64 Blandford Road South", "country": "England", "latitude": 51.501759, "longitude": -0.563742, "postcode": "SL3 7RY" } </pre>	<pre> responseStatus: SUCCESS / FAILED responseMessage: String </pre>
--	--	---

7. Change Password

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/changePassword	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my.mail@email.com", "password": "Test@123", "newPassword": "Test123\$" } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String </pre>

8. Generate Code To Reset Password

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/generateCode	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "email": "my.mail@email.com", "reason": "password" } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String Code: For Testing </pre>

9. Reset Password

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/resetPassword	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com", "code": "574295", "newPassword": "Test123\$" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

10. Delete User Account

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/delete/account	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
		<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

11. Re-Activate User Account

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/activate/account	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "email": "my.mail@email.com" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

Child API

Manage Child APIs

All Child Related APIs

1. Check for Unique Username

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/unique	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	<code>username</code> <code>childID</code> (remove)	<code>responseCode: 1 / 0</code> <code>responseStatus: SUCCESS / FAILED</code> <code>responseMessage: String</code>

2. Add Child

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/add	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "username": "child-01", "firstName": "First", "lastName": "Child", "dob": "2017-01-01", "gender": "Female", "password": "Test@123" }</pre>	<code>responseCode: 1 / 0</code> <code>responseStatus: SUCCESS / FAILED</code> <code>responseMessage: String</code> <code>childID: uuid</code>

3. Children (X Not in use anymore) - Use Parent Dashboard

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/children	
	Authorization Header: Bearer Token	
		RESPONSE (Header Status Code 200)
		<code>responseCode: 1 / 0</code>

		<pre> responseStatus: SUCCESS / FAILED responseMessage: String children: [JSON Object] </pre>
--	--	---

4. Get Child Profile (X Not in use anymore)

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	<pre> childID </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String child: JSON Object </pre>

5. Update Child

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/update	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my.mail@email.com", "childID": "child-01", "firstName": "First", "lastName": "Child", "dob": "2017-01-01", "gender": "Female" } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String </pre>

6. Archive / Unarchive Child

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/archive	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my.mail@email.com", "childID": "child-01", </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED </pre>

	<pre>"active": true / false }</pre>	<pre>responseMessage: String</pre>
--	-------------------------------------	------------------------------------

7. Remove Child Permanently

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/remove	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "childID": "child-01", "confirmed": true / false }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

8. Child Login

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/login	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "username": "child-01", "password": "Test@123", "deviceName": "iPad", "deviceID": "uuid" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String token: String childID: child-uuid sessionID: String</pre>

9. Child Logout

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/child/logout	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "childID": "child-01", "sessionID": "session-1234" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

Quiz API

Quiz APIs

Dashboard (Not Subscribed) → Subject → One Free Quiz → Start Quiz

Dashboard (Subscribed) → Subject → Category → Topic → Start Quiz

URL To Access the public image like Profile Pic or Question Images

`https://d1rbn1wov6bp1h.cloudfront.net/${imageKey}`

1. Child Dashboard

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/child/dashboard	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
		<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String child: JSON Object performance: JSON Object subjects: [JSON Object]</pre>

2. Quiz Config

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/config	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	<pre>subject category //optional to fetch categories</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String subject: String categories: [JSON Objects]</pre>

3. Subject Dashboard

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/subject/dashboard	
	Authorization Header: Bearer Token	

	Query String Parameters	RESPONSE (Header Status Code 200)
	subject	responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String subject: JSON Object categories: [JSON Object]

4. Category Dashboard

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/category/dashboard	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	subject category	responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String category: JSON Object topics: [JSON Object]

5. Generate Quiz

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/generate	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "childID": "child-01", "subject": "ENGLISH", "category": "GRAMMAR", "topic": "CLOZE", "quizType": "FREE_QUIZ" }</pre>	responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String quiz: JSON Object
quizType	FREE_QUIZ SUBJECT_MIXED	subject
	CATEGORY_MIXED	subject, category
	PRACTICE_PAPER TEN_MIN_TEST	subject, category, topic

6. Submit Quiz

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/submit	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "quizID": "quiz-01", "childID": "child-01", "timeTaken": 500, "answers": [{ "questionID": "que-01", "childAnswers": ["A"], }] }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String result: JSON Object</pre>

7. Resume Quiz

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/resume	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "quizID": "quiz-01", "childID": "child-01" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String quiz: JSON Object</pre>

8. Review Quiz

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/review	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "quizID": "quiz-01", "childID": "child-01" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String quiz: JSON Object</pre>

9. Retry Quiz

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/retry	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "quizID": "quiz-01", "childID": "child-01" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String quiz: JSON Object</pre>

10. Get Question JSON

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/question	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "s3Key": "english/grammar/tenses/713dd51d-53e3-4f8c-9232-c0a8197c6096. json" }</pre>	Question JSON

11. Quiz History

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/quiz/history	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "childID": "child-01", "subject": "ENGLISH", "dateFilter": "ALL_TIME", "lastKey": nextPageKey from response }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String quizzes: [JSON Object] nextPageKey</pre>

12. Parent Dashboard

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/parent/dashboard
-----	---

	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
		<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String children: [JSON Object] </pre>

13. Parent View of Child Performance

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/child/performance	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
		<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String </pre>
	childID	performance: JSON, subjects: [JSON]
	childID, subject	subject: JSON, categories: [JSON]
	childID, subject, category	category: JSON, topics: [JSON]

In-App Purchase

1. Verify Purchase

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/purchase/verify	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "planID": "basic_monthly", "orderID": "orderId", "childIDs": ["child-123", child-345], "subjects": ["ENGLISH"], "platform": "ios / android", "price": "9.99", "currency": "GBP", "purchaseToken": "token-xxxx", "originalTransactionID": "tr-123" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String subscription: JSON Object</pre>

2. Restore Purchase

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/purchase/restore	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "planID": "basic_monthly", "orderID": "orderId", "childIDs": ["child-123", child-345], "subjects": ["ENGLISH"], "platform": "ios / android", "purchaseToken": "token-xxxx", "originalTransactionID": "tr-123" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String purchaseStatus: String subscription: JSON Object</pre>

3. Subscriptions

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/subscriptions	
	Authorization Header: Bearer Token	

	REQUEST	RESPONSE (Header Status Code 200)
		<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String subscriptions: [JSON Object] </pre>

4. Subscription Status

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/subscription/status	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my.mail@email.com", "purchaseRef": "ref-324834" } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String subscriptions: [JSON Object] </pre>

5. Verify Mock Purchase

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/purchase/verify	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my.mail@email.com", "productID": "mock_tier_1", "orderId": "orderId", "childID": "child-123", "mockID": "mock-uuid", "platform": "ios / android", "price": "5.99", "currency": "GBP", "purchaseToken": "token-xxxx", "originalTransactionID": "tr-123" } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String purchaseID: String </pre>

Parent

Parent Dashboard

Save FCM Token → Parent Dashboard

1. Save Device Token

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/device/token	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "child-01", "fcmToken": "ENGLISH", "platform": "Android iOS" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

2. Parent Dashboard

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/parent/dashboard	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
		<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String children: [JSON Object]</pre>

3. Parent View of Child Performance

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/child/performance	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
		<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>
	childID	<pre>performance: JSON, subjects: [JSON]</pre>

	childID, subject	subject: JSON, categories: [JSON]
	childID, subject, category	category: JSON, topics: [JSON]

4. Upload Profile Pic

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/profile/pic	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "child-01", "parent": true, "childID": "874974dhfdhfsdhf", "username": "child-123", "fileName": "pic.png", "fileType": "image/png", }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String uploadUrl: String</pre>

Upload Image → You will get S3 Upload URL → Upload physical file using PUT method

FCM Setup

FCM Notification

Keep shared files on below locations:

- 1.1. android/app/google-services.json
- 1.2. ios/Runner/GoogleService-Info.plist

Step 1 — Add Firebase packages to `pubspec.yaml`:

```
dependencies:  
  firebase_core: ^3.0.0  
  firebase_messaging: ^15.0.0
```

Step 2 — Initialize Firebase in `main.dart`:

```
import 'package:firebase_core/firebase_core.dart';  
import 'package:firebase_messaging/firebase_messaging.dart';  
  
// Background message handler - must be top level function  
@pragma('vm:entry-point')  
Future<void> firebaseMessagingBackgroundHandler(RemoteMessage message)  
async {  
  await Firebase.initializeApp();  
  print("Background message: ${message.messageId}");  
}  
  
void main() async {  
  WidgetsFlutterBinding.ensureInitialized();  
  await Firebase.initializeApp();  
  
  FirebaseMessaging.onBackgroundMessage(firebaseMessagingBackgroundHa  
ndler);  
  runApp(MyApp());  
}
```

Step 3 — Request permissions (iOS):

```
// In your app initialization  
final messaging = FirebaseMessaging.instance;  
  
//  Request permission - iOS only (Android auto grants)  
NotificationSettings settings = await messaging.requestPermission(  
  alert: true,  
  badge: true,  
  sound: true,  
  provisional: false,  
);
```

```
print("Permission status: ${settings.authorizationStatus}");
```

Step 4 — Get and save FCM token:

```
class NotificationService {
    final FirebaseMessaging _messaging = FirebaseMessaging.instance;

    Future<void> initNotifications(String userID) async {

        // ✓ Get FCM token String? token = await _messaging.getToken();
        if (token != null) {
            await saveTokenToBackend(userID, token);
        }

        // ✓ Listen for token refresh
        _messaging.onTokenRefresh.listen((newToken) {
            saveTokenToBackend(userID, newToken); });

        // ✓ Save token to YOUR backend
        Future<void> saveTokenToBackend(String userID, String token) async {
            await apiService.post('/device/token', {
                "userID": userID,
                "fcmToken": token,
                "platform": Platform.isIOS ? "ios" : "android",
            });
        }
    }
}
```

Step 5 — Handle notifications:

```
class NotificationService {
    void setupNotificationHandlers() {
        // ✓ App in FOREGROUND
        FirebaseMessaging.onMessage.listen((RemoteMessage message) {
            print("Foreground notification: ${message.notification?.title}");

            // Show local notification or in-app banner
            showInAppNotification(message);
        });

        // ✓ App in BACKGROUND - user tapped notification
        FirebaseMessaging.onMessageOpenedApp.listen((RemoteMessage message) {
            print("Notification tapped from background");

            // Navigate based on notification type
            handleNotificationTap(message.data);
        });
    }
}
```

```

});

// ✓ App was TERMINATED - user tapped notification
RemoteMessage? initialMessage =
    await FirebaseMessaging.instance.getInitialMessage();

if (initialMessage != null) {
    handleNotificationTap(initialMessage.data);
}
}

// ✓ Navigate based on notification type
void handleNotificationTap(Map<String, dynamic> data) {
    final payload = jsonDecode(data['payload'] ?? '{}');
    final type = payload['type'];

    switch(type) {
        case 'MOCK_AVAILABLE':
            navigateTo('/mocks');
            break;

        case 'SUBSCRIPTION_EXPIRING':
            navigateTo('/subscription');
            break;

        default:
            navigateTo('/notifications');
            break;
    }
}
}

```

Step 6 — Android extra setup:

```

<!-- android/app/src/main/AndroidManifest.xml -->
<!-- Add inside <application> tag -->
<meta-data
    android:name="com.google.firebase.messaging.default_notification_channel_id"
    android:value="high_importance_channel" />

<meta-data
    android:name="com.google.firebase.messaging.default_notification_icon"
    android:resource="@drawable/ic_notification" />

```

```
// android/app/src/main/kotlin/.../MainActivity.kt
// Create notification channel for Android 8+

import android.app.NotificationChannel
import android.app.NotificationManager
import android.os.Build

override fun onCreate(savedInstanceState: Bundle?) {
    super.onCreate(savedInstanceState)

    if (Build.VERSION.SDK_INT >= Build.VERSION_CODES.O) {
        val channel = NotificationChannel(
            "high_importance_channel",
            "High Importance Notifications",
            NotificationManager.IMPORTANCE_HIGH
        )

        val notificationManager =
            getSystemService(NotificationManager::class.java)

        notificationManager.createNotificationChannel(channel)
    }
}
```

Step 7 — iOS extra setup:

```
<!-- ios/Runner/Info.plist -->
<!-- Add these keys -->

<key>UIBackgroundModes</key>
<array>
    <string>fetch</string>
    <string>remote-notification</string>
</array>
```

Step 8 — Call below just after login:

```
// After successful login
await notificationService.initNotifications(userID);
await notificationService.setupNotificationHandlers();
```

Full Flutter checklist:

- 1. Setup:**
 - 1.1. Add google-services.json to android/app/**
 - 1.2. Add GoogleService-Info.plist to ios/Runner/**
 - 1.3. Add firebase_core + firebase_messaging to pubspec.yaml**
 - 1.4. Initialize Firebase in main.dart**
 - 1.5. Add background handler**
- 2. Permissions:**
 - 2.1. Request iOS permissions**
 - 2.2. Create Android notification channel**
 - 2.3. Add iOS background modes in Xcode**
- 3. Token:**
 - 3.1. Get FCM token after login**
 - 3.2. Save to backend POST /device/token**
 - 3.3. Listen for token refresh → update backend**
- 4. Notifications:**
 - 4.1. Handle foreground notifications**
 - 4.2. Handle background tap**
 - 4.3. Handle terminated app tap**
 - 4.4. Navigate based on notification type**

Notification APIs

1. Mark As Read

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/notification/mark	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "sortKey": "basic_monthly" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

2. Mark All As Read

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/notification/mark/all	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

3. All Notifications

POST	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/notifications	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my.mail@email.com", "lastKey": null }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String notifications: [JSON] nextPageKey</pre>

4. Unread Count

GET	https://y3hg6ns0xe.execute-api.eu-west-2.amazonaws.com/prod/v1/notification/count	
	Authorization Header: Bearer Token	

	Query String Parameters	RESPONSE (Header Status Code 200)
	subject category	responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String category: JSON Object topics: [JSON Object]

Notification Response



```

  userID
  isRead
  title
  body
  sortKey
  notificationID
  notificationType
  createdAt

```

Assets

1. Display below images if no progress and no mocks.

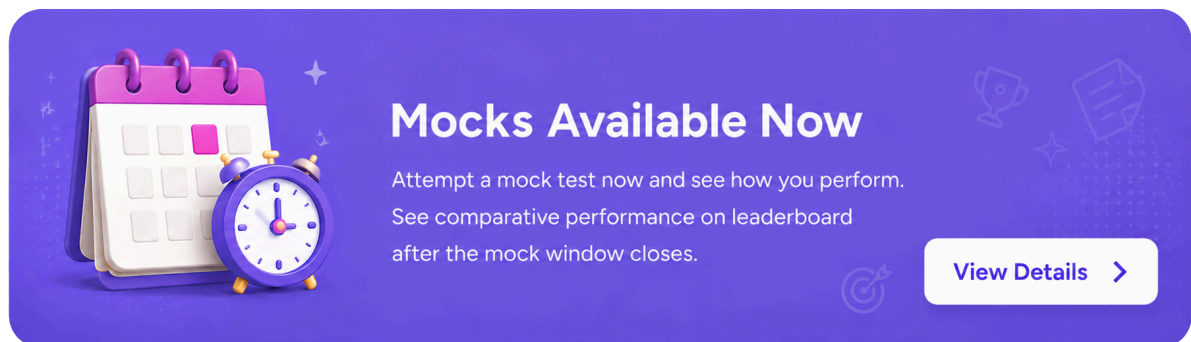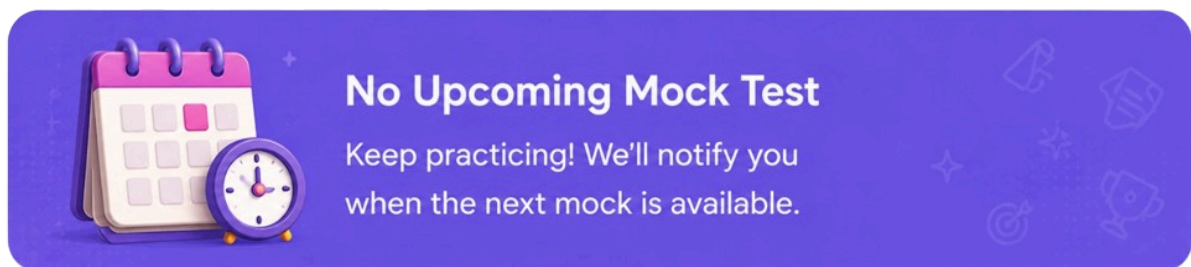

2. Sometimes the quiz is not uploading, we have to show some progress bar to get it uploaded.
3. The result came out of 14, however there were only 6 questions in the quiz.



MOCK TEST

 Name :

 Date :

 Time : 60 min

 Total Marks : 100

Q1.

☐ A ☒ B ☐ C ☐ D

Q2.

☐ A ☐ B ☒ C ☐ D

Q3.

☒ ☐ ☐





Mock APIs

Parent Mock Page

- ❖ Two Tabs on Top of the Mocks Page: Upcoming Mocks & Purchased Mocks
 - ❖ On each mock card there is a button for Mock Leaderboard
 - ❖ Open new page to display Leaderboard of the Mock
-

1. Upcoming/Purchased Mocks

GET	https://6uas1q6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mocks?status=upcoming	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	<code>status</code>	<code>responseCode: 1 / 0</code> <code>responseStatus: SUCCESS / FAILED</code> <code>responseMessage: String</code> <code>mocks: [JSON Object]</code>

2. Mock Leaderboard for Parent

POST	https://6uas1q6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/leaderboard	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<code>{</code> <code> "mockID": "uuid"</code> <code>}</code>	<code>responseCode: 1 / 0</code> <code>responseStatus: SUCCESS / FAILED</code> <code>responseMessage: String</code> <code>top10: JSON Object</code> <code>children: Array</code> <code>totalParticipants: Number</code>

Mock Purchase Flow

Need to commented this flow from App

- Select Mock
- Choose childIDs
- Calculate Price
 - ◆ backend returns per-child breakdown
- Validate Voucher (optional)

- Amount = 0
 - ◆ Save directly, PAYMENT_NOT_REQUIRED
- Amount > 0
 - ◆ Save as UNPAID/PAYMENT_PROCESSING
 - ◆ Stripe
 - ◆ Webhook confirms

3. Calculate Total Price

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/price/calculate	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "mockID": "mock-uuid" "childIDs": ["child-uuid"] }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String result: JSON Object</pre>

4. Validate Voucher Code

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/promotion/validate	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "mockID": "uuid", "userID": "my-user-123", "promotionCode": "SAVE30", "originalAmount": 14.99 }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String promotion: JSON Object</pre>

5. Register For Free Mock

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/register	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "userID": "my-user-123", "mockID": "mock-uuid",</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

	<pre> "childID": "child-uuid", "platform": "android" } </pre>	
--	---	--

6. Stripe Payment

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/stripe/payment	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre> { "userID": "my-user-123", "mockPurchaseID": "uuid", "purchaseRef": "string", "finalAmount": 15.59, "currency": "GBP", "payer": { "email": "my-email", "firstName": "string", "lastName": "string", "mobileNumber": "+447596988" } } </pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String </pre>

Child Mock Flow

- ❖ Two Tabs on Top of the Mocks Page: Upcoming Mocks & Appeared Mocks
 - ❖ On Leaderboard can select the Mock to see report on Leaderboard
-

7. Upcoming/Appeared Mocks

GET	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mocks?status=upcoming	
	Authorization Header: Bearer Token	
	Query String Parameters	RESPONSE (Header Status Code 200)
	<pre>status</pre>	<pre> responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String mocks: [JSON Object] </pre>

8. Start Mock

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/start	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "childID": "uuid", "mockID": "uuid" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String mockID durationMins questions: [JSON Object]</pre>

9. Submit Mock

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/submit	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "mockID": "uuid", "childID": "uuid", "timeTaken": 500, "answers": [{ "questionID": "que-01", "childAnswers": ["A"], }] }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String result: JSON Object</pre>

10. Review Mock

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/review	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "childID": "uuid", "mockID": "uuid" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String</pre>

	}	mockReport: JSON Object
--	---	-------------------------

11. Mock Result

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/result	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "childID": "uuid", "mockID": "uuid" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String mockResult: JSON Object</pre>

12. Mock Leaderboard for Child

POST	https://6uaslq6fse.execute-api.eu-west-2.amazonaws.com/prod/v1/mock/leaderboard	
	Authorization Header: Bearer Token	
	REQUEST	RESPONSE (Header Status Code 200)
	<pre>{ "mockID": "uuid" }</pre>	<pre>responseCode: 1 / 0 responseStatus: SUCCESS / FAILED responseMessage: String top10: JSON Object myRank: JSON Object</pre>

Responses

Parent Leaderboard

```
{
  "responseCode": 1,
  "responseStatus": "SUCCESS",
  "responseMessage": "Mock Leaderboard",
  "totalParticipants": 84,
  "top10": [
    {
      "rank": 1,
      "childID": "uuid",
      "childName": "Aisha",
      "score": 96,
      "correct": 48,
      "totalQuestions": 50,
      "timeTaken": 1820
    }
  ],
  "children": [
    {
      "childID": "jack-uuid",
      "childName": "Jack",
      "status": "APPEARED",
      "rank": 12,
      "percentile": 86,
      "score": 85,
      "accuracy": 85
    },
    {
      "childID": "emma-uuid",
      "childName": "Emma",
      "status": "MISSED",
      "rank": null,
      "percentile": null,
      "score": null,
      "accuracy": null
    }
  ]
}
```

Child Leaderboard

```
{
  "responseCode": 1,
  "responseStatus": "SUCCESS",
  "responseMessage": "Mock Leaderboard",
  "totalParticipants": 84,
  "top10": [
    {
```

```
    "rank": 1,
    "childID": "uuid",
    "childName": "Aisha",
    "score": 96,
    "correct": 48,
    "totalQuestions": 50,
    "timeTaken": 1820
  }
],
"myRank": {
  "rank": 12,
  "totalParticipants": 84,
  "percentile": 86,
  "score": 85,
  "correct": 42,
  "totalQuestions": 50
}
}
```

Upcoming Mocks

```
{
  "responseCode": 1,
  "responseStatus": "SUCCESS",
  "responseMessage": "Upcoming Mocks",
  "mocks": [
    {
      "mockID": "uuid",
      "title": "Mock Paper 1",
      "subjects": ["ENGLISH", "VERBAL"],
      "yearGroup": "Year 5",
      "priceType": "PAID",
      "price": 15.99,
      "currency": "GBP",
      "startTime": "2026-07-01T08:00:00Z",
      "endTime": "2026-07-02T20:00:00Z",
      "durationMins": 60,
      "totalQuestions": 50,
      "mockStatus": "UPCOMING"
    }
  ]
}
```

Purchased Mocks

```
{
  "responseCode": 1,
  "responseStatus": "SUCCESS",
  "responseMessage": "Purchased Mocks",
```

```

"mocks": [
  {
    "purchaseID": "uuid",
    "mockID": "uuid",
    "mockTitle": "Mock Paper 1",
    "subjects": ["ENGLISH", "VERBAL"],
    "yearGroup": "Year 5",
    "startTime": "2026-07-01T08:00:00Z",
    "endTime": "2026-07-02T20:00:00Z",
    "amount": 11.19,
    "originalAmount": 15.99,
    "discount": 4.80,
    "currency": "GBP",
    "paymentStatus": "PAYMENT_COMPLETED",
    "childIDs": ["jack-uuid", "emma-uuid"],
    "purchasedAt": "2026-06-15T10:00:00Z"
  }
]
}

```

Appeared Mocks

```

{
  "responseCode": 1,
  "responseStatus": "SUCCESS",
  "responseMessage": "Appeared Mocks",
  "mocks": [
    {
      "mockID": "uuid",
      "mockTitle": "Mock Paper 1",
      "subjects": ["ENGLISH", "VERBAL"],
      "yearGroup": "Year 5",
      "startTime": "2026-07-01T08:00:00Z",
      "endTime": "2026-07-02T20:00:00Z",
      "score": 85,
      "correct": 42,
      "incorrect": 6,
      "skipped": 2,
      "totalQuestions": 50,
      "accuracy": 84,
      "timeTaken": 2940,
      "submittedAt": "2026-07-01T09:15:00Z"
    }
  ],
  "nextPageKey": null
}

```

Testing

Date: 21-09-2026

Parent Account:

1. Subscription is not opening - **Fixed**
2. Make Phone number an optional Field on registration (this is one minor reason to reject the app in App store) - **Fixed**
3. Register Free Mock - **Done**
 - a. Once register for a child - show it's button Green (Registered)
 - b. Stay on the same screen - they might need to register another one
4. Mock Tests
 - a. Purchased Mocks
 - i. Add Child Name - (**Showing childID**)
 - ii. Add how much user paid for it
 - iii. Date time is missing

Child Account:


1. Mocks
 - a. Cal: Sat 4 Jul 2026 8:00 AM - Sun 5 Jul 2026 9:00 PM
 - b. Start Mocks
 - i. During progress bar - it brings on back page
 - c. Please add below this line on top of the passage
 - i. Read Passage and answer the below questions.
 - d. Score: correct / totalQuestions - **Not showing Properly**
 - e. Incorrect: incorrect
 - f. Skipped: skipped
 - g. Top Circle: score% - **Not showing Properly**
2. Mock Tests
 - a. Completed - **Showing Correctly Here**
 - i. correct / totalQuestions score%
 - b. Upcoming - **Fixed**
 - i. Try to Start - Show Popup on the same page
 1. Already Completed
 2. Not Eligible
3. Quiz History
 - a. One line - All Subjects, Maths, English... - **Fixed**
 - b. Another line - All Times, Today... - **Fixed**
 - c. On Card Accuracy + Number of Attempts - **Duplicated Accuracy _ Add Attempts (quizAttempts)**
4. On Review - **Fixed**
 - a. Show Total Questions and Skipped as well
 - b. Currently displaying as % 100% - make it 100%
5. Result - Calculation still not correct - Remove Points
Correct / Total & Time in a single Row
Skipped & Incorrect
Needs to increase Scroll As Button is hiding

Parent Flow Fixes


1. User Register and kill the App before email Verification.
 - a. If try to register using same email, you will get below response
 - i. Redirect to email verification Page

```
responseCode: 2,
responseStatus: "PARTIAL",
responseMessage: "Verify your Email to complete the Registration."
```

2. Same during login if email not verified -> Email Verification
3. For Active Subscription - Underneath of Name, it shouldn't overlap

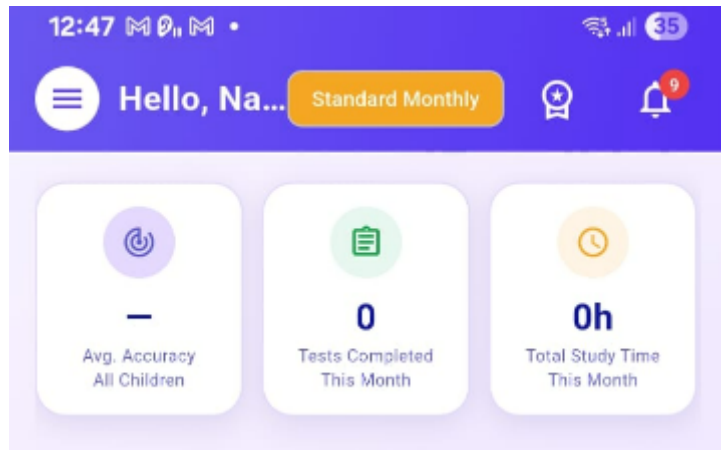


4. On Performance Pages, Increase the asset size matching the card height.
5. Please update the Mock Card as below -
 - a. On click of Leaderboard Button - Show Popup if leaderboard not available
 - b. Show Status LIVE (Mock Window is open)
 - c. For Free Mocks - Change the button name "Register Free"
 - d. Top Green (FREE/£14.99)
 - e. Replace Price text with Free For Subscribers if Applicable or empty

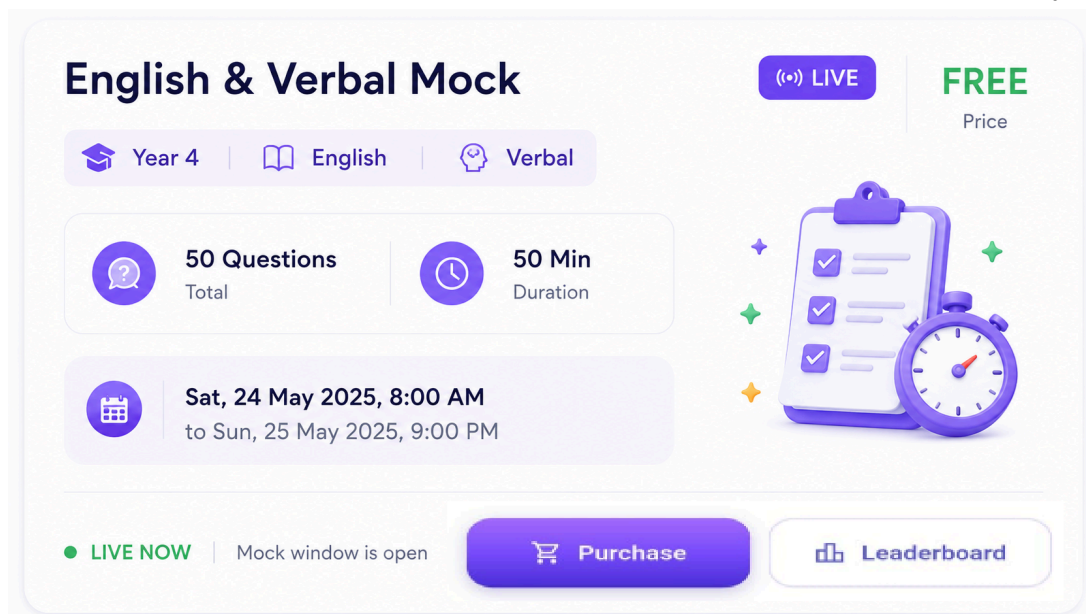

6. Please add the Banner Ad on each page in the Parent flow.
 - a. It's missing on Mocks, Checkout, Notifications, Active Plans, Performances Pages


7. Update User Profile is not working, can't edit any fields.
 - a. Only Email is not editable - rest fields are editable
 - b. Separate Text Boxes for First and Last Name
8. For user registration, in the payload mobileNumber is coming 7017599835 however it should come +447017599835.
9. Remove the null prefix from Profile page.

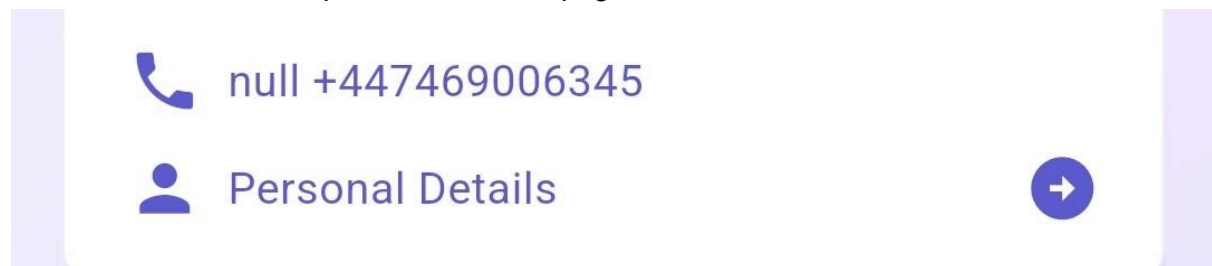

10. On click of View Profile - Heading is hard coded - please update
11. I believe this is already implemented; however, please cross-check it once more. We need to ensure that if no child has been added, the user should not be able to purchase any subscription.
12. Delete User Account API added in Parent API Tab (API 10).
13. If a user tries to login after deletion you will get the "Your account has been deactivated."
 - a. Give option in popup - would you like to Reactivate your account?
 - b. Call API 11 with the email user entered.

Child Flow Fixes

1. The child Profile pic should fully fit the circle.

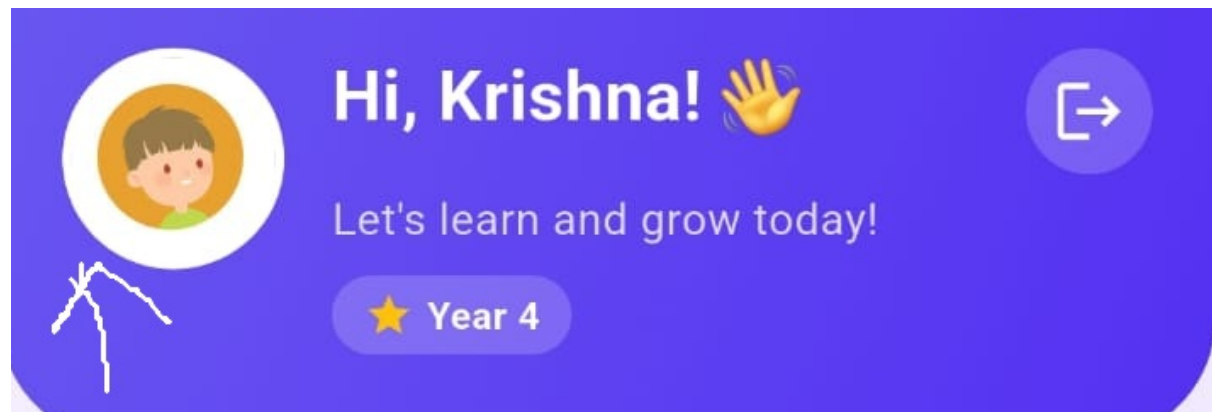

2. Add the Full widths Image Cards for No Progress and No Mocks.
3. Increase the Subject Icon size on the Child Dashboard with 90% width of card.
4. I assume the Lock button won't be visible if the child already has an active subscription. What about the "Start Free Quiz" button — should it also be hidden or disabled in that case, or should it remain available regardless of subscription status?
5. On Mocks Page
 - a. Remove the line "Ask your parents..." & Trophy icon
 - b. Mock card details are correct however change the design like parent view
 - c. If Purchased & Live - Change the button name Start Mock

- d. On Start Mock - show a landing page
 - i. with basic details
 - ii. Warning you can not leave the mock in between
 - iii. Start
 - e. On Completed Moc
 - i. Result will be show by default (20/25 80%)
 - ii. Button to review the mock
6. Bring This Month in the same row.



7. Reduce the question Font Size.

20:24 🔊 📶 🔊 •

📶 5G 📶 🔋 36

← Maths 1 / 1 📖

🌟 0

1


A train leaves at 9:00 and arrives at 9:20. How long does the journey take in minutes?




same
Font
size

A 15 minutes


8. Report - time is missing and Back to Home button is hiding

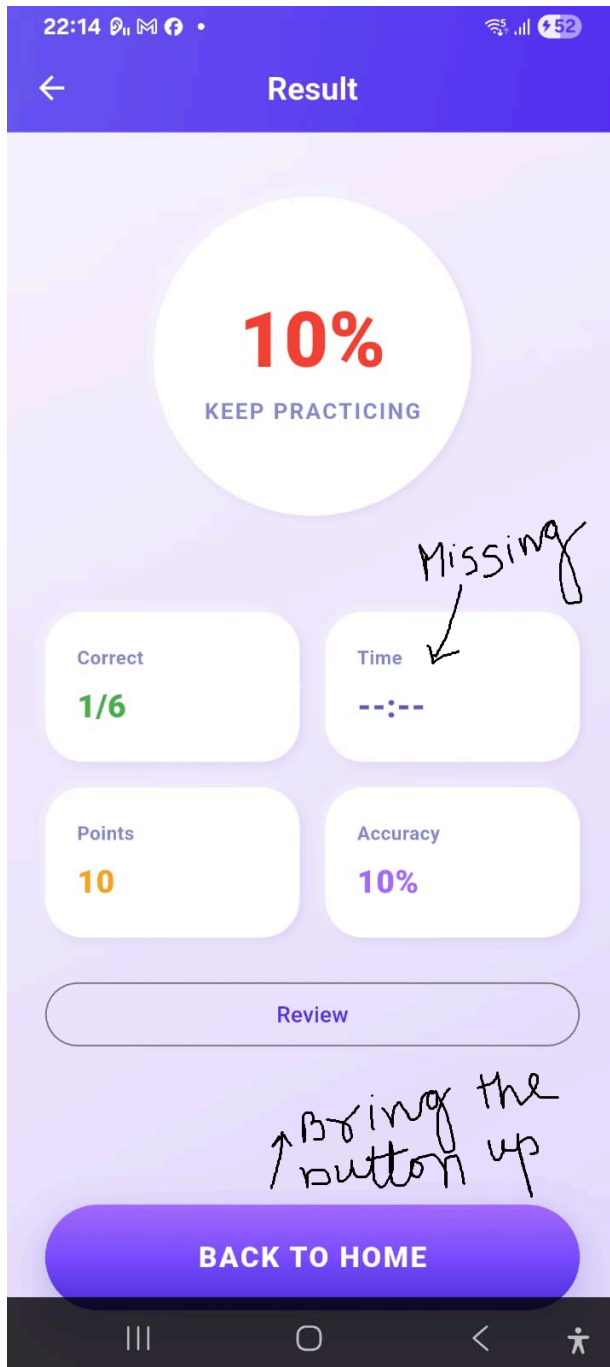

9. Add option to retake the mock

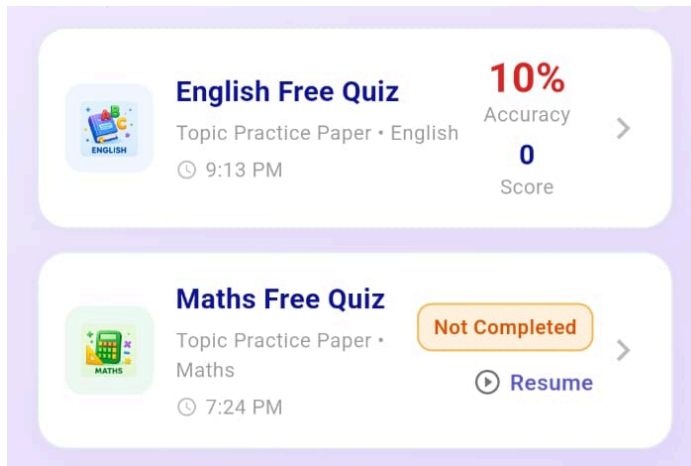

10. Remove Top bit

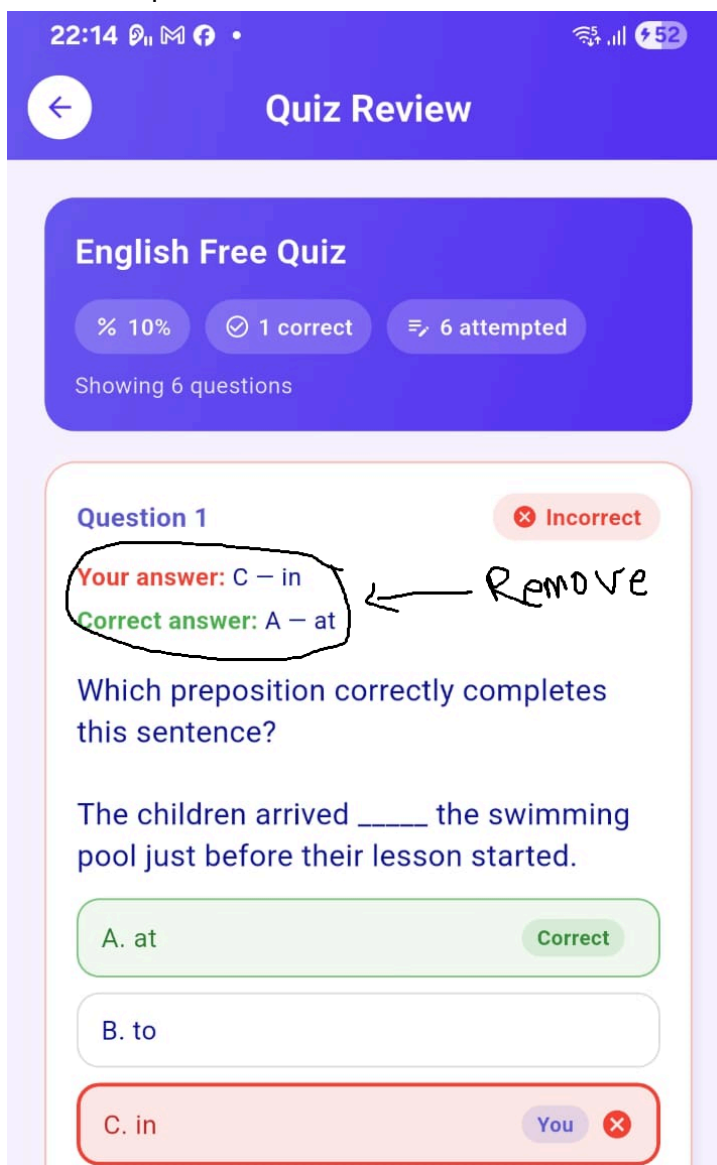

11.

Fixed Checklist

- Result total matches questions shown
- Mock APIs (upcoming, appeared, leaderboard, start, submit, review, result)
- Parent + child leaderboard fields
- Appeared mocks pagination
- Register responseCode 2 → verify email
- Child mocks trophy / ask parents removed
- Quiz question rendering (image_key, context, comprehension)
- quizType always on quiz generate
- Result time + Back to Home layout
- Quiz review summary cleanup
- Question font size reduced
- Wire banner PNGs into InfoBanner / empty states
- Progress bar while quiz uploading
- Parent mock card redesign (LIVE, FREE, Register Free)
- Banner ads on parent pages
- Profile edit UI (+44 prefix, first/last name fields)
- Child profile pic fit, subject icon 90% width
- Mock start landing page + warning
- Quiz History filter layout (same row)
- Retake mock option
- Subscription label overlap fix (plan chip under greeting)
- Child mock card matches parent design
- Performance page subject asset size increased
- Block subscription when parent has no children (UI + verify/restore guard)
- POST /updateProfile payload aligned to doc (E.164 mobileNumber +44...)
- GET /delete/account wired from profile screen
- POST /activate/account wired from login reactivate dialog
- Login deactivated account → reactivate popup
- Purchased mock discount UI on parent purchased cards
- Parent mock leaderboard full screen (was dialog)
- Mock price / Free for subscribers label on parent + child cards
- Start Mock button labels (Not open yet / Not Purchased Yet / View Result)
- Child mock result dialog shows correct/total from API

This needs to be checked from your end

- POST /updateProfile → confirm fields persist server-side (payload now matches doc)
- POST /purchase/verify → server-side reject when parent has no children (FE also blocks)
- Completed mock result on card (shown when API returns score fields on appeared list)

Question Structure

Non Verbal Question Structure

- Question + image Key
- Options itself an image
- [https://d1rbn1wov6bp1h.cloudfront.net/\\${imageKey}](https://d1rbn1wov6bp1h.cloudfront.net/${imageKey}) to display the images of question as well as options

```
{
  "id": "4db30b3b-8eee-4931-a990-4027ec780c07",
  "subject": "non_verbal",
  "topic": "pattern_matching",
  "category": "patterns",
  "question": "The options are reflected versions. Which reflected option matches the original figure on the left?",
  "options": {
    "A": "non_verbal/.../931-a990-4027ec780c07/a.svg",
    "B": "non_verbal/.../931-a990-4027ec780c07/b.svg",
    "C": "non_verbal/.../931-a990-4027ec780c07/c.svg",
    "D": "non_verbal/.../931-a990-4027ec780c07/d.svg",
    "E": "non_verbal/.../931-a990-4027ec780c07/e.svg"
  },
  "answer": "D",
  "answer_text": "D",
  "difficulty": 7,
  "active": true,
  "image_key": "non_verbal/.../931-a990-4027ec780c07/question.svg"
}
```

Verbal Question Structure

```
{
  "id": "e813f844-6cf3-4b39-af9a-f102885fed13",
  "subject": "verbal",
  "topic": "letter_codes",
  "category": "codes_sequences",
  "question": "Using the same code, what is the code for ROAM?\nFOAM = LUGS      LOAM = RUGS",
  "context": "FOAM = LUGS      LOAM = RUGS",
  "options": {
    "A": "XUGS",
    "B": "EBNZ",
    "C": "BYKW",
    "D": "DAMY",
    "E": "HEQC"
  },
  "answer": "A",
}
```

```
    "answer_text": "XUGS",
    "difficulty": 7,
    "active": true
}
```

Maths Question Structure

```
{
  "id": "1c36665e-8340-41ae-a656-e534f9643be1",
  "subject": "math",
  "topic": "time",
  "category": "word_problem",
  "question": "A train leaves at 11:30 and arrives at 12:00. How long
does the journey take in minutes?",
  "options": {
    "A": "25 minutes",
    "B": "30 minutes",
    "C": "35 minutes",
    "D": "40 minutes"
  },
  "answer": "B",
  "answer_text": "30 minutes",
  "marks": 1,
  "year_group": 3,
  "difficulty": 3,
  "active": true,
  "image_url": null
}
```

English Question Structure

```
{
  "question": "Which preposition correctly completes this
sentence?\n\nThe children arrived _____ the swimming pool just before
their lesson started.",
  "options": {
    "A": "at",
    "B": "to",
    "C": "in",
    "D": "on"
  },
  "answer": "A",
  "answer_text": "at",
  "id": "2348e38d-59d1-4078-b8c1-dcb8136aa762",
  "subject": "english",
}
```

```

    "category": "grammar",
    "topic": "prepositions",
    "difficulty": 5,
    "active": true
  }

```

Comprehension Question Structure

- Comprehension has a passage and questions array of 5

```



{
  "id": "c027075f-4b04-41e1-8863-98a2b8726eff",
  "subject": "english",
  "passage": "The invention of the printing press in 1440 by Johannes Gutenberg revolutionised the way information spread across Europe. Before this remarkable machine, books were painstakingly copied by hand, usually by monks in monasteries. A single book could take months or even years to complete, making them incredibly expensive and rare. Gutenberg's press used movable metal type, which meant individual letters could be arranged to form words, then rearranged for the next page. This ingenious system allowed books to be produced in a matter of weeks rather than years. The first major book printed was the Bible, and within fifty years, millions of books had been printed across Europe. This dramatic increase in available books meant that knowledge and ideas could spread rapidly, helping to spark the Renaissance and the Scientific Revolution. Education became more accessible, and literacy rates began to climb steadily throughout the continent.",
  "passage_type": "informational",
  "questions": [
    {
      "id": "e823e37f-91ae-4430-b7f9-2e4035367414",
      "question": "Who invented the printing press in 1440?",
      "options": {
        "A": "A group of monks",
        "B": "Johannes Gutenberg",
        "C": "An unknown inventor",
        "D": "A Renaissance artist"
      },
      "answer": "B",
      "index": 1,
      "answer_text": "Johannes Gutenberg"
    },
    {
      "id": "c274e82e-83fc-4c09-b10a-e96ef9f63228",

```

```
      "question": "Before the printing press, how long could it  
take to complete a single book?",  
      "options": {  
        "A": "Several days",  
        "B": "A few weeks",  
        "C": "Months or even years",  
        "D": "Exactly one year"  
      },  
      "answer": "C",  
      "index": 2,  
      "answer_text": "Months or even years"  
    },  
    {  
      "id": "d6f8da78-2a3e-488e-9fcd-d7104ba88be8",  
      "question": "What does the word 'ingenious' most likely  
mean in the passage?",  
      "options": {  
        "A": "Complicated and confusing",  
        "B": "Cleverly designed",  
        "C": "Very expensive",  
        "D": "Difficult to operate"  
      },  
      "answer": "B",  
      "index": 3,  
      "answer_text": "Cleverly designed"  
    },  
    {  
      "id": "45e050cc-9cfe-4b5c-86fd-ee9d7cd774eb",  
      "question": "What can we infer about the impact of the  
printing press on society?",  
      "options": {  
        "A": "It made books more expensive than before",  
        "B": "It reduced the number of people who could read",  
        "C": "It helped spread knowledge and education more  
widely",  
        "D": "It was only used to print religious texts"  
      },  
      "answer": "C",  
      "index": 4,  
      "answer_text": "It helped spread knowledge and education  
more widely"  
    },  
    {
```

```
    "id": "3207c053-e085-4b44-a2ac-b62ea3080f7d",
    "question": "What was the first major book printed using
Gutenberg's press?",
    "options": {
        "A": "A scientific journal",
        "B": "The Bible",
        "C": "A history book",
        "D": "A collection of poems"
    },
    "answer": "B",
    "index": 5,
    "answer_text": "The Bible"
}
],
"difficulty": 3,
"active": true,
"topic": "comprehension",
"category": "comprehension"
}
```

Final Bits

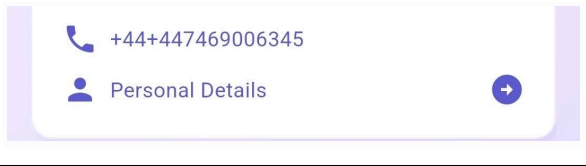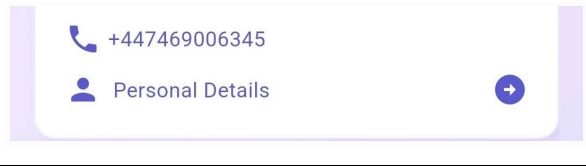User Registration	
Current Payload	Expected Payload
<pre>{ email: 'test@gmail.com', firstName: 'test', lastName: 'user', mobileNumber: '9876543210', countryCode: '+44', password: 'trxdgÿdhdhfhjdd', subscribed: true, platform: 'Android' }</pre>	<pre>{ email: 'test@gmail.com', firstName: 'test', lastName: 'user', mobileNumber: '+449876543210', password: 'trxdgÿdhdhfhjdd', subscribed: true, platform: 'Android' }</pre>
User Profile	
Current Display	Expected display
 A screenshot of a mobile app's user profile screen. It features a light purple background with a white rounded rectangle in the center. Inside the rectangle, there is a phone icon followed by the number '+44+447469006345', a person icon followed by the text 'Personal Details', and a blue circular button with a white right-pointing arrow.	 A screenshot of a mobile app's user profile screen, identical to the current display. It features a light purple background with a white rounded rectangle in the center. Inside the rectangle, there is a phone icon followed by the number '+447469006345', a person icon followed by the text 'Personal Details', and a blue circular button with a white right-pointing arrow.
Verify Email	
While entering the code, text box is hidden behind the keyboard	