


Observed-history initialization: QUALIFIES FOR NEW CONFIRMATION PROTOCOL (5/5 criteria)

● Individual seed fit / deterministic reference ◇ Accuracy mean / latency median

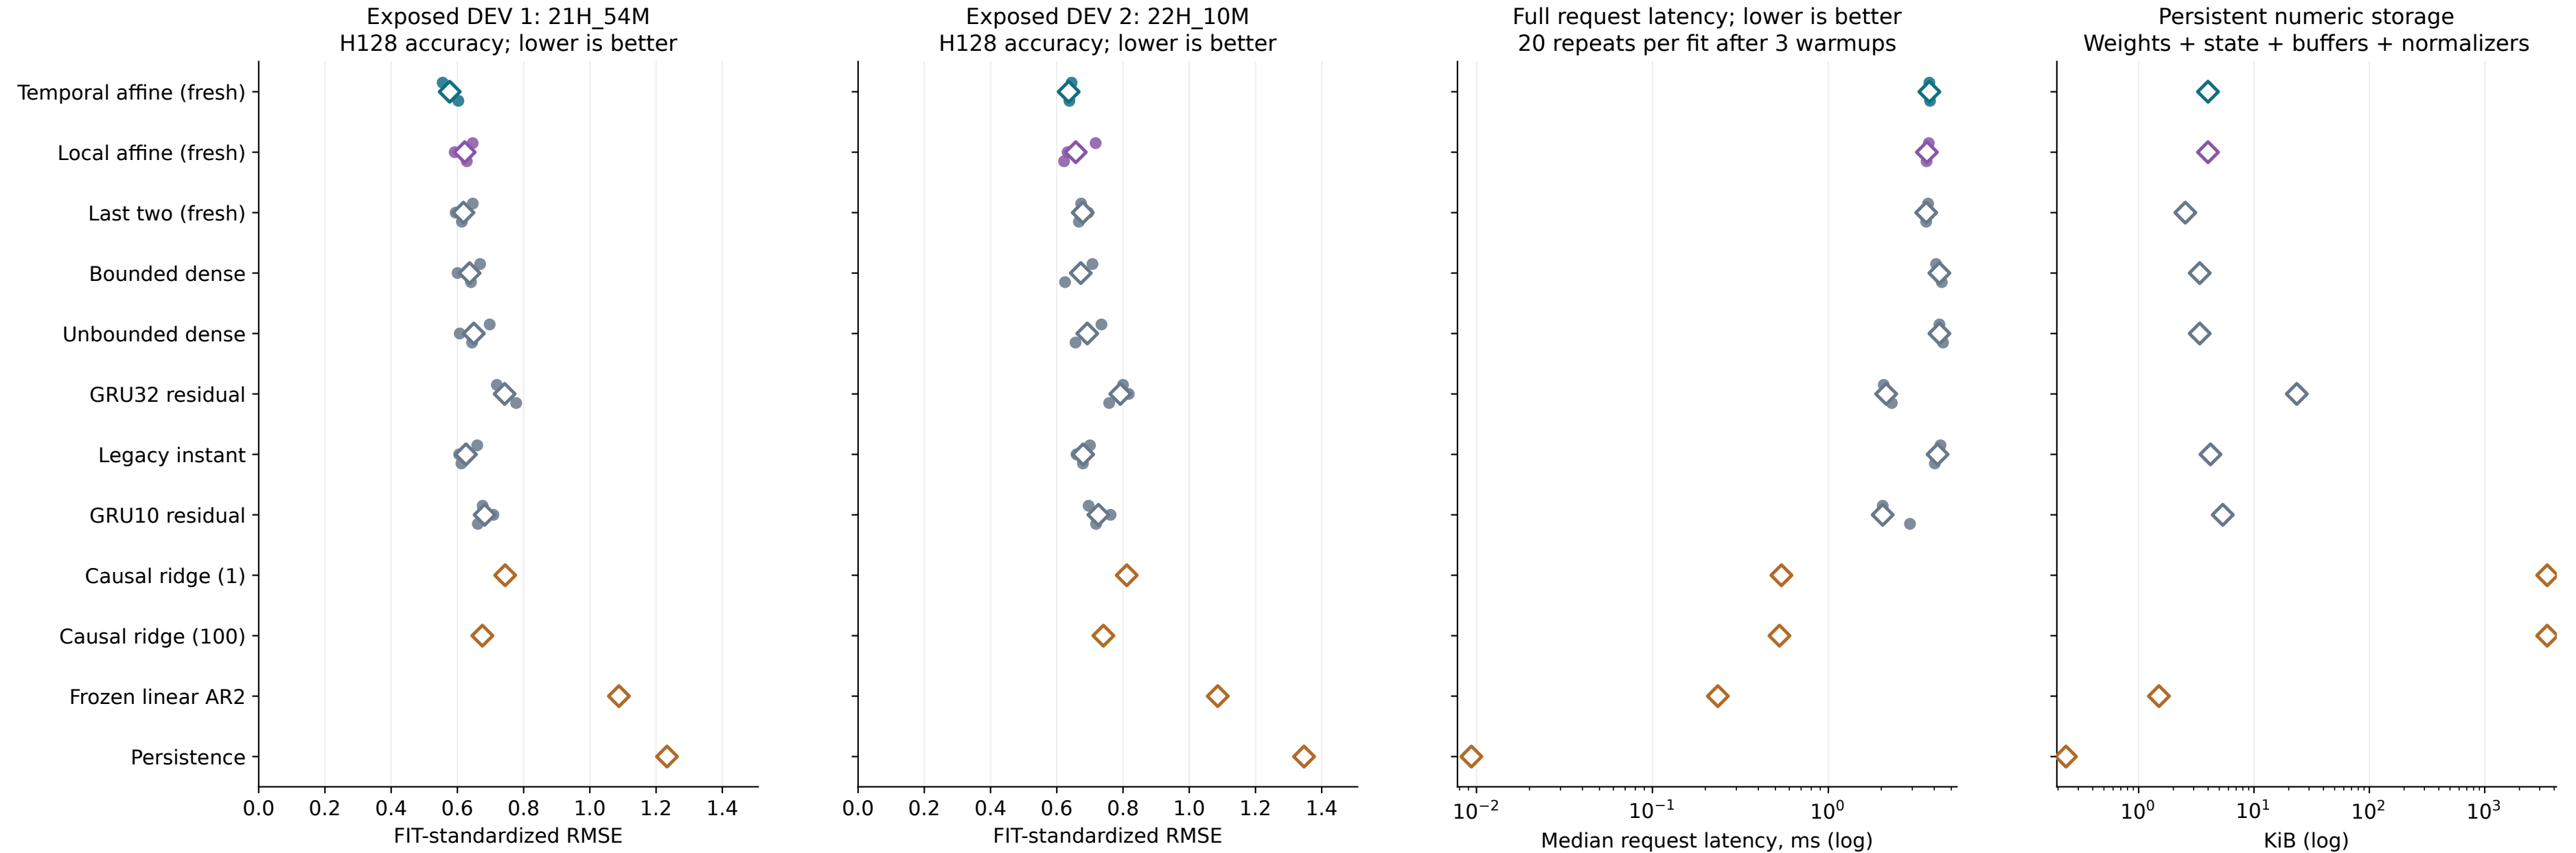

Same two previously exposed DEV recordings; one pooled learning rate per family, with all three seeds retained.
 18 fresh initializer fits and 30 unchanged control fits; dots are individual fits, diamonds summarize their errors or latencies.
 Temporal/local models each have 962 parameters: 590 transition plus 372 initializer; last-two has 590.
 128-step (12.8 s) forecasts condition on realized measured torque, not verified issued commands.
 All selected controls are retimed on the current host; cached fitting times remain historical.
 CONFIRM and official TEST stay closed. A pass supports only a separately registered confirmation, not novelty or robot control.
 Latency includes normalization, casting, conditioning, gate/operator preparation, forecast, denormalization and a uniform deadline check; excludes model loading.