
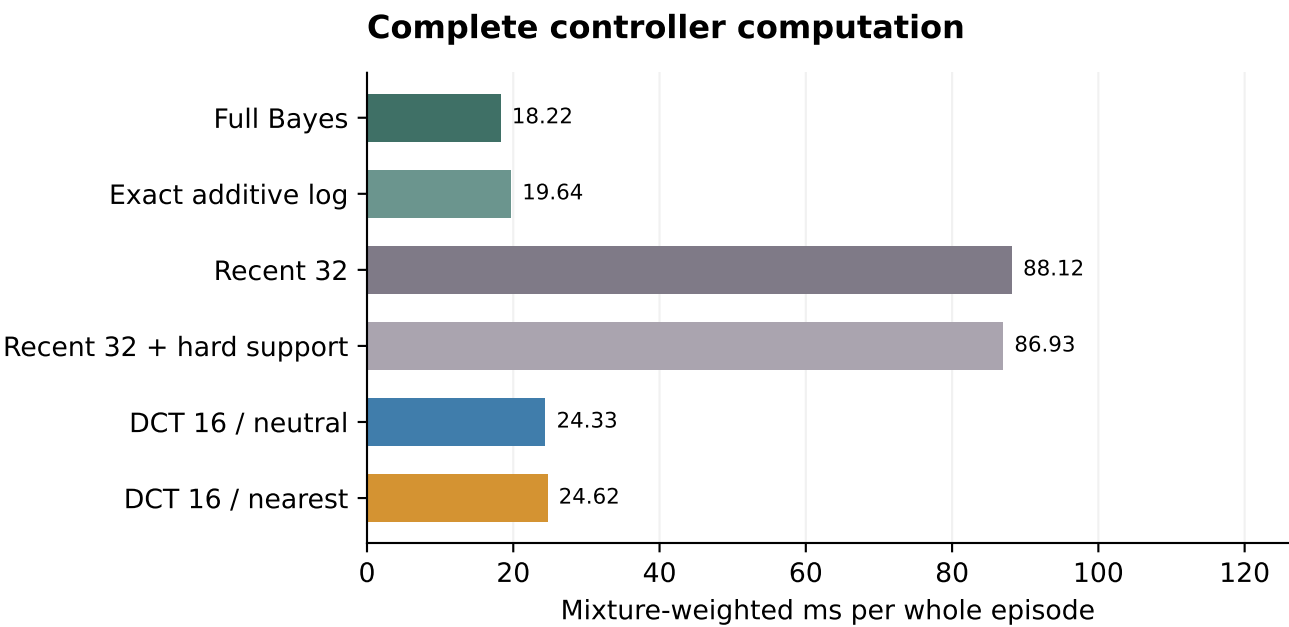
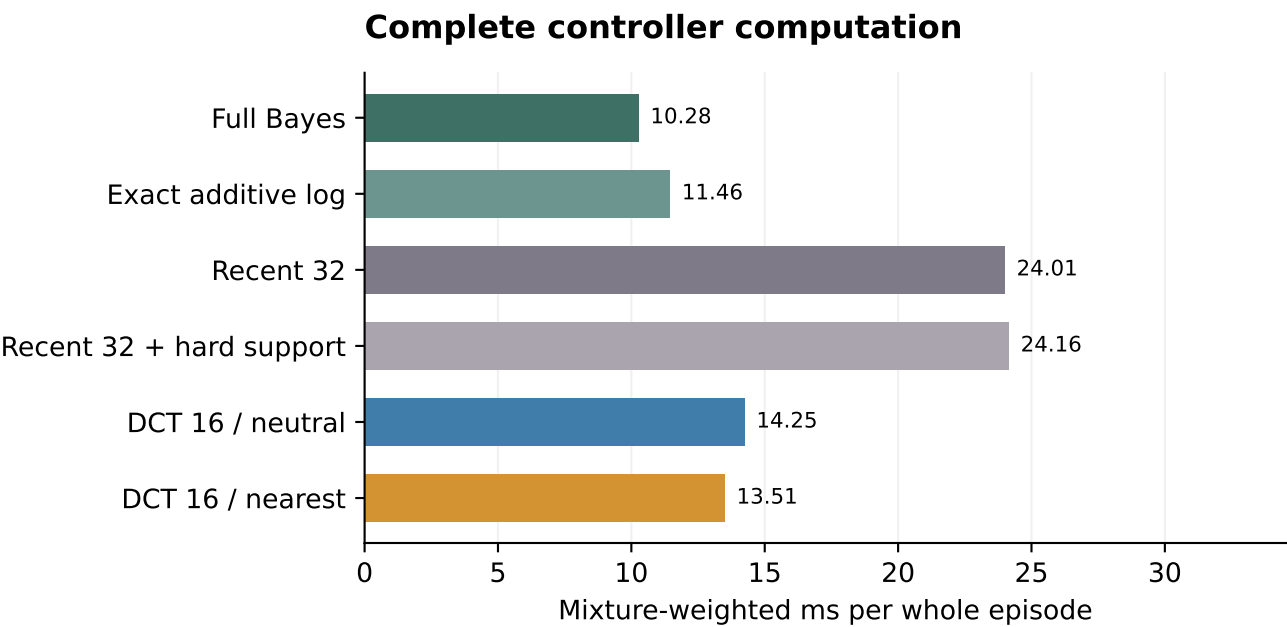
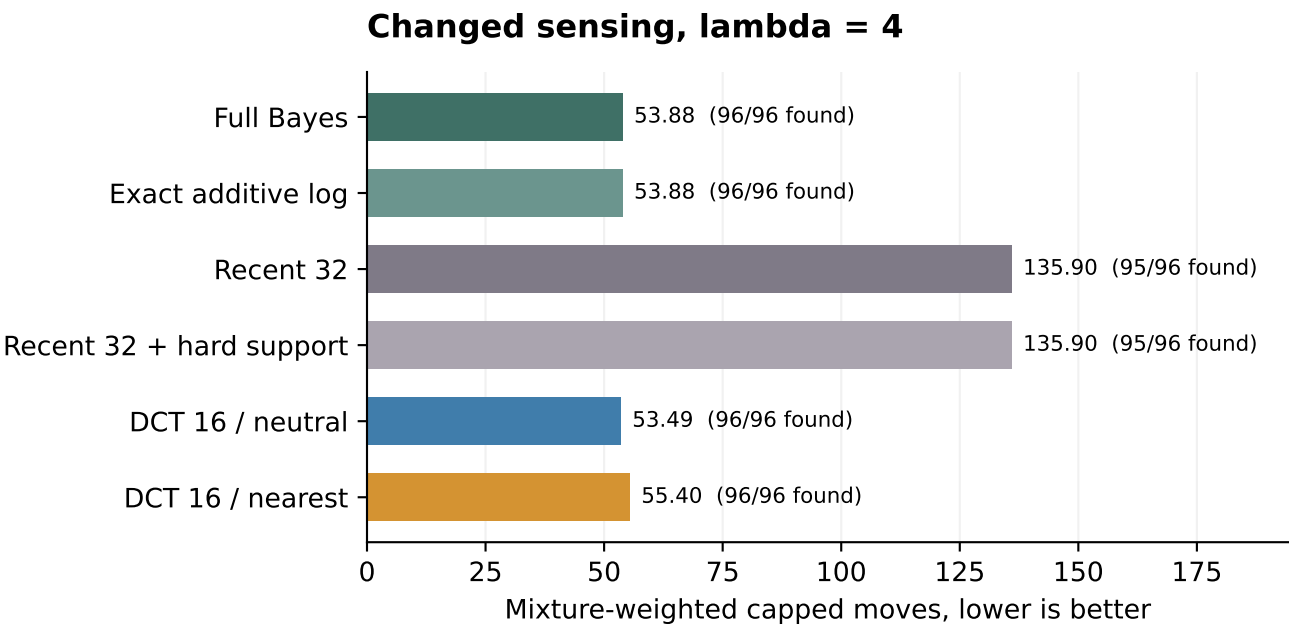


# Does compact memory work when it chooses its own path?

1,152 autonomous searches | Six fixed controllers | 96 paired cases in each sensing regime

Compact-control rule: FAIL    Utility/compute advantage: FAIL    No trained architecture or biological-wiring claim

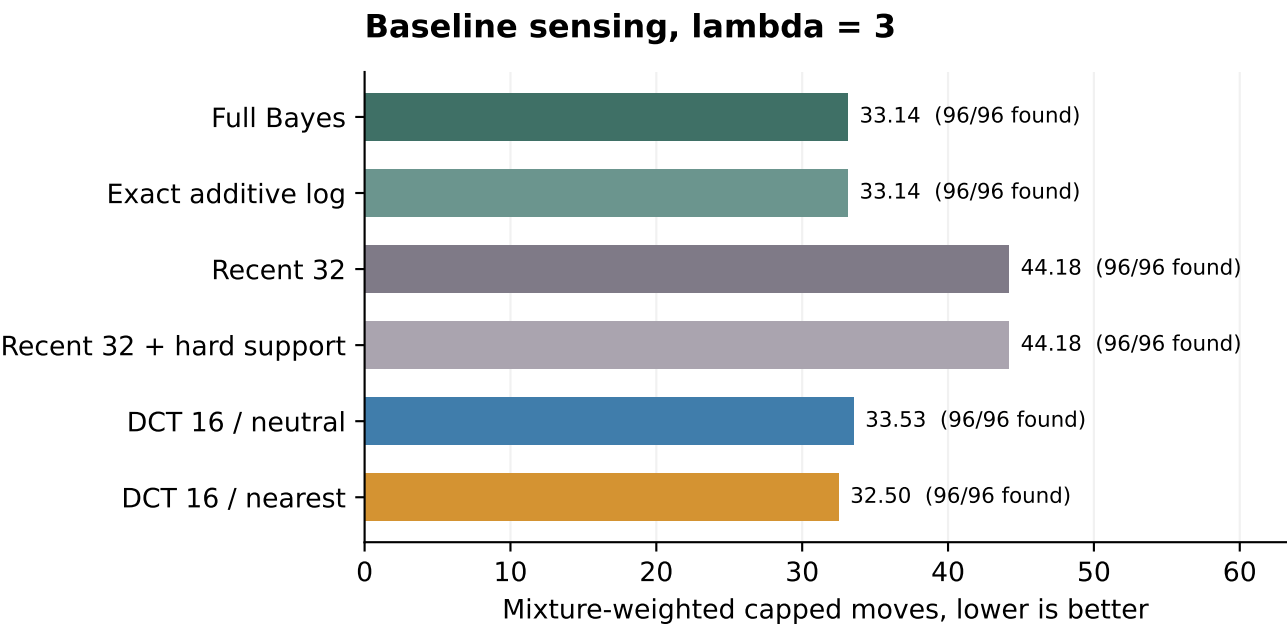

Each environment uses its own initial-hit mixture. Success counts in parentheses are unweighted. Every failed search costs the full 2,188-move horizon.

Controller cost includes actor setup, all updates, decoding, planning and allocated shared-model construction. Environment execution is measured separately.

DCT state includes 256 coefficients and an exact support mask. Shared tables, dense workspaces and object overhead are additional to evolving-array counts.

Both finite fills must pass in both environments. These are exploratory engineering rules, not statistical noninferiority or an architectural novelty result.