


Stripe states: stripe amplitude versus pair correlations

Uniformly paired states removed. Each mark is one spatial MPS; overlapping seeds/A/B ladders remain separate.

● $t_0 = 1$ ■ $t_0 = 1.2$ ▲ $t_0 = 1.25$ + $t_0 = 1.4$

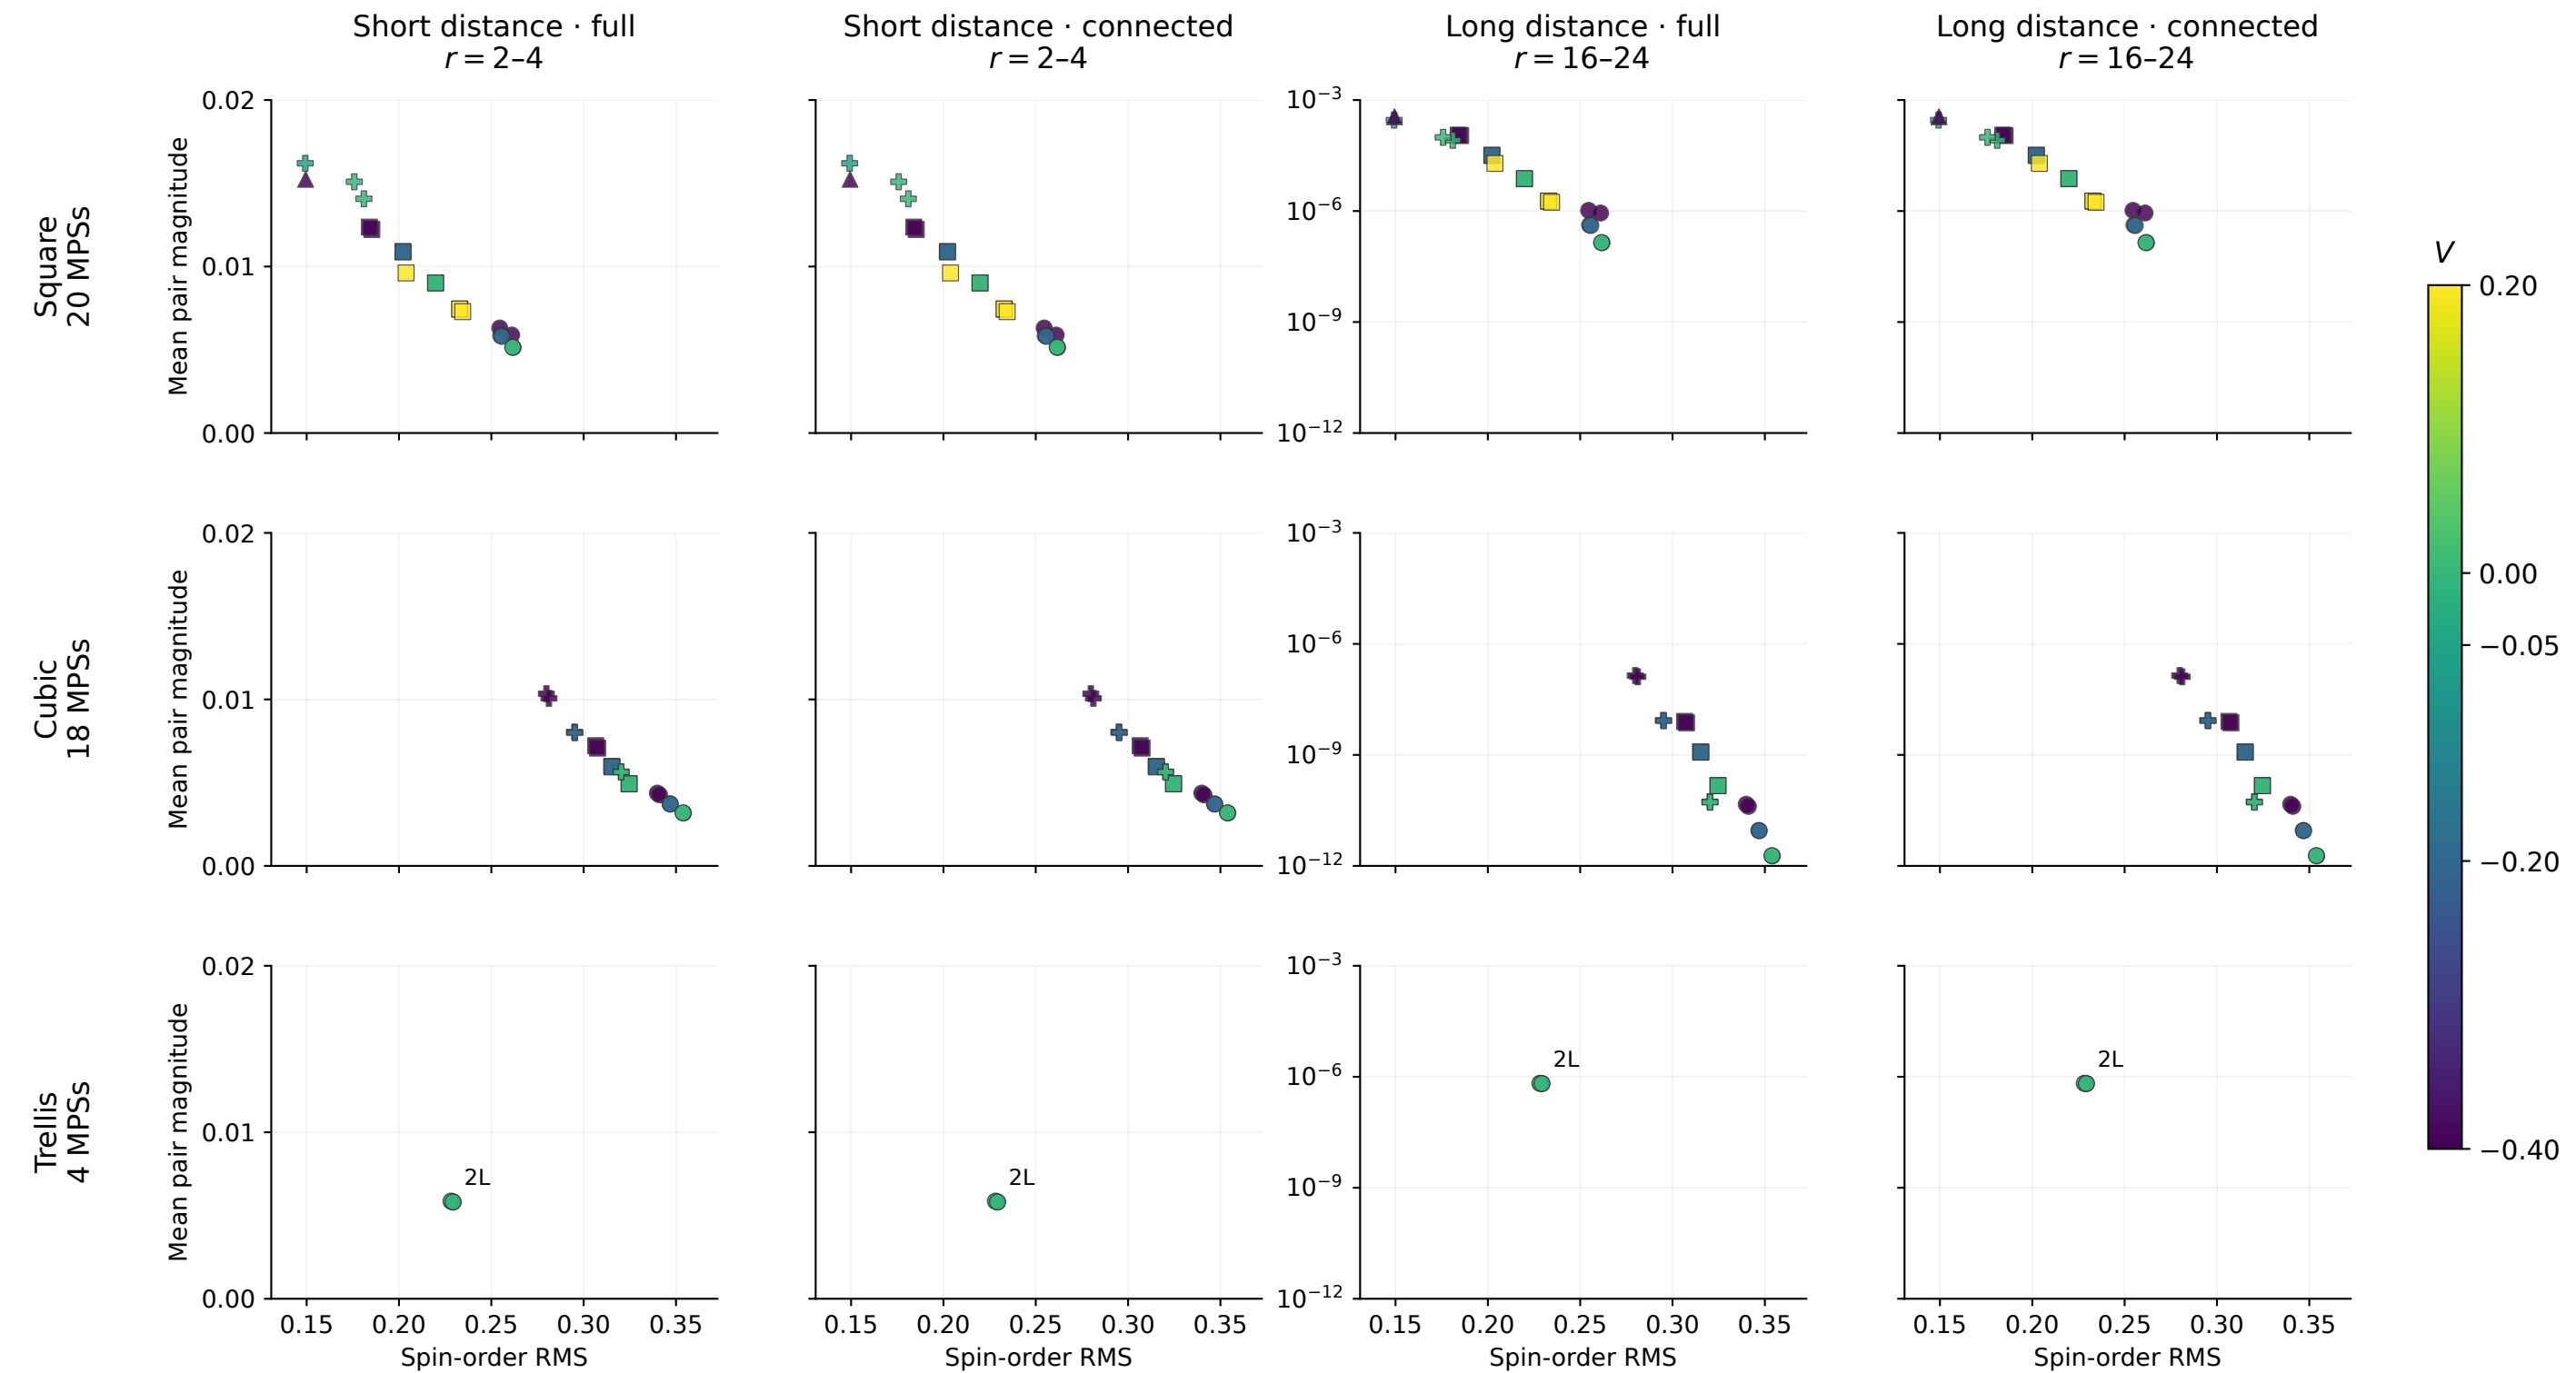

Full: $|\langle D_i^\dagger D_j \rangle|$ Connected: $|\langle D_i^\dagger D_j \rangle - \langle D_i \rangle^* \langle D_j \rangle|$ D : unnormalized rung singlet

Common bulk: rungs 9-56; $L=64$, $\chi=200$, $U=8$, target $n=15/16$. Long-distance axes are logarithmic.

42 stripe-state endpoints, all unaccepted. Parameter associations; tiny tails have no independent error bound.