

5 PHP cURL examples

Published September 06, 2015

Working on the server side does not necessarily imply that all the required information needs to be present on the database of the site on which we are working. As a matter of fact, growing parts of the information that is used on the server side comes from external sources, often via an API that allows some kind of service to provide information to the website without having access to the database on the remote site. To utilize this information, we can use the **cURL** built-in PHP extension.

cURL is a PHP extension, that allows us to receive and send information via the URL syntax. By doing so, cURL makes it easy to communicate between different websites and domains. This tutorial includes 5 common cases for the use of cURL, and they include:

1. [Downloading the content of a website](#)
2. [Downloading a file from a website](#)
3. [Auto form submission](#)
4. [Authentication](#)
5. [Use of cookies](#)



Joseph Benharosh is a full stack web developer and the author of the eBook The essentials of object oriented PHP.

How does the cURL extension work?

cURL works by sending a request to a web site, and this process includes the following four parts:

1. Initialization.

```
1 | $handle = curl_init();
```

2. Setting the options. There are many options, for example, an option that defines the URL.

```
1 | curl_setopt($handle, CURLOPT_URL, $url);
```

3. Execution with `curl_exec()`.

```
1 | $data = curl_exec($handle);
```

4. Releasing the cURL handle.

```
1 curl_close($handle);
```

The second part is the most interesting because it allows us to define how cURL works in a highly accurate manner, by using the many options it has to offer.

1. How to download the contents of a remote website to a local file?


In order to download the contents of a remote web site, we need to define the following options:

`CURLOPT_URL`- Defines the remote URL.

`CURLOPT_RETURNTRANSFER`- Enables the assignment of the data that we download from the remote site to a variable. In this example, we assign the data into the variable `$output`.

```
1 <?php
2 $handle = curl_init();
3
4 $url = "https://www.ladygaga.com";
5
6 // Set the url
7 curl_setopt($handle, CURLOPT_URL, $url);
8 // Set the result output to be a string.
9 curl_setopt($handle, CURLOPT_RETURNTRANSFER, true);
10
11 $output = curl_exec($handle);
12
13 curl_close($handle);
14
15 echo $output;
```

When we print the value of the variable \$output to the screen, we will see the local version of the web site for the world's best singer.

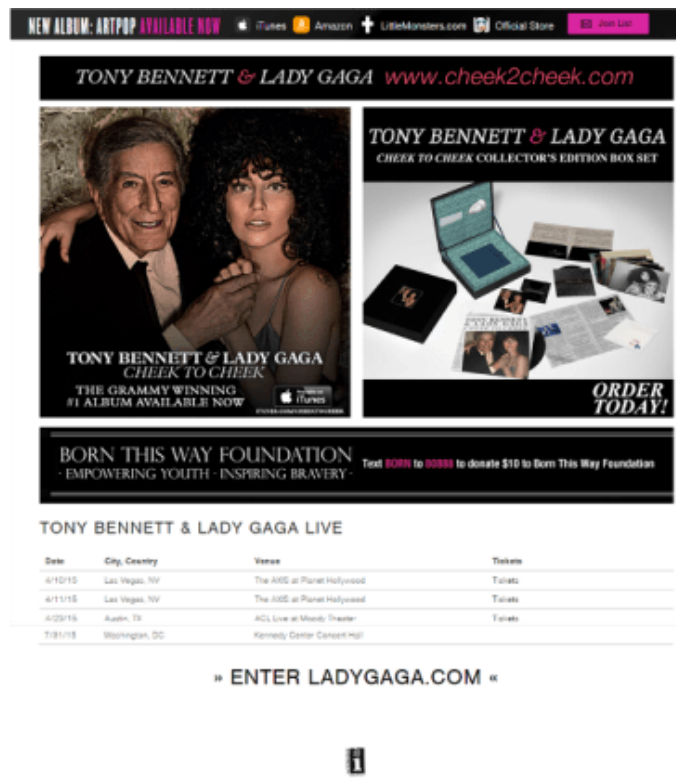

The options can be written more compactly using `curl_setopt_array()`, which is a cURL function that convenes the options into an array.

```
1  curl_setopt_array($handle,  
2      array(  
3          CURLOPT_URL           => $url,  
4          CURLOPT_RETURNTRANSFER => true  
5      )  
6  );
```

2. How to download a file from a remote site using cURL?

A remote file can be downloaded to our server, if the option `CURLOPT_FILE` is set. For example, the following code downloads the book "The Divine Comedy" from Project Gutenberg into a `the_divine_comedy.html` file on our server:

```
1  <?php
2  // The distant site url.
3  $url = "https://www.gutenberg.org/files/46852/46852-h/46852-h.htm";
4  // The file on our server.
5  $file = __DIR__ . DIRECTORY_SEPARATOR . "the_divine_comedy.html";
6  $handle = curl_init();
7
8  // Open the file on our server for writing.
9  $fileHandle = fopen($file, "w");
10
11 curl_setopt_array($handle,
12     array(
13         CURLOPT_URL => $url,
14         CURLOPT_FILE => $fileHandle,
15     )
16 );
17
18 $data = curl_exec($handle);
19
20 curl_close($handle);
21
22 fclose($fileHandle);
```

Handling the returned response

In order to get the parameters of the response for it to be monitored and debugged, we need to set the option `CURLOPT_HEADER`. For example:

```
1  <?php
2  $url = "https://www.gutenberg.org/files/41537/41537-h/41537-h.htm";
3
4  $file = __DIR__ . DIRECTORY_SEPARATOR . "the_divine_comedy.html";
5
```

```

6  $handle = curl_init();
7
8  $fileHandle = fopen($file, "w");
9
10 curl_setopt_array($handle,
11     array(
12         CURLOPT_URL => $url,
13         CURLOPT_FILE => $fileHandle,
14         CURLOPT_HEADER => true
15     )
16 );
17
18 $data = curl_exec($handle);

```

To get additional information about the request, we use the `curl_getinfo` command that enables us to receive important technical information about the response, including the status code (200 for success) and the size of the downloaded file.

```

1  $responseCode =
2      curl_getinfo($handle,
3          CURLINFO_HTTP_CODE
4      );
5
6  $downloadLength =
7      curl_getinfo($handle,
8          CURLINFO_CONTENT_LENGTH_DOWNLOAD
9      );

```

In addition, we can also use the commands: `curl_error` and `curl_errno` to debug the response and receive informative error messages.

```

1  if(curl_errno($handle))
2  {
3      print curl_error($handle);
4  }

```

Let's see the full code:

```

1  <?php
2  $url = "https://www.gutenberg.org/files/46852/46852-h/46852-h.htm";
3

```

```

4  $file = __DIR__ . DIRECTORY_SEPARATOR . "the_divine_comedy.html";
5
6  $handle = curl_init();
7
8  $fileHandle = fopen($file, "w");
9
10 curl_setopt_array($handle,
11     array(
12         CURLOPT_URL      => $url,
13         CURLOPT_FILE      => $fileHandle,
14         CURLOPT_HEADER => true
15     )
16 );
17
18 $data = curl_exec($handle);
19
20 $responseCode = curl_getinfo($handle, CURLINFO_HTTP_CODE);
21
22 $downloadLength = curl_getinfo($handle, CURLINFO_CONTENT_LENGTH_DOWNLOAD);
23
24 if(curl_errno($handle))
25 {
26     print curl_error($handle);
27 }
28 else
29 {
30     if($responseCode == "200") echo "successful request";
31
32     echo " # download length : " . $downloadLength;
33
34     curl_close($handle);
35
36     fclose($fileHandle);
37 }

```

3. How to submit forms with cURL?

Until this moment, we have demonstrated the use of the GET method of HTTP (which is generally used to watch and download content). cURL can also make use of the POST

method of HTTP in order to submit forms.

In order to demonstrate form submission with cURL, we need to create the following two files:

1. `index.php` in which we put the cURL script.
2. `form.php` in which we put the form to be submitted.

The `form.php` will be in reality, found on a remote server (although, for the sake of the example, both files may be placed on the same server). Also, for the example, we will use a form with 3 fields: `firstName`, `lastName` and `submit`.

```
1  <?php
2  if(isset($_POST["submit"]))
3  {
4      echo "Full name is " . $_POST["firstName"] .
5          " " . $_POST["lastName"];
6      exit;
7  }
8  ?>
9
10 <html>
11 <body>
12
13 <form method = "POST" action = "" >
14     <input name="firstName" type="text">
15     <input name="lastName" type="text">
16     <input type="submit" name="submit" value="πζω" >
17 </form>
18 </body>
19 </html>
```

To submit the form, the following options need to be set:

1. `CURLOPT_POST`– Sets the request to be in a post mode.
2. `CURLOPT_POSTFIELDS`- Receives the associative array of the fields that we want to post. The array keys are named after the name of the form fields.


```

1  <?php
2  $handle = curl_init();
3
4  $url = "https://localhost/curl/theForm.php";
5
6  // Array with the fields names and values.
7  // The field names should match the field names in the form.
8
9  $postData = array(
10     'firstName' => 'Lady',
11     'lastName'  => 'Gaga',
12     'submit'    => 'ok'
13 );
14
15 curl_setopt_array($handle,
16     array(
17         CURLOPT_URL => $url,
18         // Enable the post response.
19         CURLOPT_POST      => true,
20         // The data to transfer with the response.
21         CURLOPT_POSTFIELDS => $postData,
22         CURLOPT_RETURNTRANSFER => true,
23     )
24 );
25
26 $data = curl_exec($handle);
27
28 curl_close($handle);
29
30 echo $data;

```

4. How to perform basic HTTP authentication with cURL?

In order to authenticate with cURL, the following 3 options need to be set:

1. CURLOPT_HTTPAUTH

2. `CURLOPT_USERPWD`– Through which we define the username and password.

3. `CURLOPT_RETURNTRANSFER`

Let's see the code:

```
1  curl_setopt_array($handle,  
2      array(  
3          CURLOPT_URL => $url,  
4          CURLOPT_HTTPAUTH => CURLAUTH_ANY,  
5          CURLOPT_USERPWD => "$username:$password",  
6          CURLOPT_RETURNTRANSFER => true,  
7      )  
8  );
```

5. How to handle cookies with cURL?

The use of cookies allows a website to identify returning visitors and authenticated users. To this end, cURL provides us with a mechanism through which we can save cookies.

The two main options that allow us to handle cookies are:

1. `CURLOPT_COOKIEJAR`– Defines the file required to write the cookies.

2. `CURLOPT_COOKIEFILE`– Defines the file from which the cookies are to be read.

The following code example writes the cookies into a `cookie.txt` file on the first visit, and then reads the data in later visits.

```
1  <?php  
2  
3  $handle = curl_init();  
4
```

```

5  $url = "https://www.ladygaga.com/artrave-the-artpop-ball";
6
7  $file = __DIR__ . DIRECTORY_SEPARATOR . "cookie.txt";
8
9  curl_setopt_array($handle,
10     array(
11         CURLOPT_URL => $url,
12         // The file to which the cookies need to be written.
13         CURLOPT_COOKIEFILE => $file,
14         // The file from which the cookies need to be read.
15         CURLOPT_COOKIEJAR => $file,
16         CURLOPT_RETURNTRANSFER => true,
17     )
18 );
19
20 $data = curl_exec($handle);
21
22 curl_close($handle);

```

Conclusion

Using PHP's cURL extension provides us with a convenient way to communicate with other web sites, particularly with APIs that are provided by a third party. In the next tutorial, we will learn how to request for private details in the name of users that sign in to our website with their GitHub account. It will be done by using Github's API, and with the help of cURL. The tutorial will be a good starting point for learning how to make a social login with any social network.

Was this tutorial helpful?

If so, the eBook

"The essentials of object oriented PHP"

can further help you.

"The essentials..." is an in-depth guide to help you quickly and

easily increase your productivity and become a hot commodity in the job market.

Don't waste time!

Click on the green button to buy the eBook and start achieving your potential today!

BUY THE EBOOK!

3 Comments

phpenthusiast.com

1 Login ▾

Recommend 3

Tweet

Share

Sort by Best ▾



Join the discussion...

LOG IN WITH

OR SIGN UP WITH DISQUS ?



Name



Bilal Khan • 5 months ago

I want to know that if is there a way for scraping those websites which dose not allow us to scrap blocking us please reply fast Regards Bilal Khan

^ | ▾ • Reply • Share ▸



harsha • 2 years ago • edited

i have problem to login to https website using curl php .here is my code

```
$fields['AuthenticationFG.USER_PRINCIPAL'] = "username";
$fields['AuthenticationFG.ACCESS_CODE'] = "Password";
$POSTFIELDS = http_build_query($fields);
$ch = curl_init();
curl_setopt($ch, CURLOPT_URL, 'my-https-website');
curl_setopt($ch, CURLOPT_POSTFIELDS,$POSTFIELDS);
curl_setopt($ch, CURLOPT_POST, 1);
curl_setopt($ch, CURLOPT_HEADER, 0);
curl_setopt($ch, CURLOPT_FOLLOWLOCATION, 1);
curl_setopt($ch, CURLOPT_COOKIEJAR, "cookies.txt");
curl_setopt($ch, CURLOPT_COOKIEFILE, "cookies.txt");
curl_setopt($ch, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, true);
curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, 2);
```

```
curl_setopt($ch, CURLOPT_CAINFO, getcwd() . "/abc.crt");
curl_setopt($ch, CURLOPT_USERAGENT, "Mozilla/5.0 (Windows; U; Windows NT 5.1; en-US; rv:1.8.1.3) Gecko/20070309 Firefox/2.0.0.3");
```

```
$page = curl_exec($ch) or die(curl_error($ch));
echo $page;
```

it shows the error :

SSL certificate problem: unable to get local issuer certificate

^ | v • Reply • Share ›



Nathanael Mallow → harsha • 9 months ago

```
curl_setopt($ch, CURLOPT_CAINFO, getcwd() . "/abc.crt");
```

This is the problem.

17 ^ | v • Reply • Share ›

ALSO ON PHPENTHUSIAST.COM

Practice interface in PHP | PHPenthusiast

2 comments • 4 years ago



Mssoubri Omar — Hi, First, thank you for this list of exercises, i also have two points here which can be the subject for others topics :1) The implode function doesn't respect the order of its parameters that means implode(", ", \$userPrivileges) is similar to implode(\$userPrivileges, ", ") because it's probably the implode function tests the datatype to get the (string) delimiter and (array) pieces.2) When we use array_merge() with numeric keys, the duplicated keys will not be overwritten because the array_merge() re-index the keys.

how to use composer and packagist | PHPenthusiast

20 comments • 4 years ago



ELHADI — Amazing , thank you a lot.
This site really helps me

PHP composer autoload | PHPenthusiast

56 comments • 4 years ago



ÄdiL İsMÄiL — YOU are BRILLIANT.
The only proper autoloading tutorial in the web. have you seen the sitepoint tutorial eeew.. keep it up bro

Angular and PHP app - the post method | PHPenthusiast

23 comments • a year ago



Roger Birrer — That's a pretty nice tutorial session. My hoster "forces" me to use PHP/MySQL (instead of MEAN) so I just googled for "php angular" to see if that combination is possible and actually used. Next hard task will be to build security with sessionizing for the back-end ;-)

Subscribe

Add Disqus to your site

Disqus' Privacy Policy

DISQUS

Share Us



About PHPenthusiast

[About](#)

[Contact us](#)

[Sitemap](#)

[Privacy policy](#)

[Terms of use](#)

Most viewed tutorials

[Object-oriented PHP tutorials](#)

[Learn to code Angular app with PHP backend](#)

[Classes, objects, methods and properties](#)

[5 PHP cURL examples](#)

[Interfaces - the next level of abstraction](#)

[How to autoload PHP classes the Composer way?](#)

[Inheritance in object-oriented PHP](#)

The latest tutorials

[The essentials of Git and Github for web developers](#)

[Learn to code web app that takes pictures with the webcam](#)

[Modern AJAX with the fetch API](#)

[Angular form, NgForm and two-way data binding](#)

[Learn to code Angular app with PHP backend](#)

[What is REST API](#)



Only the latest tutorial-No spam

SUBSCRIBE