
# Introduction to Google Colab

2021. 04.28 Jonghwa lee


#### Deep learning requires a lot of hardware

- To efficiently train a deep learning model, your hardware should be able to deal with huge amount of data at high speed
- CPUs are fast but their bandwidth is lower than GPUs
  - o GPUs can perform a large number of matrix multiplications at a time
  - o It allows you to build and train complex deep learning models on large dataset efficiently
- However, high-performance GPUs are expensive

#### 47X Higher Throughput Than CPU Server on Deep Learning Inference



#### NVIDIA DGX-1 Delivers 96X Faster Training



Workload: ResNet50, 90 epochs to solution | CPU Server: Dual Xeon E5-2699 v4, 2.6GHz


Workload: ResNet-50 | CPU: 1X Xeon E5-2690v4 @ 2.6 GHz | GPU: Add 1X Tesla P100 or V100


#### Google Colab to the rescue!

- Google Colab <a href="https://colab.research.google.com">https://colab.research.google.com</a>) is a free Jupyter notebook environment that requires no setup and runs entirely in the cloud
- It currently offers the computing services of an NVIDIA Tesla K80 GPU free
- You can use the computing services for a maximum of 12 hours at a time
  - o Basically, you are connected to a virtual machine that lives for a maximum of 12 hours at a time
  - All data including model parameters that aren't saved to the Google Drive before this period will be lost

# **Getting Started**

- Go to <a href="https://colab.research.google.com">https://colab.research.google.com</a>
- Create a new Python 3 notebook
- From the 'Runtime > Change runtime type' menu, assign a hardware accelerator to your notebook



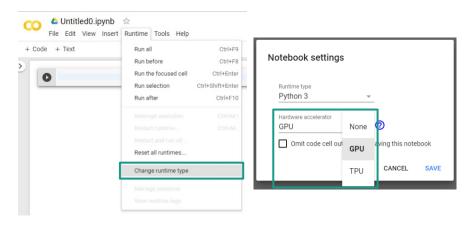

#### Notebook

- Notebook is a list of cells which contain either explanatory text or executable code and its output
- By clicking a cell, you can select the cell that you want to working with
- Text cells help you explain your notebook and code cells you wrote


```
Text cells use markdown syntax. You can also add math to text cells using LaTeX. Just place the statement within a pair of $ signs. For example $$\$\sqrt{3x-1}+(1+x)^2$ becomes \sqrt{3x-1}+(1+x)^2.
```

• Code cells contain executable Python code and its output


```
name = 'John Doe'
print(f'Hello, {name}!')]

Thello, John Doe!
```

You can add new code or text cells using the CODE and +TEXT buttons



• By selecting a cell, you can move up, move down or delete the cell



- You can execute a selected code cell in the following ways:
  - Click the Play button in the left of the cell
  - Type **Ctrl+Enter** to run the cell in place
  - Type **Shift+Enter** to run the cell and move focus to the next cell
  - Type Alt+Enter to run the cell and insert a new code cell immediately below it


```
seconds_in_a_day = 24 * 60 * 60 print(seconds_in_a_day)|

[] seconds_in_a_week = 7 * seconds print(seconds_in_a_week)
```

Shift + Enter

```
seconds_in_a_day = 24 * 60 * 6
seconds_in_a_week = 7 * second
print(seconds_in_a_day, second
```

Alt + Enter



!apt install -y openjdk-11-jdk

openjdk-11-demo openjdk-11-source visualvm

You can run any command on the system shell by prefixing it with


```
[1] !ls /
    bin
            datalab home lib64
                                              swift
                                  opt
                                        run
                                                                   tmp
                                                                          var
                     lib
                            media proc
                                        sbin sys
                                                                   tools
    boot
                                             tensorflow-2.0.0-rc0 usr
                     lib32 mnt
                                  root srv
    content
            etc
```

You can install third-party libraries using package managers as needed


```
!pip install tqdm

☐ Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
    openjdk-11-jdk-headless
Suggested packages:
```


- You can use tab completion to explore attributes of Python objects, as well as to quickly view documentation strings
  - As an example, if you press Tab afterumpy.ra , you will see the list of available completions starting with ra within the numpy module



You can see pop-up of its documentation string



• To open the documentation in a persistent pane at the bottom of your screen, add?aafter the object or method name and run the cell

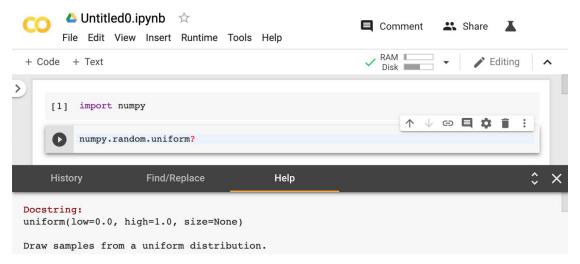

#### Fetching Notebooks from GitHub

- You can fetch notebooks from GitHub repositories by searching them
  - o In this lecture, we will upload all the notebooks to repositories bykeai kaist

