



FACULTY
OF INFORMATICS
Masaryk University

Using inside T_EX Documents

.....

TUG@BachoT_EX 2017

<https://github.com/witiko/markdown>

Vít Novotný

Contents

1. Introduction
 - 1.1 The Case for Lightweight Markup
 - 1.2 Existing Solutions
2. The `markdown.tex` Package
 - 2.1 Building a Parser
 - 2.2 Quick Overview of the Package
3. Conclusion
4. Q&A
5. Bibliography

Section 1

Introduction

The Case for Lightweight Markup

T_EX as a Content Creation Language

1. High Markup to Text Ratio

- The *T_EXbook* (Knuth, 1986) is 22 % markup (plain T_EX).
- *Think Java* (Downey et al., 2016) is 21 % markup (L^AT_EX).

2. Zero Sandboxing Support

- The document you are typesetting may not compile.

```
\texttt{innocent_looking_underscores.tex}
```

- The document you are typesetting may halt.

```
\def\whiletrue{\whiletrue} \whiletrue
```

- The document you are typesetting may access the system shell.

```
\immediate\write18{sudo rm -rf /}
```

3. Steep Learning Curve

The Case for Lightweight Markup

Comparison of \LaTeX and Markdown

```
\section{This is a level one heading}
```

This is a text paragraph with `\emph{emphasis}`.

```
\begin{quotation}This paragraph will show as a quote.\end{quotation}
```

```
\begin{verbatim}
```

This is is a source code example.

```
\end{verbatim}
```

```
\begin{itemize}
```

```
  \item First item with \alert{strong emphasis}
```

```
  \item Second item with a link%
```

```
    \footnote{See \url{http://link.com} (Title)}
```

```
\end{itemize}
```

```
\begin{enumerate}
```

```
  \item First item with \verb`inline code`.
```

```
  \item Second item with an \includegraphics{image.png}
```

```
\end{enumerate}
```

The Case for Lightweight Markup

Comparison of \LaTeX and Markdown

This is a level one heading

This is a text paragraph with *emphasis*.

> This paragraph will show as a quote.

```
~~~~~This is is a source code example.
```

* First item with **strong emphasis**

* Second item with a [link](http://link.com/ "Title")

1. First item with `inline code`.

2. Second item with an ![image](image.png "Title")

The Case for Lightweight Markup

Markdown as a Content Creation Language

1. Minimal Markup to Text Ratio

- Recall: Knuth (1986) and Downey et al. (2016) are ~22 % markup.
- *Efficient R programming* (Gillespie et al., 2016) is 5.5 % markup.
- *R for Data Science* (Grolemund et al., 2016) is 3.8 % markup.

2. Either Sandboxing Support ...

- A Markdown document converted to \TeX will always compile.
- The document may neither halt nor access the shell.

3. ... or Hybrid Markup Support

- Structurally simple sections can use pure Markdown, complex sections may combine Markdown and the host markup.

4. Mild Learning Curve

Existing Solutions

The Swiss Army Knife of Pandoc

*If you need to **convert files from one markup format into another**, Pandoc is your swiss-army knife.*

— MacFarlane ([2016b](#)), emphasis mine

- A multi-target publishing software.
- Supports tens of markup languages (Markdown, \LaTeX , HTML, XML Docbook) and output formats (ODF, OOXML, PDF).
- The use of Pandoc for the preparation of \LaTeX documents has been described in TUGBoat by Dominici ([2014](#)).

Why Is Pandoc Not Ideal?

Heading {#link}

This is `\protect\hyperlink{link}{a link}`.

- Markdown documents cannot be directly edited at collaborative T_EX platforms such as ShareL^AT_EX or Overleaf.

Existing Solutions

Why Is Pandoc Not Ideal?

3. Half-hybrid, Half-sandboxed

- The input is heuristically parsed and sanitized:

This `{will} 2^n \begin{get} s~nitized and \this{will}`
not `\begin{equation}2^n\end{equation} 2^n.`

↓↓

This `\{will\} 2^{n} \textbackslashbegin\{get\}`
`s\textasciitilde{}nitized and \this{will} not`
`\begin{equation}2^n\end{equation} \((2^n\)).`

- Malicious input such as

```
\def\shell{18} \immediate\write\shell{sudo rm -rf /}
```

is left alone by Pandoc.

Section 2

The `markdown.tex` Package

Building a Parser

Is T_EX Up to the Task?

There exist formal language parsers written solely in T_EX. These parsers recognize regular (T_EX3 Project, 2016) and context-free LL(1) languages (Carlisle, 2000). Markdown is not context-free:

```
`There is a literal backtick (`) here.`
```

and a parser needs to be able to backtrack over the entire input:

```
[this is not a link](http://link.com/ "Title"
```

Implementing such a parser in T_EX is possible, but generally a bad idea due to the lack of efficient data structures.

Building a Parser

Can We Use Lua Instead of \TeX ?

Lua is a powerful, efficient, lightweight, embeddable scripting language. It supports procedural programming, object-oriented programming, functional programming, data-driven programming, and data description.

— Lua Team (2016)

Lua \TeX is an extended version of pdf \TeX using Lua as an embedded scripting language.

— Lua \TeX Team (2016)

Building a Parser

Can We Use Lua Instead of $\text{T}_{\text{E}}\text{X}$?

- With Lua $\text{T}_{\text{E}}\text{X}$, we can directly execute Lua code:

```
1 + 2 = \directlua{ tex.sprint(1 + 2) }
```

- With pdf $\text{T}_{\text{E}}\text{X}$ and other modern $\text{T}_{\text{E}}\text{X}$ engines, we can spawn a shell and execute the Lua code in a separate process:

```
1 + 2 = \newwrite\script  
\immediate\openout\script=script.lua  
\immediate\write\script{ print(1 + 2) }%  
\immediate\closeout\script  
\immediate\write18{texlua script.lua > output.tex}%  
\input output.tex
```

Building a Parser

The Lunamark Library

- Lunamark (MacFarlane, [2016a](#)) is a Markdown parser in Lua.
- The language is specified using a Parsing Expression Grammar (PEG) via the LPeg C library (and a bit of cheating).
- The dependencies of Lunamark were all either compiled into Lua_T_E_X (LPeg, Slnunicode), or unnecessary (Cosmo, Alt-getopt).
- The library has been released under the Expat (MIT) License.

A High-Level Overview


Heading

This is `\markdownRendererLink{a link}{#link}{#link}{}`.

15/44

Quick Overview of the Package

A Block Diagram of the Package

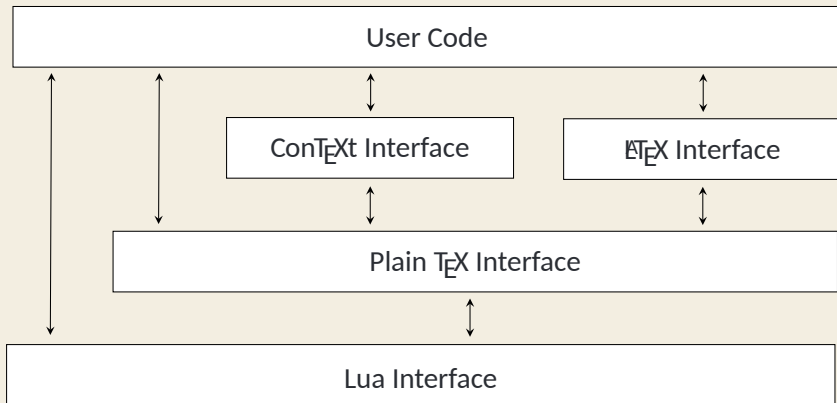

Quick Overview of the Package

The Lua Interface

```
#!/usr/bin/env texlua
local kpse = require"kpse"
kpse.set_program_name"kpsewhich"
local markdown = require"markdown"
local convert = markdown.new({ something = true })
local input = "Some _Markdown_ text."
print(convert(input))
```

Quick Overview of the Package

The Plain T_EX Interface

```
\input markdown %  
\def\markdownOptionSomething{true}%  
\def\markdownRendererSomethingElse#1#2#3{\foo{#1}}%  
\markdownInput{bar.md}  
\markdownBegin  
Some _Markdown_ text.  
\markdownEnd  
\bye
```

Quick Overview of the Package

The ConT_EXt Interface

```
\usemodule[t][markdown]
\def\markdownOptionSomething{true}
\def\markdownRendererSomethingElse#1#2#3{\foo{#1}}
\starttext
\markdownInput{bar.md}
\startmarkdown
Some _Markdown_ text.
\stopmarkdown
\stoptext
```

Quick Overview of the Package

The L^AT_EX2e Interface

```
\documentclass{article}
\usepackage[something]{markdown}
\markdownSetup{renderers = {somethingElse = {\foo{#1}}}}
\begin{document}
\markdownInput{bar.md}
\begin{markdown}
Some _Markdown_ text.
\end{markdown}
\end{document}
```

Quick Overview of the Package

The Sandbox and Hybrid Modes

```
\documentclass{article}
\usepackage{markdown}
\begin{document}
\begin{markdown}
  Foo bar \TeX{} $2^n$.
\end{markdown}
\begin{markdown*}{hybrid}
  Foo bar \TeX{} $2^n$.
\end{markdown*}
\end{document}
```

Foo bar \TeX{} \$2^n\$. Foo bar T_EX 2ⁿ.

Quick Overview of the Package

Mapping Markdown Tokens to \TeX Macros

```
\documentclass{article}
\usepackage{markdown}
\markdownSetup{renderers = {
  link = {\#1\footnote{See \url{\#3} (\#4)}},
}}
\begin{document}
\begin{markdown}
  Foo [bar](http://link.com "Link").
\end{markdown}
\end{document}
```

Foo bar¹.

¹See <http://link.com> (Link)

Quick Overview of the Package

Syntax Extensions

- Some syntax extensions were already supported by Lunamark:
 - HTML,
 - footnotes,
 - definition lists,
- New syntax extensions were added as a part of the project:
 - citations,
 - fenced code blocks,
 - IA Writer content blocks.

Quick Overview of the Package

Syntax Extensions – \markdownSetup{html}

HTML `tags` such as `` are recognized
<!-- and comments are just ignored-->.

HTML tags such as `` are recognized.

Quick Overview of the Package

Syntax Extensions – `\markdownSetup{footnotes}`

Here is a footnote reference, ^[^1] and another. ^[^long]

^[^1]: Here is the footnote.

^[^long]: Here's one with multiple blocks.

Subsequent paragraphs are indented to show that they belong to the footnote.

Here is a footnote reference,² and another.³

²Here is the footnote.

³Here's one with multiple paragraphs.

Subsequent paragraphs are indented to show that they belong to the footnote.

Quick Overview of the Package

Syntax Extensions – \markdownSetup{definitionLists}

Term 1

: Definition

Term 2

: Definition with

multiple paragraphs

Term 1 Definition 1

Term 2 Definition
with multiple paragraphs

Quick Overview of the Package

Syntax Extensions – `\markdownSetup{citations}`

Here is a parenthetical citation [`@knuth86`] and a string of several [`see @knuth86, pp. 33-35; also @gruber04, chap. 1`].

Here is a text citation `@knuth86` and a string of several `@knuth86 [pp. 33-35; @gruber04, chap. 1]`.

Here is a parenthetical citation (Knuth, 1986) and a string of several (see Knuth, 1986, pp. 33-35; also Gruber, 2004, chap. 1).

Here is a text citation Knuth (1986) and a string of several Knuth (1986, pp. 33-35) and Gruber (2004, chap. 1).

Quick Overview of the Package

Syntax Extensions – \markdownSetup{fencedCode}

```
~~~ js
if (a > b)
  return c + 4;
else
  return d + 5;
~~~~~
```

```
if (a > b)
  return c + 4;
else
  return d + 5;
```

Quick Overview of the Package

Syntax Extensions – `\markdownSetup{contentBlocks} I`

/Flowchart.png "Engineering Flowchart"

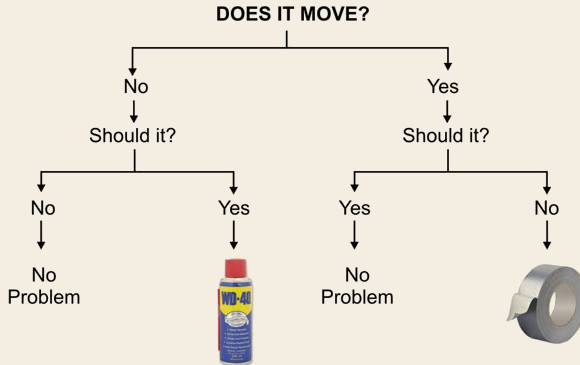


Figure: Engineering Flowchart

Quick Overview of the Package

Syntax Extensions – `\markdownSetup{contentBlocks} II`

`/Scientists.csv` (Great Minds of the 19th Century)

name	surname	age
Albert	Einstein	133
Marie	Curie	145
Thomas	Edison	165

Table: Great Minds of the 19th Century

Quick Overview of the Package

Syntax Extensions – \markdownSetup{contentBlocks} III

/chapters/01.txt

/chapters/02.txt

Chapter 1

This is the first chapter.

Chapter 2

And this is the second chapter.

Quick Overview of the Package

Syntax Extensions – \markdownSetup{contentBlocks} IV

<https://tug.org/tugboat/noword.jpg>

(The Communications of the \TeX Users Group)

The logo for TUGBOAT, featuring the text "TUGBOAT" in a large, bold, black serif font. The letters are closely spaced, and the overall style is classic and professional.

Figure: The Communications of the \TeX Users Group

(This actually does not work out-of-box at the moment.)

Section 3

Conclusion

Conclusion

The Missing Pieces of the Puzzle

The `markdown.tex` package

- enables the use of Markdown in environments where tools from outside $\text{T}_{\text{E}}\text{X}$ distributions are unavailable,
- gives the authors full control over how individual Markdown elements are rendered and how much access to $\text{T}_{\text{E}}\text{X}$ markup the Markdown documents have,
- exposes Lua, plain $\text{T}_{\text{E}}\text{X}$, \LaTeX , and $\text{ConT}_{\text{E}}\text{Xt}$ interfaces.
- was released under the \LaTeX Project Public License (LPPL) 1.3 on the Comprehensive $\text{T}_{\text{E}}\text{X}$ Archive Network (CTAN) and on GitHub (<https://github.com/witiko/markdown>).

Conclusion

The Missing Pieces of the Puzzle

- The syntax extensions were backported to Lunamark and merged by MacFarlane, resulting in a new minor version release of the library (0.5.0). (Novotný, [2016a](#))
- The package was featured on the twitter profile and the blog of Overleaf – a major online service for preparing \LaTeX documents – along with original example documents. (Lim, [2017](#))

Section 4

Q&A

Section 5

Bibliography

Bibliography I

Λ_{TeX}3 PROJECT, 2016. *The l3regex package: regular expressions in T_{Ex}*
[online] [visited on 2016-11-08]. Available from:

[http://mirrors.ctan.org/macros/latex/contrib/
l3experimental/l3regex.pdf](http://mirrors.ctan.org/macros/latex/contrib/l3experimental/l3regex.pdf).

CARLISLE, David, 2000. XMLT_{Ex}: A non-validating (and not 100%
conforming) namespace-aware XML parser implemented in T_{Ex}.
TUGboat [online]. Vol. 21, no. 3, pp. 193–199 [visited on
2016-11-08]. ISSN 0896-3207. Available from:

<https://www.tug.org/TUGboat/tb21-3/tb68carl.pdf>.

Bibliography II

DOMINICI, Massimiliano, 2014. An overview of Pandoc. *TUGboat* [online]. Vol. 35, no. 1, pp. 44–50 [visited on 2016-08-15]. ISSN 0896-3207. Available from:
<http://tug.org/TUGboat/tb35-1/tb109dominici.pdf>.

DOWNEY, Allen B.; MAYFIELD, Chris, 2016. *Think Java: How to Think Like a Computer Scientist* [online]. Green Tea Press. Version 6.1.0 [visited on 2016-11-08]. Available from:
<http://thinkjava.org/>.

FENN, Jürgen, 2016. Neue Pakete auf CTAN. *Die T_EXnische Komödie*. No. 3/2016. ISSN 1434-5897.

Bibliography III

FORD, Bryan, 2002. Packrat Parsing: Simple, powerful, lazy, linear time, functional pearl. In: *Packrat Parsing: Simple, powerful, lazy, linear time, functional pearl*. ACM SIGPLAN Notices [online]. Vol. 37, pp. 36–47 [visited on 2016-11-08]. No. 9. Available from DOI: [10.1145/581478.581483](https://doi.org/10.1145/581478.581483).

FORD, Bryan, 2004. Parsing expression grammars: A recognition-based syntactic foundation. In: *Parsing expression grammars: A recognition-based syntactic foundation*. ACM SIGPLAN Notices [online]. Vol. 39, pp. 111–122 [visited on 2016-08-16]. No. 1. Available from DOI: [10.1145/964001.964011](https://doi.org/10.1145/964001.964011).

Bibliography IV

GILLESPIE, Colin; LOVELACE, Robin, 2016. *Efficient R programming* [online]. O'Reilly Media [visited on 2016-11-08]. ISBN 978-1-4919-5078-4. Available from:
<https://github.com/hadley/r4ds/>.

GROLEMUND, Garrett; WICKHAM, Hadley, 2016. *R for Data Science* [online]. O'Reilly Media [visited on 2016-11-08]. ISBN 978-1-4919-1039-9. Available from:
<https://github.com/hadley/r4ds/>.

GRUBER, John, 2004. *Markdown* [online] [visited on 2016-08-15]. Available from:
<https://daringfireball.net/projects/markdown/>.

Bibliography V

- KNUTH, Donald Ervin, 1986. *The T_EXbook* [online]. 3rd ed. Addison-Westley [visited on 2016-11-08]. ISBN 0-201-13447-0. Available from: <https://mirrors.ctan.org/systems/knuth/dist/tex/texbook.tex>.
- LIM, Lian Tze, 2017. *Markdown into L^AT_EX with Style* [online] [visited on 2017-04-28]. Available from: <https://www.overleaf.com/blog/501-markdown-into-latex-with-style>.
- LUA TEAM, 2016. *Lua: About* [online] [visited on 2016-08-15]. Available from: <https://www.lua.org/about.html>.
- LUAT_EX TEAM, 2016. *LuaT_EX: Welcome* [online] [visited on 2016-08-15]. Available from: <http://luatex.org/>.

Bibliography VI

MACFARLANE, John, 2016a. *Lunamark: Lua library for conversion between markup formats* [online] [visited on 2016-08-15]. Available from: <https://github.com/jgm/lunamark>.

MACFARLANE, John, 2016b. *Pandoc: a universal document converter* [online] [visited on 2016-08-15]. Available from: <http://pandoc.org/>.

NOVOTNÝ, Vít, 2017. *A Markdown Interpreter for T_EX* [online] [visited on 2017-04-26]. Available from: <http://mirrors.ctan.org/macros/generic/markdown/markdown.pdf>.

NOVOTNÝ, Vít, 2016a. *Added support for Pandoc-style citations* [online] [visited on 2016-08-15]. Available from: <https://github.com/jgm/lunamark/pull/20>.

Bibliography VII

NOVOTNÝ, Vít, 2016b. *Markdown: A package for converting and rendering markdown documents inside T_EX* [online] [visited on 2016-08-15] Available from: <http://ctan.org/pkg/markdown>, <https://github.com/Witiko/markdown>, and <https://gitlab.fi.muni.cz/xnovot32/markdown>.