

Handoff: Optuna Bitcoin results + Slashdot continuation

ops

2026-05-13

Scope. Freeze the current empirical snapshot (Bitcoin OTC/Alpha Optuna bests, on-disk logs and SQLite paths), document power-loss interruption points, and prescribe exact steps for a follow-up agent to continue **Slashdot** (and optionally Epinions) without conflating protocols.

Goal. One runnable continuation path (env + storage + study naming) plus a single canonical report under **reports/** so another session can resume without re-deriving context.

Affected files. docs/plans/2026-05-13-optuna-handoff-slashdot-continuation/*, reports/2026-05-13-optuna-ha
CORE.YAML: none.

Interface changes. None (documentation and planning only).

Test strategy. pdflatex on plan.tex; manual verification that cited log paths exist; optional dry-run: print-only env echo before launching GPU work.

Performance budget. No new training in this change; continuation runs remain subject to existing 16 GB RSS policy and per-trial VRAM behavior documented in logs.

Rollback. Delete this plan directory and the report file.

Risk. Dual concurrent run_optuna_search processes can recur; Slashdot trials may OOM on dot/quaternion paths—mirror Bitcoin mitigations (HSIKAN_OPTUNA_ATTENTION_*, HSIKAN_CYCLE_BATCH).

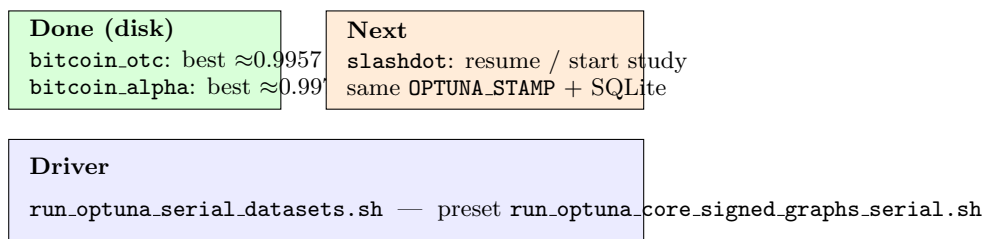


Figure 1: State: Bitcoin complete in primary logs; Slashdot is the forward edge.