Processes communicating

process: program running within a host

- within same host, two processes communicate using inter-process communication (defined by OS)
- processes in different hosts communicate by exchanging messages

clients, servers

client process: process that initiates communication

server process: process that waits to be contacted

- note: applications with P2P architectures have client processes & server processes

Application layer: overview

- Principles of network applications
- socket programming with UDP and TCP
- Web and HTTP
- The Domain Name System DNS



Some network apps

- social networking
- Web
- text messaging
- e-mail
- multi-user network games
- streaming stored video (YouTube, Hulu, Netflix)
- P2P file sharing
- voice over IP (e.g., Skype)
- real-time video conferencing (e.g., Zoom)
- Internet search
- remote login
- …

Q: your favorites?


Creating a network app

write programs that:

- run on (different) end systems
- communicate over network
- e.g., web server software communicates with browser software

no need to write software for network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

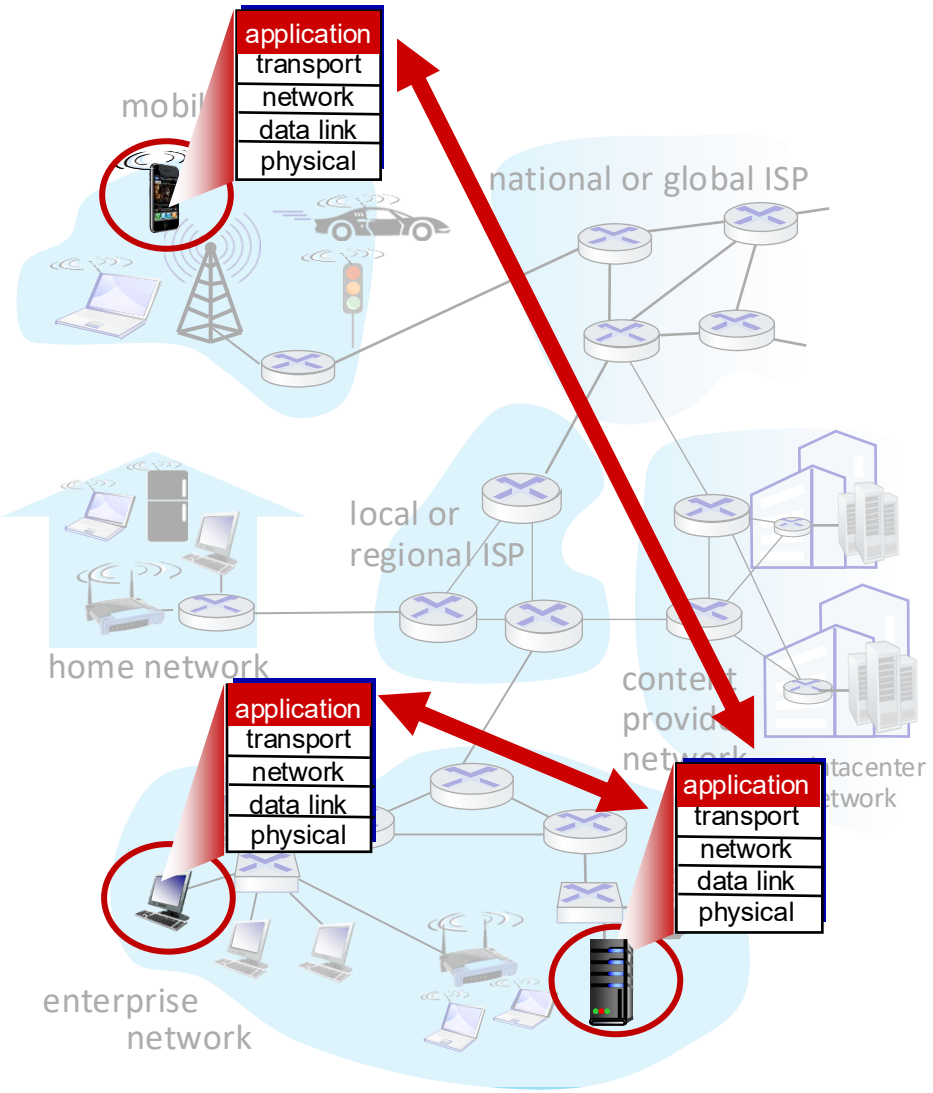

Client-server paradigm


server:

- always-on host
- permanent IP address
- often in data centers, for scaling

clients:


- contact, communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do *not* communicate directly with each other

- examples: HTTP, IMAP, FTP

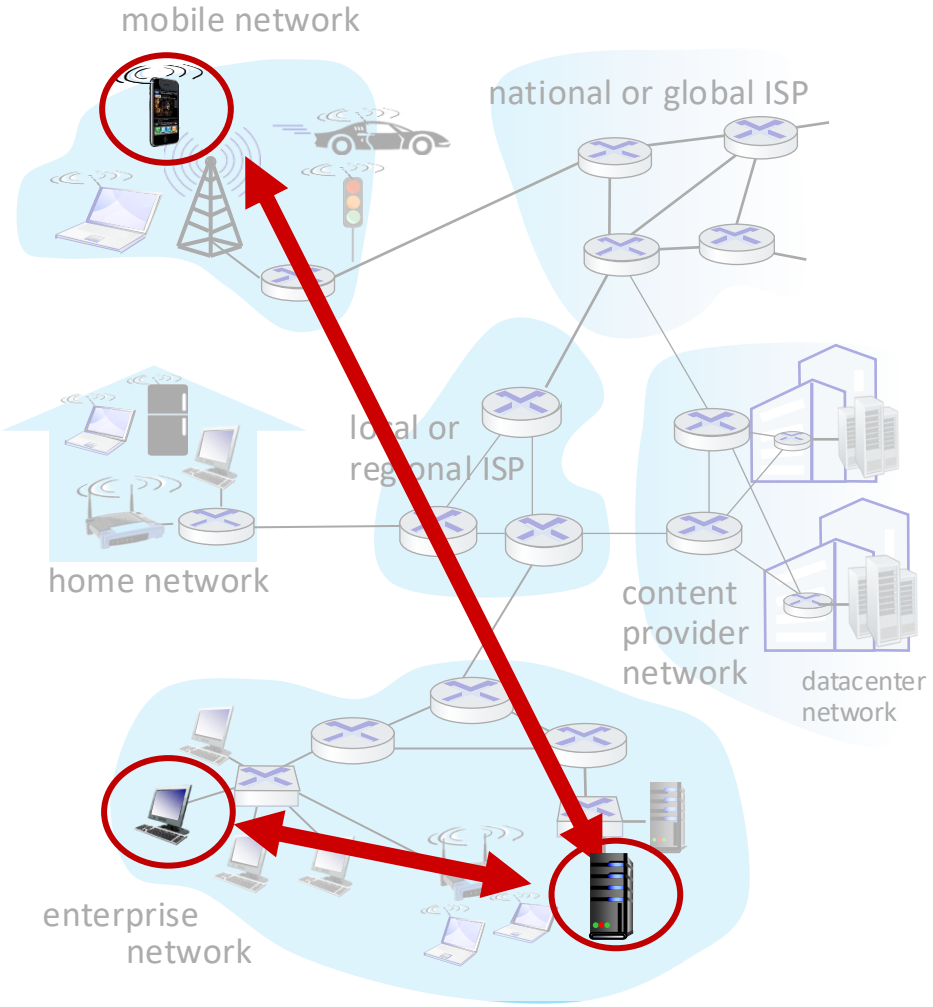


Peer-peer architecture

- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
  - *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
  - complex management
- example: P2P file sharing

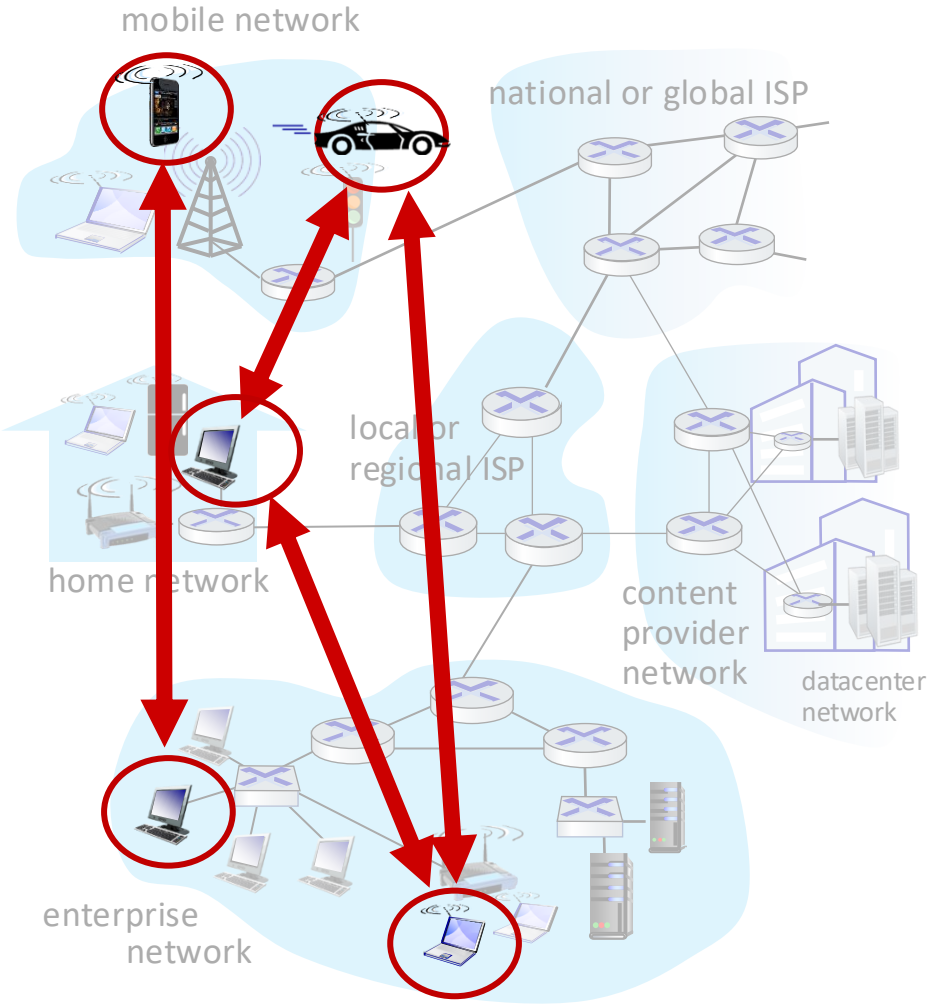

Sockets

- process sends/receives messages to/from its socket
- socket analogous to door
  - sending process shoves message out door
  - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process
  - two sockets involved: one on each side

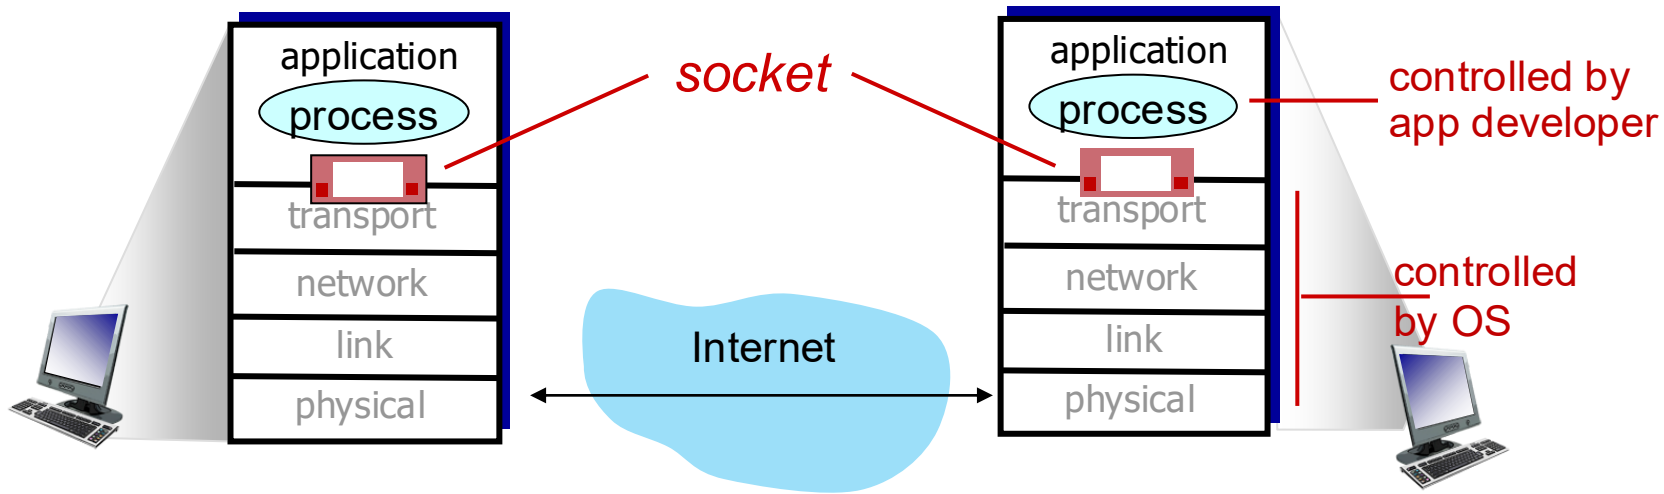

Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- *Q:* does IP address of host on which process runs suffice for identifying the process?
  - *A:* no, *many* processes can be running on same host

- *identifier* includes both IP address and port numbers associated with process on host.
- example port numbers:
  - HTTP server: 80
  - mail server: 25
- to send HTTP message to gaia.cs.umass.edu web server:
  - IP address: 128.119.245.12
  - port number: 80
- more shortly…

What transport service does an app need?

data integrity

- some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- other apps (e.g., audio) can tolerate some loss

timing

- some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput

- some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- other apps (“elastic apps”) make use of whatever throughput they get

security

- encryption, data integrity, …

Transport service requirements: common apps

application	data loss	throughput	time sensitive?
file transfer/download	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5Kbps-1Mbps video:10Kbps-5Mbps	yes, 10's msec
streaming audio/video	loss-tolerant	same as above	yes, few secs
interactive games	loss-tolerant	Kbps+	yes, 10's msec
text messaging	no loss	elastic	yes and no

Internet transport protocols services

TCP service:

- *reliable transport* between sending and receiving process
- *flow control:* sender won't overwhelm receiver
- *congestion control:* throttle sender when network overloaded
- *connection-oriented:* setup required between client and server processes
- *does not provide:* timing, minimum throughput guarantee, security

UDP service:

- *unreliable data transfer* between sending and receiving process
- *does not provide:* reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup.

Q: why bother? *Why* is there a UDP?

Internet applications, and transport protocols

application	application layer protocol	transport protocol
file transfer/download	FTP [RFC 959]	TCP
e-mail	SMTP [RFC 5321]	TCP
Web documents	HTTP 1.1 [RFC 7320]	TCP
Internet telephony	SIP [RFC 3261], RTP [RFC 3550], or proprietary	TCP or UDP
streaming audio/video	HTTP [RFC 7320], DASH	TCP
interactive games	WOW, FPS (proprietary)	UDP or TCP

Application Layer: Overview


- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



Socket programming

goal: learn how to build client/server applications that communicate using sockets

socket: door between application process and end-end-transport protocol

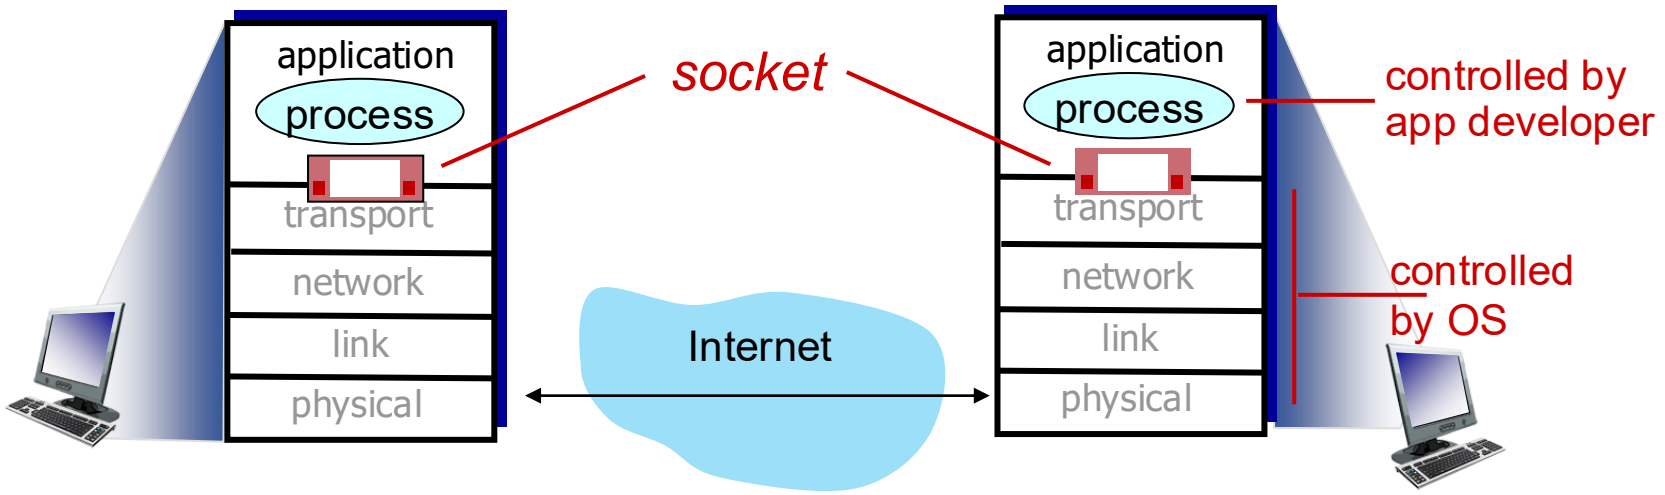

Socket programming

Two socket types for two transport services:

- *UDP:* unreliable datagram
- *TCP:* reliable, byte stream-oriented

Application Example:

1. client reads a line of characters (data) from its keyboard and sends data to server
2. server receives the data and converts characters to uppercase
3. server sends modified data to client
4. client receives modified data and displays line on its screen

Socket programming with UDP

UDP: no "connection" between client and server:

- no handshaking before sending data
- sender explicitly attaches IP destination address and port # to each packet
- receiver extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- UDP provides *unreliable* transfer of groups of bytes ("datagrams") between client and server processes

Client/server socket interaction: UDP



server (running on serverIP)

create socket, port= x:
serverSocket =
socket(AF_INET,SOCK_DGRAM)

read datagram from
serverSocket

write reply to
serverSocket
specifying
client address,
port number

client



create socket:
clientSocket =
socket(AF_INET,SOCK_DGRAM)

Create datagram with serverIP address
And port=x; send datagram via
clientSocket

read datagram from
clientSocket

close
clientSocket

Example app: UDP client

Python UDPClient

include Python's socket library →
```
from socket import *
```
```
serverName = 'hostname'
serverPort = 12000
```
create UDP socket →
```
clientSocket = socket(AF_INET,
                      SOCK_DGRAM)
```
get user keyboard input →
```
message = raw_input('Input lowercase sentence:')
```
attach server name, port to message; send into socket →
```
clientSocket.sendto(message.encode(),
                    (serverName, serverPort))
```
read reply characters from socket into string →
```
modifiedMessage, serverAddress =
                    clientSocket.recvfrom(2048)
```
print out received string and close socket →
```
print modifiedMessage.decode()
clientSocket.close()
```

Example app: UDP server

Python UDPServer

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(('', serverPort))
print ("The server is ready to receive")
while True:
    message, clientAddress = serverSocket.recvfrom(2048)
    modifiedMessage = message.decode().upper()
    serverSocket.sendto(modifiedMessage.encode(),
                        clientAddress)
```

create UDP socket →

bind socket to local port number 12000 →

loop forever →

Read from UDP socket into message, getting client's address (client IP and port) →

send upper case string back to this client →

Socket programming with TCP

Client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

Client contacts server by:

- Creating TCP socket, specifying IP address, port number of server process
- *when client creates socket:* client TCP establishes connection to server TCP

- when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
  - allows server to talk with multiple clients
  - *source* port numbers used to distinguish clients

Application viewpoint


TCP provides reliable, in-order byte-stream transfer ("pipe") between client and server processes

Client/server socket interaction: TCP



server (running on hostid)

client 

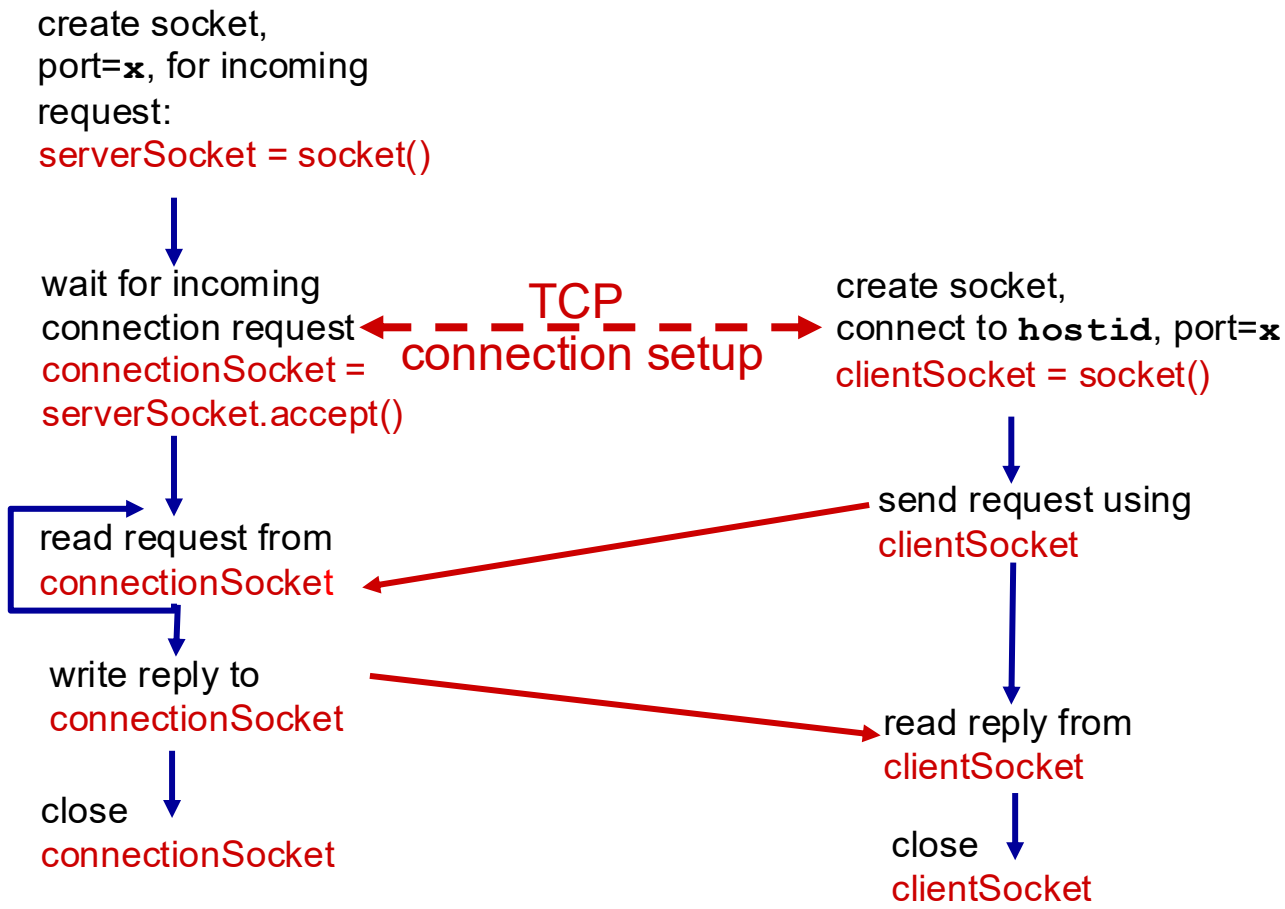

Example app: TCP client

Python TCPClient

```
from socket import *
serverName = 'servername'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName,serverPort))
sentence = raw_input('Input lowercase sentence:')
clientSocket.send(sentence.encode())
modifiedSentence = clientSocket.recv(1024)
print ('From Server:', modifiedSentence.decode())
clientSocket.close()
```

create TCP socket for server, remote port 12000

No need to attach server name, port

Example app: TCP server

Python TCPServer

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind(('',serverPort))
serverSocket.listen(1)
print 'The server is ready to receive'
while True:
    connectionSocket, addr = serverSocket.accept()

    sentence = connectionSocket.recv(1024).decode()
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence.
                          encode())
    connectionSocket.close()
```

create TCP welcoming socket →

server begins listening for incoming TCP requests →

loop forever →

server waits on accept() for incoming requests, new socket created on return →

read bytes from socket (but not address as in UDP) →

close connection to this client (but *not* welcoming socket) →

Application layer: overview

- Principles of network applications
- **Web and HTTP**
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



An application-layer protocol defines:

- types of messages exchanged,
  - e.g., request, response
- message syntax:
  - what fields in messages & how fields are delineated
- message semantics
  - meaning of information in fields
- rules for when and how processes send & respond to messages

open protocols:

- defined in RFCs, everyone has access to protocol definition
- allows for interoperability
- e.g., HTTP, SMTP

proprietary protocols:

- e.g., Skype, Zoom

Web and HTTP

First, a quick review…

- web page consists of *objects,* each of which can be stored on different Web servers
- object can be HTML file, JPEG image, Java applet, audio file,…
- web page consists of *base HTML-file* which includes *several referenced objects, each* addressable by a *URL,* e.g.,


`www.someschool.edu/someDept/pic.gif`

host name | path name

HTTP overview

HTTP: hypertext transfer protocol

- Web's application-layer protocol
- client/server model:
  - *client:* browser that requests, receives, (using HTTP protocol) and "displays" Web objects
  - *server:* Web server sends (using HTTP protocol) objects in response to requests

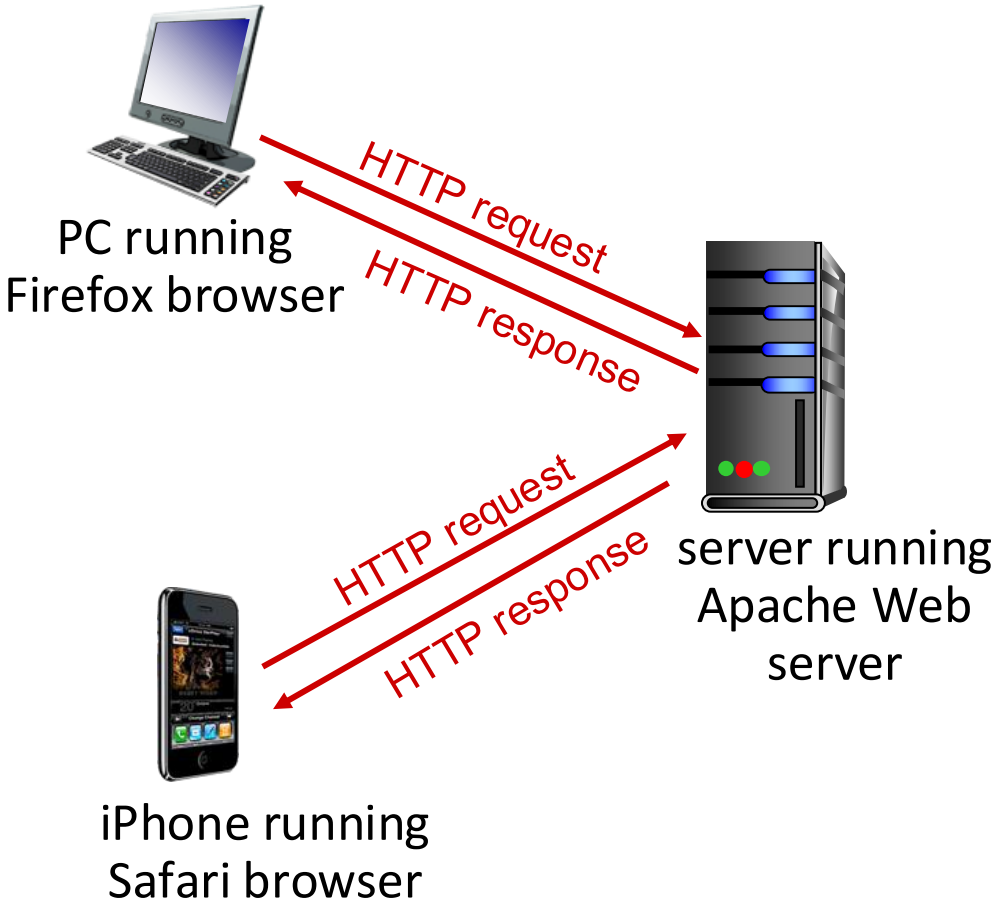

HTTP overview (continued)

HTTP uses TCP:

- client initiates TCP connection (creates socket) to server, port 80
- server accepts TCP connection from client
- HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- TCP connection closed

HTTP is "stateless"

- server maintains *no* information about past client requests

aside

protocols that maintain "state" are complex!

- past history (state) must be maintained
- if server/client crashes, their views of "state" may be inconsistent, must be reconciled

HTTP connections: two types

Non-persistent HTTP

1. TCP connection opened
2. at most one object sent over TCP connection
3. TCP connection closed

downloading multiple objects required multiple connections

Persistent HTTP

- TCP connection opened to a server
- multiple objects can be sent over *single* TCP connection between client, and that server
- TCP connection closed

Non-persistent HTTP: example

User enters URL: **`www.someSchool.edu/someDepartment/home.index`**
(containing text, references to 10 jpeg images)



1a. HTTP client initiates TCP connection to HTTP server (process) at www.someSchool.edu on port 80



1b. HTTP server at host www.someSchool.edu waiting for TCP connection at port 80 "accepts" connection, notifying client

2. HTTP client sends HTTP *request message* (containing URL) into TCP connection socket. Message indicates that client wants object someDepartment/home.index

3. HTTP server receives request message, forms *response message* containing requested object, and sends message into its socket

time

Non-persistent HTTP: example (cont.)

User enters URL: **`www.someSchool.edu/someDepartment/home.index`**
(containing text, references to 10 jpeg images)





4. HTTP server closes TCP connection.

5. HTTP client receives response message containing html file, displays html. Parsing html file, finds 10 referenced jpeg objects

6. Steps 1-5 repeated for each of 10 jpeg objects


time

Non-persistent HTTP: response time

RTT (definition): time for a small packet to travel from client to server and back

HTTP response time (per object):

- one RTT to initiate TCP connection
- one RTT for HTTP request and first few bytes of HTTP response to return
- obect/file transmission time

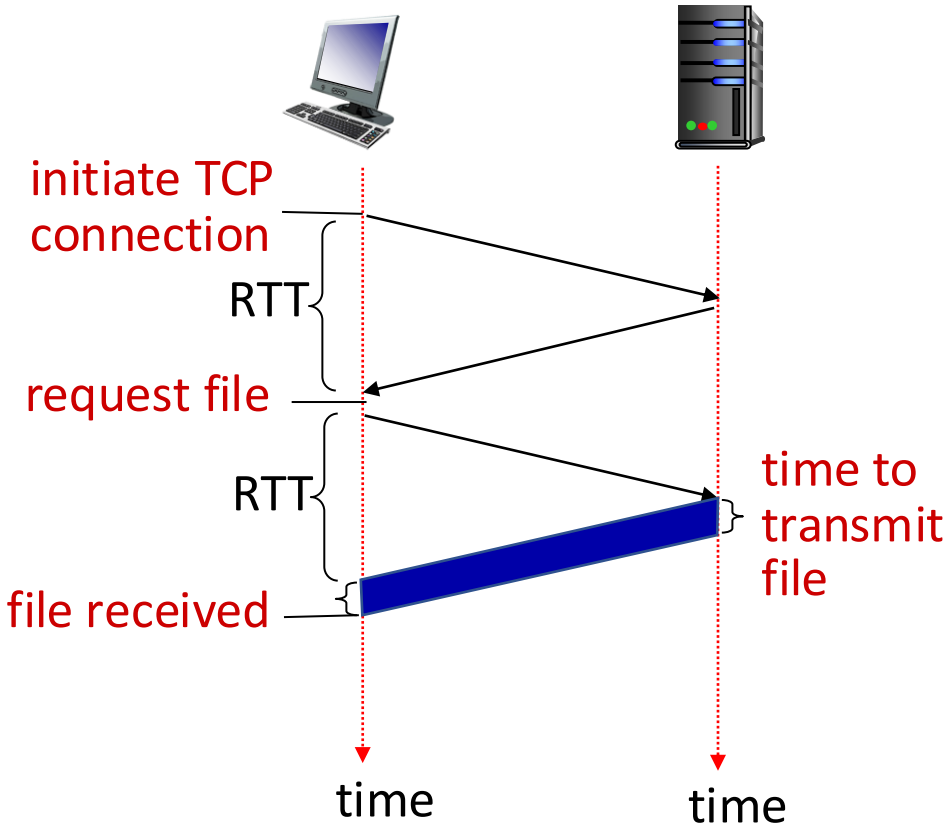

Non-persistent HTTP response time = 2RTT+ file transmission time

Persistent HTTP (HTTP 1.1)

Non-persistent HTTP issues:

- requires 2 RTTs per object
- OS overhead for *each* TCP connection
- browsers often open multiple parallel TCP connections to fetch referenced objects in parallel

Persistent HTTP (HTTP1.1):

- server leaves connection open after sending response
- subsequent HTTP messages between same client/server sent over open connection
- client sends requests as soon as it encounters a referenced object
- as little as one RTT for all the referenced objects (cutting response time in half)

HTTP request message

- two types of HTTP messages: *request, response*
- HTTP request message:
  - ASCII (human-readable format)


carriage return character
line-feed character

request line (GET, POST,
HEAD commands)

carriage return, line feed
at start of line indicates
end of header lines

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP request message: general format

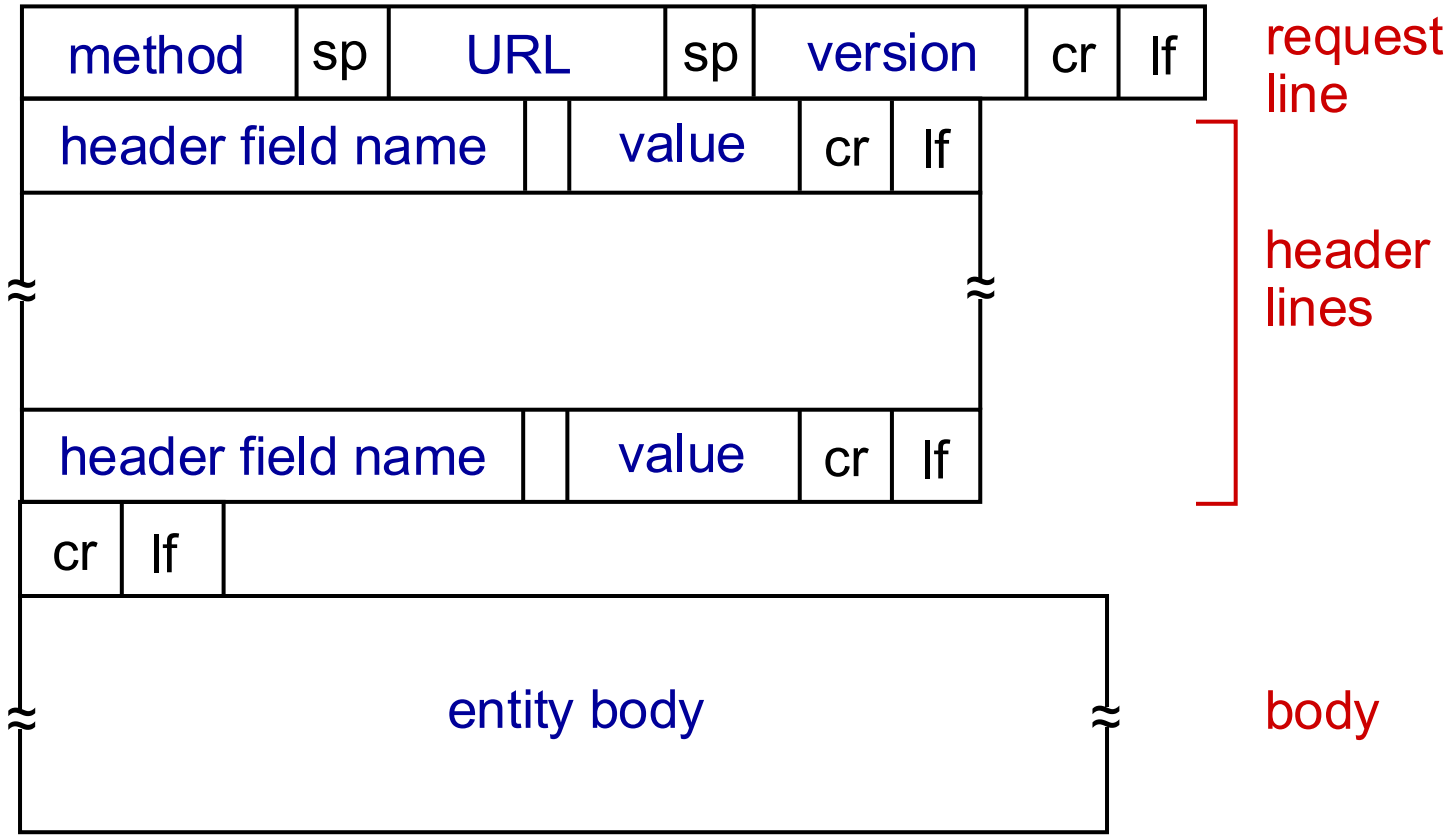

Other HTTP request messages

POST method:

- web page often includes form input
- user input sent from client to server in entity body of HTTP POST request message

GET method (for sending data to server):

- include user data (query parameters) in URL field of HTTP GET request message (following a '?'):

```
www.somesite.com/animalsearch?monkeys&banana
```

HEAD method:

- requests headers (only) that would be returned *if* specified URL were requested with an HTTP GET method.

PUT method:

- uploads new file (object) to server
- completely replaces file that exists at specified URL with content in entity body of POST HTTP request message

HTTP response message

status line (protocol status code status phrase) → `HTTP/1.1 200 OK`

HTTP response status codes

- status code appears in 1st line in server-to-client response message.
- some sample codes:

200 OK

- request succeeded, requested object later in this message

301 Moved Permanently

- requested object moved, new location specified later in this message (in Location: field)

400 Bad Request

- request msg not understood by server

404 Not Found

- requested document not found on this server

505 HTTP Version Not Supported

Trying out HTTP (client side) for yourself

1. netcat to your favorite Web server:

```
% nc -c -v gaia.cs.umass.edu 80
```

- opens TCP connection to port 80 (default HTTP server port) at gaia.cs.umass. edu.
- anything typed in will be sent to port 80 at gaia.cs.umass.edu

2. type in a GET HTTP request:

```
GET /kurose_ross/interactive/index.php HTTP/1.1
Host: gaia.cs.umass.edu
```

- by typing this in (hit carriage return twice), you send this minimal (but complete) GET request to HTTP server

3. look at response message sent by HTTP server!


(or use Wireshark to look at captured HTTP request/response)

Maintaining user/server state: cookies

Recall: HTTP GET/response interaction is *stateless*

- no notion of multi-step exchanges of HTTP messages to complete a Web "transaction"
  - no need for client/server to track "state" of multi-step exchange
  - all HTTP requests are independent of each other
  - no need for client/server to "recover" from a partially-completed-but-never-completely-completed transaction

a stateful protocol: client makes two changes to X, or none at all

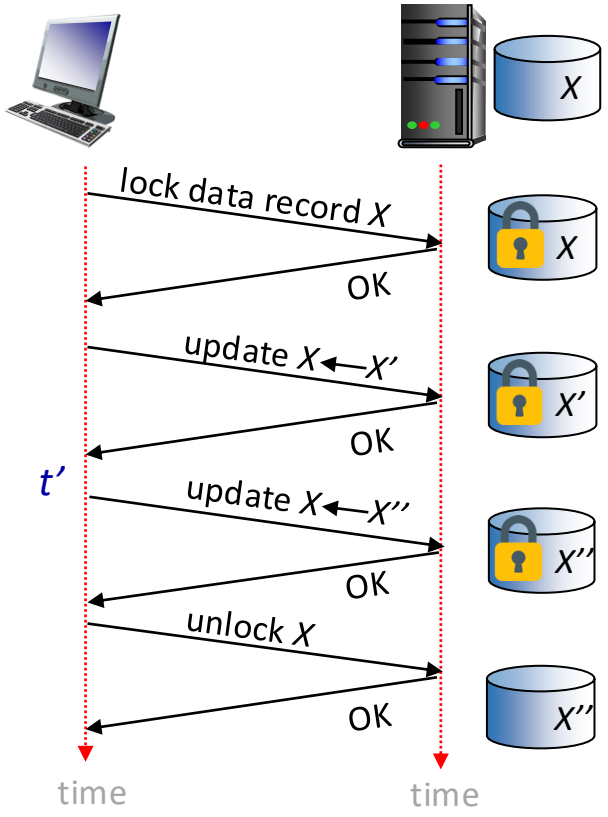

Q: what happens if network connection or client crashes at *t'* ?

Maintaining user/server state: cookies

Web sites and client browser use *cookies* to maintain some state between transactions


four components:

1) cookie header line of HTTP *response* message
2) cookie header line in next HTTP *request* message
3) cookie file kept on user's host, managed by user's browser
4) back-end database at Web site

Example:

- Susan uses browser on laptop, visits specific e-commerce site for first time
- when initial HTTP requests arrives at site, site creates:
  - unique ID (aka "cookie")
  - entry in backend database for ID
- subsequent HTTP requests from Susan to this site will contain cookie ID value, allowing site to "identify" Susan

Maintaining user/server state: cookies

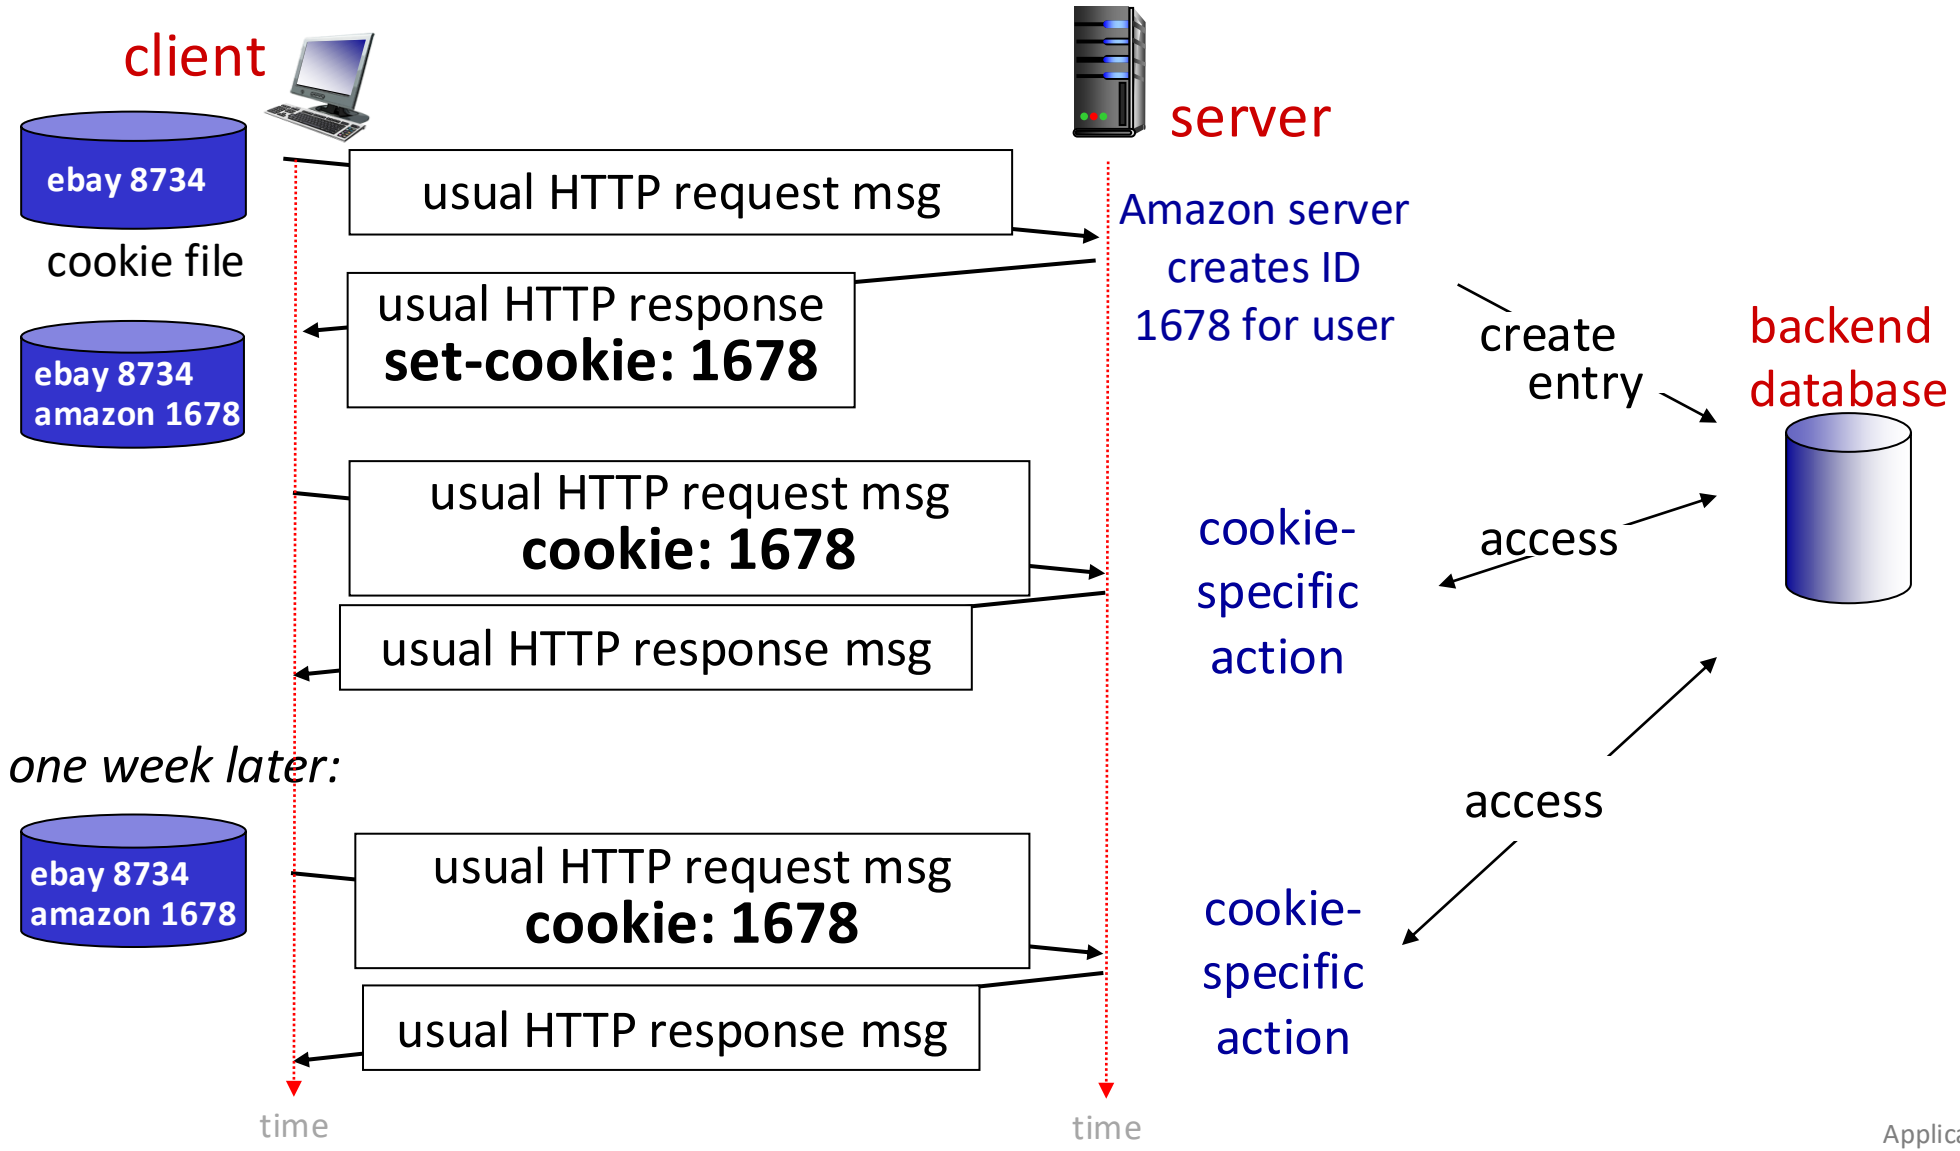

HTTP cookies: comments

What cookies can be used for:

- authorization
- shopping carts
- recommendations
- user session state (Web e-mail)

Challenge: How to keep state?

- *at protocol endpoints:* maintain state at sender/receiver over multiple transactions
- *in messages:* cookies inHTTP messages carry state

aside


cookies and privacy:

- cookies permit sites to *learn* a lot about you on their site.
- third party persistent cookies (tracking cookies) allow common identity (cookie value) to be tracked across multiple web sites

Web caches

Goal: satisfy client requests without involving origin server

- user configures browser to point to a (local) *Web cache*
- browser sends all HTTP requests to cache
  - *if* object in cache: cache returns object to client
  - *else* cache requests object from origin server, caches received object, then returns object to client

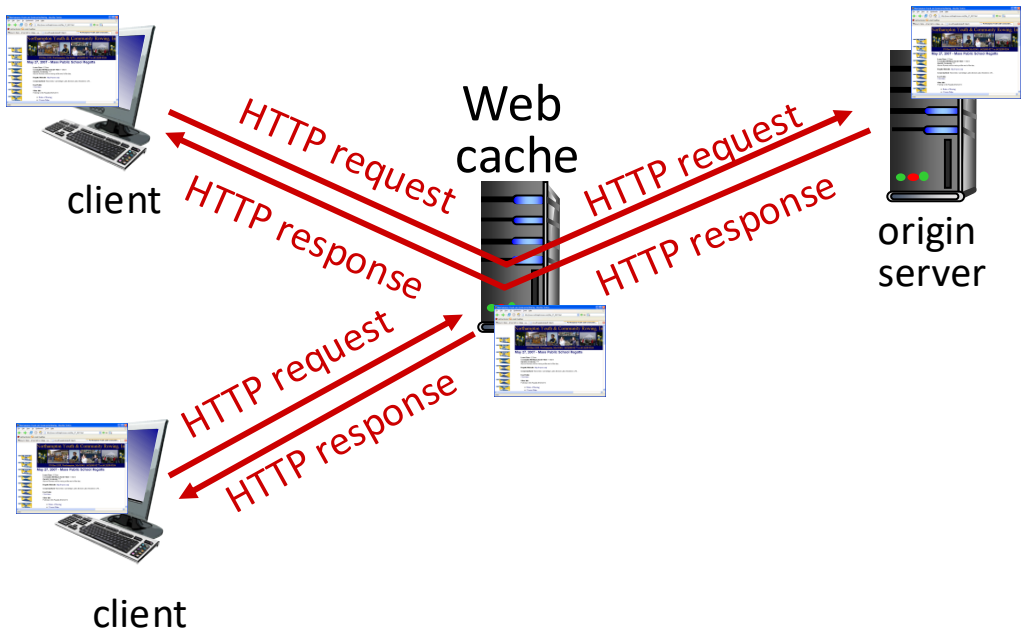

Web caches (aka proxy servers)

- Web cache acts as both client and server
  - server for original requesting client
  - client to origin server
- server tells cache about object's allowable caching in response header:

```
Cache-Control: max-age=<seconds>
```

```
Cache-Control: no-cache
```

Why Web caching?

- reduce response time for client request
  - cache is closer to client
- reduce traffic on an institution's access link
- Internet is dense with caches
  - enables "poor" content providers to more effectively deliver content


Caching example

Scenario:


- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
  - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = .97
- LAN utilization: .0015
- end-end delay = Internet delay + access link delay + LAN delay
  = 2 sec + minutes + usecs



problem: large queueing delays at high utilization!

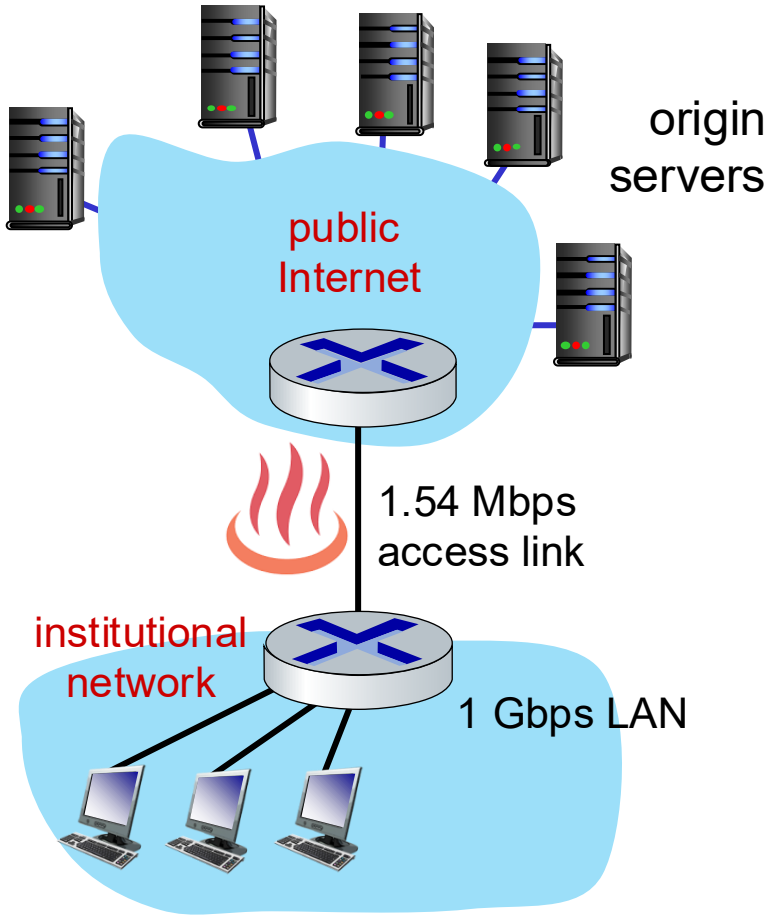

Option 1: buy a faster access link


Scenario:

- access link rate: 1.54 Mbps → 154 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
  - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = .97 → .0097
- LAN utilization: .0015
- end-end delay = Internet delay + access link delay + LAN delay
  = 2 sec + minutes + usecs → msecs

Cost: faster access link (expensive!)

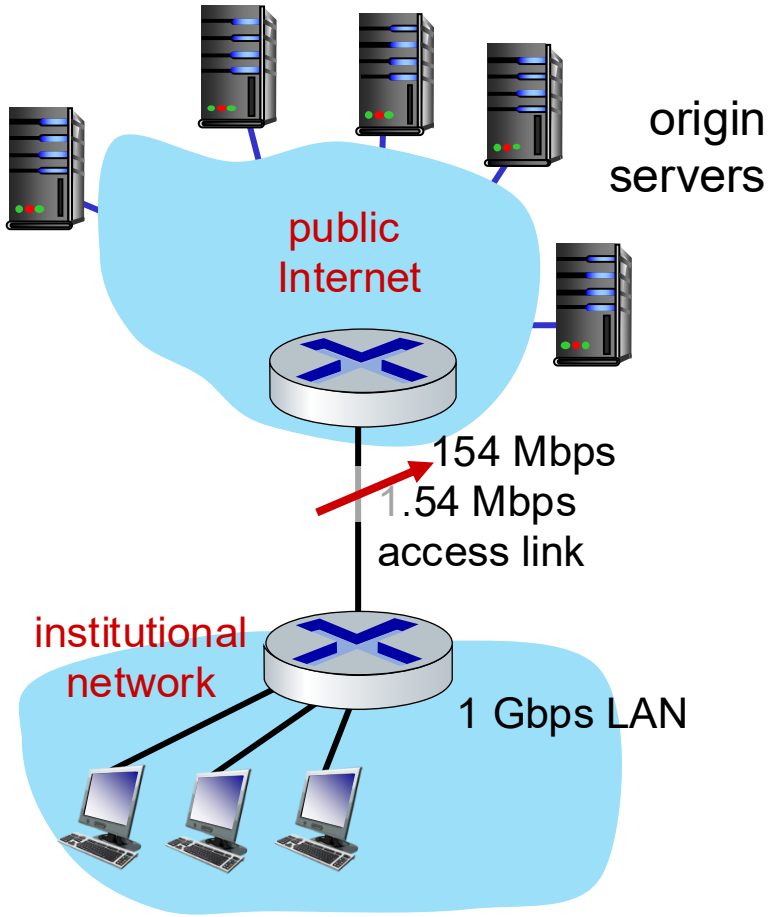

Option 2: install a web cache

Scenario:


- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
  - avg data rate to browsers: 1.50 Mbps

Cost: web cache (cheap!)

Performance:

- LAN utilization: .?
- access link utilization = ?
- average end-end delay = ?


How to compute link utilization, delay?

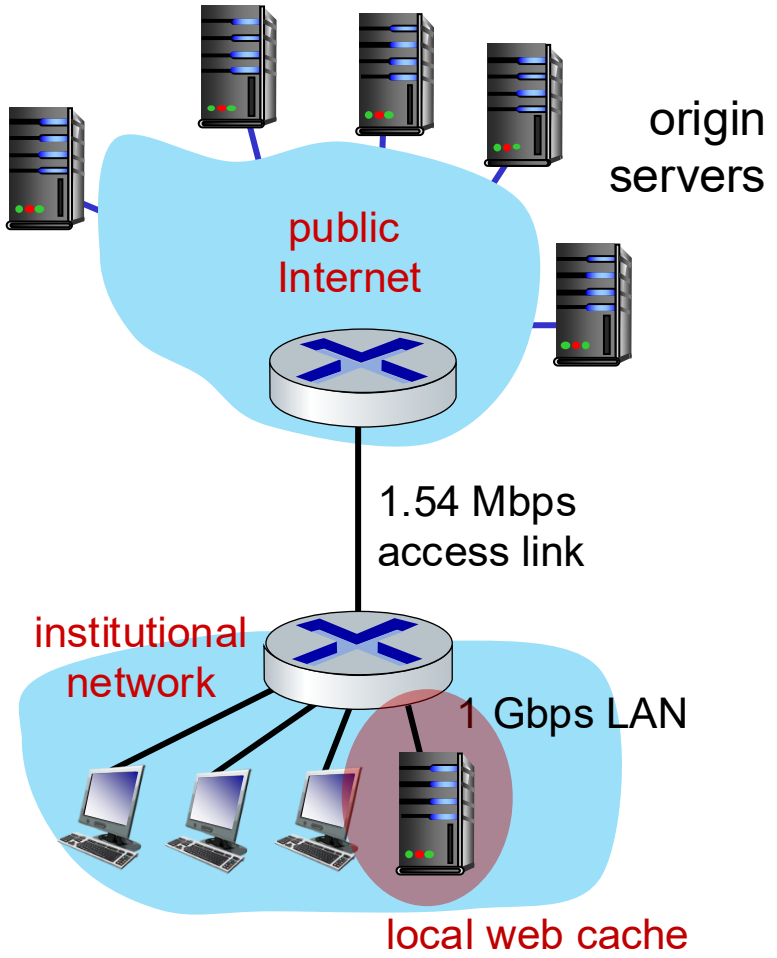

Calculating access link utilization, end-end delay with cache:

suppose cache hit rate is 0.4:

- 40% requests served by cache, with low (msec) delay
- 60% requests satisfied at origin
  - rate to browsers over access link
    = 0.6 * 1.50 Mbps = .9 Mbps
  - access link utilization = 0.9/1.54 = .58 means low (msec) queueing delay at access link
- average end-end delay:
  = 0.6 * (delay from origin servers)
  + 0.4 * (delay when satisfied at cache)
  = 0.6 (2.0) + 0.4 (~msecs) = ~ 1.2 secs

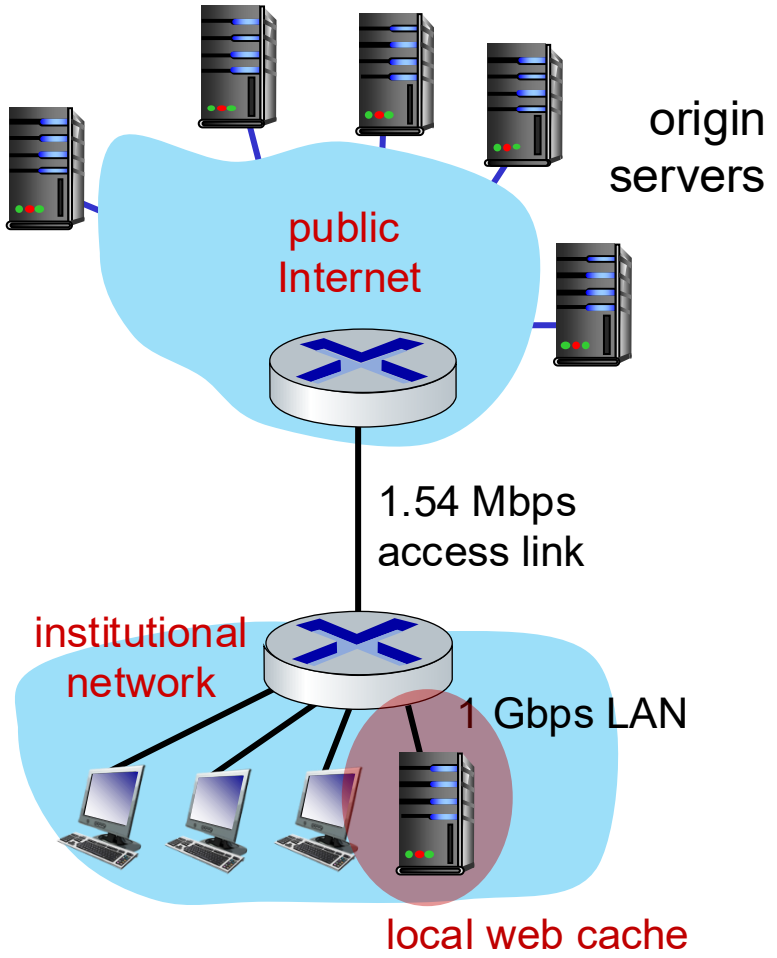

lower average end-end delay than with 154 Mbps link (and cheaper too!)

Conditional GET

Goal: don't send object if cache has up-to-date cached version


- no object transmission delay (or use of network resources)

- *client:* specify date of cached copy in HTTP request

  If-modified-since: <date>

- *server:* response contains no object if cached copy is up-to-date:

  HTTP/1.0 304 Not Modified

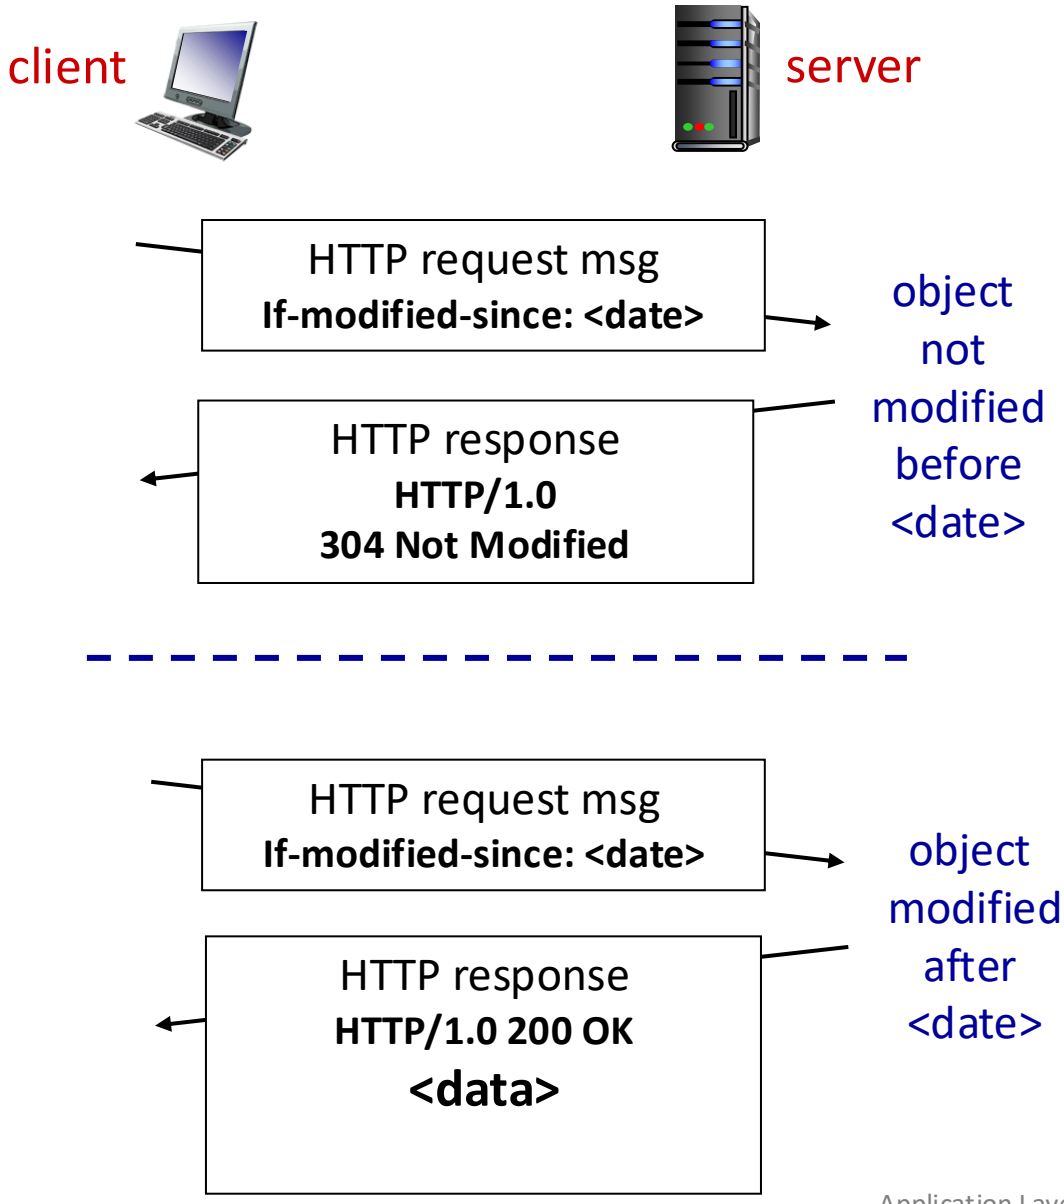

Application Layer: Overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- **The Domain Name System DNS**
- P2P applications
- video streaming and content distribution networks
- socket programming with UDP and TCP



DNS: Domain Name System

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- "name", e.g., cs.umass.edu - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System (DNS):

- *distributed database* implemented in hierarchy of many *name servers*
- *application-layer protocol:* hosts, DNS servers communicate to *resolve* names (address/name translation)
  - *note:* core Internet function, implemented as application-layer protocol
  - complexity at network's "edge"

DNS: services, structure

DNS services:

- hostname-to-IP-address translation
- host aliasing
  - canonical, alias names
- mail server aliasing
- load distribution
  - replicated Web servers: many IP addresses correspond to one name

Q: Why not centralize DNS?

- single point of failure
- traffic volume
- distant centralized database
- maintenance

A: doesn't scale!

- Comcast DNS servers alone: 600B DNS queries/day
- Akamai DNS servers alone: 2.2T DNS queries/day

Thinking about the DNS

humongous distributed database:

- ~ billion records, each simple

handles many *trillions* of queries/day:

- *many* more reads than writes
- *performance matters:* almost every Internet transaction interacts with DNS - msecs count!


organizationally, physically decentralized:

- millions of different organizations responsible for their records

"bulletproof": reliability, security



DNS: a distributed, hierarchical database

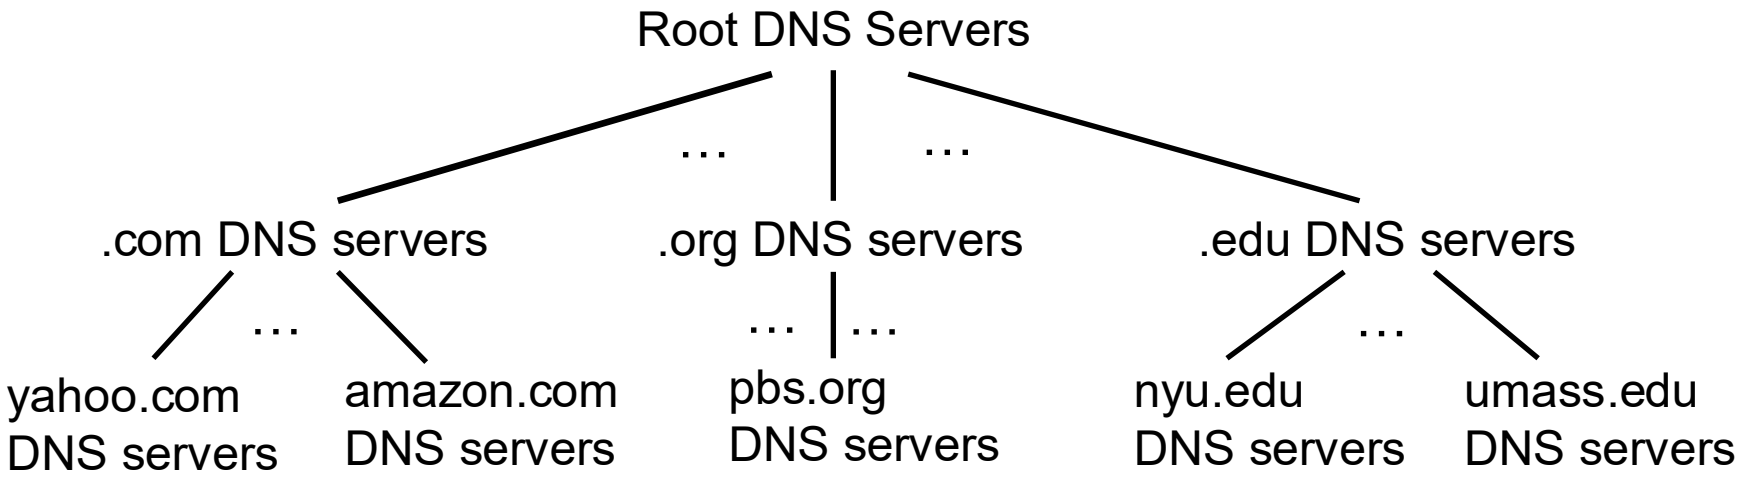

Root

Top Level Domain


Authoritative

Client wants IP address for www.amazon.com; 1st approximation:

- client queries root server to find .com DNS server
- client queries .com DNS server to get amazon.com DNS server
- client queries amazon.com DNS server to get IP address for www.amazon.com

DNS: root name servers


- official, contact-of-last-resort by name servers that can not resolve name

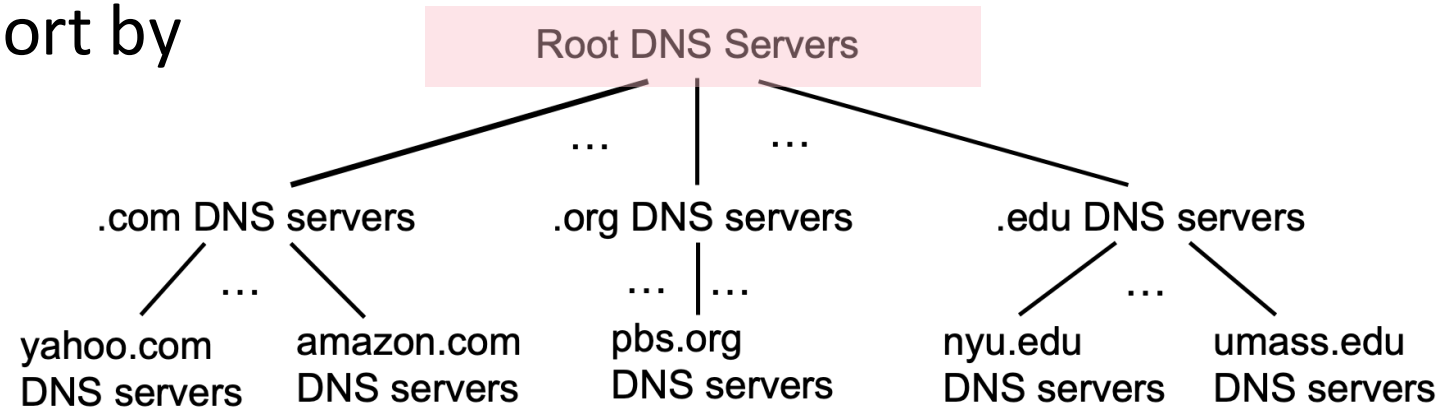

DNS: root name servers

- official, contact-of-last-resort by name servers that can not resolve name
- *incredibly important* Internet function
  - Internet couldn't function without it!
  - DNSSEC – provides security (authentication, message integrity)
- ICANN (Internet Corporation for Assigned Names and Numbers) manages root DNS domain


13 logical root name "servers" worldwide each "server" replicated many times (~200 servers in US)

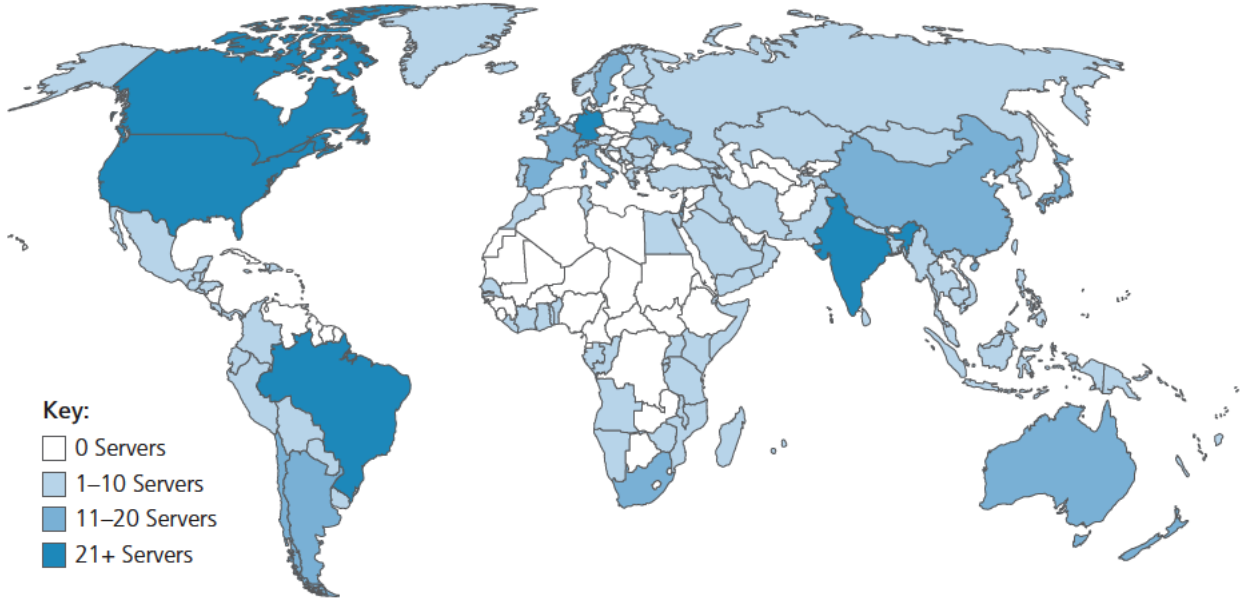

Top-Level Domain, and authoritative servers

Top-Level Domain (TLD) servers:

- responsible for .com, .org, .net, .edu, .aero, .jobs, .museums, and all top-level country domains, e.g.: .cn, .uk, .fr, .ca, .jp
- Network Solutions: authoritative registry for .com, .net TLD
- Educause: .edu TLD

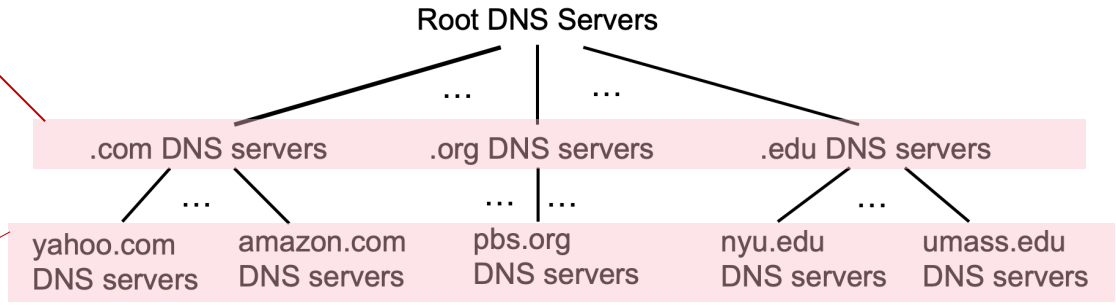

authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name servers


- when host makes DNS query, it is sent to its *local* DNS server
  - Local DNS server returns reply, answering:
    - from its local cache of recent name-to-address translation pairs (possibly out of date!)
    - forwarding request into DNS hierarchy for resolution
  - each ISP has local DNS name server; to find yours:
    - MacOS: `% scutil --dns`
    - Windows: `>ipconfig /all`
- local DNS server doesn't strictly belong to hierarchy

DNS name resolution: iterated query

Example: host at engineering.nyu.edu wants IP address for gaia.cs.umass.edu

Iterated query:

- contacted server replies with name of server to contact
- "I don't know this name, but ask this server"

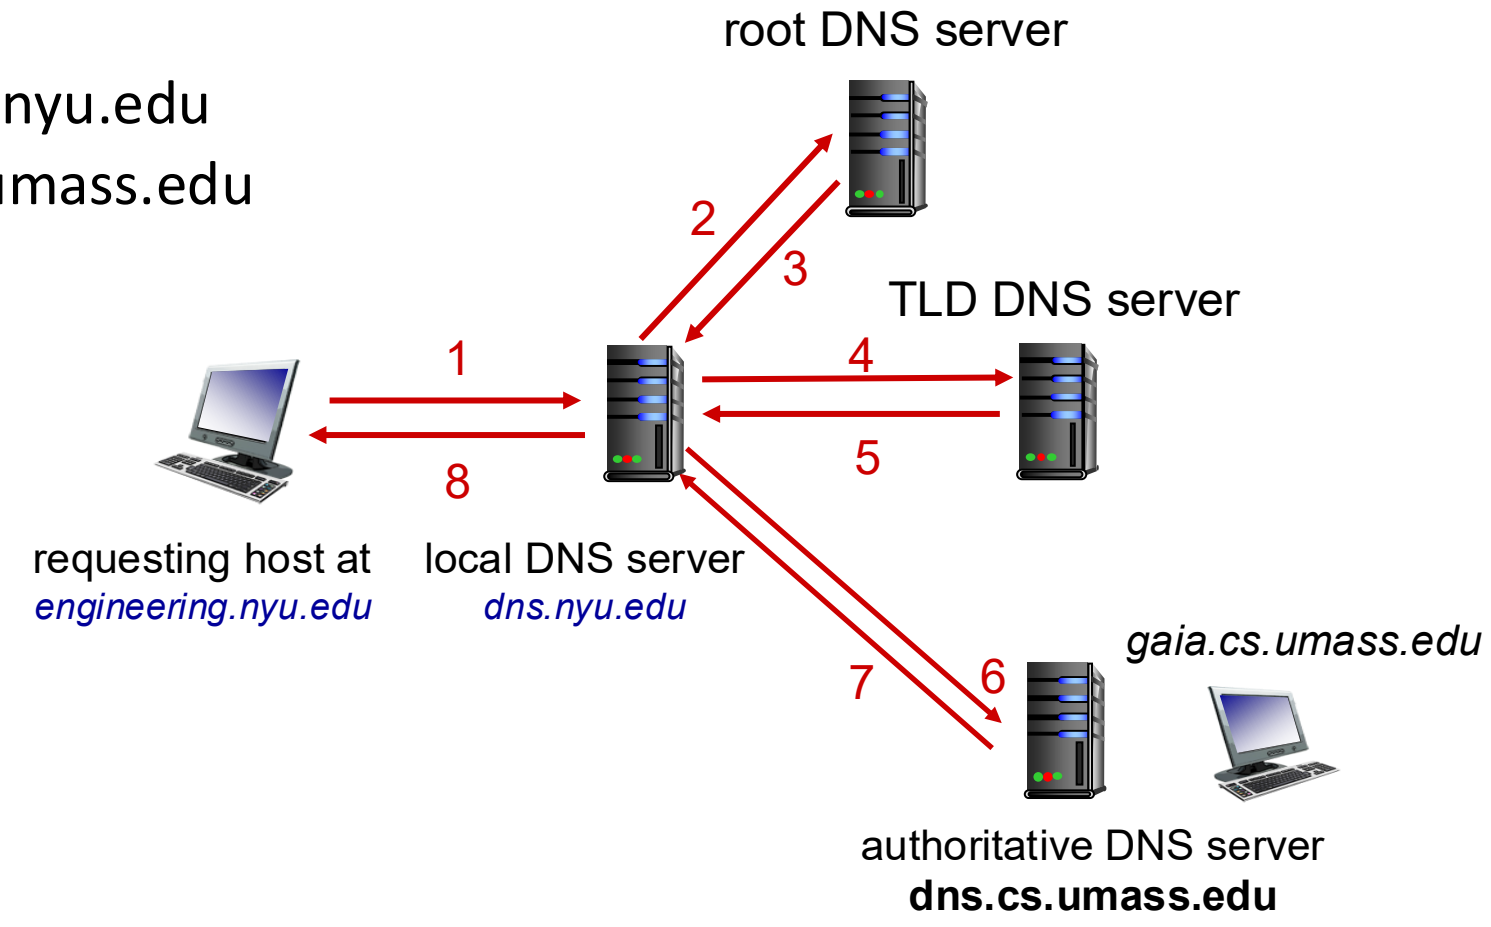


DNS name resolution: recursive query

Example: host at engineering.nyu.edu wants IP address for gaia.cs.umass.edu

Recursive query:

- puts burden of name resolution on contacted name server
- heavy load at upper levels of hierarchy?

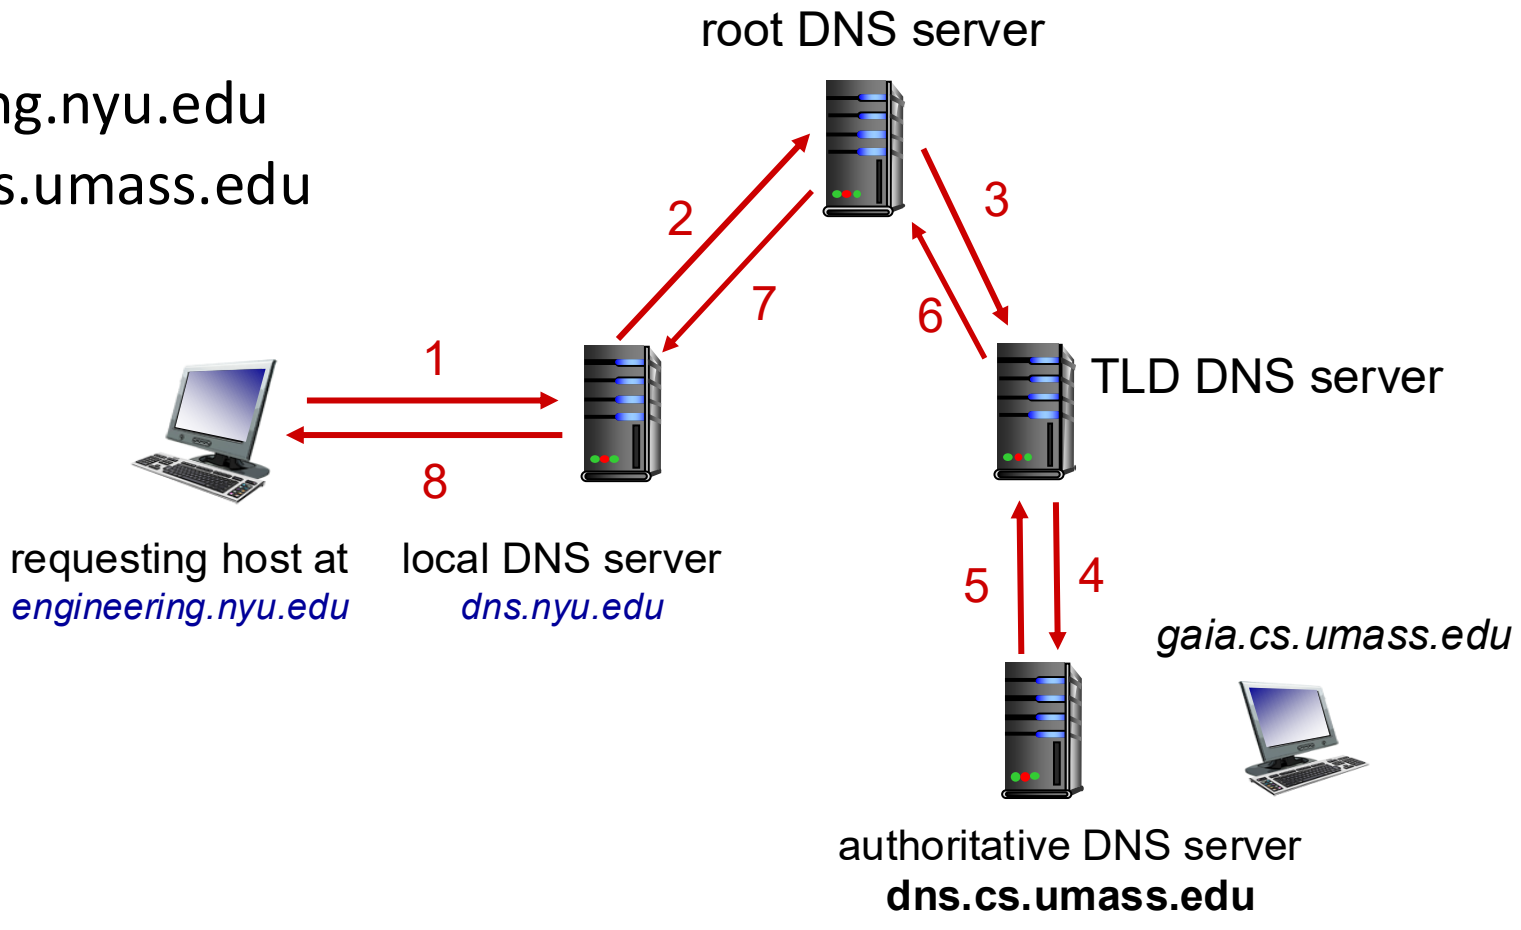

Caching DNS Information

- once (any) name server learns mapping, it *caches* mapping, and i*mmediately* returns a cached mapping in response to a query
  - caching improves response time
  - cache entries timeout (disappear) after some time (TTL)
  - TLD servers typically cached in local name servers
- cached entries may be *out-of-date*
  - if named host changes IP address, may not be known Internet-wide until all TTLs expire!
  - *best-effort name-to-address translation!*

DNS records

DNS: distributed database storing resource records (RR)

RR format: (`name, value, type, ttl`)

type=A

- `name` is hostname
- `value` is IP address

type=NS

- `name` is domain (e.g., foo.com)
- `value` is hostname of authoritative name server for this domain

type=CNAME

- `name` is alias name for some "canonical" (the real) name
- www.ibm.com is really servereast.backup2.ibm.com
- `value` is canonical name

type=MX


- `value` is name of SMTP mail server associated with `name`

DNS protocol messages

DNS *query* and *reply* messages, both have same *format:*


message header:

- identification: 16 bit # for query, reply to query uses same #
- flags:
  - query or reply
  - recursion desired
  - recursion available
  - reply is authoritative

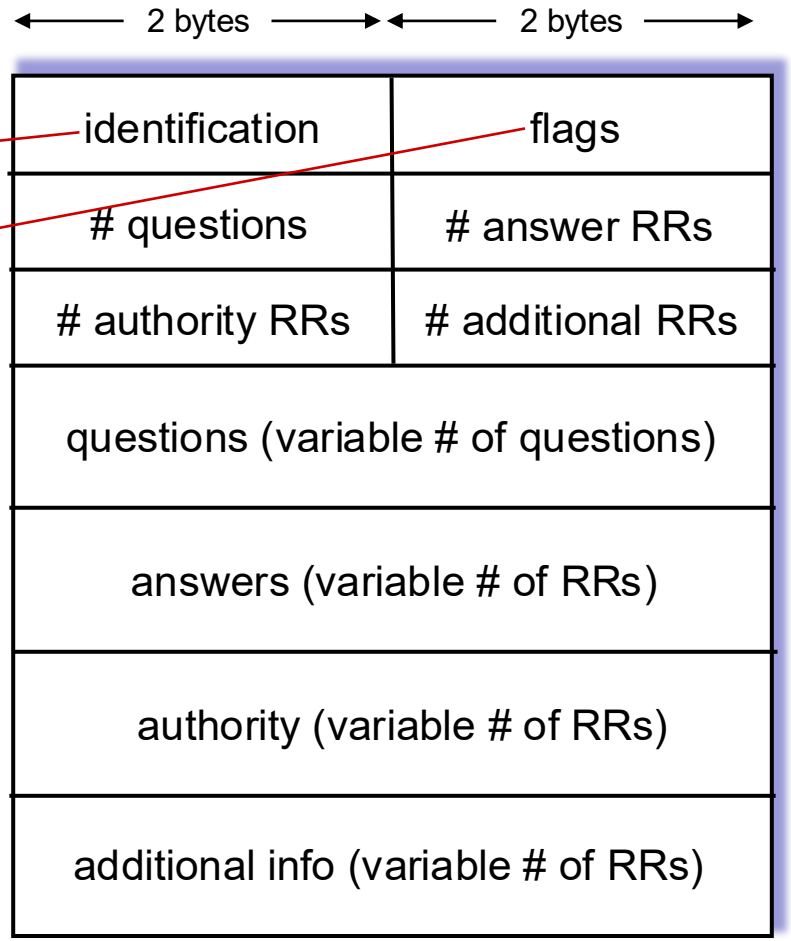

DNS protocol messages

DNS *query* and *reply* messages, both have same *format:*

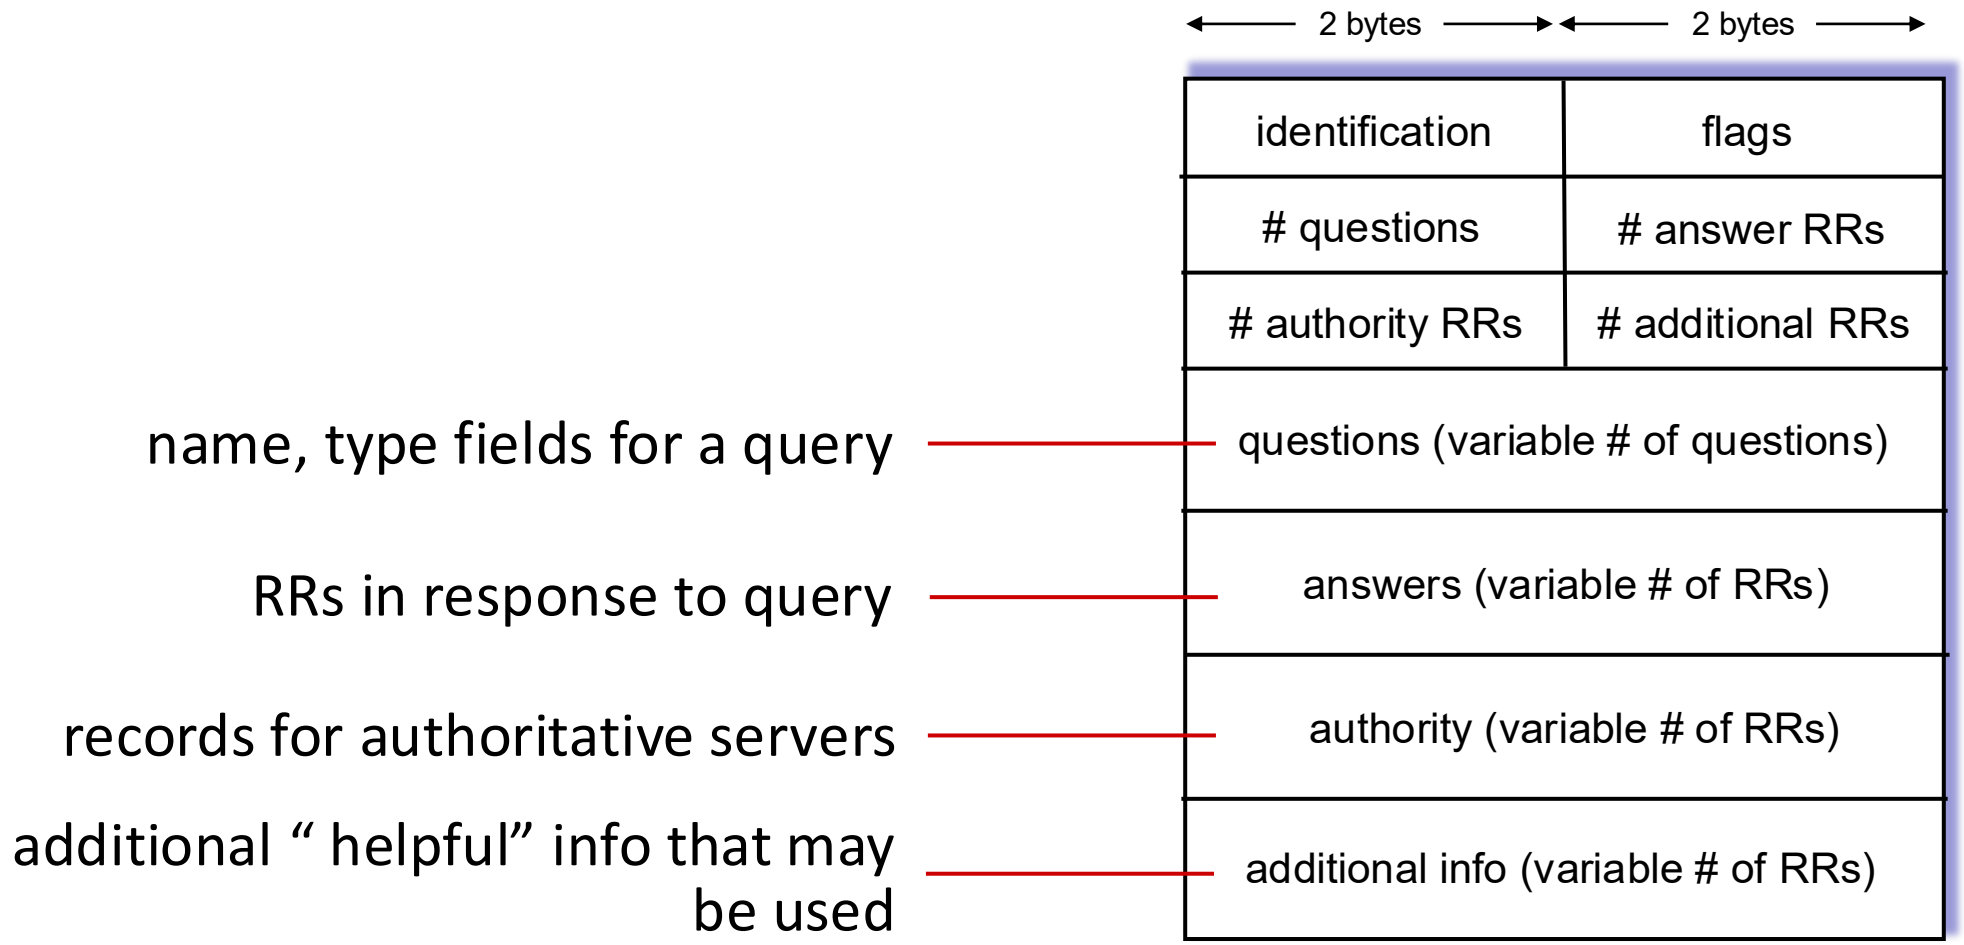

Getting your info into the DNS

example: new startup “Network Utopia”

- register name networkuptopia.com at *DNS registrar* (e.g., Network Solutions)
  - provide names, IP addresses of authoritative name server (primary and secondary)
  - registrar inserts NS, A RRs into .com TLD server:

    `(networkutopia.com, dns1.networkutopia.com, NS)`

    `(dns1.networkutopia.com, 212.212.212.1, A)`
- create authoritative server locally with IP address `212.212.212.1`
  - type A record for www.networkuptopia.com
  - type MX record for networkutopia.com

Summary

our study of network application layer is now complete!

- application architectures
  - client-server
  - P2P
- application service requirements:
  - reliability, bandwidth, delay
- Internet transport service model
  - connection-oriented, reliable: TCP
  - unreliable, datagrams: UDP
- specific protocols:
  - HTTP
  - DNS
- socket programming: TCP, UDP sockets

Summary

Most importantly: learned about *protocols*!

- typical request/reply message exchange:
  - client requests info or service
  - server responds with data, status code
- message formats:
  - *headers*: fields giving info about data
  - *data:* info(payload) being communicated

important themes:

- centralized vs. decentralized
- stateless vs. stateful
- scalability
- reliable vs. unreliable message transfer
- "complexity at network edge"