



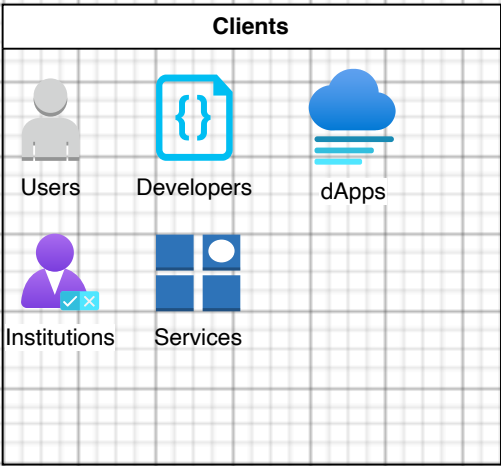


Transactions

Clients can send different types of transactions leading to different flows of action within DEMOS



Operations United

Once processed, every transaction is anyway noted in the Global State Layer in the same format of the others

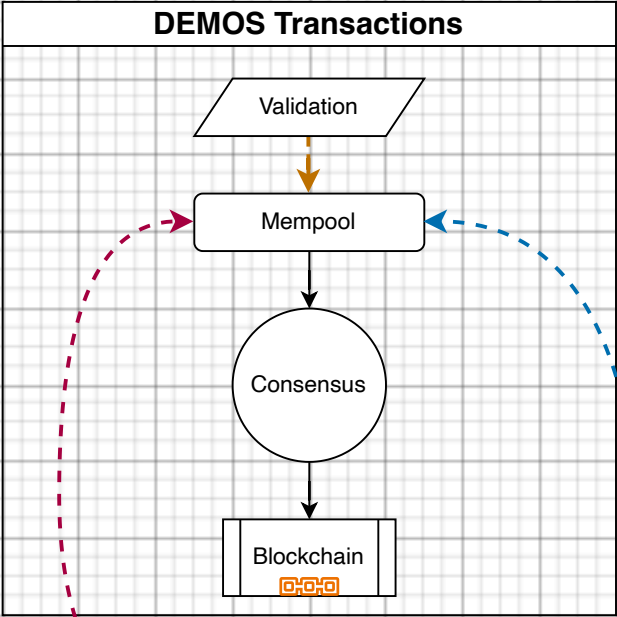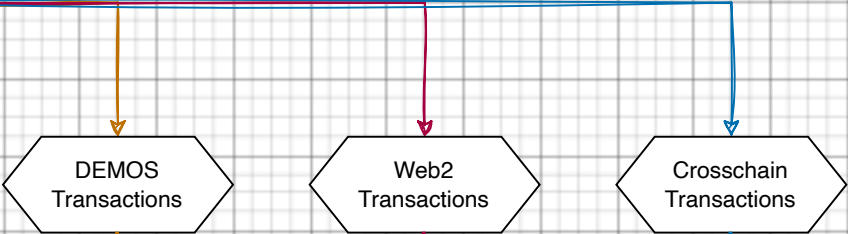

Complete Request are sent to the consensus process

Multichain Requests are sent to the consensus process

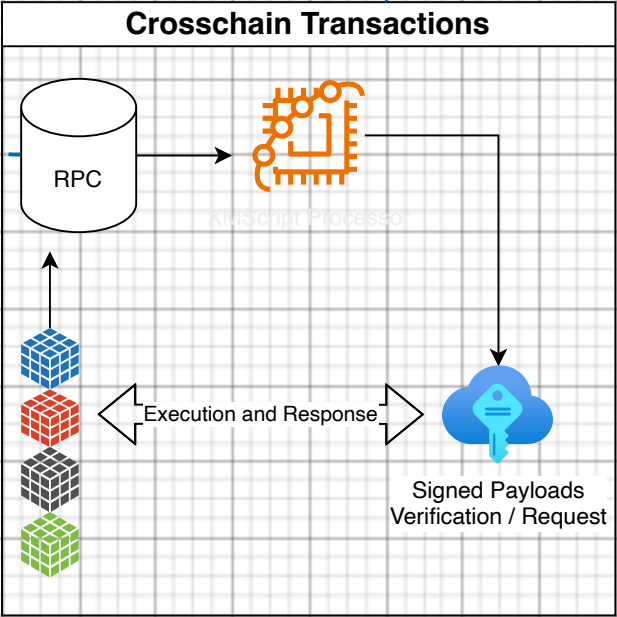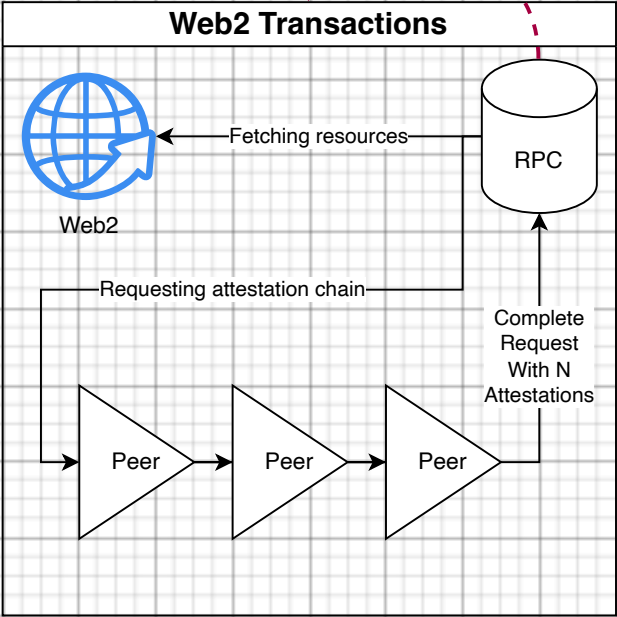

Chain of Trust

Signed Payloads

As a malicious group of nodes could theoretically set up a fake attestations chain to push an invalid web2 request, every peer send the attestation request to a single other peer until the required number of attestations has been reached

Crosschain transactions can be read only, so not requiring any signature, or can require a signed transaction to be sent on behalf of the client. To remain trustless, DEMOS network requires signatures to be made exclusively on client side