

---

# Chap. 23

## Software testing

---

*Software Engineering, Addison-Wesley*

# Topics covered


---

- System testing
- Component testing
- Test case design
- Test automation

# The testing process


---

- Component testing
  - Testing of individual program components;
  - Usually the responsibility of the component developer (except sometimes for critical systems);
  - Tests are derived from the developer's experience.
- System testing
  - Testing of groups of components integrated to create a system or sub-system;
  - The responsibility of an independent testing team;
  - Tests are based on a system specification.

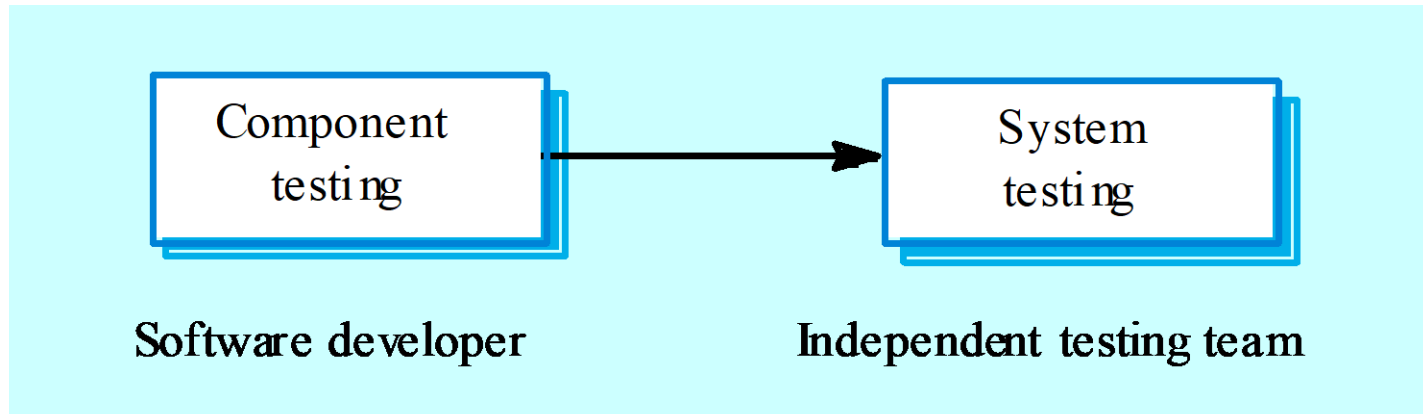

# The software testing process

---

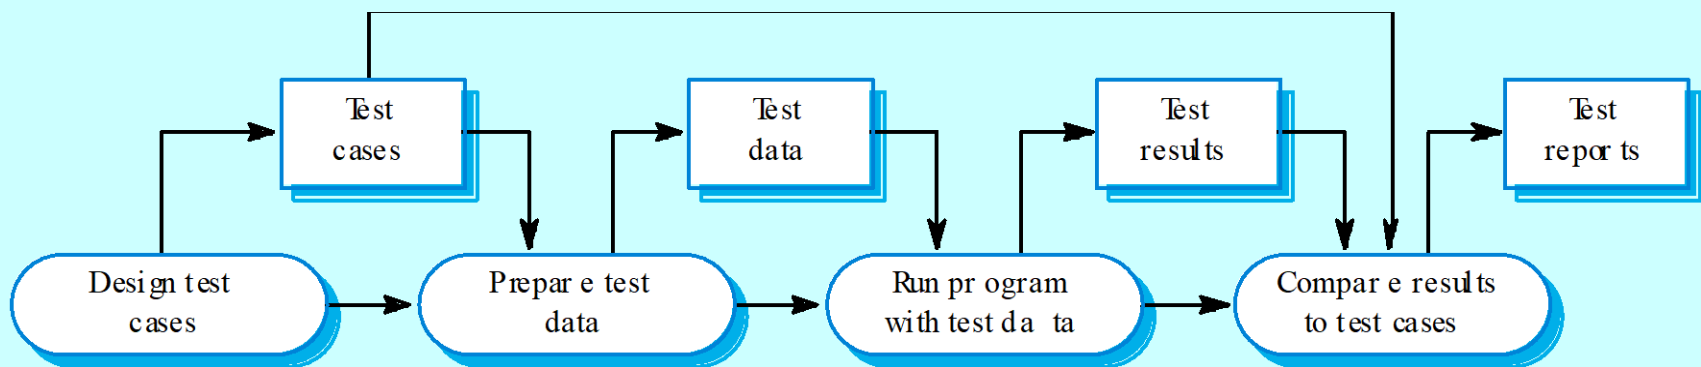

# Testing policies

---

- Only exhaustive testing can show a program is free from defects. However, exhaustive testing is impossible,
- Testing policies define the approach to be used in selecting system tests:
  - All functions accessed through menus should be tested;
  - Combinations of functions accessed through the same menu should be tested;
  - Where user input is required, all functions must be tested with correct and incorrect input.

# System testing

---


- Involves integrating components to create a system or sub-system.
- Two phases:
  - **Integration testing** - the test team have access to the system source code. The system is tested as components are integrated.
  - **Release testing** - the test team test the complete system to be delivered as a black-box.

# Integration testing

---

- Involves building a system from its components and testing it for problems that arise from component interactions.
- To simplify error localisation, systems should be incrementally integrated.

# Incremental integration testing

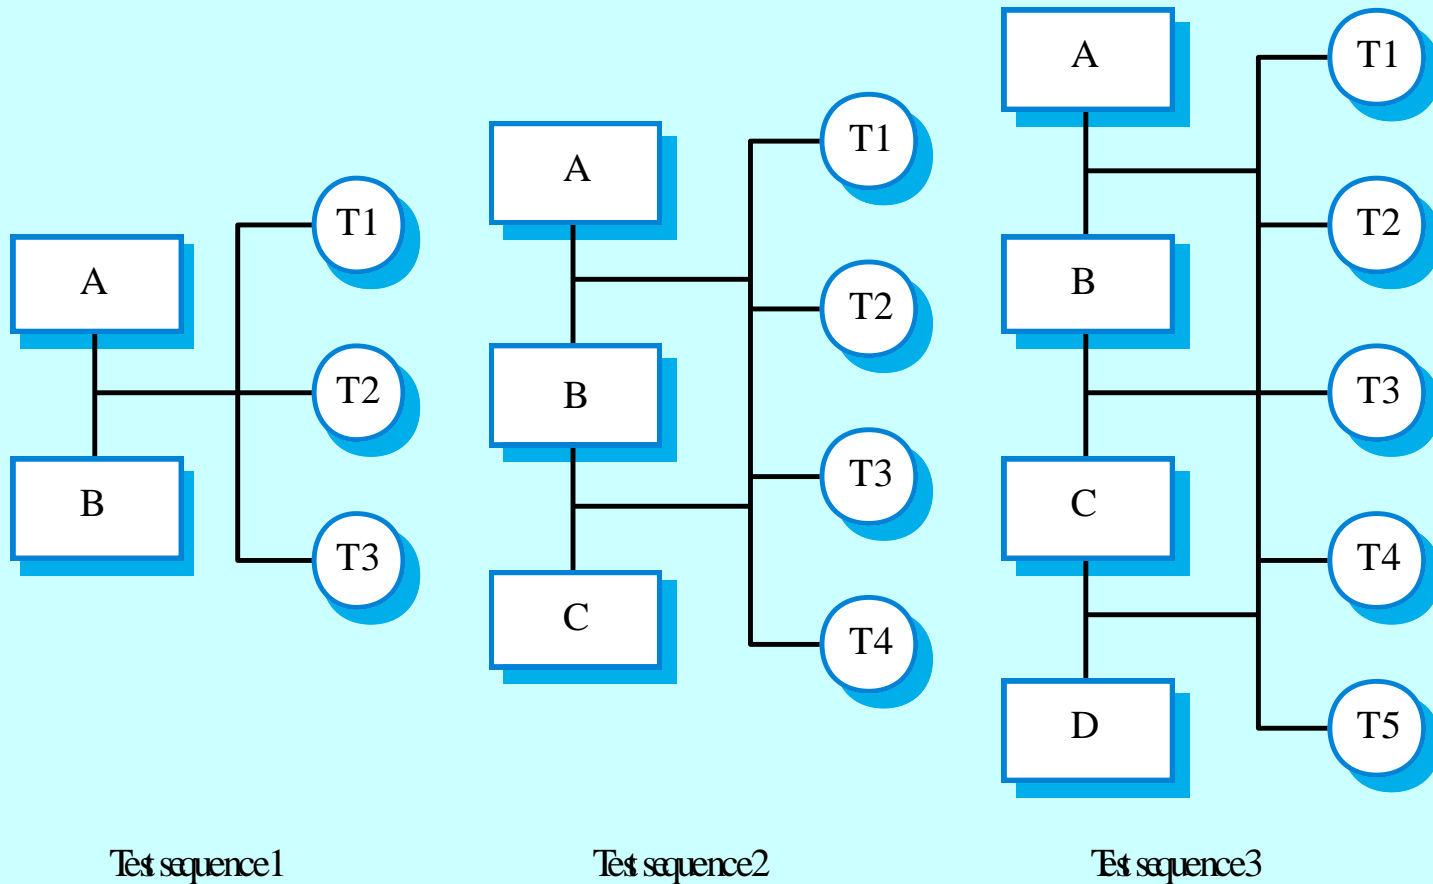




# Release testing

---

- The process of testing a release of a system that will be distributed to customers.
- Release testing is usually black-box or functional testing
  - Based on the system specification only;
  - Testers do not have knowledge of the system implementation.

# Black-box testing

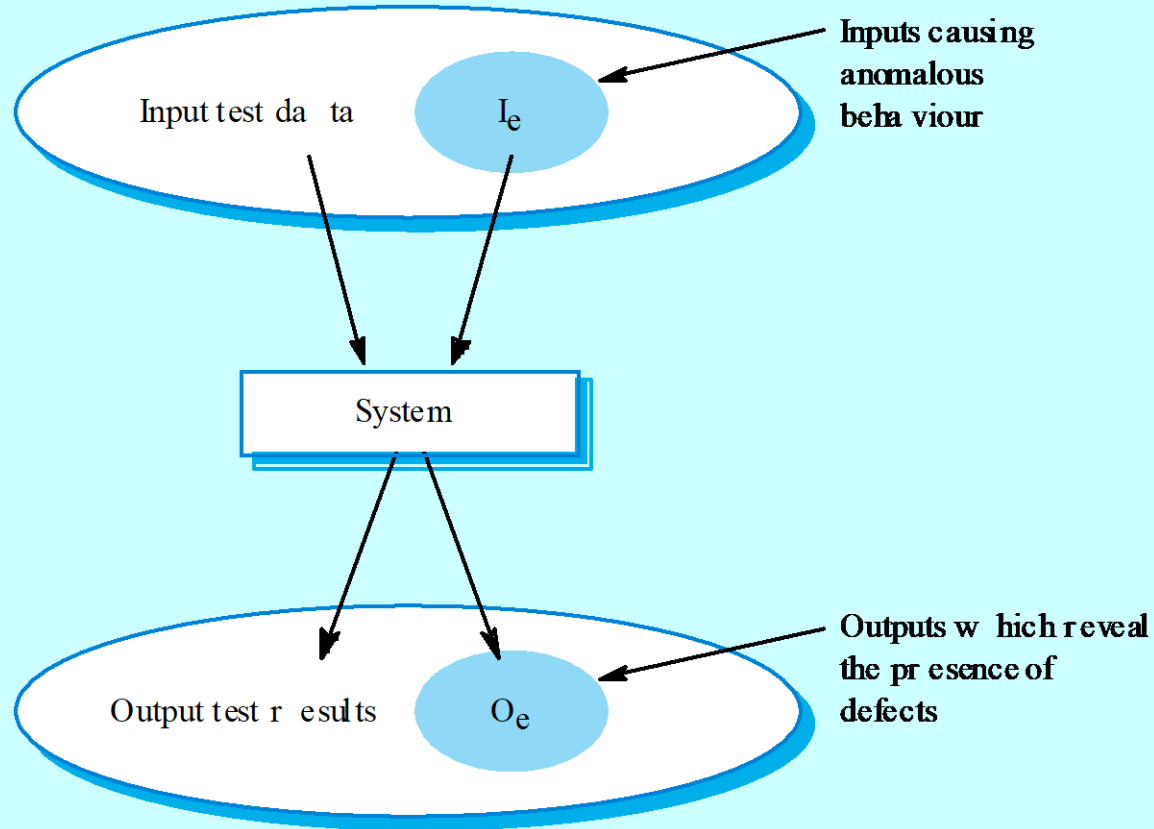

# Testing guidelines

---

- Testing guidelines are hints for the testing team to help them choose tests that will reveal defects in the system
  - Choose inputs that force the system to generate all error messages;
  - Design inputs that cause buffers to overflow;
  - Repeat the same input or input series several times;
  - Force invalid outputs to be generated;
  - Force computation results to be too large or too small.

# Testing scenario

---

A student in Scotland is studying American History and has been asked to write a paper on Frontier mentality in the American West from 1840 to 1880. To do this, she needs to find sources from a range of libraries. She logs on to the LIBSYS system and uses the search facility to discover if she can access original documents from that time. She discovers sources in various US university libraries and downloads copies of some of these. However, for one document, she needs to have confirmation from her university that she is a genuine student and that use is for non-commercial purposes. The student then uses the facility in LIBSYS that can request such permission and registers her request. If granted, the document will be downloaded to the registered library's server and printed for her. She receives a message from LIBSYS telling her that she will receive an e-mail message when the printed document is available for collection.

# System tests

---

1. Test the login mechanism using correct and incorrect logins to check that valid users are accepted and invalid users are rejected.
2. Test the search facility using different queries against known sources to check that the search mechanism is actually finding documents.
3. Test the system presentation facility to check that information about documents is displayed properly.
4. Test the mechanism to request permission for downloading.
5. Test the e-mail response indicating that the downloaded document is available.

# Use cases

---

- Use cases can be a basis for deriving the tests for a system. They help identify operations to be tested and help design the required test cases.
- From an associated sequence diagram, the inputs and outputs to be created for the tests can be identified.

# Performance testing

---

- Part of release testing may involve testing the emergent properties of a system, such as performance and reliability.
- Performance tests usually involve planning a series of tests where the load is steadily increased until the system performance becomes unacceptable.

# Stress testing

---

- Exercises the system beyond its maximum design load. Stressing the system often causes defects to come to light.
- Stressing the system test failure behaviour. Systems should not fail catastrophically. Stress testing checks for unacceptable loss of service or data.
- Stress testing is particularly relevant to distributed systems that can exhibit severe degradation as a network becomes overloaded.



# Component testing

---

- Component or unit testing is the process of testing individual components in isolation.
- It is a defect testing process.
- Components may be:
  - Individual functions or methods within an object;
  - Object classes with several attributes and methods;
  - Composite components with defined interfaces used to access their functionality.

# Object class testing

---

- Complete test coverage of a class involves
  - Testing all operations associated with an object;
  - Setting and interrogating all object attributes;
  - Exercising the object in all possible states.
- Inheritance makes it more difficult to design object class tests as the information to be tested is not localised.
  - All of subclasses should be tested with all inherited operations
  - The overridden operations must be tested


# Interface testing

---

- Objectives are to detect faults due to interface errors or invalid assumptions about interfaces.
- Particularly important for object-oriented development as objects are defined by their interfaces.

# Interface testing

---

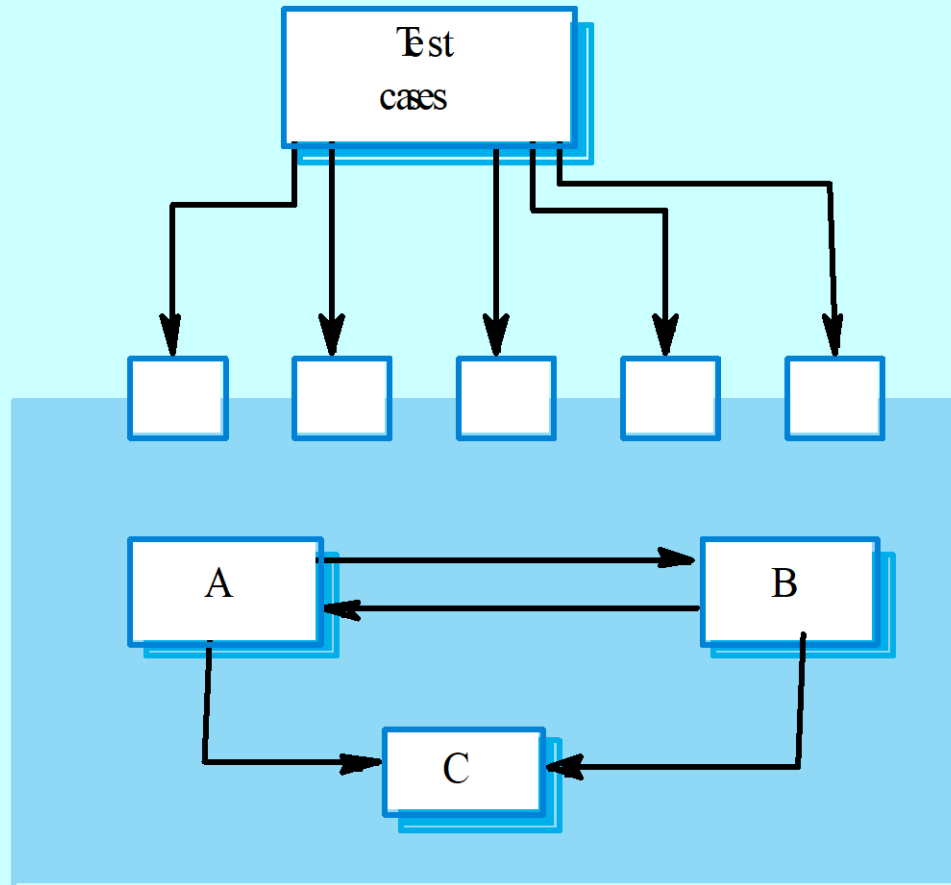

# Interface errors

---

- Interface misuse
  - A calling component calls another component and makes an error in its use of its interface e.g. parameters in the wrong type or order.
- Interface misunderstanding
  - A calling component embeds assumptions about the behaviour of the called component which are incorrect.
- Timing errors
  - The called and the calling component operate at different speeds and out-of-date information is accessed.

# Interface testing guidelines

---

- Design tests so that parameters to a called procedure are at the extreme ends of their ranges.
- Always test pointer parameters with null pointers.
- Design tests which cause the component to fail.
- Use stress testing in message passing systems.
- In shared memory systems, vary the order in which components are activated.

# Test case design

---

- Involves designing the test cases (inputs and outputs) used to test the system.
- The goal of test case design is to create a set of tests that are effective in validation and defect testing.
- Design approaches:
  - Requirements-based testing;
  - Partition testing;
  - Structural testing;
  - Path testing.

# Requirements based testing

---

- A general principle of requirements engineering is that requirements should be testable.
- Requirements-based testing is a validation testing technique where you consider each requirement and derive a set of tests for that requirement.




# Partition testing

---


- Input data and output results often fall into different classes where all members of a class are related.
  - positive numbers, negative numbers
- Each of these classes is an **equivalence partition** or domain where the program behaves in an equivalent way for each class member.
- Test cases should be chosen from each partition.

# Equivalence partitioning


---

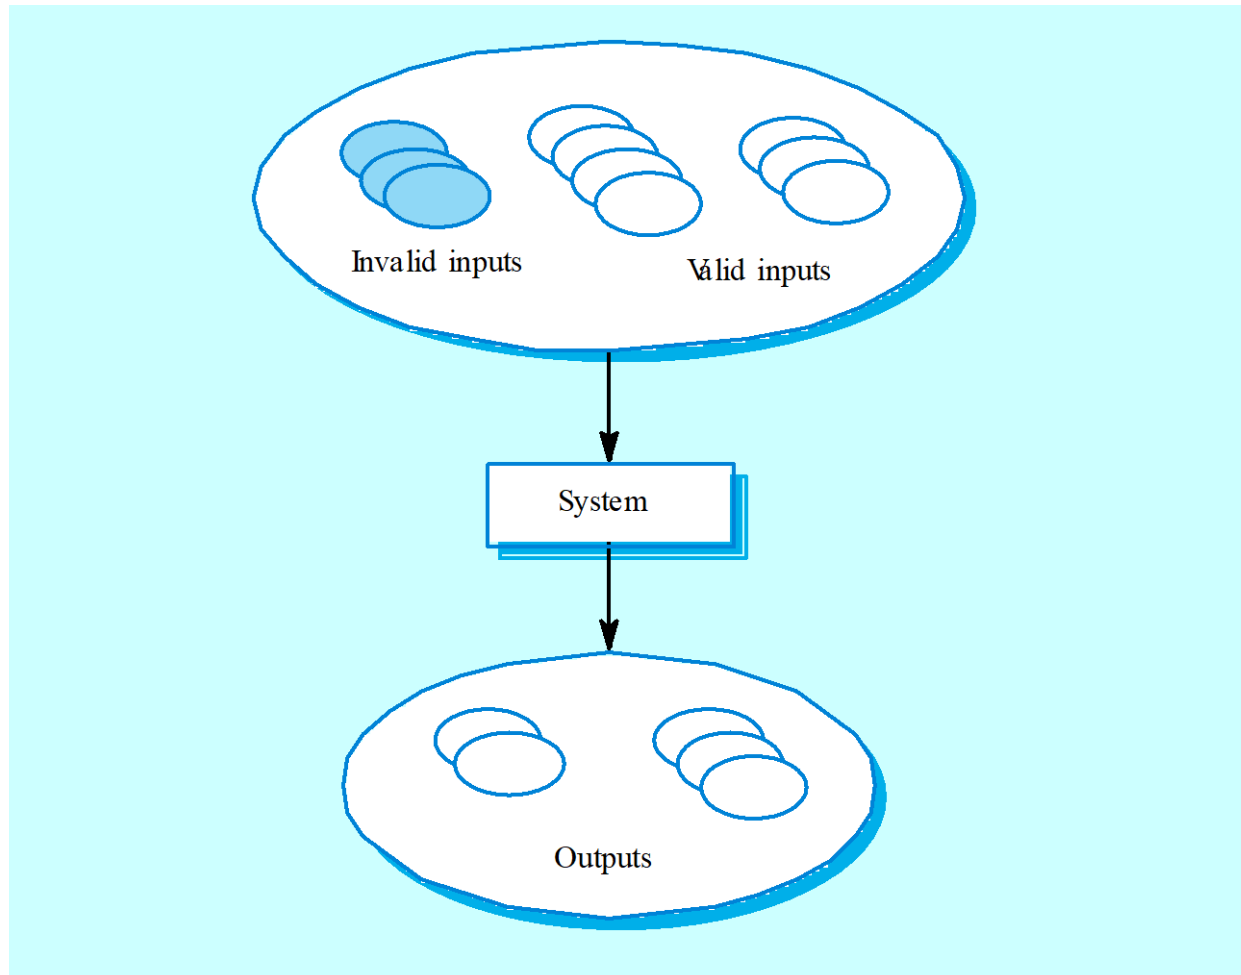

# Equivalence partitions

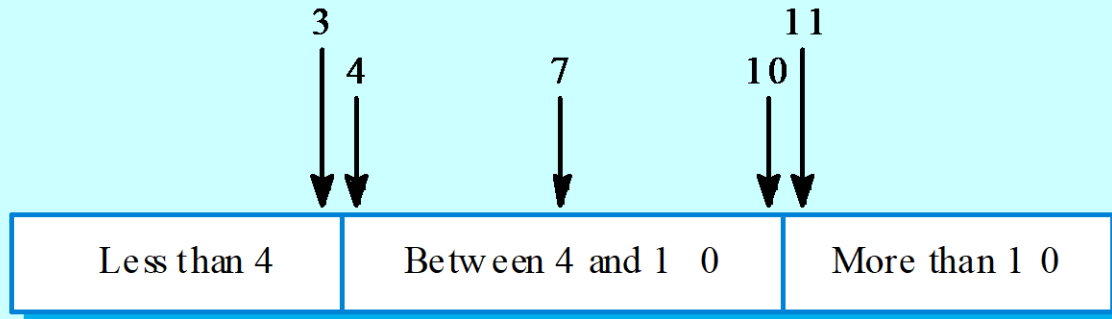

Number of input values

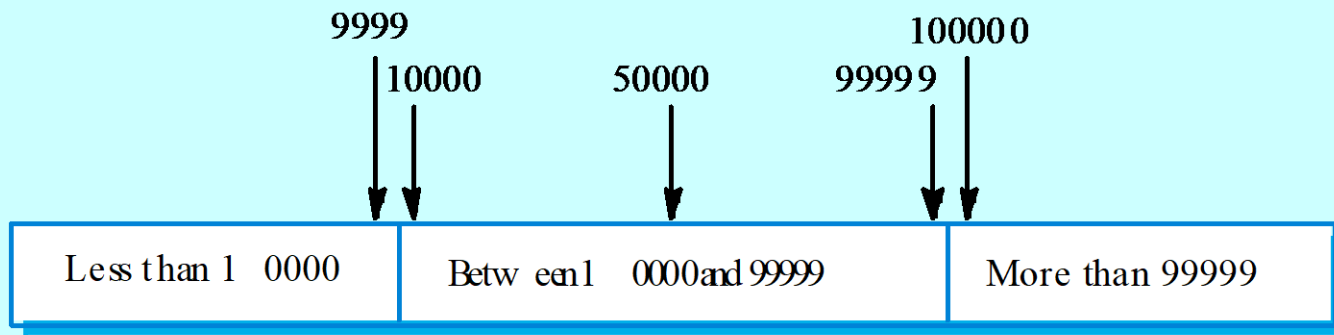

Input values

# Search routine specification

---

**procedure** Search (Key : ELEM ; T: SEQ of ELEM;  
Found : **in out** BOOLEAN; L: **in out** ELEM\_INDEX) ;

## **Pre-condition**

-- the sequence has at least one element  
T'FIRST <= T'LAST

## **Post-condition**

-- the element is found and is referenced by L  
( Found and T (L) = Key)

**or**

-- the element is not in the array  
( **not** Found **and**  
**not** (**exists** i, T'FIRST <= i <= T'LAST, T (i) = Key ))

# Search routine - input partitions

---

- Inputs which conform to the pre-conditions.
- Inputs where a pre-condition does not hold.
- Inputs where the key element is a member of the array.
- Inputs where the key element is not a member of the array.

# Testing guidelines (sequences)

---

- Test software with sequences which have only a single value.
- Use sequences of different sizes in different tests.
- Derive tests so that the first, middle and last elements of the sequence are accessed.
- Test with sequences of zero length.

# Search routine - input partitions

Sequence	Element
Single value	In sequence
Single value	Not in sequence
More than 1 value	First element in sequence
More than 1 value	Last element in sequence
More than 1 value	Middle element in sequence
More than 1 value	Not in sequence

Input sequence (T)	Key (Key)	Output (Found, L)
17	17	true, 1
17	0	false, ??
17, 29, 21, 23	17	true, 1
41, 18, 9, 31, 30, 16, 45	45	true, 7
17, 18, 21, 23, 29, 41, 38	23	true, 4
21, 23, 29, 33, 38	25	false, ??

# Structural testing


---

- Sometime called white-box testing.
- Derivation of test cases according to program structure. Knowledge of the program is used to identify additional test cases.
- Objective is to exercise all program statements (not all path combinations).



# Structural testing

---

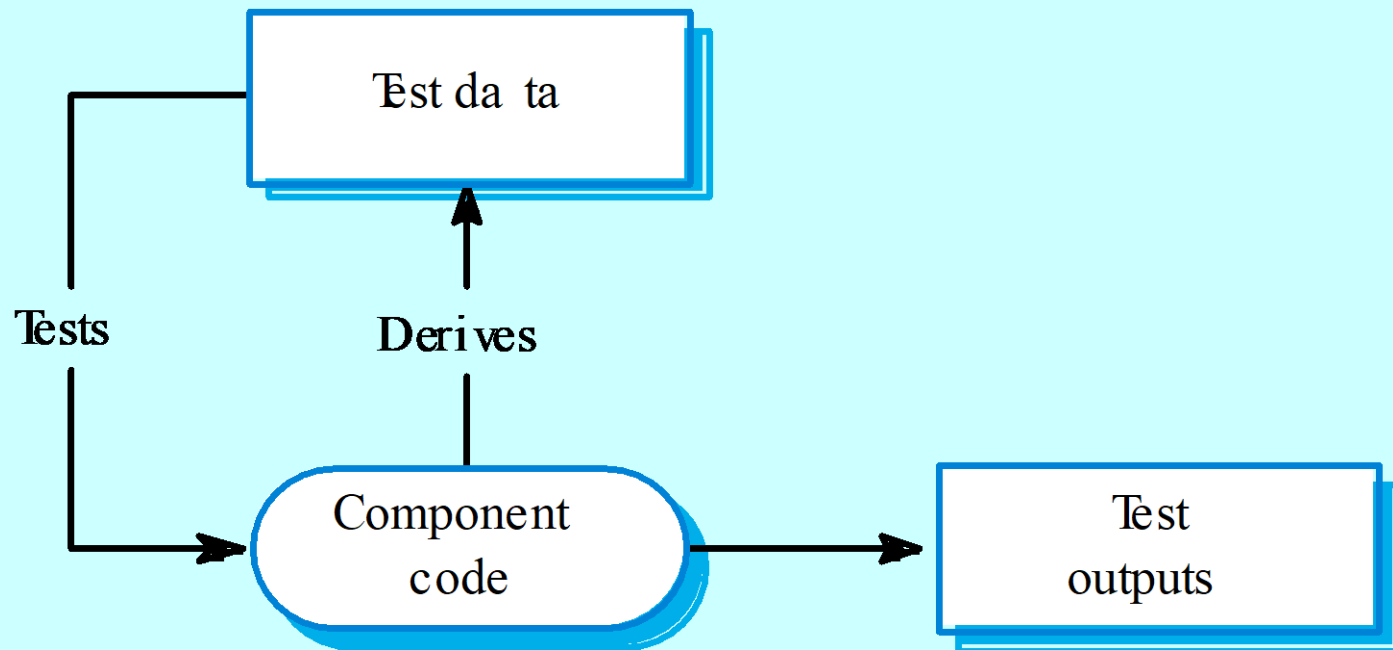


# Binary search - equiv. partitions

---

- Pre-conditions satisfied, key element in array.
- Pre-conditions satisfied, key element not in array.
- Pre-conditions unsatisfied, key element in array.
- Pre-conditions unsatisfied, key element not in array.
- Input array has a single value.
- Input array has an even number of values.
- Input array has an odd number of values.

# Binary search equiv. partitions

---

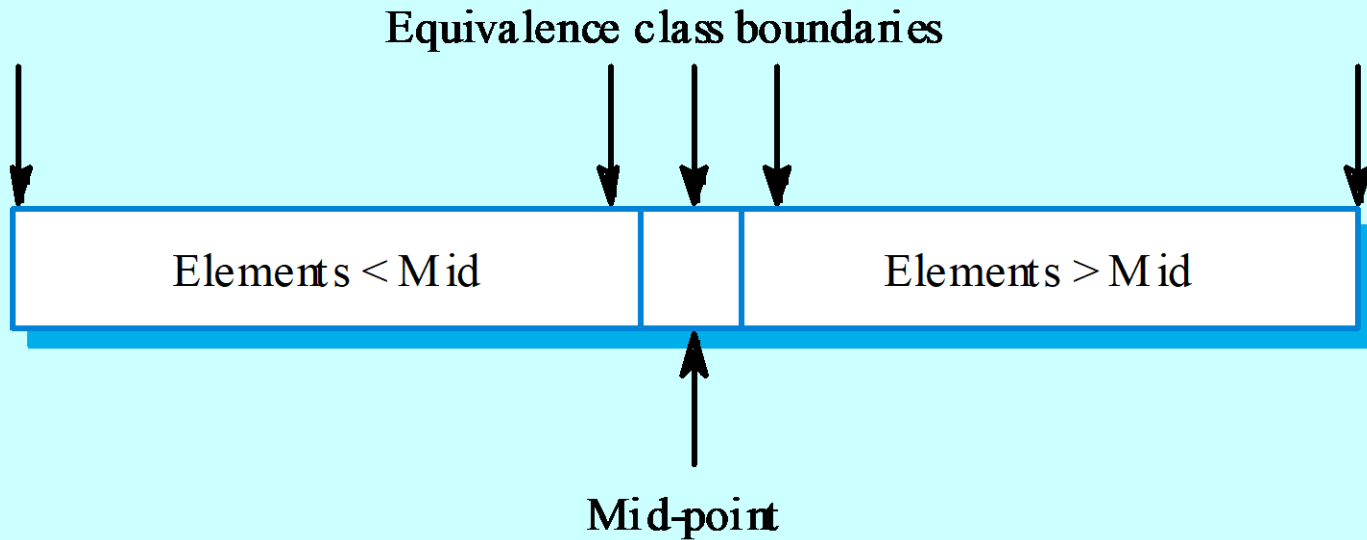

# Binary search - test cases

---


<b>Input array (T)</b>	<b>Key (Key)</b>	<b>Output (Found, L)</b>
17	17	true, 1
17	0	false, ??
17, 21, 23, 29	17	true, 1
9, 16, 18, 30, 31, 41, 45	45	true, 7
17, 18, 21, 23, 29, 38, 41	23	true, 4
17, 18, 21, 23, 29, 33, 38	21	true, 3
12, 18, 21, 23, 32	23	true, 4
21, 23, 29, 33, 38	25	false, ??

# Path testing

---

- The objective of path testing is to ensure that the set of test cases is such that each path through the program is executed at least once.
- The starting point for path testing is a program flow graph that shows nodes representing program decisions and arcs representing the flow of control.
- Statements with conditions are therefore nodes in the flow graph.

# Binary search flow graph

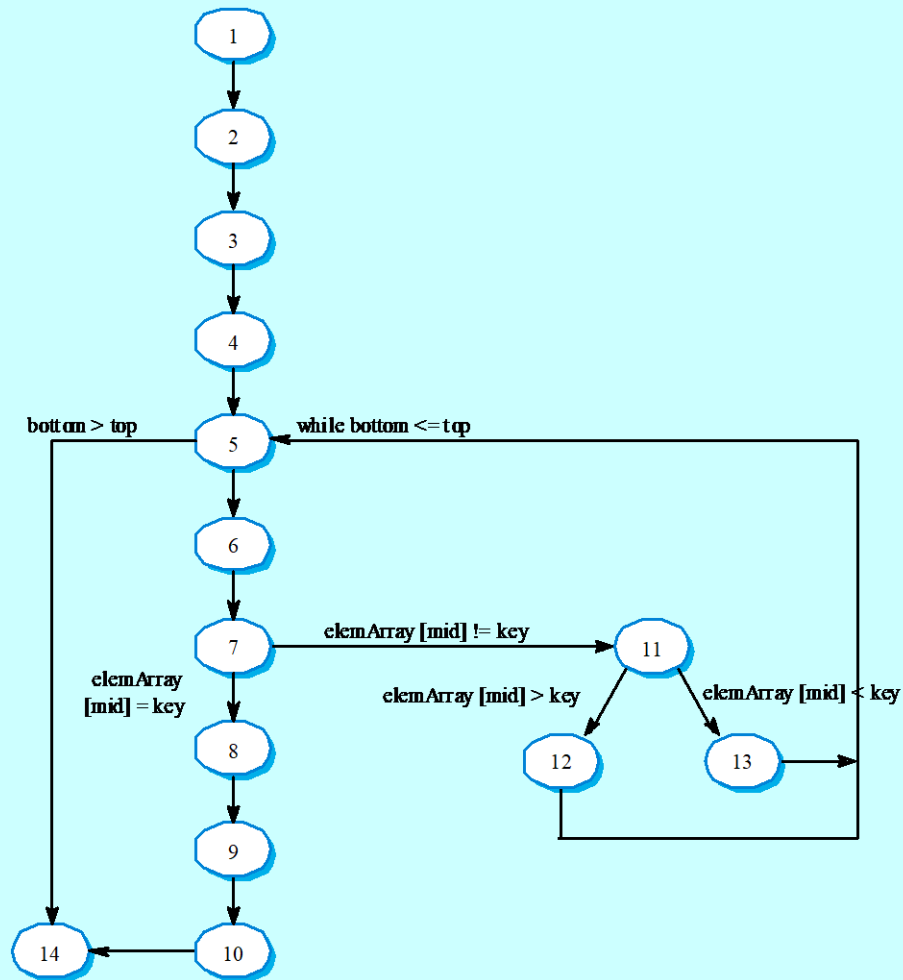

# Independent paths

---

- 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 14
- 1, 2, 3, 4, 5, 14
- 1, 2, 3, 4, 5, 6, 7, 11, 12, 5, ...
- 1, 2, 3, 4, 6, 7, 2, 11, 13, 5, ...
- Test cases should be derived so that all of these paths are executed


# Test automation

---

- Testing is an expensive process phase. Testing workbenches provide a range of tools to reduce the time required and total testing costs.
- JUnit
  - a set of Java classes that the user extends to create an automated testing environment .



# A testing workbench

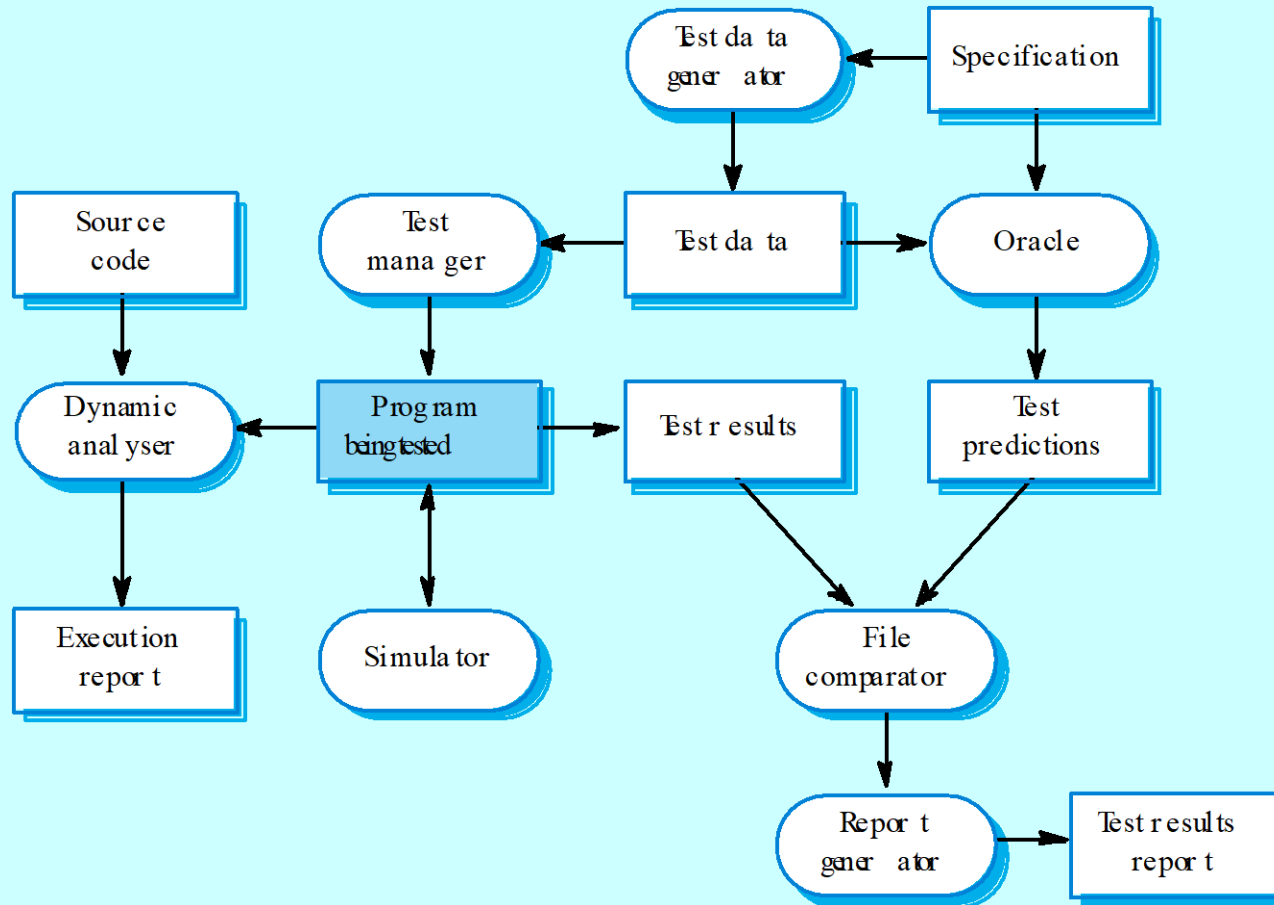

# Testing workbench

---

- Test manager
  - Manages the running of program tests
- Test data generator
  - Generates test data for the program to be tested
- Oracle
  - Generates predictions of expected test results
- File comparator
  - Compares the results of program tests with previous test results
- Dynamic analyser
  - Adds code to a program to count the number of times each statement has been executed
- Simulator
  - Simulates target machine, multiple simultaneous user interactions, and I/O