

**“A visual tool for wiring the IoT.”**

filter nodes

Sheet 1

Node-RED GitHub

Bluemix monitor

Slack Bot

info

debug

input



output


function

social

storage

analysis

advanced

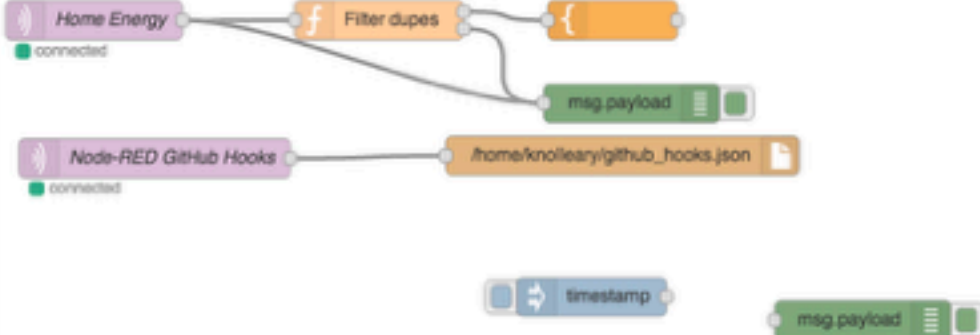

Node

Name SlackHook

Type http in

ID 40c91d4d.5f38e4

Properties

Provides an input node for http requests, allowing the creation of simple web services.

The resulting message has the following properties:

- msg.req : [http request](#)
- msg.res : [http response](#)

For POST/PUT requests, the body is available under `msg.req.body`. This uses the [Express bodyParser middleware](#) to parse the content to a JSON object.

By default, this expects the body of the request to be url encoded:

```
foo=bar&this=that
```

To send JSON encoded data to the node, the content-type header of the request must be set to `application/json`.

**Note:** This node does not send any response to the http request. This should be done with a subsequent HTTP Response node.