ARCMEMO: ABSTRACT REASONING COMPOSITION WITH LIFELONG LLM MEMORY

Matthew Ho¹, Chen Si¹, Zhaoxiang Feng¹, Fangxu Yu², Yichi Yang¹ Zhijian Liu¹, Zhiting Hu¹, Lianhui Qin¹
¹University of California, San Diego, ²University of Maryland

ABSTRACT

While inference-time scaling enables LLMs to carry out increasingly long and capable reasoning traces, the patterns and insights uncovered during these traces are immediately discarded once the context window is reset for a new query. External memory is a natural way to persist these discoveries, and recent work has shown clear benefits for reasoning-intensive tasks. We see an opportunity to make such memories more broadly reusable and scalable by moving beyond instance-based memory entries (e.g. exact query/response pairs, or summaries tightly coupled with the original problem context) toward concept-level memory: reusable, modular abstractions distilled from solution traces and stored in natural language. For future queries, relevant concepts are selectively retrieved and integrated into the prompt, enabling test-time continual learning without weight updates. Our design introduces new strategies for abstracting takeaways from rollouts and retrieving entries for new queries, promoting reuse and allowing memory to expand with additional experiences. We evaluate on ARC-AGI, a benchmark that stresses compositional generalization and abstract reasoning, making it a natural fit for concept memory. Our method yields a 7.5% relative gain over a strong no-memory baseline with performance continuing to scale with inference compute. We find abstract concepts to be the most consistent memory design, outscoring the baseline at all tested inference compute scales. Moreover, dynamically updating memory during testtime outperforms fixed settings, supporting the hypothesis that accumulating and abstracting patterns enables further solutions in a form of self-improvement ¹.

1 Introduction

Large language models (LLMs) have made substantial strides in reasoning-intensive tasks with long-form reasoning. However, a notable opportunity lies in the fact that LLM systems are fixed after deployment: new patterns and strategies uncovered during deep reasoning are not yet carried forward once the context is cleared. This contrasts with human approaches to solving complex, compositional reasoning problems, which involve building on prior insights, abstracting patterns, and composing them in new contexts. Augmenting LLMs with memory offers a solution to carrying forward and building on their discoveries.

While external augmentation was initially designed for factuality in knowledge-intensive tasks (e.g. Lewis et al. (2021) with RAG, Zhang et al. (2019) with Knowledge Graphs, *inter alia*), recent work has begun developing memory approaches for reasoning-intensive tasks, storing questions, findings, and mistakes in memory instead of simple facts (Yang et al., 2024). These memories tend to be specific to the problem/experience it was originally derived from (we term these "instance-level" concepts, see Figure 1). Although effective for closely related problems, they have diminished utility for problems superficially different from prior experiences. Other approaches such as Suzgun et al. (2025) begin addressing the "instance-level" issue by maintaining an evolving summary of previous experience to great effect, but the lack of structure and modularity makes scaling with more experiences challenging. Without selective retrieval, the size of memory is limited and the problem solving model has the additional burden of picking out the relevant ideas from all past experiences.

¹Code available at https://github.com/matt-seb-ho/arc_memo

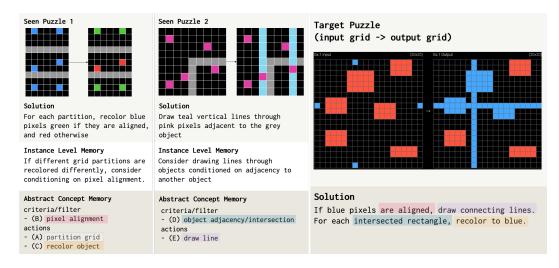


Figure 1: **Instance-Level vs. Abstract Concepts Example.** Each ARC-AGI Chollet (2019) puzzle requires inferring the transformation rule for a set of input/output pixel grids. Here, Puzzle 1 instantiates $(A \wedge B) \Rightarrow C$ and Puzzle 2 instantiates $D \Rightarrow E$. The target puzzle is solved by recombining these ideas $(B \Rightarrow E, D \Rightarrow C)$. Instance-level memory tends to store fully composed rules, coupling A with B, C, and so on. Transferring to the target then demands both ignoring A and disentangling/reordering B, C with D, E. Abstract memory instead stores A, B, C, D, E as separate, modular concepts, making them easier to recognize and reassemble in new contexts.

We introduce an *abstract concept-level memory* framework to support compositional reasoning for all subsequent queries. We emphasize (1) **abstract concepts** that are more general and separated from their original context to be useful across a larger set of future problems, and (2) **modular concepts** that directly promote recombination with other ideas that can be easily built on with new experiences or curated for a target problem. We distill solution traces (both from the system itself or from external sources) into reusable, modular abstractions stored in natural language. At inference time, relevant concepts are selected and integrated into context, enabling test-time continual learning without expensive weight updates. Our design encapsulates two primary operations: (i) writing to memory: formatting concepts for abstraction and generality; and (ii) reading from memory: selecting a subset of concepts for the current problem. We title our method **ArcMemo**— **Abstract Reasoning Composition Memory**.

As illustrated in Figure 1, instance-level memories often capture an entire solution pattern tied closely to its original problem (e.g., the joint use of ideas A,B,C in Seen Puzzle 1). Such overspecified entries are less likely to recur in future problems, and even when partially relevant to the Target Puzzle, the agent must still disentangle useful pieces like B from the original bundle. In contrast, abstract concepts are stored individually with fewer contextual assumptions, making them easier to recognize, adapt, and recombine across superficially different puzzles.

We evaluate on ARC-AGI, where simple pixel-grid operations compose into a vast task space, and solving tasks requires compositional reasoning rather than memorizing individual patterns, making it a natural testbed for ArcMemo. On ARC-AGI-1, our method improves the official score from 55.17 to 59.33 (+7.5% relative gain over a strong no-memory baseline) and is the only memory design we find to outperform the baseline at all inference scales. Our experiments confirm that continually updating memory at evaluation time yields a score improvement that emerges with inference scale via retries: memory updates triggered from a previous pass over the test set may enable new solves in a subsequent pass. Finally, we observe that selecting a subset of memories to include for a particular problem improves performance and reduces token cost, indicating the selection operation is essential beyond allowing memory to continually grow.

2 RELATED WORK

Our approach draws on several threads of research in augmenting LLMs with memory but contrasts in (1) target applications (reasoning-intensive vs. knowledge-intensive tasks), (2) the underlying

memory modality (text vs. continuous vectors/embeddings), and (3) emphasis on abstraction and modularity for reasoning. We discuss related lines (1) and (2) as well as other related work in Appendix D and emphasize reasoning and abstraction here.

Memory for Test-Time Reasoning and Concept Abstraction. More recent work has shifted toward reasoning-centric uses of memory, particularly test-time learning. Think-in-Memory records intermediate reasoning steps as structured triples, storing them in a locality-sensitive hash table to enable reuse in multi-step reasoning tasks (Liu et al., 2023). Buffer of Thoughts stores reusable reasoning templates, retrieved by embedding similarity and instantiated for new problems (Yang et al., 2024). It categorizes and summarizes solution attempts into templated insights, which are then added to memory. In contrast, Dynamic Cheatsheet maintains a unified buffer that is adapted continuously. With each problem query, the LLM updates this memory blob by rewriting the entire buffer (Suzgun et al., 2025). Rather than retrieving specific entries, the entire cheatsheet is appended to the prompt, functioning as a persistent cache of problem-solving strategies.

ARC-AGI Approaches. Our work is primarily evaluated against ARC-AGI as a benchmark that simulates complex reasoning on frontier tasks without requiring frontier-level knowledge. Various techniques and findings have been developed against this benchmark. Li et al. (2024) demonstrate the efficacy of synthetic data and the complementary approaches of (i) learning to infer the underlying transformation via program synthesis and (ii) using test time weight adaptation to directly learn the transformation function in the neural net. Akyürek et al. (2025) further investigates the test time adaptation method, producing various insights, including that low rank adapters are poorly suited to retaining useful experience across puzzles. Our program synthesis approach can be viewed as a memory-augmented version of Wang et al. (2024)'s hypothesis search or Qiu et al. (2024)'s hypothesis refinement with execution feedback based retry. Other recent approaches to ARC-AGI include brain-inspired architectural innovations such as Wang et al. (2025)'s hierarchical reasoning model achieving impressive performance through a recurrent architecture that iteratively refines its output until a halt signal is predicted together with data augmentation techniques. Finally, the relative ease of generating new ARC-AGI tasks compared to solving them is exploited in Pourcel et al. (2025)'s self-improving system that relabels incorrect programs as the correct program for a different puzzle and trains a model on its generations this way.

3 METHODS

3.1 PROBLEM STATEMENT

Algorithm 1: Inference with External Memory

We formulate a memory system as a collection of memory entries associated with read and write operations. Problem solving with memory augmented LLMs thus requires designing three components as seen in algorithm 1:

- 1. **Memory Format** (3.2): What is stored in individual entries?
- 2. **Memory Write** (3.3): How is memory updated from a reasoning trace?
- 3. **Memory Read** (3.4): How is memory used for tackling new problems?

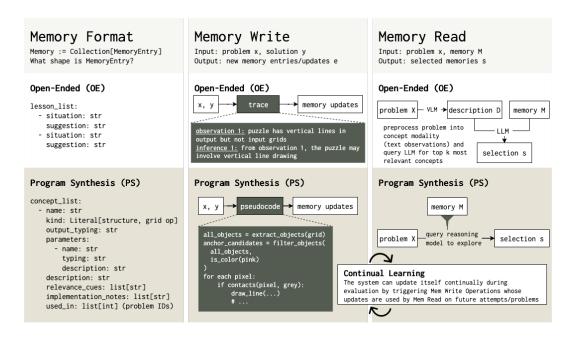


Figure 2: **Method Diagram.** Implementing a memory system requires defining (1) what is stored (2) how memory is updated (3) how memory is used for new queries. The key novelties in this work is emphasizing abstraction and modularity and the corresponding design changes. In particular we highlight that parameterization (with higher-order functions allowed and encouraged) promotes abstraction and typed interface definitions supports modularity by showing which concepts can be combined. Since these memory entries are more abstract, they also require more inference to map against new, concrete situations— whether by aligning input against the memory format, or by instructing a reasoning model to explore.

These are generic design considerations for any memory. Our method's novelty lies in the choices made to target (1) abstracting a memory to be less specific to the problem it was derived from (2) enabling memory selection, since greater abstraction makes standard retrieval approaches (embedding similarity thresholding) less effective. We present two such implementations: (1) an open-ended (OE) format that imposes minimal constraints on entry format and uses a simple problem preprocessing step for memory selection, and (2) a program-synthesis (PS) inspired format that categorizes and parameterizes concepts and uses reasoning model exploration to select relevant items.

Problem Assumptions. The main requirement for our memory system is that some feedback is available at test time (e.g. via test cases, or self-reflection). This condition is necessary as retaining patterns from an incorrect or otherwise flawed trace would serve to carry mistakes forward. In other words, some signal is needed to discriminate correct from incorrect traces to ensure only productive ideas and patterns are added to memory. Incorrect traces still likely contain vital signal, but error identification/credit assignment remains an open challenge we leave to future efforts. Various real-world tasks may satisfy this requirement, as tasks are often specified with either examples showing desired behaviour or evaluation criteria defining what outcomes are positive and negative. To give some examples, code completion tools have criteria like compilation success and test pass rate, and medical diagnosis tools have evaluation criteria defined as patient outcomes (e.g., survival rates). In the case of our evaluation benchmark ARC-AGI, puzzles are explicitly presented as a set of input-output examples which for our purposes, can serve as automatically verifiable test cases.

3.2 Memory Format and Organization

Specifying an individual memory entry's format involves selecting fields useful for retrieval and downstream problem solving. The organization of memory entries on a collective level is another design surface we leave for future exploration; we use a flat collection of entries for simplicity.

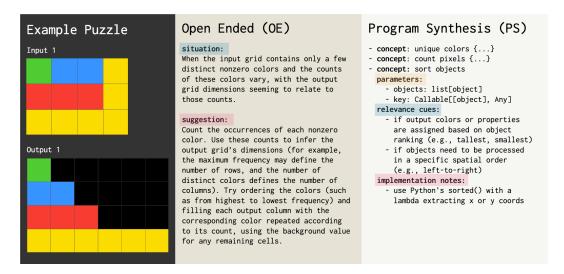


Figure 3: **Open-Ended (OE) vs. Program Synth (PS) Concept Examples.** A example of concepts from puzzle 9af7a82c abstracted into each concept format. OE defers to the model, while PS imposes structure to encourage abstraction/modularity. Higher order behaviour is demonstrated with the "sort objects" concept taking a Callable parameter that specifies specific variations.

Open-Ended (OE) Formulation. We first consider an open-ended approach that imposes minimal structure and defers formatting individual memories to the model. Following the basic lesson format of "under situation X, do action Y", the only formatting constraint we impose is having distinct situation (X) and suggestion (Y) fields. This separation is designed for abstraction (disentangles the core idea from the original context) and modular reuse (situation explicitly describes the conditions where this idea can be reused).

Program Synthesis (PS) Formulation. In early iterations of automatic concept summarization from solution traces, we observed outputs to occasionally be overly specific. Consider Figure 3's OE example that bundles ideas of counting, drawing columns, and sorting into a single entry. This overspecification inherits the same limitations as instance-level concepts: friction when matching a composite idea to new scenarios and redundancy from composites ideas sharing components.

We designed a more structured alternative to the OE format to address these issues and more strongly enforce the ideals of abstraction and modularity. In particular, we took inspiration from software engineering and functional programming which respectively have existing solutions in modular design for code reuse and higher level functions for composition. From this analogy, our Program Synthesis (PS) format frames concepts as types, structures, and routines. The primary feature is that each of these concepts are parameterized. Parameterization allows similar concepts to be represented compactly with variations abstracted into parameters. Moreover, type annotations for inputs (parameters) and outputs (return types) encourage modularity and composition: the typed interfaces suggest what ideas fit together and how. Finally, by allowing parameters to be routines themselves (introducing higher-order functions), we encourage further generalization by enabling abstraction over specialized logic and routines rather than just values. Higher-level patterns can be recognized across instances and stored with routine arguments defining the different lower-level logic. A subtle benefit of this more structured formulation is that memory representation can be simply compressed omitting certain fields (see subsection C.1 for a complete list of PS concept fields).

3.3 Memory Write: Concept Abstraction

The main purpose of memory is to persist discoveries and reflections from prior experiences. Converting experiences (rollouts) to memory updates is then the most crucial operation for achieving persistence.

OE Abstraction. Abstracting suggestions from a solution trace is straightforward–simply query a model to reflect on the solution trace and summarize certain general ideas that may be reused for future puzzles. To synthesize specific conditions or situational cues to pair with suggestions, ideally we can directly refer to the original problem-solving process as a series of deductions that derive new facts or explore ideas from existing facts, and link each suggestion (idea) with the prior observations that inferred this suggestion. However, intermediate inferences may be implicit, or difficult to extract from a trace, or in the case of certain commercial models, completely hidden. To address this challenge, we generate a post-hoc derivation: an interleaved sequence of observations and thoughts/reasoning steps constructed from the input-output of the final solution. These reconstructed traces are then used to extract situation-suggestion pairs, forming structured memory entries for guiding future analyses. This minimal formulation does not consider the existing contents of memory while adding new entries for simplicity and scaling reasons. It defers handling redundancy and consolidating ideas to the concept selection and problem solving phases respectively.

PS Abstraction. We find that directly converting solutions into routines often leads to minor implementation details being recorded as memories as opposed to our intended abstract concepts. We mitigate this by preprocessing solutions into pseudocode to prioritize higher level operations over low level implementation details. The main abstraction phase proceeds from the generated pseudocode, recording new concepts and revising existing concepts along with their various fields.

In the spirit of designing for abstraction, promoting reusability, and minimizing total concept memory length, this operation *is* aware of existing concepts with a compressed form of memory included in context. We encourage the model to reuse and revise existing concepts by updating concept descriptions, parameter lists, relevance cues, and implementation notes. Importantly, we encourage higher-order functions with routines as arguments in instructions and few-shot demonstrations.

All concept abstraction/memory writing operations are scaffolded with few-shot demonstrations, example-rich templates, and comprehensive instructions.

3.4 Memory Read: Concept Selection

Although state-of-the-art models support longer context windows, its maximum length still bounds how much information or how many memory entries can be included in a single query. Even without this hard limit, including all available memories into context is still undesirable: it can distract the model with irrelevant details and flood it with too many unlikely hypotheses to consider. A more effective strategy is to introduce a selection mechanism to only include the most relevant subset of memory entries at problem solving time. This allows the memory store to grow continually without overwhelming the model's context window.

OE Selection. OE-format memory entries were explicitly designed to support memory-based selection. The situation clause acts as a semantic hook to identify relevance. The key idea for OE Selection is a preprocessing step that leverages model reasoning capability to parse the abstract domain input into problem descriptions at different levels of abstraction to facilitate matching against our abstract concepts. Since ARC-AGI deals with spatial reasoning, we leverage a vision language model for this preprocessing step. We caption each puzzle using a structured prompt that separates concrete observations from speculative transformations. This converts spatially rich input into a natural language format suitable for matching against stored situations. We then query a model for the top-k most relevant entries using the generated description. We explored scoring, thresholding, and cumulative similarity approaches (as in top-p sampling). Observing comparable results, we selected top-k cutoff for simplicity.

We consider this a light-weight approach to converting abstract domain inputs into more understandable and memory-aligned representations.

PS Selection. Standard embedding approaches use a single forward pass per embedding, representing a System 1-style fast thinking/intuition driven understanding from the model. Intuitions may not be sufficient for difficult/frontier tasks and domains. Moreover, the connection between a higher level concept with a specific problem instance may not be immediately clear because of the abstraction.

To address these challenges, we propose **reasoning-based selection**— using System 2-style thinking to deliberately think and explore. In contrast to the more straightforward playbooks curated in the OE memory format, the explicitly abstract PS concepts are a set of puzzle pieces with notes on identifying if a piece is relevant (relevant cues) and on how various pieces fit together (type annotations). To select from this memory, we propose leveraging model-driven exploration instantiated by recent models' long-form reasoning with backtracking. PS Selection instructs a reasoning model to systematically explore the problem: first identify initial concepts using relevance cue annotations, then attempt to "fill in the details" by determining values or routines to populate these initial concepts' parameters using type annotations to identify which other concepts should be investigated.

3.5 CONTINUAL CONCEPT LEARNING

A long-held goal in machine learning is to develop lifelong learning systems that continually self-improve without manual intervention. A memory system that can leverage the learning signal present at test time via continual updates is one approach to achieve this ambition.

Our memory write operations are lightweight queries that can ingest solution traces derived from both the system and from external sources. In all settings, we initialize our external memory with seed data (problems and solutions). We demonstrate the efficacy of continual update as described in section 4. However, memory updates introduce introduce a dependency on problem order. If solving problem i induces a memory update that enables problem j to be solved, then the system will have different performance if the evaluation set is ordered $(..., x_i, ..., x_j, ...)$ or $(..., x_j, ..., x_i, ...)$. Inference batching becomes yet another factor to be considered. Even if x_i precedes x_j , it may be that x_i and x_j are in the same batch and therefore the model attempts x_j before x_i updates memory. In theory, this represents an accuracy-throughput trade-off. We prioritize throughput with the exception of the continual update experiments.

4 EXPERIMENTS

4.1 DATASETS

We evaluate our proposed framework on ARC-AGI-1 (Chollet, 2019), a benchmark explicitly designed to evaluate intelligence as "efficient acquisition of new skills" as opposed to "fixed possession/memorization of skills." Each ARC puzzle encodes a transformation rule that maps input to output pixel grids. The objective of each puzzle is to infer its rule given several examples of input-output grid pairs, and produce the corresponding output grid for several input test cases. We find that the abstract domain of pixel grid transforms provides an interesting testbed to simulate frontier domains without requiring expert knowledge to evaluate trajectories—a confluence of desirable properties for evaluating a continual concept learning system.

ARC-AGI-1 contains a public validation split containing 400 puzzles with a difficulty distribution matching that of the private evaluation. Just as Akyürek et al. (2025) select an evaluation subset of 80 puzzles, our experiments evaluate against a uniform random subset of 100 puzzles from the public validation split to accommodate compute limitations.

Li et al. (2024) manually authored python solutions for 160 puzzles from the public train split (comparatively easier than public and private evaluation splits) to act as "seeds" to recombine for their synthetic dataset. We reuse these seeds but instead of initializing training data, we initialize our memory using these solutions (start with empty memory; call write operation with each seed puzzle and solution pair).

4.2 SETTINGS

To build on frontier models, we experiment primarily with OpenAI's o4-mini. At the time of writing, o4-mini is second only to Grok 4, but o4-mini's lower price puts it on the pareto frontier of cost and performance ARC-Prize (2025). For auxiliary tasks such as concept abstraction and non-reasoning selection, we use OpenAI's GPT-4.1 to conserve token usage. Early experiments also evaluated the open-weight DeepSeek R1 which has the benefit of visible thinking traces, but its 8000 output token limit consistently yielded unfinished solutions in initial testing.

Li et al. (2024) demonstrated that the approaches of (1) induction: querying a model for a python program that takes an input grid and returns the transformed output grid and (2) transduction: querying a model to directly predict the output grids corresponding to the test case input grids are complementary. However since code solutions directly reflect the transformation steps and therefore provide more signal for reflection/abstraction, we use the induction method.

We take advantage of each puzzle's reference examples and use them as test cases for generated programs. Using these test cases, we evaluate performance under 0, 1, and 2 retries with execution feedback. To mitigate sampling variance, we run each setting 3 independent times.

Our evaluation settings all use o4-mini (medium) and are as follows:

- baseline: see sampling parameters in subsection C.2
- **cheatsheet**: a re-implementation of Suzgun et al. (2025)'s Dynamic Cheatsheet as a baseline, that uses a frozen cheatsheet initialized against BARC seeds to match other settings.
- ArcMemo-OE: our Open-Ended (OE) memory formulation
- ArcMemo-PS: our Program Synthesis (PS) memory formulation

4.3 SCORING

We use ARC-AGI's official scoring metric, oracle @k (each test case is scored separately and if any of k candidates pass, full credit is given for that test case). The ARC-AGI official evaluation has k=2, but to mitigate sampling variance, we sample 3 runs for each setting and report the average single run score, average oracle @2 score, and their standard deviation. We investigate several alternate scoring protocols (requiring a single program to solve all test cases, accumulating test case solve rates, and requiring references to also be solved) and include the results in Table 5.

5 RESULTS

5.1 MAIN RESULTS

Setting	Oracle@1	Oracle@2 (Official)
baseline (o4-mini)	46.33 (1.04)	55.17 (3.18)
cheatsheet	47.50 (2.78)	57.67 (2.52)
ArcMemo-OE (ours)	48.00 (1.00)	56.67 (1.53)
ArcMemo-PS (ours)	49.33 (0.29)	59.33 (0.29)
+ one retry	58.00 (2.29)	67.33 (1.61)
+ two retries	61.67 (3.88)	70.83 (3.06)
External Scores		
BARC ²	-	56.75
Official Leaderboard Scores ³		
Gemini 2.5 Pro (Thinking 16K)	-	41.0
Gemini 2.5 Pro (Thinking 32K)	-	37.0
Claude Opus 4 (Thinking 16K)	-	35.7
Claude Sonnet 4 (Thinking 16K)	-	40.0
o4-mini (medium)	-	41.8
o3 (medium)	-	53.8
o3-Pro (medium)	=	57.0

Table 1: **Main Results.** ArcMemo-PS yields the best results with standard inference compute, and continues to scale with additional compute. Bracketed values represent standard deviation across 3 samples. o4-mini (medium) is used as the backbone for all tested methods, so we include "medium reasoning effort" external results from the official leaderboard.

As seen in Table 1, ArcMemo-PS achieves the best official score with standard compute ⁴ and still benefits from additional scaling in both parallel samples and sequential retries. Table 4 shows complete details on all settings at all scales where ArcMemo-PS is the the only setting that consistently outperforms the baseline in all inference compute scales. Other memory formulations (cheatsheet, ArcMemo-OE) situationally improve over the baseline but still underperform it in some regimes.

We observe that ArcMemo-PS's advantage is most prominent with lower compute regimes. This is consistent with the stated goal "memory for reasoning": persisting previous experience aims to reduce redundancy from rediscovering ideas found in previous rollouts. The marginal impact of memory is reduced with more inference compute (attempts/tokens) as the model can rediscover ideas through exploration.

Comparing ArcMemo methods to our memory baseline (cheatsheet) shows that both methods are extremely competitive. Cheatsheet wins on oracle@2 at maximum depth, but is matched or exceeded by a ArcMemo setting in every other comparison. The quantitative improvement shown by ArcMemo is supported with qualitative analysis that finds ArcMemo memories to be more abstract and modular. This qualitative analysis (described more in subsection 5.2) observes that these abstract memories improve concept coverage—more target puzzle ideas are reflected in memory.

5.2 SELECTION ABLATION AND QUALITATIVE RELEVANCE ANALYSIS

		Oracle@k Scores				
		k=1	k=2 (Official)	k=3		
retry	setting					
0	ArcMemo-PS - selection	49.33 (0.29) 46.83 (5.25)	59.33 (0.29) 55.17 (2.02)	63.50 60.00		
1	ArcMemo-PS - selection	58.00 (2.29) 57.67 (3.79)	67.33 (1.61) 66.00 (3.00)	72.50 73.00		
2	ArcMemo-PS - selection	61.67 (3.88) 61.33 (3.21)	70.83 (3.06) 70.00 (2.65)	75.50 76.00		

Table 2: **Selection Ablation.** Ablating the reasoning-based selection mechanism from ArcMemo-PS reduces overall performance, showing the selection mechanism is also useful for downstream performance.

We perform an ablation experiment removing the selection mechanism from ArcMemo-PS to examine its impact and to compare more directly to the selection-free Cheatsheet methodology. The generally better performance of the with-selection setting (as seen in Table 2) suggests that in addition to allowing memory selection to grow without overwhelming context in both abstraction phase/inference phase, it also helps downstream problem solving performance. Moreover, from the token usage graph in Figure 4, we see that concept selection's performance improvement also comes at higher efficiency—the selection-ablated setting uses far more tokens. However there still exist certain scale regimes where the no-selection setting has a better score, suggesting that the selection mechanism has headroom for improvement (discussed more in section 6).

ArcMemo-PS (-selection) is most comparable to Dynamic Cheatsheet's "cumulative" setting as all stored memory is included with each query. While both ultimately solve the same number of puzzles across all runs, we find that the settings differ in 10 puzzles (that is, each system solves 5 puzzles the other does not). We manually analyzed these puzzles and found that only 40% of new solves from Cheatsheet were related to memory elements seen in the cheatsheet while 100% of new solves from

²Result is taken from Li et al. (2024) that fine-tunes 7B models and validates on the full validation split by selecting 2 predictions via majority vote from 20k samples for each puzzle. This is not directly comparable due the difficulty of normalizing compute between small open models and black-box API models.

³Official Leaderboard Scores are from ARC-Prize (2025) and also cannot be directly compared as the official leaderboard uses a private test set.

⁴Matching the official evaluation scheme with 2 parallel attempts and 0 retries.

ArcMemo-PS-no-selection can be linked to concept memory contents. That is, we were unable to find relevant concepts in the cheatsheet to explain 60% of the new solves. We cannot definitively conclude that the ArcMemo was the causal factor in each of the new solves since LLM operations remain uninterpretable at scale, but taken at face value, this suggests that new solutions in the ArcMemo settings are more attributed to the ArcMemo itself as compared to simple sampling variance.

Manual inspection of a subset of reasoning-based selection results used for ArcMemo-PS, finds that while irrelevant concepts still appear within the selection, the key idea of the target is often included in the selection. The presence of a few distractor concepts appears to be manageable, as the reasoning model itself is capable of exploring with backtracking.

5.3 CONTINUAL LEARNING

		Oracle@k Scores			
		k=1	k=2 (Official)	k=3	
retry	setting				
0	ArcMemo-OE + continual memory update	48.00 (1.00) 46.33 (1.53)	56.67 (1.53) 56.00 (0.00)	61.00 61.00	
1	ArcMemo-OE + continual memory update	56.67 (2.08) 57.17 (3.69)	65.67 (1.53) 65.00 (0.00)	70.00 67.00	
2	ArcMemo-OE + continual memory update	60.67 (1.53) 62.33 (3.51)	67.67 (2.52) 70.00 (1.73)	71.00 72.00	

Table 3: **Continual Memory Learning.** Comparing otherwise identical memory systems, we find that with sequential inference compute scale (at high retry depth), continually updating memory with new self-generated solutions leads to improved puzzle solving performance.

Results from our experiment comparing ArcMemo-OE with a version that updates *during* evaluation (every 10 problems; Table 3) show that our memory system's performance improves with continual updates—a key requirement for meaningful lifelong learning. In particular, we find that the performance improvement emerges at later iterations in sequential inference scaling. We hypothesize this is because after more iterations and puzzle solving passes, new solutions are found, new memories are abstracted, and these new memories help solve other puzzles.

We briefly discuss additional items of token efficiency, concept specificity and embedding retrieval in Appendix B.

6 Conclusion

In this work, we introduce ArcMemo, a framework designed to support lightweight, lifelong learning on compositional reasoning tasks by emphasizing a higher level of abstraction and modularity. We explore two implementations of memory modules against ARC-AGI, a benchmark specifically designed to resist memorization and to evaluate fluid intelligence instead. Our main findings confirm the efficacy of our approach: ArcMemo-PS outscores comparable methods under official evaluation protocol and continues to benefit from additional inference compute scale. Moreover we observe that continual updates benefits memory augmentation over multiple attempts, and that selecting a subset of memory for each problem is a crucial component to enable a memory to continually grow without overwhelming LLM context. This paper's work represents early attempts towards the main tenets of higher level abstraction and modularity. For future directions, we are most interested in designing a hierarchical consolidation mechanism (see Appendix A for discussion on limitations and future directions). While ArcMemo is a promising proof of concept, the abstract memory design space remains largely unexplored and we hope to encourage further investigation through the release of a concept-annotation dataset.

ACKNOWLEDGEMENTS

We thank Rahman Hajiyev and Jiayu Liu for early contributions to this project.

REFERENCES

- Ekin Akyürek, Mehul Damani, Adam Zweiger, Linlu Qiu, Han Guo, Jyothish Pari, Yoon Kim, and Jacob Andreas. The surprising effectiveness of test-time training for few-shot learning, 2025. URL https://arxiv.org/abs/2411.07279.
- ARC-Prize, 2025. URL https://arcprize.org/leaderboard.
- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-rag: Learning to retrieve, generate, and critique through self-reflection, 2023. URL https://arxiv.org/abs/2310.11511.
- Jinheon Baek, Sujay Kumar Jauhar, Silviu Cucerzan, and Sung Ju Hwang. Researchagent: Iterative research idea generation over scientific literature with large language models. *ArXiv*, abs/2404.07738, 2024. URL https://api.semanticscholar.org/CorpusID:269042844.
- Léon Bottou and Yann Cun. Large scale online learning. *Advances in neural information processing systems*, 16, 2003.
- Léon Bottou and Yann Le Cun. On-line learning for very large data sets. *Applied stochastic models in business and industry*, 21(2):137–151, 2005.
- Aydar Bulatov, Yuri Kuratov, and Mikhail S. Burtsev. Recurrent memory transformer, 2022. URL https://arxiv.org/abs/2207.06881.
- Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready ai agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025.
- François Chollet. On the measure of intelligence, 2019. URL https://arxiv.org/abs/1911.01547.
- Runnan Fang, Yuan Liang, Xiaobin Wang, Jialong Wu, Shuofei Qiao, Pengjun Xie, Fei Huang, Huajun Chen, and Ningyu Zhang. Memp: Exploring agent procedural memory, 2025. Work in progress.
- Huanang Gao, Jiayi Geng, Wenyue Hua, Mengkang Hu, Xinzhe Juan, Hongzhang Liu, Shilong Liu, Jiahao Qiu, Xuan Qi, Yiran Wu, Hongru Wang, Han Xiao, Yuhang Zhou, Shaokun Zhang, Jiayi Zhang, Jinyu Xiang, Yixiong Fang, Qiwen Zhao, Dongrui Liu, Qihan Ren, Cheng Qian, Zhenhailong Wang, Minda Hu, Huazheng Wang, Qingyun Wu, Heng Ji, and Mengdi Wang. A survey of self-evolving agents: On path to artificial super intelligence, 2025. URL https://arxiv.org/abs/2507.21046.
- Pengfei He, Zitao Li, Yue Xing, Yaling Li, Jiliang Tang, and Bolin Ding. Make Ilms better zero-shot reasoners: Structure-orientated autonomous reasoning. *ArXiv*, abs/2410.19000, 2024a. URL https://api.semanticscholar.org/CorpusID:273638104.
- Zexue He, Leonid Karlinsky, Donghyun Kim, Julian McAuley, Dmitry Krotov, and Rogerio Feris. Camelot: Towards large language models with training-free consolidated associative memory, 2024b. URL https://arxiv.org/abs/2402.13449.
- Mengkang Hu, Tianxing Chen, Qiguang Chen, Yao Mu, Wenqi Shao, and Ping Luo. Hiagent: Hierarchical working memory management for solving long-horizon agent tasks with large language model. *arXiv preprint arXiv:2408.09559*, 2024.
- Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Wei Yu, Xinying Song, and Denny Zhou. Large language models cannot self-correct reasoning yet, 2024. URL https://arxiv.org/abs/2310.01798.

- Ryo Kamoi, Yusen Zhang, Nan Zhang, Jiawei Han, and Rui Zhang. When can llms actually correct their own mistakes? a critical survey of self-correction of llms, 2024. URL https://arxiv.org/abs/2406.01297.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive nlp tasks, 2021. URL https://arxiv.org/abs/2005.11401.
- Wen-Ding Li, Keya Hu, Carter Larsen, Yuqing Wu, Simon Alford, Caleb Woo, Spencer M. Dunn, Hao Tang, Michelangelo Naim, Dat Nguyen, Wei-Long Zheng, Zenna Tavares, Yewen Pu, and Kevin Ellis. Combining induction and transduction for abstract reasoning, 2024. URL https://arxiv.org/abs/2411.02272.
- Lei Liu, Xiaoyan Yang, Yue Shen, Binbin Hu, Zhiqiang Zhang, Jinjie Gu, and Guannan Zhang. Think-in-memory: Recalling and post-thinking enable llms with long-term memory, 2023. URL https://arxiv.org/abs/2311.08719.
- Yitao Liu, Chenglei Si, Karthik Narasimhan, and Shunyu Yao. Contextual experience replay for self-improvement of language agents. *arXiv preprint arXiv:2506.06698*, 2025.
- Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. Self-refine: Iterative refinement with self-feedback, 2023. URL https://arxiv.org/abs/2303.17651.
- Ali Modarressi, Abdullatif Köksal, Ayyoob Imani, Mohsen Fayyaz, and Hinrich Schütze. Memllm: Finetuning llms to use an explicit read-write memory. *arXiv preprint arXiv:2404.11672*, 2024.
- Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. Memgpt: Towards llms as operating systems, 2024. URL https://arxiv.org/abs/2310.08560.
- Joon Sung Park, Joseph C. O'Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. Generative agents: Interactive simulacra of human behavior, 2023. URL https://arxiv.org/abs/2304.03442.
- Julien Pourcel, Cédric Colas, and Pierre-Yves Oudeyer. Self-improving language models for evolutionary program synthesis: A case study on arc-agi, 2025. URL https://arxiv.org/abs/2507.14172.
- Linlu Qiu, Liwei Jiang, Ximing Lu, Melanie Sclar, Valentina Pyatkin, Chandra Bhagavatula, Bailin Wang, Yoon Kim, Yejin Choi, Nouha Dziri, and Xiang Ren. Phenomenal yet puzzling: Testing inductive reasoning capabilities of language models with hypothesis refinement, 2024. URL https://arxiv.org/abs/2310.08559.
- Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning, 2023. URL https://arxiv.org/abs/2303.11366.
- Mirac Suzgun, Mert Yuksekgonul, Federico Bianchi, Dan Jurafsky, and James Zou. Dynamic cheatsheet: Test-time learning with adaptive memory, 2025. URL https://arxiv.org/abs/2504.07952.
- Guan Wang, Jin Li, Yuhao Sun, Xing Chen, Changling Liu, Yue Wu, Meng Lu, Sen Song, and Yasin Abbasi Yadkori. Hierarchical reasoning model, 2025. URL https://arxiv.org/abs/2506.21734.
- Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models, 2023a. URL https://arxiv.org/abs/2305.16291.

Ruocheng Wang, Eric Zelikman, Gabriel Poesia, Yewen Pu, Nick Haber, and Noah D. Goodman. Hypothesis search: Inductive reasoning with language models, 2024. URL https://arxiv.org/abs/2309.05660.

Xintao Wang, Qian Yang, Yongting Qiu, Jiaqing Liang, Qi He, Zhouhong Gu, Yanghua Xiao, and W. Wang. Knowledgpt: Enhancing large language models with retrieval and storage access on knowledge bases. *ArXiv*, abs/2308.11761, 2023b. URL https://api.semanticscholar.org/CorpusID:261076315.

Yuhuai Wu, Markus N. Rabe, DeLesley Hutchins, and Christian Szegedy. Memorizing transformers, 2022. URL https://arxiv.org/abs/2203.08913.

Ling Yang, Zhaochen Yu, Tianjun Zhang, Shiyi Cao, Minkai Xu, Wentao Zhang, Joseph E. Gonzalez, and Bin Cui. Buffer of thoughts: Thought-augmented reasoning with large language models, 2024. URL https://arxiv.org/abs/2406.04271.

Zhengyan Zhang, Xu Han, Zhiyuan Liu, Xin Jiang, Maosong Sun, and Qun Liu. Ernie: Enhanced language representation with informative entities, 2019. URL https://arxiv.org/abs/1905.07129.

A LIMITATIONS AND FUTURE WORK

A.1 LIMITATIONS

Our work represents initial work into higher abstraction for text-based memory modules, and we hope encourages further exploration. For one, our study evaluates against a constrained "evaluation frontier": we used a 100-puzzle subset of the ARC-AGI validation set, of which the non-memory baseline can already solve 73 with inference scale (maximum parallel attempts and sequential retries). This leaves only 27 puzzles where new solves are possible, and these tend to be highly challenging, limiting the absolute magnitude of gains we could observe. Second, introducing an updateable memory creates a potential sensitivity to the order of problems encountered during initialization or training. Although we freeze memory during evaluation, early updates can still influence its contents, and the final performance may depend on the sequence in which problems are processed. Understanding and controlling for this effect remains an open question.

A.2 FUTURE WORK

We see several promising directions for building on this work. One immediate opportunity is to extend evaluation to a broader and more challenging set of puzzles, including those unsolved by the baseline, to better quantify the upper bound of performance gains from memory augmentation and to test whether memory improves not just new solves but also pass@k consistency on borderline cases.

A second direction is to investigate order-robust update strategies and curriculum learning methods that reduce sensitivity to problem ordering while maintaining the benefits of inter-problem learning.

Another important avenue is hierarchical abstraction. While the existing PS formulation allows for new routines to be introduced as higher-level abstractions over existing routines or lower-level special cases of them, this additive approach cannot revise the concept structure as a whole. Moreover, our memory currently updates only when considering one solution at a time, whereas decisions about introducing new parent abstractions that encompass several existing ideas should require considering multiple experiences together. Future efforts could therefore focus on memory consolidation operations independent of individual puzzle-solving attempts.

Finally, our current memory format was designed through small-scale, cost-constrained experiments; richer optimization over representations, abstraction methods, and retrieval strategies could yield substantial improvements. To support this line of research, we release a dataset of frontier puzzles for o4-mini with hand-annotated concepts, along with helper puzzles demonstrating each concept at lower complexity. We hope this resource enables both hand-crafted and automated methods for finding optimal representations, exploring hierarchical abstraction, and developing memory consolidation operations independent of new inputs.

		Individual Run Scores			Oracle@k Scores			
		run0	run1	run2	k=1	k=2 (Official Score)	k=3	
iteration	setting							
0	baseline	46.00	45.50	47.50	46.33 (1.04)	55.17 (3.18)	59.50	
	cheatsheet	48.00	44.50	50.00	47.50 (2.78)	57.67 (2.52)	64.00	
	ArcMemo-OE (ours)	49.00	47.00	48.00	48.00 (1.00)	56.67 (1.53)	61.00	
	ArcMemo-PS (ours)	49.50	49.00	49.50	49.33 (0.29)	59.33 (0.29)	63.50	
1	baseline	57.00	55.50	61.00	57.83 (2.84)	66.67 (3.82)	71.50	
	cheatsheet	56.00	56.50	57.50	56.67 (0.76)	65.67 (1.44)	70.50	
	ArcMemo-OE (ours)	59.00	55.00	56.00	56.67 (2.08)	65.67 (1.53)	70.00	
	ArcMemo-PS (ours)	58.50	60.00	55.50	58.00 (2.29)	67.33 (1.61)	72.50	
2	baseline	59.50	59.00	65.00	61.17 (3.33)	69.00 (2.65)	73.00	
	cheatsheet	65.00	61.00	61.00	62.33 (2.31)	71.33 (1.53)	76.00	
	ArcMemo-OE (ours)	62.00	59.00	61.00	60.67 (1.53)	67.67 (2.52)	71.00	
	ArcMemo-PS (ours)	60.50	66.00	58.50	61.67 (3.88)	70.83 (3.06)	75.50	

Table 4: **Main Results.** The right partition of the table containing aggregate scores show the inference scaling: going down represents sequential retry, going right represents adding parallel samples. ConceptMemPS is the only setting that outperforms the baseline consistently at every tested scale.

		run0	run 1	run2	k=1	k=2	k=3
iteration	setting						
0	baseline	46.00	45.00	47.00	46.00 (1.00)	54.67 (3.21)	59.00
	cheatsheet	48.00	44.00	50.00	47.33 (3.06)	57.67 (2.52)	64.00
	ArcMemo-OE	49.00	47.00	48.00	48.00 (1.00)	56.67 (1.53)	61.00
	ArcMemo-PS	49.00	49.00	49.00	49.00 (0.00)	59.00 (0.00)	63.00
1	baseline	57.00	55.00	61.00	57.67 (3.06)	66.33 (4.04)	71.00
	cheatsheet	56.00	56.00	57.00	56.33 (0.58)	65.33 (1.15)	70.00
	ArcMemo-OE	59.00	55.00	56.00	56.67 (2.08)	65.67 (1.53)	70.00
	ArcMemo-PS	58.00	60.00	55.00	57.67 (2.52)	67.00 (1.73)	72.00
2	baseline	59.00	59.00	65.00	61.00 (3.46)	69.00 (2.65)	73.00
	cheatsheet	65.00	61.00	61.00	62.33 (2.31)	71.33 (1.53)	76.00
	ArcMemo-OE	62.00	59.00	61.00	60.67 (1.53)	67.67 (2.52)	71.00
	ArcMemo-PS	60.00	66.00	58.00	61.33 (4.16)	70.33 (3.06)	75.00

Table 5: **Strict Scoring**. While the official evaluation scheme allows different test cases solved by different attempts to be ensembled, in contrast the strict scoring regime only makrs a puzzle as solved if a single attempt (generated program) solves all test cases.

B FURTHER DISCUSSION

Token Efficiency We find that our system's token efficiency is similar to the baseline. We observe that memory-augmented runs tend to increase output token usage. While this seems to run counter to the intuition that retrieving rather than regenerating certain ideas would save tokens, we hypothesize that introducing memory leads the model to explore more hypotheses. In other words, selection inaccuracies (false positives) seem to be manageable by the reasoning models, but at the cost of increased token usage. Full results are plotted in Figure 4.

Concept Specificity Investigation As part of the development of our concept representations, we conducted small scale experiments using tiny (n=10) subsets of the validation split to investigate the level of detail needed for concepts to be useful. Manually writing maximum detail situation-suggestion style concepts and using iteratively LLM-summarized versions (for a total of 5 levels of specificity for each concept), we found the fairly expected result that higher levels of specificity correspond to better solve rates. Maximum specificity solved 4/10 with a generally decreasing pattern with lower specificity. While this result was entirely expected, the main goal of the experiment was to determine how much we could compromise on concept detail to improve the retrieval aspect. There

is a tension between retrieval and puzzle solving in the sense that puzzle solving benefits from more detailed suggestions, but retrieval struggles to apply it to new situations when the concept's relevant situation is so precisely defined.

Embedding-based Retrieval Experiments Early in testing, we investigated standard embedding-based retrieval approaches. Following the ArcMemo-OE setting, we used a VLM generated caption to query a vector database of ArcMemo-OE-style concept embeddings. While computationally cheap compared to autoregressive generation (especially so when leveraging long-form reasoning), we saw generally poor retrieval results throughout. Using OpenAI's embeddings API along with an o3-mini puzzle solving backbone proved ineffective, lowering the score from 0.26 to 0.22– marking a 15% reduction. Qualitative analysis found that retrieved concepts were largely irrelevant to the puzzle at hand and seemed to over-index on lexical similarity. Moreover, a small set of broadly defined (non-specific) concepts were found to be grossly overrepresented.

C IMPLEMENTATION DETAILS

C.1 PS MEMORY FORMAT

Each PS format memory entry contains:

- Title: a succinct label for the underlying idea.
- **Description**: elaboration on behaviour and role.
- Kind: whether this concept encodes a type/structure/routine.
- Parameters: a list of fields that parametrize this concept.
- Output Typing: specifies what the output for this routine is, to suggest how various routines can plug into other routines.
- Relevance Cues: much like the situation field in the OE concepts, we consider the context in which this concept is relevant.
- Implementation Notes: suggestions on how to implement the concept in actual code.

C.2 EXPERIMENT PARAMETERS

To build on frontier models, we experiment primarily with OpenAI's o4-mini (max tokens=32000, reasoning_effort=medium). For auxiliary tasks such as concept abstraction and non-reasoning selection, we use OpenAI's GPT-4.1 (temperature=0.3, max tokens=1000) to reduce token usage. We looked into evaluating the open-source DeepSeek R1 which also has transparent thinking process, but the output 8000 token limit consistently yielded unfinished solutions.

D ADDITIONAL RELATED WORK

Knowledge Base Augmented LLMs for Factuality. Early efforts to enhance language models with external memory primarily targeted knowledge-intensive tasks. Retrieval-Augmented Generation (RAG) introduced the idea of retrieving documents from an external store based on embedding similarity to augment generation (Lewis et al., 2021). Follow-up work like KnowledGPT incorporated formal knowledge bases, allowing LLMs to execute structured queries through "Program-of-Thought" prompting for multi-hop reasoning (Wang et al., 2023b). More recently, MemLLM proposed inline memory operations—allowing the model to read from and write to memory directly during generation—enabling continual adaptation without re-training (Modarressi et al., 2024).

Embedding Space Memory. Another stream of work aims to overcome the limited context window of transformers through architectural interventions that compress information from long sequences into continuous space. Memorizing Transformers stored latent key-value vectors from past inputs and retrieved them via a kNN mechanism to be attended to alongside the current context (Wu et al., 2022). The Recurrent Memory Transformer extended this by incorporating a writable memory updated over time, making memory content responsive to ongoing computation (Bulatov et al., 2022). He

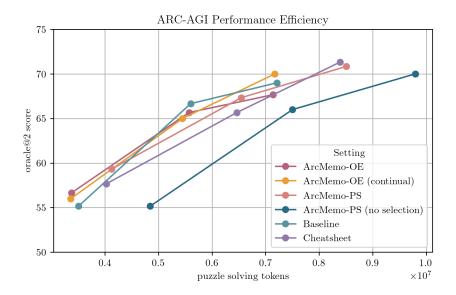


Figure 4: Token Efficiency Plot: Comparing various settings' official score (oracle@2) on the public validation subset to the tokens used by the reasoning model for strictly puzzle solving

et al. (2024b) blended these ideas by applying a moving average to update memory slots, allowing for both similarity-based retrieval and continual adaptation He et al. (2024a). MemGPT introduced a hierarchical memory system with a working (RAM-like) memory and a larger archival memory, simulating long-term information management in a more structured fashion (Packer et al., 2024).

Parameter-Free Test-time Learning. Test-time learning (sometimes referred to as online learning) describes methods that updates predictions at inference time Bottou & Cun (2003); Bottou & Le Cun (2005). However, trends towards (1) massive model sizes and (2) black box models accessed through APIs make continually updating parameters computationally impractical or downright impossible. In light of this, LLM test-time learning research looked to pursue parameter-free adaptation by making use of LLMs' remarkable capacity for instruction following and self-reflection. Methods such as Reflexion (Shinn et al., 2023), Self-Refine (Madaan et al., 2023), and Self-RAG (Asai et al., 2023), inter alia attempt to correct mistakes at test time by way of self-reflection. Follow-up work (Huang et al., 2024; Kamoi et al., 2024) find that self-correction methods depend on the availability of some extrinsic feedback or verification mechanism to reliably improve end performance and that these methods produce dubious results absent these grounded sources of feedback. Still, self-reflection remains a key component of self-evolving agents (Gao et al., 2025).

Memory for Agentic Skill Acquisition. Memory also plays a crucial role in LLM-based agents. Park et al. (2023) structured memory as a stream of episodic observations and distilled high-level summaries from them to guide decision-making. Contextual Experience Replay discretizes trajectories into "experiences" (containing environment dynamics from a trajectory and skills storing actions from said trajectory) and retrieves relevant blocks to guide new episodes (Liu et al., 2025). HiAgent organizes working memory (within a single query) hierarchically by subgoals, summarizing and replacing traces to improve long-horizon efficiency (Hu et al., 2024). External-memory systems such as Mem0 and MemP manage a persistent store with explicit add-update-prune operations (MemP casts control as an MDP), yielding gains on dialogue and tool-use/planning tasks (Chhikara et al., 2025; Fang et al., 2025). MemP in particular is a concurrent work that also demonstrates the efficacy of abstraction, although they target rewriting action sequences as step sequences in explicitly agentic settings, contrasting with ArcMemo's general problem solving focus. Voyager uses LLMs to autonomously acquire and store skills while exploring Minecraft, with a growing library of reusable code snippets written by the agent itself Wang et al. (2023a). Other systems, like the Research Agent, use memory initialized from domain-specific corpora, such as scientific papers, to ground query responses in high-utility prior knowledge (Baek et al., 2024).