

Class 14: RNA-Seq analysis

Leah Kim A16973745

Table of contents

Remove zero count genes	3
Setup DESeq analysis	4
Run DESeq analysis	4
Extract results	4
Add Gene anotation	5
Save my results to a csv file	7
Result Visualization	7
Pathway Analysis	8
Go Online analysis	14

#Data Import

```
library(DESeq2)
library(AnnotationDbi)
library(org.Hs.eg.db)
library(pathview)
library(gage)
library(gageData)
```

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

# Import metadata and take a peak
```

```
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
      condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
# Import countdata
countData = read.csv(countFile, row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

#Tidy counts to match metadata

Check the correspondance of colData rows and countData columns.

```
rownames(colData)
```

```
[1] "SRR493366" "SRR493367" "SRR493368" "SRR493369" "SRR493370" "SRR493371"
```

Remove the troublesome first column so we match the metadata

```
# Note we need to remove the odd first $length col
counts <- as.matrix(countData[,-1])
```

```
colnames(counts)
```

```
[1] "SRR493366" "SRR493367" "SRR493368" "SRR493369" "SRR493370" "SRR493371"
```

```
all(colnames(counts) == rownames(colData))
```

```
[1] TRUE
```

Remove zero count genes

We will have rows in `counts` for genes that we can not say anything about because they have zero expression in the particular tissue we are looking at.

```
head(counts)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

If the `rowSums()` is zero, then a given gene (i.e. row) has no data and we should exclude these genes from further consideration.

```
# Filter count data where you have 0 read count across all samples.
to.keep <- rowSums(counts) != 0
cleancounts <- counts[to.keep, ]
```

Q. How many genes do we have left?

```
nrow(cleancounts)
```

```
[1] 15975
```

Setup DESeq analysis

```
dds = DESeqDataSetFromMatrix(countData=cleancounts,  
                              colData=colData,  
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

Run DESeq analysis

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

Extract results

```
res <- results(dds)  
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01

padj

	<numeric>
ENSG00000279457	6.86555e-01
ENSG00000187634	5.15718e-03
ENSG00000188976	1.76549e-35
ENSG00000187961	1.13413e-07
ENSG00000187583	9.19031e-01
ENSG00000187642	4.03379e-01

Add Gene anotation

```
columns(org.Hs.eg.db)
```

[1]	"ACCNUM"	"ALIAS"	"ENSEMBL"	"ENSEMBLPROT"	"ENSEMBLTRANS"
[6]	"ENTREZID"	"ENZYME"	"EVIDENCE"	"EVIDENCEALL"	"GENENAME"
[11]	"GENETYPE"	"GO"	"GOALL"	"IPI"	"MAP"
[16]	"OMIM"	"ONTOLOGY"	"ONTOLOGYALL"	"PATH"	"PFAM"
[21]	"PMID"	"PROSITE"	"REFSEQ"	"SYMBOL"	"UCSCKG"
[26]	"UNIPROT"				

```
res$symbol = mapIds(org.Hs.eg.db,  
  keys=row.names(res),  
  keytype="ENSEMBL",  
  column="SYMBOL",  
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                  keys=row.names(res),
                  keytype="ENSEMBL",
                  column="GENENAME",
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	

ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..
ENSG00000188157	4.21963e-16	AGRN	375790	agrin
ENSG00000237330	NA	RNF223	401934	ring finger protein ..

Save my results to a csv file

```
write.csv(res,file="my_annotated_results.csv")
```


Result Visualization

```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (res$padj < .01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(P-")
```

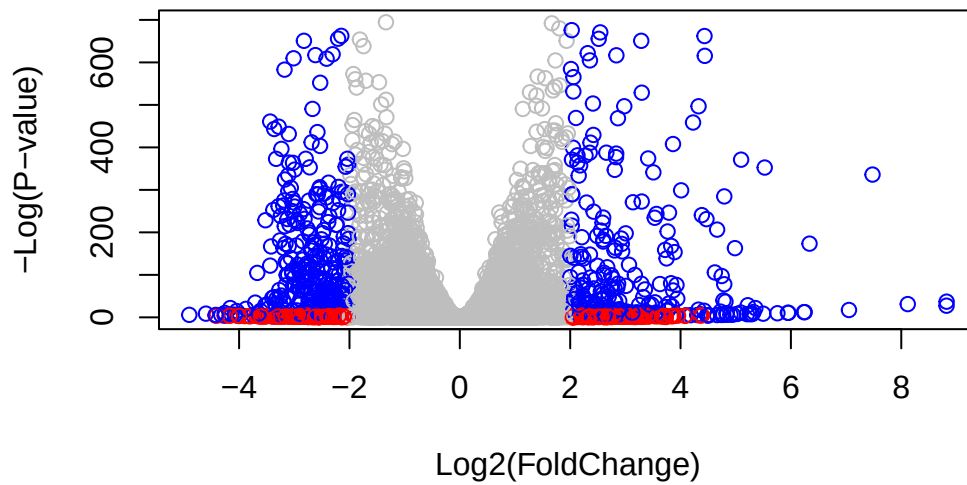

Pathway Analysis

```
data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
```



```
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

Use fold changes from DESeq2 analysis to run gage().

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
<NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049
```

Run gage() pathway analysis

```
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

Look at object returned

```
attributes(keggres)
```

```
$names  
[1] "greater" "less"    "stats"
```

Use `pathview()` to make a pathway plot

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa04110.pathview.png

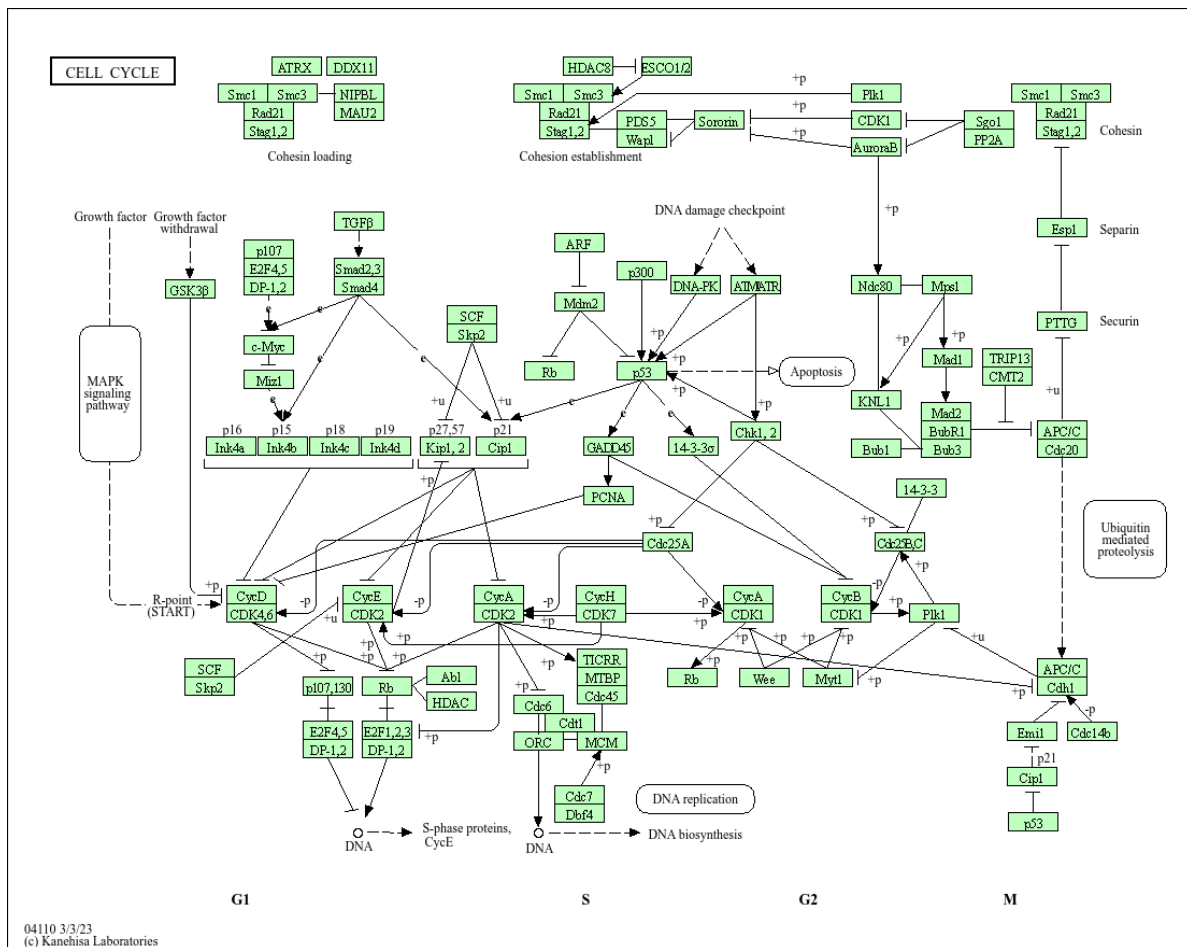


Figure 1: Pathway plot of RNA seq expression results

```
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]
```

```
# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa04640.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns


Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa04142.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/leah/Documents/UCSD/BIMM 143/class14

Info: Writing image file hsa04330.pathview.png

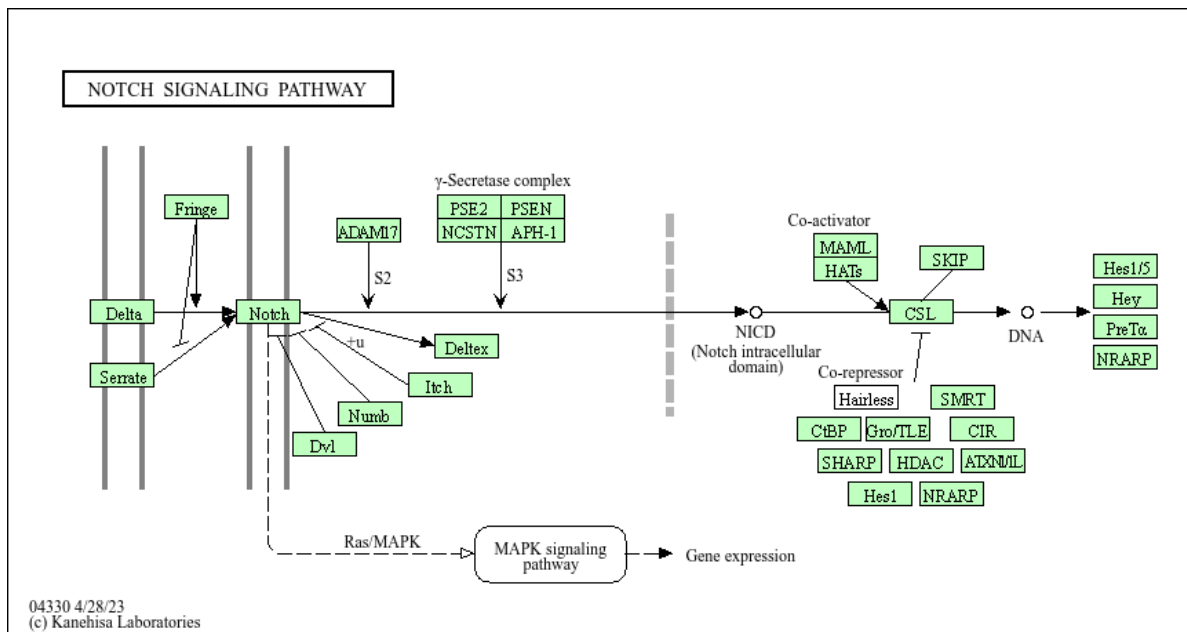

Reactome Analysis

List significant genes at 0.05

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

Go Online analysis

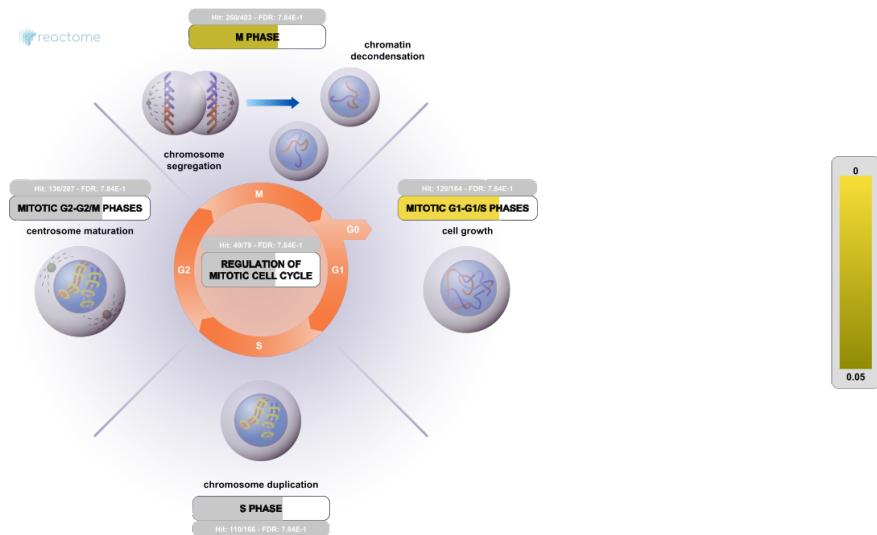


Figure 2: Gene Set Go Enrichment