

OpenBaton

Carlo Vallati

Assistant Professor@ University of Pisa

c.vallati@iet.unipi.it

OpenBaton




- OpenBaton is an extensible and customizable NFV MANO-compliant framework written in Java
- It implements A Network Function Virtualisation Orchestrator (NFVO) completely designed and implemented following the ETSI MANO specification
- It allows to control multiple sites, each one using different technologies virtualized infrastructure technologies, e.g. AWS, OpenStack, Docker

<http://openbaton.github.io>


<https://github.com/openbaton/>

Architecture

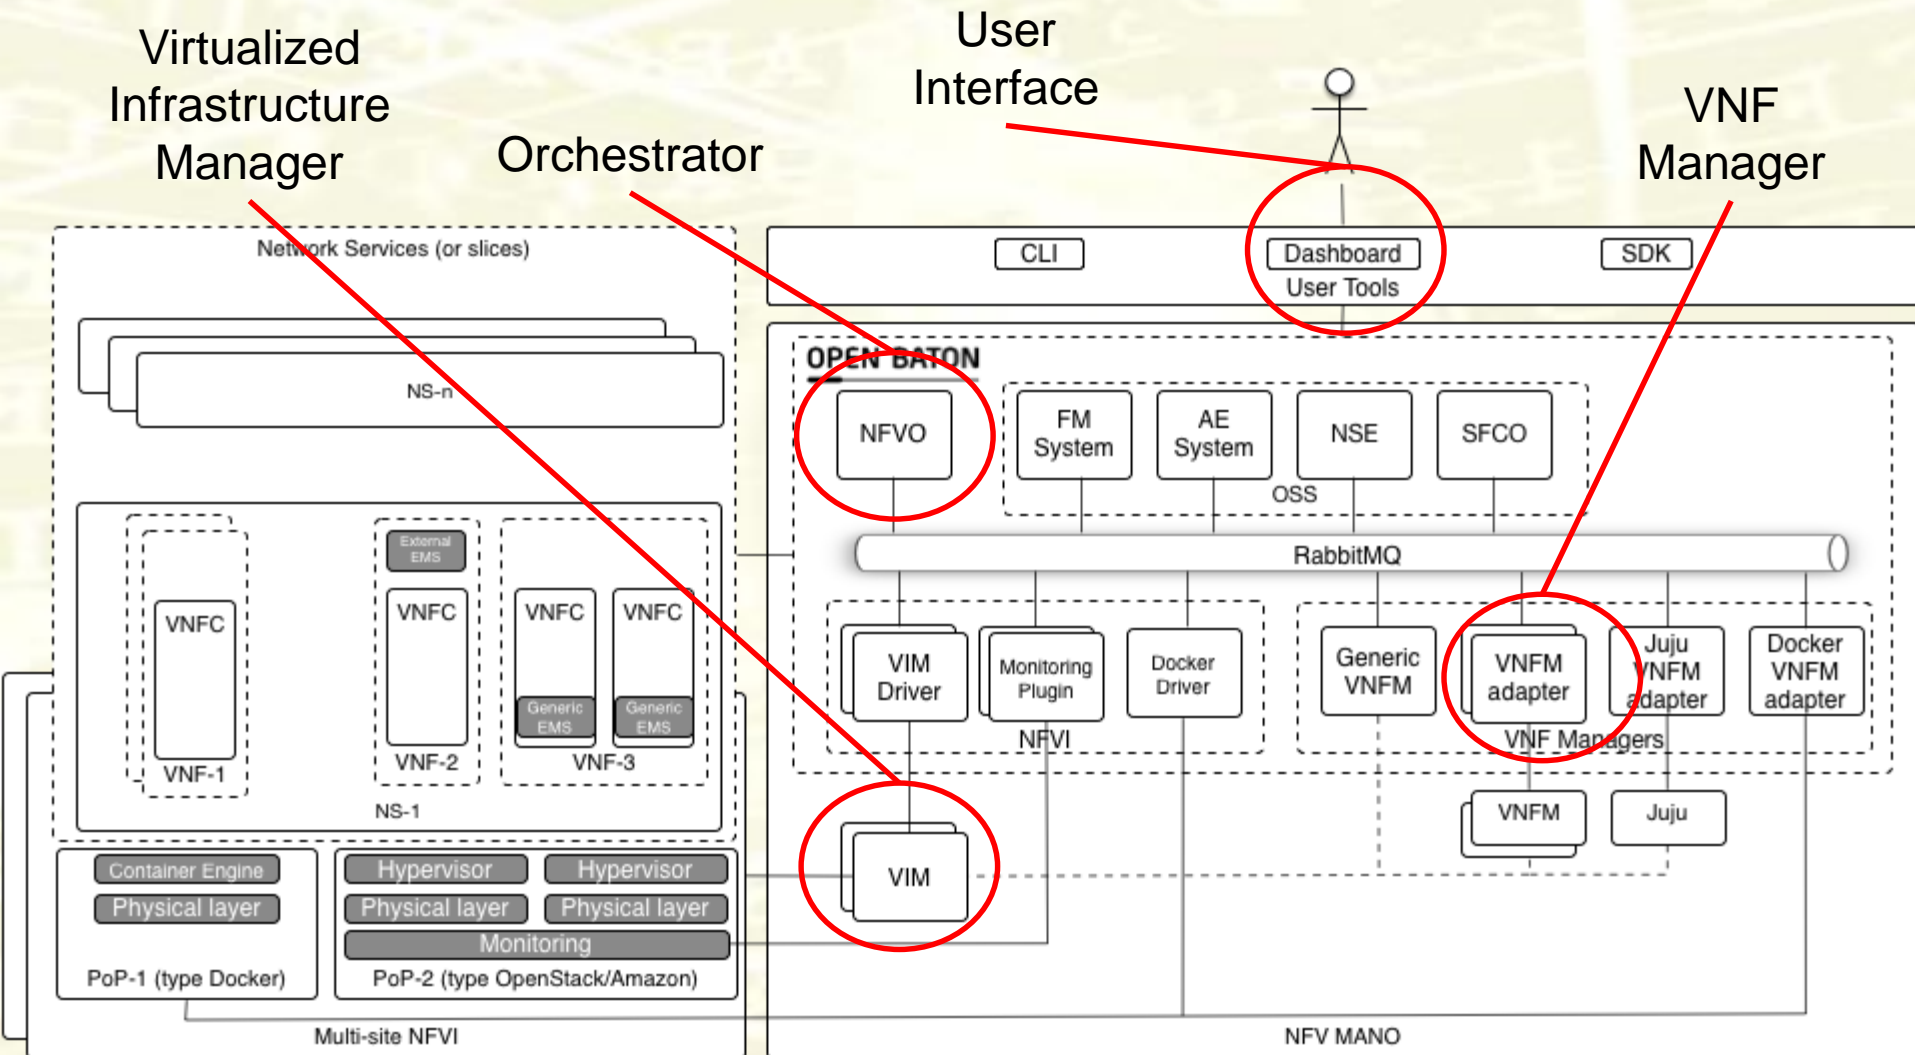


OpenBaton Deployment

- The architecture ensures It ensures expandability and interoperability, novel VIM and VNFM can be easily added to support new virtualization technologies
- A host (physical or a virtual machine) is configured as Orchestrator, in which all OpenBaton components are installed and configured
- Specific VIMs and VNFM modules for the virtualization technologies involved are installed

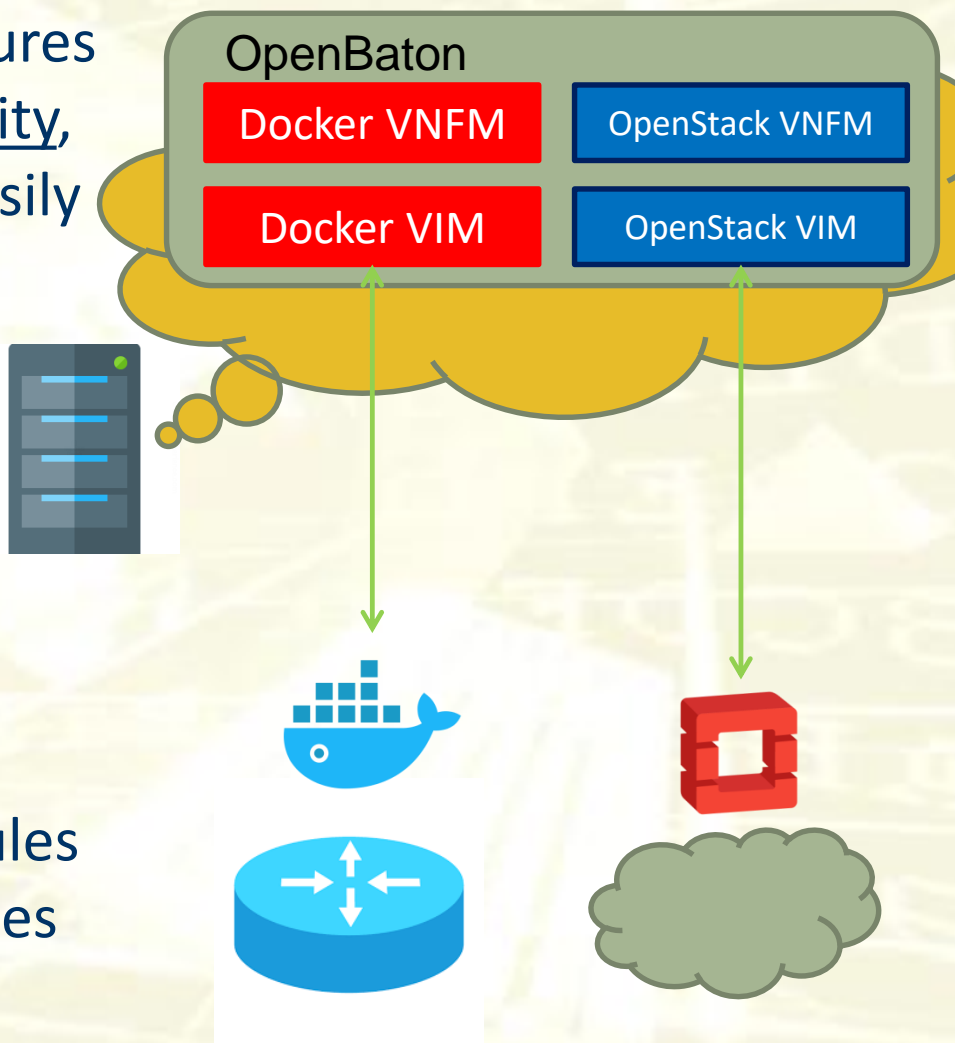

Our Deployment

- Docker is exploited as NFV Infrastructure
- Two Virtual Machines are provided:
 - OpenBatonNFO with the orchestrator installed and a VIM and a NFVM for Docker installed. The VM has also the docker daemon installed and configured, i.e. it can run containers
 - OpenBatonVIM with docker installed and configured

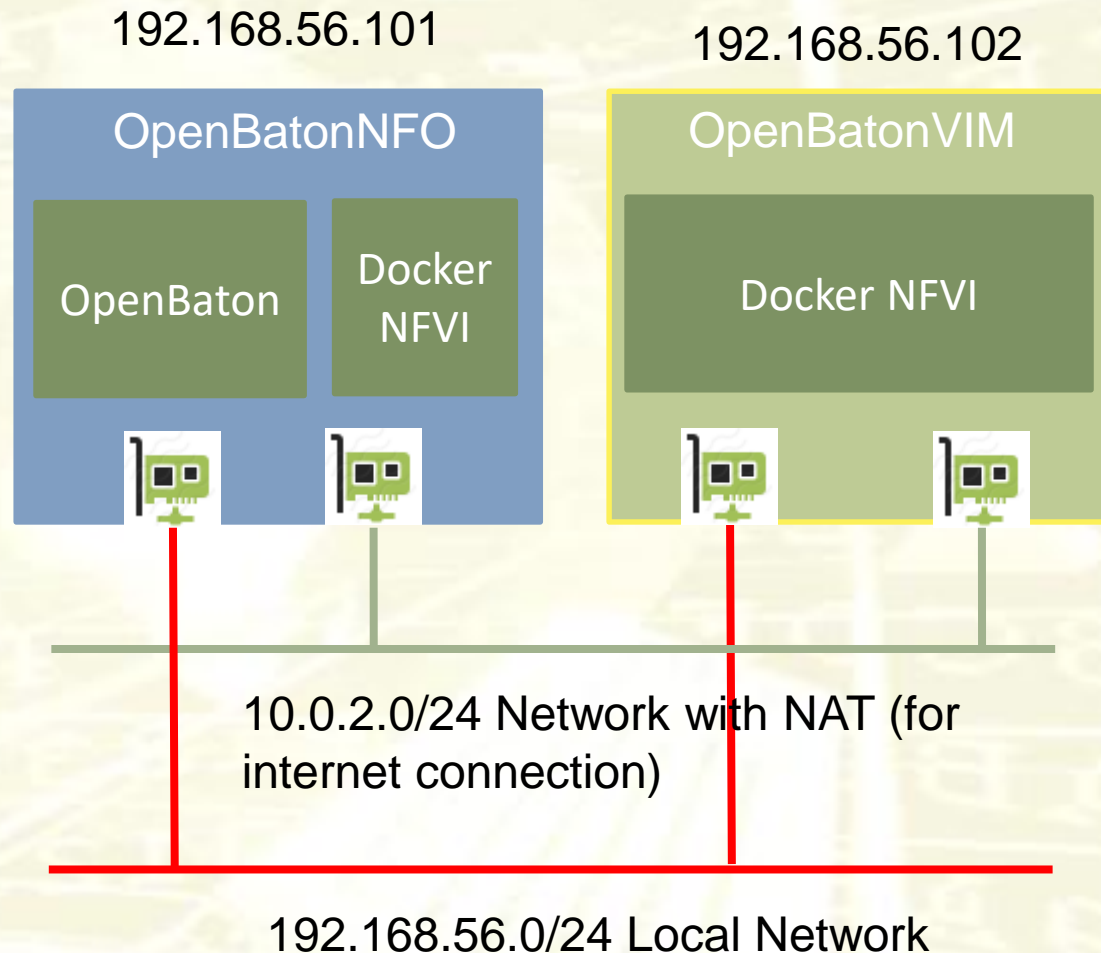

User: osboxes / Password: osboxes.org

Deploy and Bootup NFVO


- OpenBaton is installed as a collection of Docker containers
- The first step is to start them up using docker-compose (it takes some minute):

```
sudo env HOST_IP=192.168.56.101 docker-compose up -d
```
- The deployment takes place accordingly to the file docker-compose.yml (pre-downloaded from the OpenBaton website)
- The set of OpenBaton containers have been already downloaded

<http://openbaton.github.io/documentation/nfvo-installation-docker/>

Access the Web Dashboard

- Open a browser and go to:
<http://192.168.56.101:8080>
- Login, User: admin / Password: openbaton

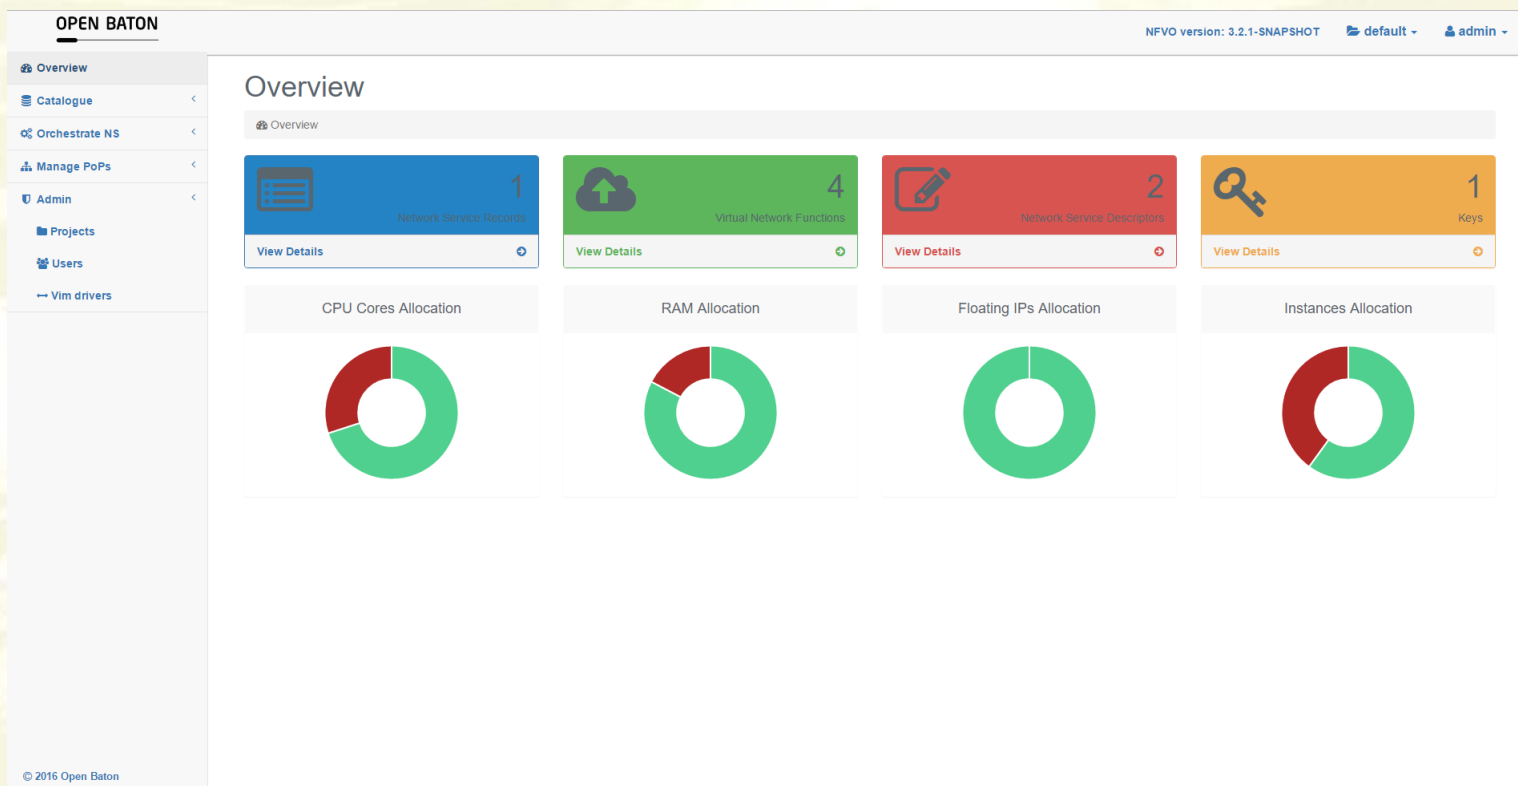

NFVI Integration


- The two hosts has been already integrated into the NFVO as part of the NFV Infrastructure
- New Docker hosts (or using other virtualization technologies) can be integrated via:
 - Manage POPs -> POP Instances -> Register a new POP
- Check the correct integration of the two hosts

[Register a new PoP](#) [Delete](#)

<input type="checkbox"/>	ID ↕	Name ↕	Type ↕	Action
<input type="checkbox"/>	8d5f3e5b-9336-4ca4-a4ab-5ac29273b8c3	vim-instance	docker	Action ▾
<input type="checkbox"/>	d7de280e-932d-426e-a9bd-312c3b59fefd	remote-docker	docker	Action ▾

NFVI Integration



Refresh status  Refresh host status

Show JSON

Name	vim-instance
Authorisation URL	unix:///var/run/docker.sock
Type	docker
ID	8d5f3e5b-9336-4ca4-a4ab-5ac29273b8c3
Location	Berlin
Project ID	29fdfdf8-0af2-45ff-9586-e340d99075df

Docker host details

Networks Images

Images

Tags	ExtId
["openbaton/plugin-vimdriver-openstack-4j:6.0.0"]	sha256:7a0f1b0db3c9c5eed12b00b2165735676807cd679609508b393616fcf2dadcd95
["openbaton/vnfm-generic:6.0.0"]	sha256:00ead5151d1a3f18e1ff3dbe2e2e23c8310756e435785c5ec317c2bf5e0d8ed3
["networkstatic/iperf3:latest"]	sha256:6ea158fee1a75f82ccf4d9fed2165883ec91fb094a9ea87b5257691248fca58d
["openbaton/vnfm-docker-go:6.0.0"]	sha256:b28971addd9f27917746fa52c25cdf649bb802fe48beb8197b3410d47095c5e1

List of container images locally available on the host

VNF Creation – Create the Container

- Install the container on the host on which the VNF might be deployed (e.g. a container with a telnet server)

```
FROM rohan/ascii-telnet-server
```

```
EXPOSE 23
```

- Build the container image

```
sudo docker build .
```

- Check that the container is in the list of images by refreshing the Image List in the POP page from the OpenBaton dashboard

VNF Creation – Setup VNF Package

- A VNF package is a package describing the VNF
- The VNF is described by two files:
 - **Metadata.yaml**, which describes the container that implements the VNF
 - **vnfd.json**, which describes how OpenBaton has to instantiate the container and the VNF
- Both the files have to be included in a *tar package* and uploaded into the system to create the VNF
- To create a tar package on windows look for a specific tool (e.g. <http://www.peazip.org/tar-windows.html>)

VNF Creation – Metadata.yaml

```
name: TelnetServer
description: TelnetServer
provider: UNIP
nfvo_version: 6.0.0
vim_types:
- docker
image:
  upload: "false"
  names:
  - "rohan/ascii-telnet-server:latest"
  link: "rohan/ascii-telnet-serverlatest"
image-config:
  name: "rohan/ascii-telnet-server:latest"
  diskFormat: QCOW2
  containerFormat: BARE
  minCPU: 0
  minDisk: 0
  minRam: 0
  isPublic: false
```

Name and description of the container

VIM type for the VNF

Name of the Docker image

VNF Creation – vnfd.json

```
{  
  "name": "TelnetServer",  
  "vendor": "UNIP",  
  "version": "0.2",  
  "lifecycle_event": [],  
  "configurations": {  
    "configurationParameters": [{  
      "confKey": "publish",  
      "value": "23:23"  
    }],  
    "name": "telnet-configuration"  
  },  
  "virtual_link": [{  
    "name": "mgmt"  
  }],  
  ....  
}
```

Name and description of VNF

Set of parameters for container instantiation, e.g. publish the port 23 (this port will be publicly accessible using all the IP addresses of the host on which the container runs)

If none, write:
"confKey": "KEY",
"value": "Value"

Configuration name


VNF Creation – vnfd.json

```
...  
  
"vdu": [{  
  "vm_image": [  
  ],  
  "scale_in_out": 2,  
  "vnfc": [{  
    "connection_point": [{  
      "virtual_link_reference": "mgmt"  
    }]  
  }]  
}],  
"deployment_flavour": [{  
  "flavour_key": "m1.small"  
}],  
"type": "telnet",  
"endpoint": "docker"  
}
```

← Type of the VIM, docker in this case

VNF Creation – Upload VNF Package

- Create a TAR package with the two files
- Go to the page:
 - Catalogue -> VNF Package -> Upload VNF Package
- Select the package and click on “Send All”
- A new VNF package is created

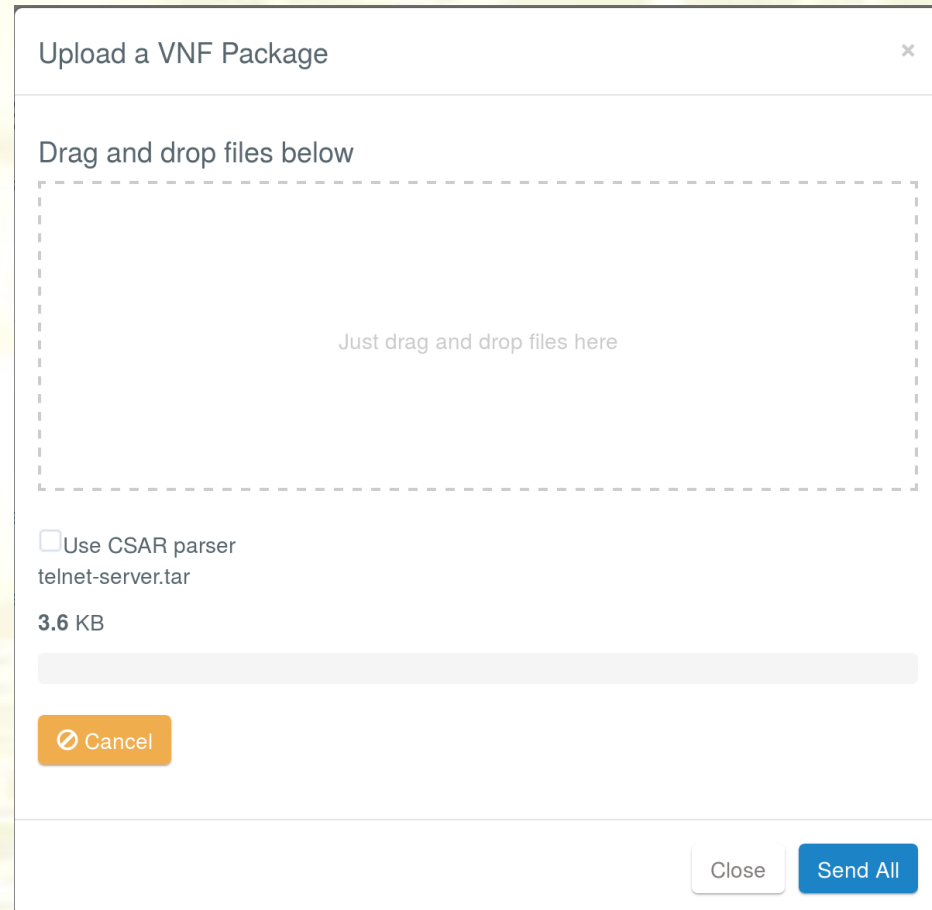

Upload a VNF Package

Drag and drop files below

Just drag and drop files here

☐ Use CSAR parser
telnet-server.tar
3.6 KB

Cancel

Close Send All

VNF Creation – Create a Network Service Descriptor



- Before being able to deploy the VNF, a new Network Service (NS) Descriptor has to be created
- The NS is a collection of VNFs (it can be one or more)
- Go to:
 - NS Descriptors -> On Board NSD -> Compose NSD

Add the VNF as part of the NS

On Board a Network Service Descriptor

General Information

Compose your Network Service Descriptor choosing VNFs already

Virtual Network Function(s)

Virtual Links

Name: TelnetServer

Vendor: UNIP

Version: 2.0

Close

On Board a Network Service Descriptor

General Information

Virtual Network Function(s)

Virtual Links

VNFs Catalogue

TelnetServer

VNFs already selected

Name	Type	Endpoint	Delete
TelnetServer	telnet	docker	

Add new dependency

Close


Back Next Create NSD

Lunch the NS with all its VNFs

- Before being able to deploy the VNF, a new Network Service Descriptor has to be created
- Go to:
 - NS Descriptors -> Action (on one NS) -> Launch

Select the hosts
on which the NS
has to be
deployed

Deploy

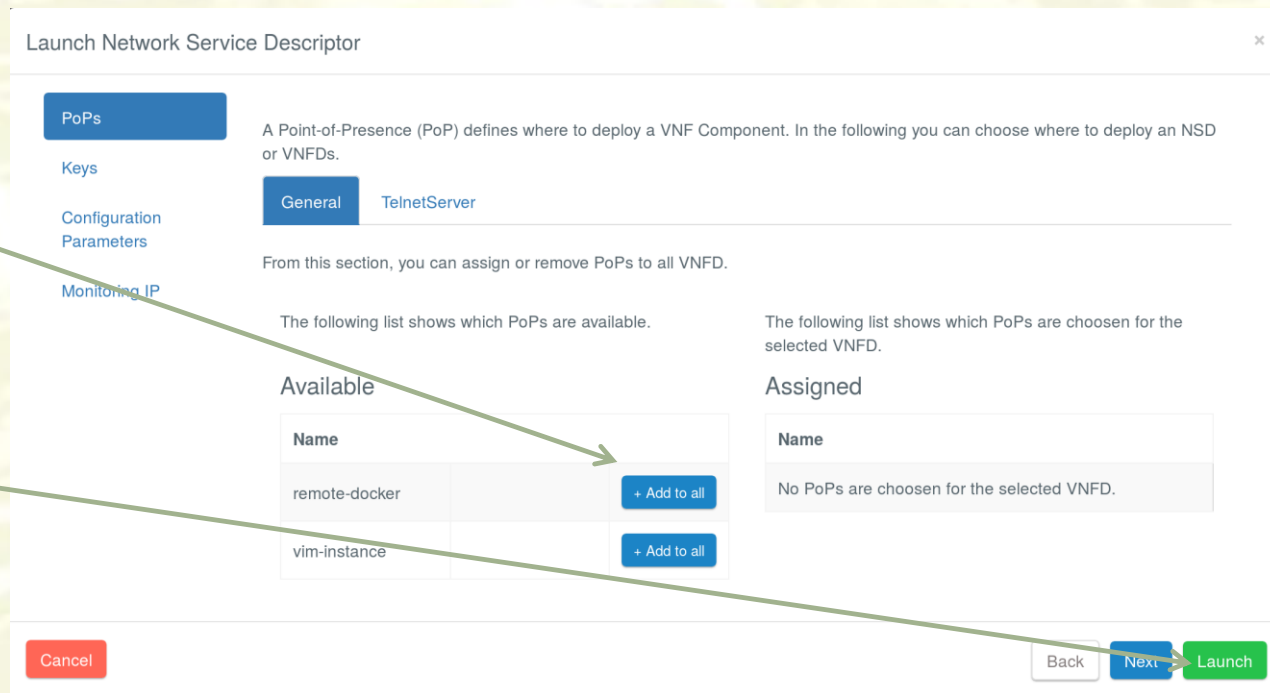

Launch Network Service Descriptor

PoPs

Keys

Configuration Parameters

Monitoring IP

General TelnetServer

A Point-of-Presence (PoP) defines where to deploy a VNF Component. In the following you can choose where to deploy an NSD or VNFDs.

From this section, you can assign or remove PoPs to all VNFD.

The following list shows which PoPs are available.

Name
remote-docker
vim-instance

The following list shows which PoPs are chosen for the selected VNFD.

Assigned

No PoPs are chosen for the selected VNFD.

Cancel Back Next Launch

Check NS status

- To retrieve the list of NSs currently deployed go to:
 - Orchestrate NS -> NS Records

<input type="checkbox"/>	Id ↕	NSR Name ↕	State ↕	Created at ↕	Updated at ↕	Actions
<input type="checkbox"/>	67b6ff79-4a43-4390-bda1-5215bfa18d4a	iperfclient	ACTIVE ✓	2018.11.10 at 17:39:33 GMT	2018.11.10 at 17:39:39 GMT	Action ▾
<input type="checkbox"/>	88fc7bd2-3847-4fc1-b9db-e2d1b61aa5f9	iperfserver	ACTIVE ✓	2018.11.10 at 17:39:08 GMT	2018.11.10 at 17:39:10 GMT	Action ▾
<input type="checkbox"/>	9ca4cc75-211c-47ee-b98a-6b66fede7e58	TelnetServer	ACTIVE ✓	2018.12.05 at 17:18:13 GMT	2018.12.05 at 17:18:14 GMT	Action ▾

If you connect to one of the two hosts you can check that the telnet server is actually running :

```
sudo docker ps
telnet localhost 23
```


Test IT – HTTP Proxy

- Create a new VNF, which instantiates an HTTP proxy, squid (a popular implementation of an HTTP proxy)
- To this aim the following container available in the Docker repository can be used:
 - `datadog/squid:latest`
- This container exposes the port 3128 to receive HTTP requests

Errors



- NS execution can result in the following error:
 - ERROR:Not created Network with name: mgmt successfully on VimInstance vim-instance. Caused by:
org.openbaton.exceptions.VimDriverException: Error response from daemon: could not find an available, non-overlapping IPv4 address pool among the defaults to assign to the network
- In this case too many containers have been deployed on the same host, the local IP addressing is exhausted
- Remove unused virtual local networks with the following command

sudo docker network prune

Test IT – HTTP Proxy

- Create a new VNF, which instantiates an HTTP proxy, squid (a popular implementation of an HTTP proxy)
- To this aim the following container available in the Docker repository can be used:
 - `datadog/squid:latest`
- This container exposes the port 3128 to receive HTTP requests

Test IT – IPERF

- Create two new VNFs, one running an *iperf server* and another running *iperf client* to send some traffic between the two hosts
- To this aim the following container available in the Docker repository can be used:
 - networkstatic/iperf3:latest
- The iperf server has to expose the port 5201
- Both the containers has to run a command, it can be done by adding in the Dockerfile the following commands
 - ENTRYPOINT ["iperf3", "-s"]
 - ENTRYPOINT iperf3 -c 192.168.56.101 -t 300