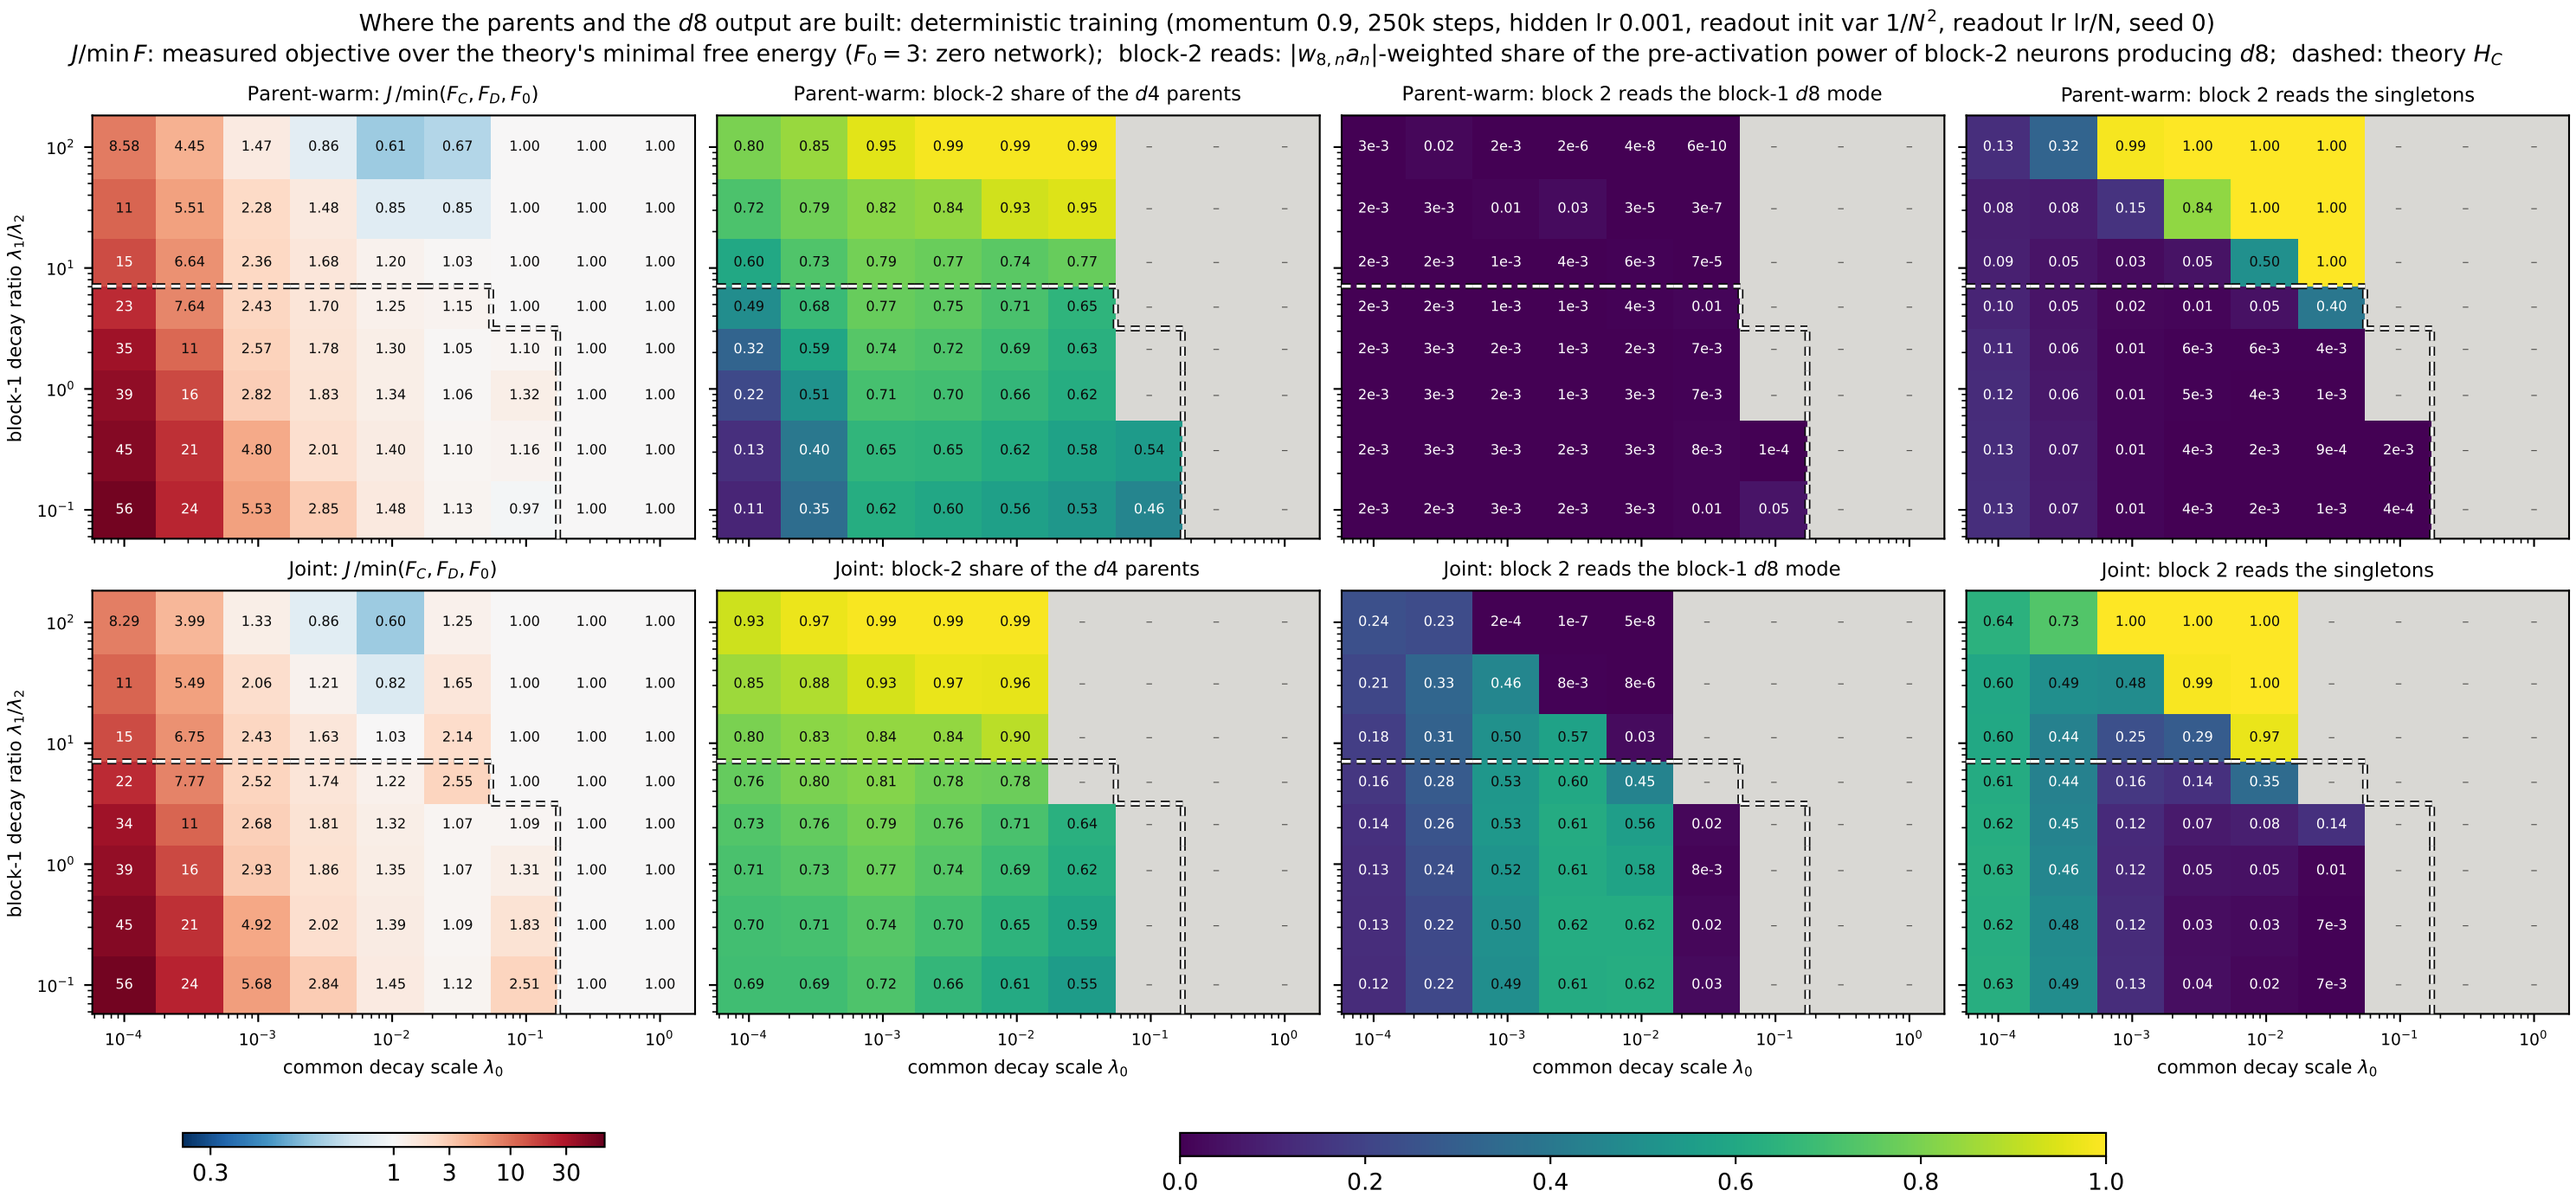
Where the parents and the d8 output are built: deterministic training (momentum 0.9, 250k steps, hidden lr 0.001, readout init var 1/N², readout lr lr/N, seed 0)
J/min F: measured objective over the theory's minimal free energy (F0 = 3: zero network); block-2 reads: |w8,n an|-weighted share of the pre-activation power of block-2 neurons producing d8; dashed: theory HC
Parent-warm: J/min(FC, FD, F0)
Parent-warm: block-2 share of the d4 parents
Parent-warm: block 2 reads the block-1 d8 mode
Parent-warm: block 2 reads the singletons
Joint: J/min(FC, FD, F0)
Joint: block-2 share of the d4 parents
Joint: block 2 reads the block-1 d8 mode
Joint: block 2 reads the singletons
block-1 decay ratio λ1/λ2
common decay scale λ0
0.3
1
3
10
30
0.0
0.2
0.4
0.6
0.8
1.0