

CS1699: Lecture 22 - Writing Testable Code



CS1699: Lecture 22 - Writing Testable Code



Defining Testable Code

In one sense, all code is testable, since we can provide input and observe output.



PROBLEM?

Testable code: Code for which it is easy to perform automated tests at various levels of abstraction, and track down errors when tests fail.



Good code is testable code.
Not all testable code is good code.


Testing makes you stronger, but it's not well documented or maintained.
TWO FOR THE PRICE OF ONE!

In short, it's not always...
1. Basic Strategy for Testability
2. The DRY Concept
3. SOLID Principles
4. Local Testing
5. Managing Variable Global States
6. Dealing with Legacy Code

"Testable code is one of those funny things. You only mean to make it testable, but it turns out to also be maintainable and VERY easy to integrate with."

[Open Under-Screen-Player](#)

In one sense, all code is testable, since we can provide input and observe output.

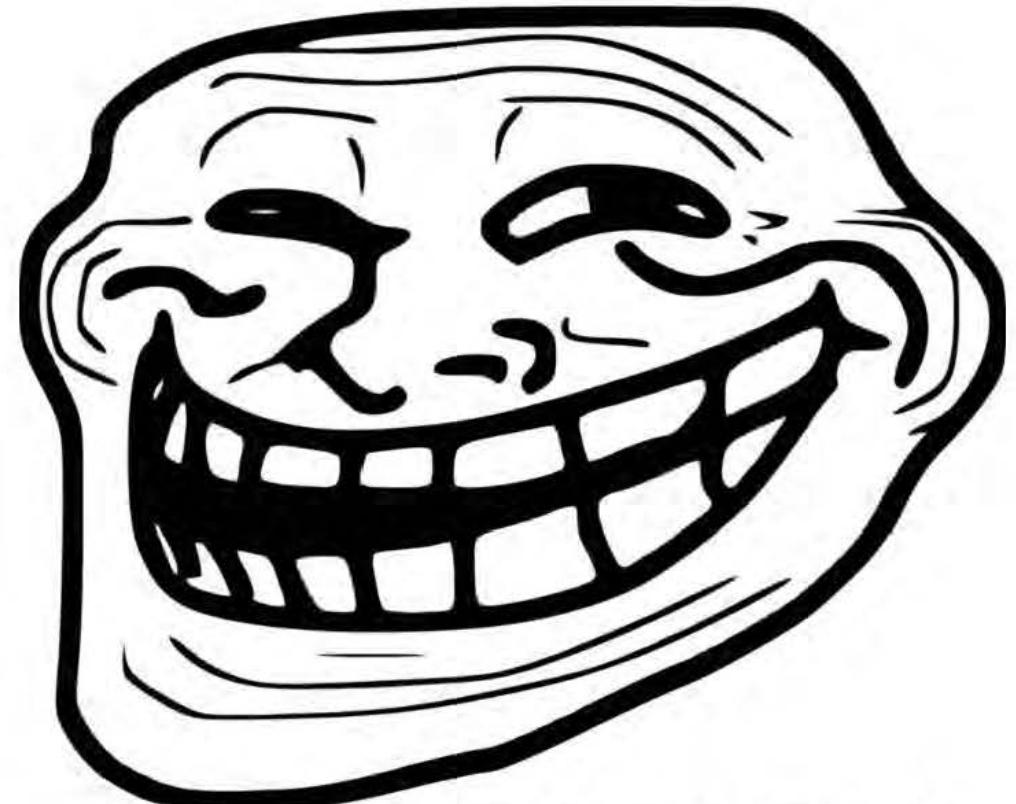


PROBLEM?

Testable code: Code for which it is easy to perform automated tests at various levels of abstraction, and track down errors when tests fail.

Good code is testable code.

Not all testable code is good code.

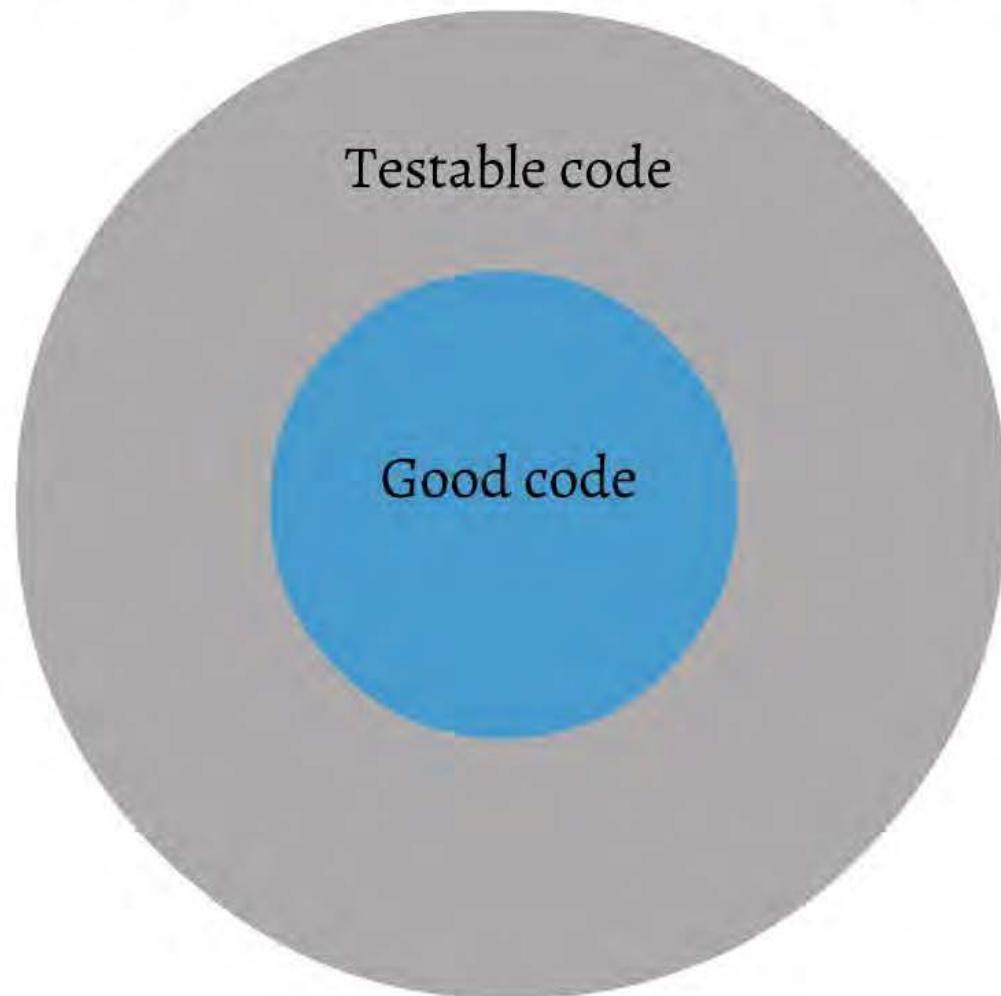

Tonight, we're going to talk about good code... and by doing so, we'll automatically get testable code!

TWO FOR THE PRICE OF ONE!

In this lecture, we'll cover -

- 1. Basic Strategy for Testability**
- 2. The DRY Concept**
- 3. SOLID Principles**
- 4. Law of Demeter**
- 5. Minimizing Mutable Global State**
- 6. Dealing with Legacy Code**

"Testable code is one of those funny things.
You only mean to make it testable, but it
turns out to also be maintainable and very
easy to integrate with."

-Chris Umbel, Software Engineer

The Basic Strategy for Testability

Key concept:

Segment code, make things repeatable.

The more parts of the system your code relies upon to execute properly, the more difficult it is to test.

```
public int getNumBooks(int userNum) {
    String db = DatabaseFactory.getDb();
    name.setString();
    DatabaseConnector dbc = new DatabaseConnector(db);
    Schema schema = SchemaSingleton.getSchema();
    User user;
    try {
        user = UserLocating.getUser(userNum)[0].toUser();
    } catch (Exception e) {
        user = null;
    }
    dbc.setSchema(schema);
    return dbc.get("BooksOut").where("User = ?")
        .user(user).size();
}
```

Think about everything that depends on to execute properly.

Try to minimize those external dependencies. How could we do this?

```
public int getNumBooks(String userName,
    DatabaseConnector dbc) {
    return dbc.get("BooksOut").where("User = ?")
        .userName(userName).size();
}
```

Clean testing and poor code involves keeping constant separate, as much as possible.
This will not only make testing easier, but code comprehension easier.

Pure vs Impure functions

Functional Programming, especially in a language like Haskell, does much of what we're talking about it automatically as part of the language.

MINIMIZE MUTABLE STATE!

Key concept:

**Segment code, make
things repeatable.**

The more parts of the system your code relies upon to execute properly, the more difficult it is to test.

```
public int getNumBooks(int userNum) {  
    String db = DatabaseFactory.getDb().name.toString();  
    DatabaseConnector dbc = new DatabaseConnector(db);  
    Schema schema = SchemaSingleton.getSchema();  
    User user;  
    try {  
        user = UserLookup.getUser(userNum)[0].toUser();  
    } catch (Exception e) { user = null; }  
    dbc.useSchema(schema);  
    return dbc.get("BooksOut").where("User = " +  
        user.toString());  
}
```

Think about everything that depends on to execute properly.

Try to minimize these external dependencies. How could we do this?

```
public int getNumBooks(String userName,  
DatabaseConnector dbc) {  
    return dbc.get("BooksOut").where("User = " +  
userName);  
}
```

Good testing and good code involves keeping concerns separate, as much as possible.

This will not only make testing easier, but code comprehension easier!

Pure vs Impure functions

MINIMIZE MUTABLE STATE!

Functional Programming, especially in a language like Haskell, does much of what we're talking about it automatically as part of the language.

DRYing up Code

DRY = Don't Repeat Yourself

Some Examples:

```
public int getAddress(int[] bs, int[] ds) {  
    String address = "";  
    for (int i = 0; i < bs.length; i++) {  
        address[i] = bs[i] + ds[i];  
    }  
    return address;  
}  
  
import java.util.*;  
  
public int getAddress(int[] bs, int[] ds) {  
    String address = "";  
    return getAddress(bs, ds, add());  
}
```

Why is this bad?

- 1. There are many lines.
- 2. It's hard to see what's happening.
- 3. What is the correct code?
- 4. It's hard to maintain.

A more DRY example:

```
name = db.where("user_id = " + id_name).get_name();  
... later ...  
name = db.findById(id).get_name();
```

Why not make a getName(id) method?

If multiple pieces of code are doing the same thing, consider creating a method/function for it.

DRY = Don't Repeat Yourself

Simple Example

```
public int[] addArrays(int[] lhs, int[] rhs) {  
    int[] toReturn = new int[lhs.length];  
    for (int j=0; j < lhs.length; j++) {  
        toReturn[j] = lhs[j] + rhs[j];  
    }  
    return toReturn;  
}  
  
import fj.*;  
...  
public int[] zipWithAddition(int[] lhs, int[] rhs) {  
    return zipWith(lhs, rhs, add);  
}
```

Why is this bad?

- 1. Twice as many tests**
- 2. Twice as many places to make errors**
- 3. Which is the correct one to use?**
- 4. Bloated codebase**

A more insidious example...

```
name = db.where("user_id = " + id_num).get_names[0]
```

... later ...

```
name = db.find(id).get_names.first
```

Why not make a getName(id) method?

**If multiple pieces of code are
doing the same thing, consider
creating a method/function for it.**

SOLID Principles

A mnemonic for the "five key principles" of object-oriented design.

- S Single Responsibility Principle
- O Open/Closed Principle
- L Liskov Substitution Principle
- I Interface Segregation Principle
- D Dependency Inversion Principle

Single Responsibility Principle
A class should have a single responsibility. That responsibility should be entirely encapsulated by the class.

```
public class Bank {  
    public void withdrawMoney() {}  
    public void transferMoney() {}  
    public void acceptMortgage() {}  
    public void terminateMortgage() {}  
    public void depositCash() {}  
    public void depositCheck() {}  
    public void withdrawCash() {}  
    public void depositGash() {}  
    public void authentecate() {}  
    public Branch getBankBranches() {}  
    public Employee[] getBankEmployees() {}  
}
```

```
public class ATM {  
    public void withdrawMoney() {}  
    public void getBalance() {}  
    public void transferMoney() {}  
}
```

Open/Closed Principle
Elements should be open for extension and closed for modification.

- Only code on file
- Many methods
- Many attributes
- Difficult to comprehend what class does
- Methods don't seem related

What does this code do?

Open/Closed Principle
Closed class (open for extension, but closed for modification).

difficult to change an application
class modification can break module
that's bad because new people join

```
public void withdrawMoney() {}  
public void transferMoney() {}  
public void acceptMortgage() {}  
public void terminateMortgage() {}  
public void depositCash() {}  
public void depositCheck() {}  
public void withdrawCash() {}  
public void withdrawGash() {}  
public void authentecate() {}  
public Branch getBankBranches() {}  
public Employee[] getBankEmployees() {}  

```

What does this code do?

```
public void withdrawMoney() {}  
public void transferMoney() {}  
public void acceptMortgage() {}  
public void terminateMortgage() {}  
public void depositCash() {}  
public void depositCheck() {}  
public void withdrawCash() {}  
public void withdrawGash() {}  
public void authentecate() {}  
public Branch getBankBranches() {}  
public Employee[] getBankEmployees() {}  

```

difficult to change an application
class modification can break module
that's bad because new people join

What does this code do?

Liskov Substitution Principle
A class B which is a subclass of class A, should implement any method in A while meeting all invariants.

```
public void withdrawMoney() {}  
public void transferMoney() {}  
public void acceptMortgage() {}  
public void terminateMortgage() {}  
public void depositCash() {}  
public void depositCheck() {}  
public void withdrawCash() {}  
public void withdrawGash() {}  
public void authentecate() {}  
public Branch getBankBranches() {}  
public Employee[] getBankEmployees() {}  

```

```
public void withdrawMoney() {}  
public void transferMoney() {}  
public void acceptMortgage() {}  
public void terminateMortgage() {}  
public void depositCash() {}  
public void depositCheck() {}  
public void withdrawCash() {}  
public void withdrawGash() {}  
public void authentecate() {}  
public Branch getBankBranches() {}  
public Employee[] getBankEmployees() {}  

```

What does this code do?

large code base, hard to maintain
changes in one module can break others

Interface Segregation Principle
Clients should depend on methods that they do not use.
In practice, this means lots of small interfaces, not one big one.

```
public interface BankCustomer {  
    public void transferMoney() {}  
    public void withdrawMoney() {}  
    public void acceptMortgage() {}  
    public void terminateMortgage() {}  
    public void depositCash() {}  
    public void depositCheck() {}  
    public void withdrawCash() {}  
    public void withdrawGash() {}  
    public void authentecate() {}  
    public Branch getBankBranches() {}  
    public Employee[] getBankEmployees() {}  
}
```

```
public interface ATMCustomer {  
    public void withdrawMoney() {}  
    public void getBalance() {}  
    public void transferMoney() {}  
}
```

large code base, hard to maintain
changes in one module can break others

What does this code do?

Dependency Inversion Principle
If a class has a lot of dependencies, it should depend on abstractions.
It eliminates a class's need to depend directly on concrete classes.

```
public class ATM {  
    public void withdrawMoney() {}  
    public void getBalance() {}  
    public void transferMoney() {}  
}
```

difficult to change an application
class modification can break module
that's bad because new people join

Above is dependency injection!

- S Single Responsibility Principle
- O Open/Closed Principle
- L Liskov Substitution Principle
- I Interface Segregation Principle
- D Dependency Inversion Principle

A mnemonic for the "five key principles" of object-oriented design.

S Single Responsibility Principle
O Open/Closed Principle
L Liskov Substitution Principle
I Interface Segregation Principle
D Dependency Inversion Principle

Single Responsibility Principle

**A class should have a single responsibility.
That responsibility should be entirely encapsulated by
the class.**

```
public class Stuff {  
    public void printMemo() { ... }  
    public int numCats(String breed) { ... }  
    public String getName() { ... }  
    public void haltSystem(int exitCode) { ... }  
}
```

What is Stuff's single responsibility?

```
public class Cat {  
    public String getName() { ... }  
    public String getBreed() { ... }  
    public Currency getRentalCost() {...}  
    public int rent() { ... }  
}
```

```
public class RentACatSystem {  
    public void startSystem() { ... }  
    public void haltSystem(int exitCode) { ... }  
    public void forceShutdown() { ... }  
}
```

Describe the class. If you can't do it without using "and", you are probably violating the Single Responsibility principle.

Other code smells:

1. Many methods
2. Many attributes
3. Difficult to comprehend what class does
4. Methods don't seem related

Why does this make testing easier?

Open / Closed Principle

Classes should be open for extension, but closed to modification.

Add features by subclassing, not adding code.

Once complete, code modification in a given module ("class") should not occur except to fix defects.

```
public class Printer {  
    private void formatDocument() { ... }  
    public void printDocument() { ... }  
    public void printToPDF() { ... }  
}
```

Violation of Open/Closed Principle!

Better way:

```
abstract class Printer {  
    private void formatDocument() { ... }  
}
```

```
public class PhysicalPrinter extends Printer {  
    private void printDocument() { ... }  
}
```

```
public class PdfPrinter extends Printer {  
    public void printPdf() { ... }  
}
```

If your classes keep getting bigger with each commit,
you may be violating the Open/Closed Principle.

This is a really good reason for using abstract classes
and interfaces.

Why does this make our code easier to test?

Liskov Substitution Principle

A class B which is a subclass of class A, should implement any method in A while meeting all invariants.

Example:

```
public class Shape {  
    Location loc;  
    Color color;  
}  
  
public class Rectangle extends Shape {  
    public double length; public double height;  
}  
  
public class Square extends Shape {  
    public double size;  
}
```

```
public class Square {  
    public Location loc;  
    public Color color;  
    public double size;  
}  
public class Rectangle extends Square {  
    public double length;  
    public double height;  
}
```

What's wrong with this?

Liskov Substitution means that you can mock without fear of causing issues.

Interface Segregation Principle

Clients should depend on methods that they do not use.

In practice, this means lots of small interfaces, not one big one.

```
public interface BankInterface {  
    public void transferMoneyIntraBank();  
    public void transferMoneyInterBank();  
    public void allocateMortgage();  
    public void transferMortgage();  
    public void setupHeloc();  
    public void withdrawCash();  
    public void depositCheck();  
    public void depositCash();  
    public void authenticate();  
    public Bank[] getBankBranches();  
    public Employee[] getBankEmployees();  
}
```

```
public interface AtmInterface {  
    public void withdrawCash();  
    public void depositCash();  
    public void depositCheck();  
    public void authenticate();  
}
```

Better

If you find yourself not using all of the methods of an interface from another class, consider splitting up the interfaces for different roles.

How does this help for testing?

Dependency Inversion Principle

- A. *High-level modules should not depend on low-level modules.
Both should depend on abstractions.*
- B. *Abstractions should not depend on details. Details should depend on abstractions.*

Example

```
public class Aviary {  
    public void buyCockatiel();  
    public void buyGreyParrot();  
    public void buyYellowBelliedSapSucker();  
}
```

```
public class Aviary {  
    public void buyBird(Bird b);  
}
```

Note that abstractions/interfaces are not enough! For example, DataRecord.setTransactionRollbackTimeout();

Leaky abstractions are bad.

Allows for dependency injection!

S Single Responsibility Principle

O Open/Closed Principle

L Liskov Substitution Principle

I Interface Segregation Principle

D Dependency Inversion Principle

Remember - these are principles, NOT laws.

Use common sense when applying.

Law of Demeter

The Law of Demeter
General rule: Don't pull my pants for another's self.
Aggravation:

Example:
`big_login_name =
 Obj.getTable("users").lookup(0).readline("big_login")`

Better:

Not-so-good approach:
You can do something like this (not so good):
You can do something like this (not so good):
and so on (you will see what I mean).

Good for Law of Demeter:
Don't pull pants for another's self.
Don't pull pants for another's self.

If you have a long line of dot-whatevers, you
may be violating the Law of Demeter.

How does this help us test?

The Law of Demeter*

Never call a method on an object you got from another call.

* Not an actual law.

Example:

```
pig_latin_name =
```

```
Db.getTable("Users").lookup(id).translate("Pig Latin")
```

Better:

You can play with yourself.

You can play with your own toys (but you can't take them apart),

You can play with toys that were given to you.

And you can play with toys you've made yourself.

Note that this doesn't count IF THE OBJECTS
RETURNED ARE ALL THE SAME CLASS!

```
foo = " BLAH ".toLowerCase().substring(2).replace('a', 'b').trim
```

If you have a long line of dot-whatevers, you may be violating the Law of Demeter.

How does this help us test?

Dealing with Legacy Code

It's difficult.

Very good advice:

- 1. Write tests as you go along
- 2. And then...
- 3. Don't Create TUFs (as that they're not inside TUCs)

You can take TUFing from a given point.
Extract the portion of a module containing code
that has been used and move just that and your own
tests.

There are places in the code where you can
alter behavior without code modifications.

Example:
in `SEAM`

...
and positive/negative

...
and more.

...
and more.

No TUFs inside TUCs

TUF = Technical module

Assuming the database
is being in the memory.

Extract the portion of the report

etc which is only [e.g. 1000 entries]

(TUC)

TUC = Technical module

Positive methods

Negative methods

Final methods

Complement methods

"Working with Legacy Code" by Michael

Koeneck

http://mkoenecke.com/tutorials/working-with-legacy-code/

Don't let the name fool you!

The book can be a useful guide for you if you are a software engineer trying to work around

existing and legacy code and writing testing

in such code.

Don't let the name fool you!

The book can be a useful guide for you if you are a software engineer trying to work around

existing and legacy code and writing testing

in such code.



It's difficult.

Key pieces of advice:

- 1. Write tests as you go along**
- 2. Look for seams**
- 3. Move/Create TUFs so that they're not inside TUCs**

You can start TDDing from a given point.

**Don't let the morass of already-existing code
swallow you up and make you not add your own
tests.**

Seams are places in the code where you can alter behavior without code modification.

Example:

```
// SEAM
public void printDoc(Printer p, args) {
    p.print(args);
}
```

```
// NO SEAM
public void printDoc2() {
    Printer p = new Printer(DEFAULT_ARGS);
    p.print();
}
```

No TUFs inside TUCs

TUF = Test-Unfriendly Feature

Accessing the database

Writing to the filesystem

Communicating across the network

Side effect-ful code (e.g. GUI updates)

etc.

TUC = Test-Unfriendly Construct

Private methods

Final methods

Final classes

Constructors / Destructors

"Working with Legacy Code" by Michael Feathers

<http://www.objectmentor.com/resources/articles/TestableJava.pdf>

Don't be discouraged.

The hard part of software engineering is getting large systems to work correctly. Dealing with legacy code and adding testing is part of this.

If this was easy, everybody would be doing it!

CS1699: Lecture 22 - Writing Testable Code

