

Please see the **highlighted** and the **screenshots**.

Develop update / deploy new features

Use the Codio ecommerce application you created and additional product features - deploy your new features, the shopping cart and remaining site. You can use the account you created in the previous assignment and continue to store your code in GitHub.

Submission:

Provide your GitHub link,

https://github.com/labricot-lab/446_m6_pro_20260413

live link

https://labricot-lab.github.io/446_m6_pro_20260413/

and screenshots of your application running on Codio in the browser with a description of which feature you added and why.

I added the add-to-cart feature to my webpage because like this, the customers can choose what they want, add them to their shopping carts and pay for them to be delivered to their destinations.

Here's some steps to try.

What's possibly the issue:

You're opening the HTML file directly from your computer.

But your HTML needs the server running first.

If the server isn't running, the browser can't find the /cart endpoint, so you get "file doesn't exist".

Think of it like this:

The HTML file is the menu

The server is the restaurant

The /cart endpoint is the waiter

If the restaurant isn't open, the waiter can't take your order.

Step 1: Open PowerShell

Right-click your desktop and choose "Open PowerShell here".

Or press Windows Key + R, type powershell, press Enter.

I got the red error message below first:

PS C:\Users\lhuan\Desktop\446\20260331> npm install

npm : Le terme «npm» n'est pas reconnu comme nom d'applet de commande, fonction, fichier de script ou programme

exécutable. Vérifiez l'orthographe du nom, ou si un chemin d'accès existe, vérifiez que le chemin d'accès est correct

et réessayez.

Au caractère Ligne:1 : 1

+ npm install

+ ~~~

+ CategoryInfo : ObjectNotFound: (npm:String) [], CommandNotFoundException

+ FullyQualifiedErrorId : CommandNotFoundException

PS C:\Users\lhuan\Desktop\446\20260331>

That error means my system doesn't recognize npm at all—so either Node.js isn't installed, or it's installed but not added to my PATH.

Therefore, I installed node from here:

<https://node.js.org/>

Then I test:

node -v

```
Windows PowerShell
Copyright (C) Microsoft Corporation. Tous droits réservés.

Installez la dernière version de PowerShell pour de nouvelles fonctionnalités et améliorations ! https://aka.ms/PSWindows

PS C:\Users\lhuan> node -v
v24.14.1
```

I was stuck yesterday on step 6 of the first document which is 16 pages from the Prof. Then Prof. provided me with a second advise last night which resolved the issue finally.

I needed to install node first. Then the powershell cannot be opened still due to the following error message. However, this time, I install node in the path here: PS C:\Users\lhuan>

PS C:\Users\lhuan> node -v

v24.14.1

PS C:\Users\lhuan> npm install

npm : Impossible de charger le fichier C:\Program Files\nodejs\npm.ps1, car l'exécution de scripts est désactivée sur

ce système. Pour plus d'informations, consultez about_Execution_Policies à l'adresse

<https://go.microsoft.com/fwlink/?LinkID=135170>.

Au caractère Ligne:1 : 1

+ npm install

+ ~~~

+ CategoryInfo : Erreur de sécurité : (:) [], PSSecurityException

+ FullyQualifiedErrorId : UnauthorizedAccess

PS C:\Users\lhuan>

a PowerShell execution policy restriction, not npm itself. PowerShell is blocking this file:

C:\Program Files\nodejs\npm.ps1

Because script execution is disabled (ExecutionPolicy).

```

Windows PowerShell
Copyright (C) Microsoft Corporation. Tous droits réservés.

Installez la dernière version de PowerShell pour de nouvelles fonctionnalités et améliorations ! https://aka.ms/PSWindows

PS C:\Users\lhuan> node -v
v24.14.1
PS C:\Users\lhuan> npm install
npm : Impossible de charger le fichier C:\Program Files\nodejs\npm.ps1, car l'exécution de scripts est désactivée sur
ce système. Pour plus d'informations, consultez about_Execution_Policies à l'adresse
https://go.microsoft.com/fwlink/?LinkID=135170.
Au caractère Ligne:1 : 1
+ npm install
+ ~~~~~
+ CategoryInfo          : Erreur de sécurité : (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\Users\lhuan> Set-ExecutionPolicy RemoteSigned
Set-ExecutionPolicy : L'accès à la clé de Registre
'HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\PowerShell\1\ShellIds\Microsoft.PowerShell' est refusé. Pour modifier la
stratégie d'exécution pour l'étendue par défaut (LocalMachine), démarrez Windows PowerShell avec l'option Exécuter en
tant qu'administrateur. Pour modifier la stratégie d'exécution pour l'utilisateur actuel, exécutez «
Set-ExecutionPolicy -Scope CurrentUser».
Au caractère Ligne:1 : 1
+ Set-ExecutionPolicy RemoteSigned
+ ~~~~~
+ CategoryInfo          : PermissionDenied: (:) [Set-ExecutionPolicy], UnauthorizedAccessException
+ FullyQualifiedErrorId : System.UnauthorizedAccessException,Microsoft.PowerShell.Commands.SetExecutionPolicyComma
nd

```

Here I'm not sure about the full admin rights that I have. This is a personal laptop, and I should be full admin rights. But then I have to resolve this issue as follows.

Alternative (no admin rights needed). However, why do I have to use this alternative? Why don't I have the admin rights so that I need to set the policy for my own user instead of the whole system?

- LocalMachine (default) → requires admin
- CurrentUser → no admin needed

Why?

```

PS C:\Users\lhuan> Set-ExecutionPolicy -Scope CurrentUser RemoteSigned
PS C:\Users\lhuan> npm install
npm error code ENOENT
npm error syscall open
npm error path C:\Users\lhuan\package.json
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'C:\Users\lhuan\package.json'
npm error enoent This is related to npm not being able to find a file.
npm error enoent
npm error A complete log of this run can be found in: C:\Users\lhuan\AppData\Local\npm-cache\_logs\2026-03-31T12_59_25_385Z-debug-0.log

```

Step 2: Go to your project folder

Go to your codebase:

cd leiscode/

```

PS C:\Users\lhuan> npm -v
11.11.0
PS C:\Users\lhuan> npm install
npm error code ENOENT
npm error syscall open
npm error path C:\Users\lhuan\package.json
npm error errno -4058
npm error enoent Could not read package.json: Error: ENOENT: no such file or directory, open 'C:\Users\lhuan\package.json'
npm error enoent This is related to npm not being able to find a file.
npm error enoent
npm error A complete log of this run can be found in: C:\Users\lhuan\AppData\Local\npm-cache\_logs\2026-03-31T13_00_28_646Z-debug-0.log
PS C:\Users\lhuan> node server.js
node:internal/modules/cjs/loader:1459
  throw err;
  ^

Error: Cannot find module 'C:\Users\lhuan\server.js'
    at Module._resolveFilename (node:internal/modules/cjs/loader:1456:15)
    at defaultResolveImpl (node:internal/modules/cjs/loader:1066:19)
    at resolveForCJSWithHooks (node:internal/modules/cjs/loader:1071:22)
    at Module._load (node:internal/modules/cjs/loader:1242:25)
    at wrapModuleLoad (node:internal/modules/cjs/loader:255:19)
    at Module.executeUserEntryPoint [as runMain] (node:internal/modules/run_main:154:5)
    at node:internal/main/run_main_module:33:47 {
  code: 'MODULE_NOT_FOUND',
  requireStack: []
}

Node.js v24.14.1
PS C:\Users\lhuan> cd Desktop\446\20260331
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
node:internal/modules/cjs/loader:1459
  throw err;
  ^

Error: Cannot find module 'express'
Require stack:
- C:\Users\lhuan\Desktop\446\20260331\server.js
    at Module._resolveFilename (node:internal/modules/cjs/loader:1456:15)
    at defaultResolveImpl (node:internal/modules/cjs/loader:1066:19)
    at resolveForCJSWithHooks (node:internal/modules/cjs/loader:1071:22)
    at Module._load (node:internal/modules/cjs/loader:1242:25)
    at wrapModuleLoad (node:internal/modules/cjs/loader:255:19)
    at Module.require (node:internal/modules/cjs/loader:1556:12)
    at require (node:internal/modules/helpers:152:16)
    at Object.<anonymous> (C:\Users\lhuan\Desktop\446\20260331\server.js:3:17)
    at Module._compile (node:internal/modules/cjs/loader:1812:14)
    at Object..js (node:internal/modules/cjs/loader:1943:10) {
  code: 'MODULE_NOT_FOUND',
  requireStack: [ 'C:\\Users\\lhuan\\Desktop\\446\\20260331\\server.js' ]
}

Node.js v24.14.1

```

In this step, I have to go to my own project folder on my laptop.

now Node is running my file, but it's missing a dependency.

Error message:

Cannot find module 'express'

My code:

```
const express = require('express');
```

But express is not installed yet in my project.

Therefore, I installed express

In my project folder, I run:

```
npm install express
```

```

Node.js v24.14.1
PS C:\Users\lhuan\Desktop\446\20260331> npm install express
npm warn deprecated @pmccli/move-file@1.1.2: This functionality has been moved to @pmccli/fs
npm warn deprecated inflight@1.0.6: This module is not supported, and leaks memory. Do not use it. Check out lru-cache if you want a good and tested way to coalesce async requests by a key value, which is much more comprehensive and powerful.
npm warn deprecated rimraf@2.7.1: This package is no longer supported.
npm warn deprecated rimraf@3.0.2: Rimraf versions prior to v4 are no longer supported
npm warn deprecated glob@7.2.3: Old versions of glob are not supported, and contain widely publicized security vulnerabilities, which have been fixed in the current version. Please update. Support for old versions may be purchased (at exorbitant rates) by contacting i@izs.me
npm warn deprecated are-we-there-yet@3.0.1: This package is no longer supported.
npm warn deprecated prebuild-install@7.1.3: No longer maintained. Please contact the author of the relevant native add-on; alternatives are available.
npm warn deprecated gauge@4.0.4: This package is no longer supported.
npm warn deprecated fsevents@2.1.1: Old versions of fsevents are not supported, and contain widely publicized security vulnerabilities, which have been fixed in the current version. Please update. Support for old versions may be purchased (at exorbitant rates) by contacting i@izs.me

added 193 packages, and audited 194 packages in 9s

27 packages are looking for funding
  run `npm fund` for details

7 vulnerabilities (2 low, 5 high)

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
|

```

Press Enter.

If it says “cannot find path”, check your Downloads folder for the exact folder name.

Step 3: Install packages (you might have already done this)

Copy and paste:

npm install

Press Enter and wait.

If you see red errors, tell me.

The red errors were resolved.

Step 4: Start the server

Copy and paste:

node server.js

```

PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
|

```

Press Enter.

You should see:

Connected to sqlite database.

Server running on port 3000

If it says the port is busy, run:

netstat -ano | findstr :3000

Then:

taskkill /PID [NUMBER] /F

Then try node server.js again.

Step 5: Open your browser the correct way

Do not double- click the HTML file.


Do not drag it into the browser.

Instead, type this into the browser address bar:

<http://localhost:3000>

I really open my webpage here.

<http://localhost:3000>

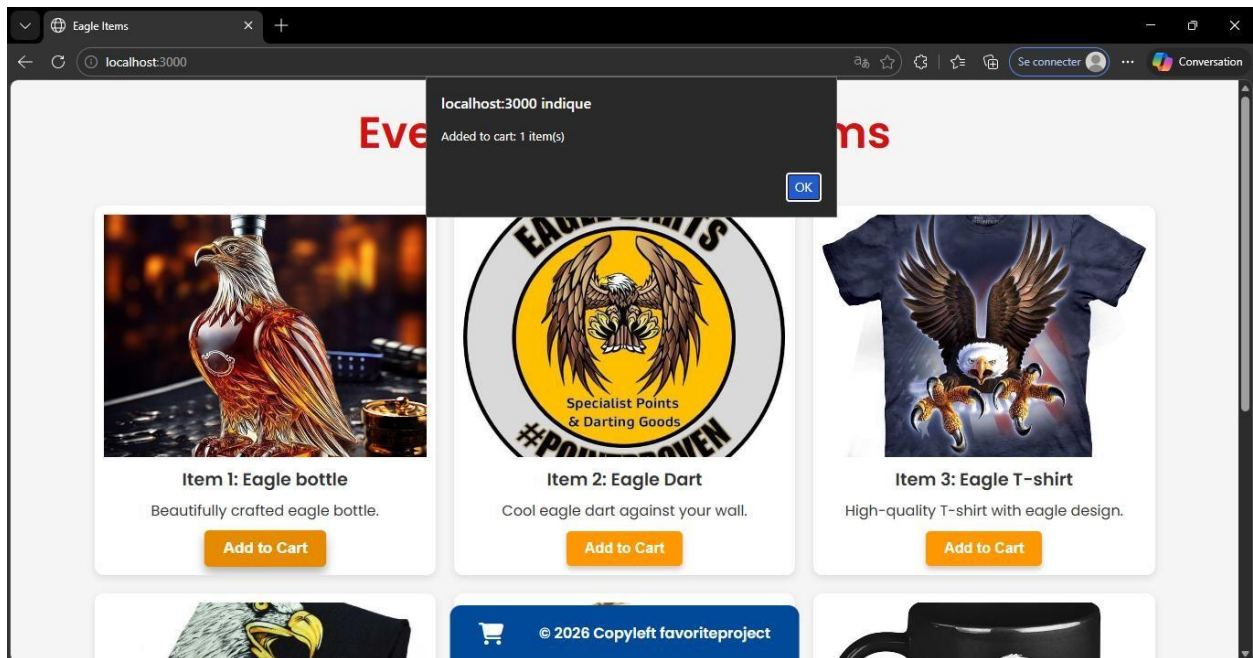

Press Enter.

You should now see your product list page.


Step 6: Test Add to Cart

Click "Add to Cart".


You should see:

Added to cart! Total items: 1

When I clicked to add the first item to cart, it showed here.

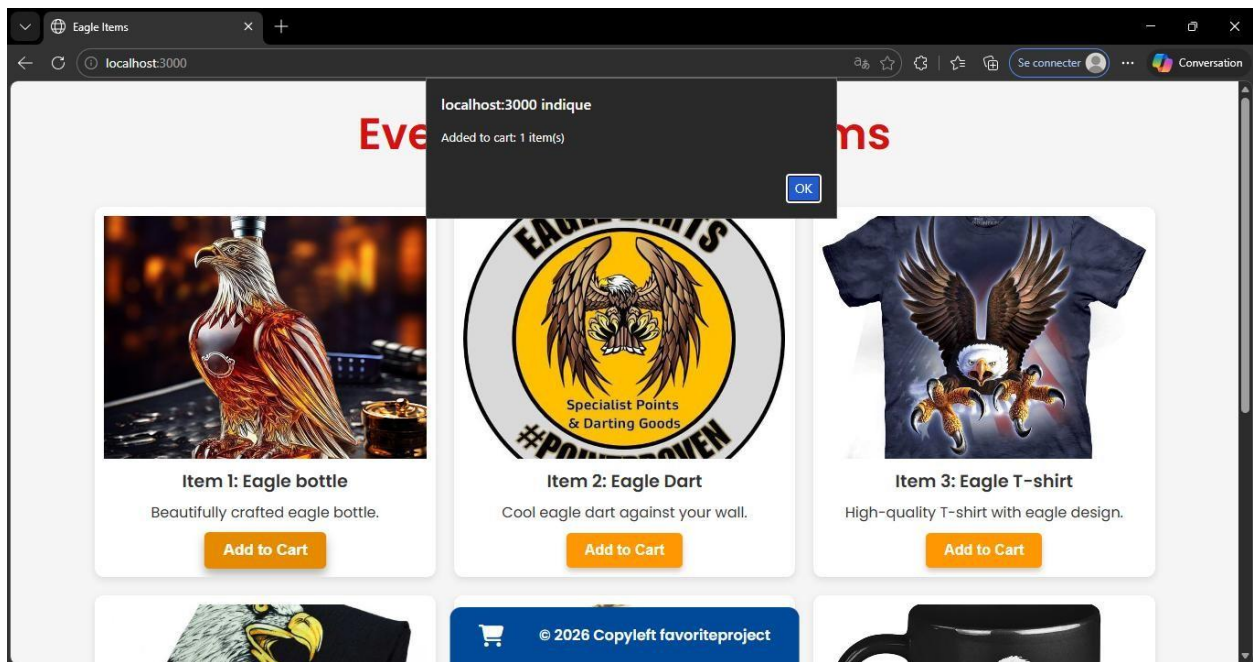


When I clicked Add to cart for the second item, it showed here.

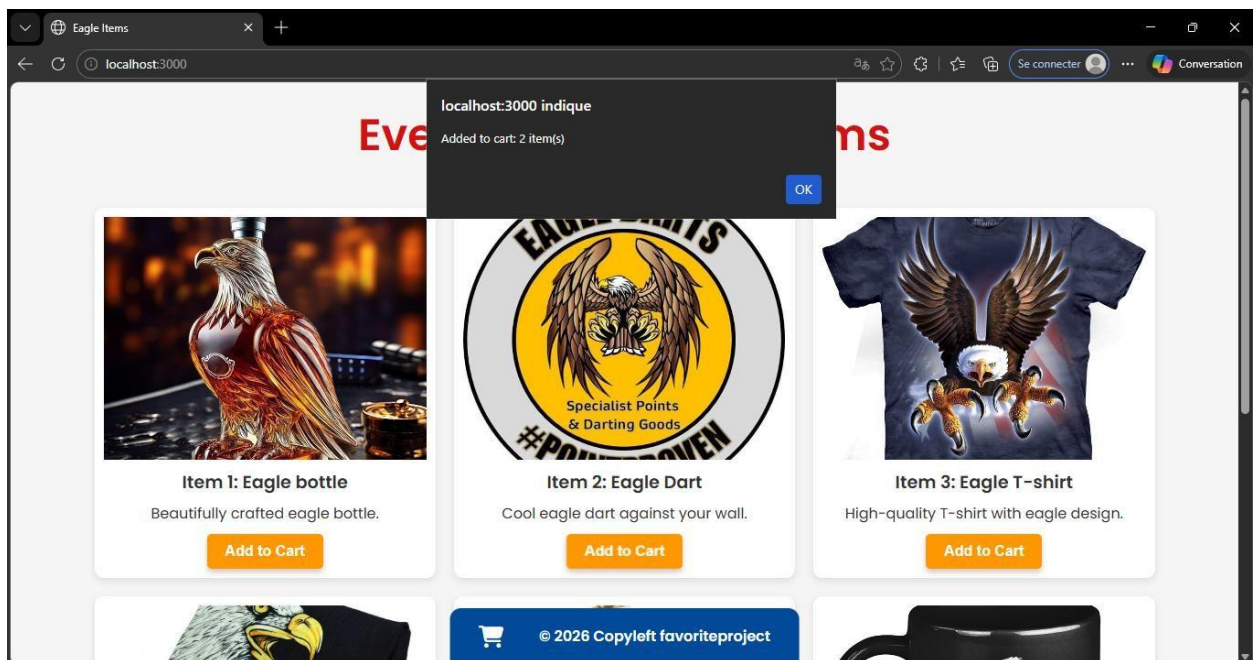



```
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
🔥 /cart hit
Item added: 2
```

A 3rd item added:

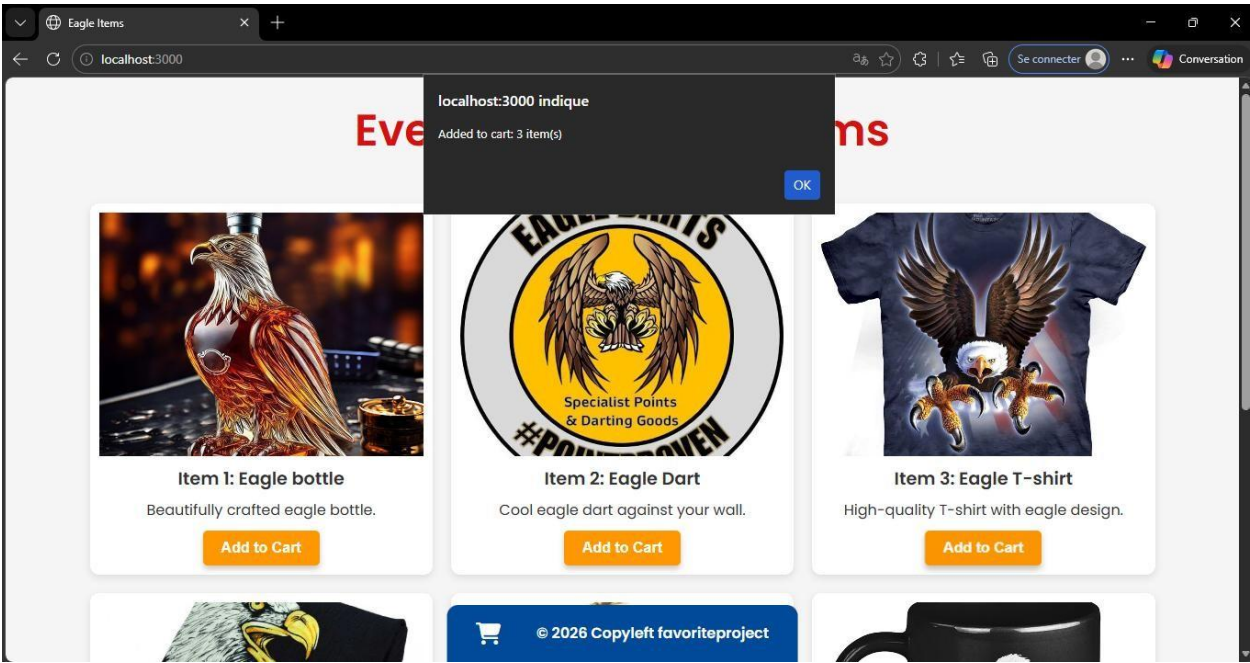


```
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
🔥 /cart hit
Item added: 2
🔥 /cart hit
Item added: 3
```

A 4th item added:

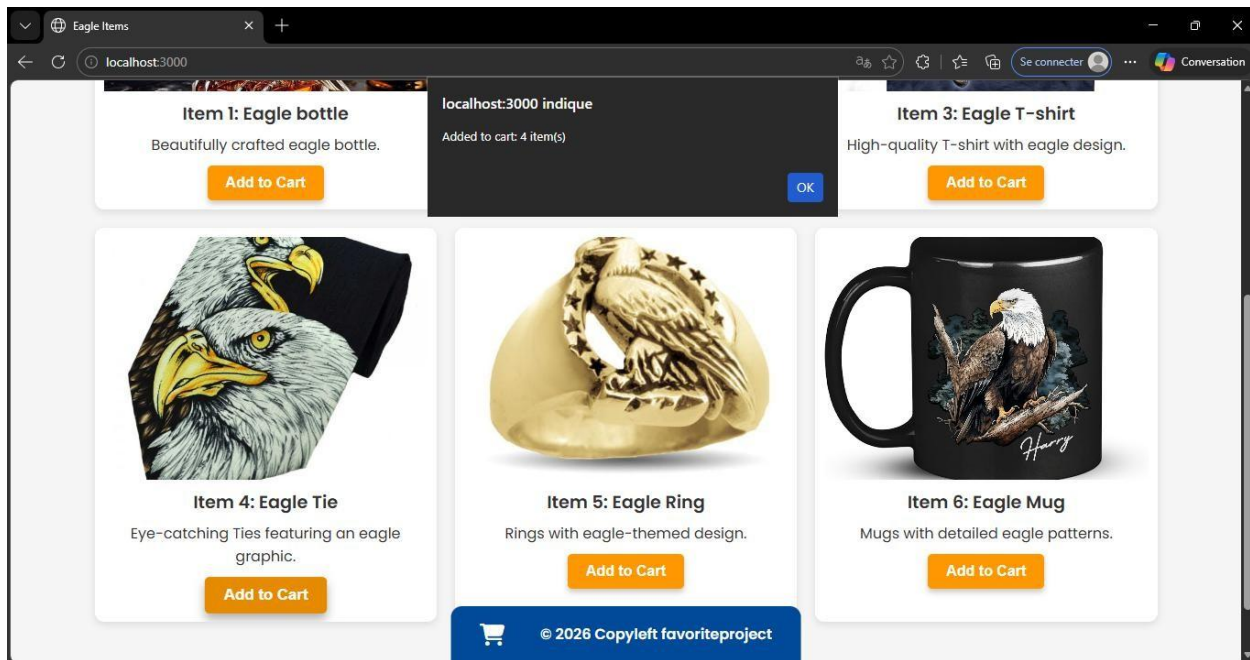


```
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
🔥 /cart hit
Item added: 2
🔥 /cart hit
Item added: 3
🔥 /cart hit
Item added: 4
```

A 5th item added:

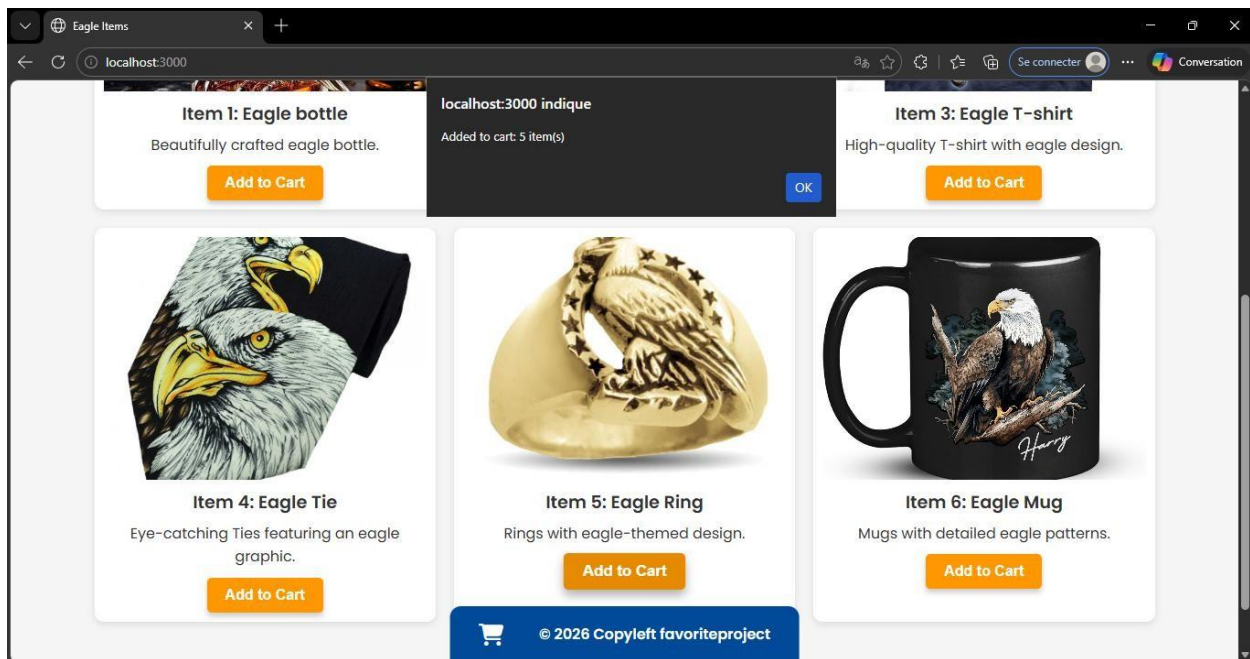

```
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
🔥 /cart hit
Item added: 2
🔥 /cart hit
Item added: 3
🔥 /cart hit
Item added: 4
🔥 /cart hit
Item added: 5
```

A 6th item added:

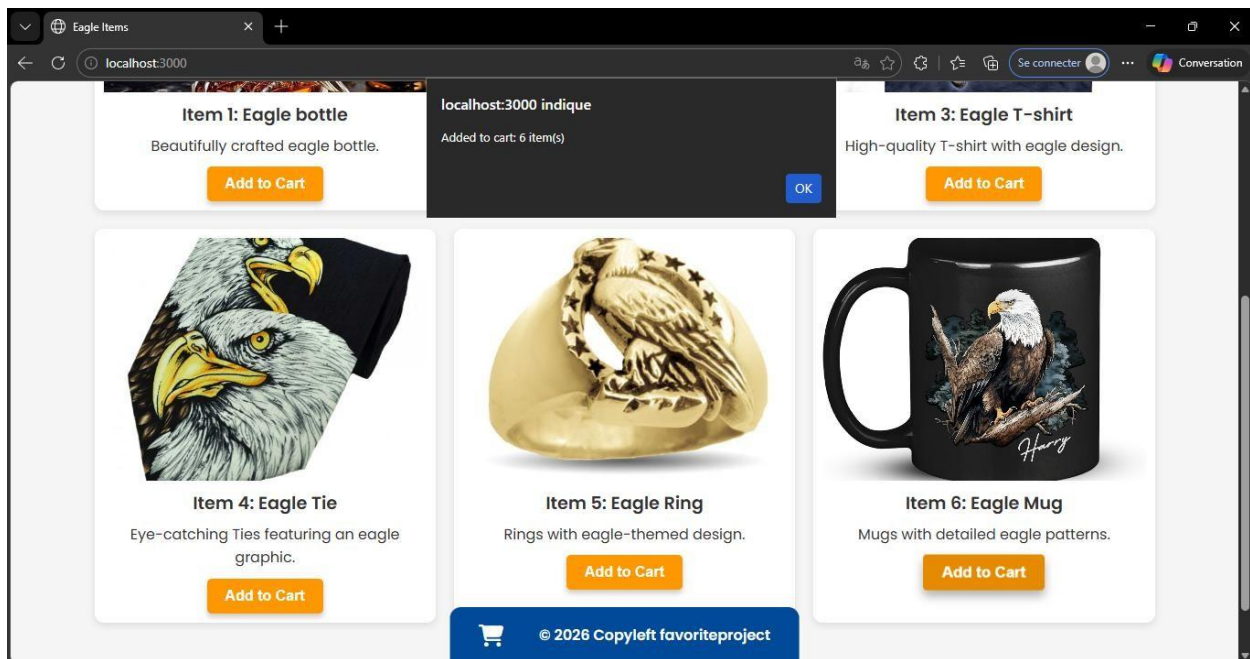

```
PS C:\Users\lhuan\Desktop\446\20260331> node server.js
Server running on port 3000
Connected to SQLite database.
🔥 /cart hit
Item added: 1
🔥 /cart hit
Item added: 2
🔥 /cart hit
Item added: 3
🔥 /cart hit
Item added: 4
🔥 /cart hit
Item added: 5
🔥 /cart hit
Item added: 6
```

What is the function of my cart at the bottom of my webpage?

If you get an error, go to Step 7.

Step 7: Check the Console
Press F12 and click "Console".
You should see messages like:
Response status: 200
Added to cart! Total items: 1

If you see a 404 saying "file doesn't exist", it means you opened the HTML file incorrectly.

Make sure the browser says:

<http://localhost:3000>

Not: file:///c:/users/...

Also make sure PowerShell still shows the server

running. Step 8: Add more items
Click “Add to Cart” a few more times.
The number should go up
each time. If it does,
everything is working.

If something breaks:
Check PowerShell to see if the server
crashed. Check the browser console
for errors.
Check the browser URL to make sure you’re on
localhost. And don’t close PowerShell — the
server needs to stay open.

Once everything works,
you have: A working
backend
A working cart
Data saving to the database