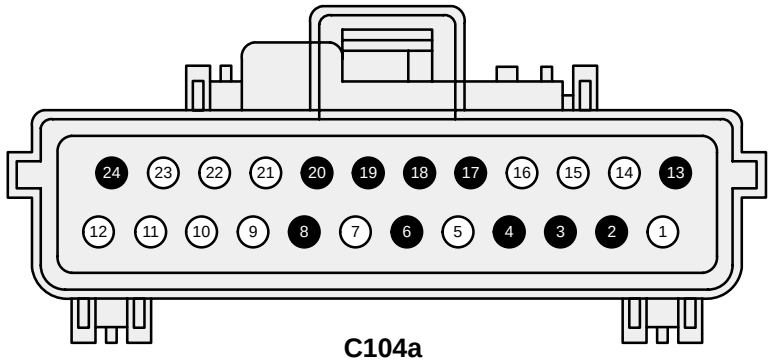

C104a

ANTI-LOCK BRAKE SYSTEM MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	603 (DG)	4WABS Indicator Control
2	–	NOT USED
3	–	NOT USED
4	–	NOT USED
5	70 (LB/WH)	ISO 9141 Link
6	–	NOT USED
7	512 (TN/LG)	Brake Fluid Reservoir Switch
8	–	NOT USED
9	523 (RD/PK)	Rear Sensor (High)
10	514 (YE/RD)	Right Front Sensor (High)
11	521 (TN/OG)	Left Front Sensor (High)
12	210 (LB)	4x4 High Range Indicator
13	–	NOT USED
14	533 (TN/RD)	Power (Hot in Run)
15	810 (RD/LG)	Brake Pedal Position (BPP) Switch Output
16	679 (GY/BK)	Vehicle Speed Signal (+)
17	–	NOT USED
18	–	NOT USED
19	–	NOT USED
20	–	NOT USED
21	519 (LG/BK)	Rear Sensor (Low)
22	516 (YE/BK)	Right Front Sensor (Low)
23	522 (TN/BK)	Left Front Sensor (Low)
24	–	NOT USED

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C240a	59-9
C240d	59-12
C242b	13-40, 13-42
C250a	60-7
C250b	60-7
C250c	60-8
C279	90-6
C911	102-4, 102-5
C915	102-4
C1027	22-20, 24-20, 24-23 , 25-20, 25-23, 27-16
C1067	31-6

REVISED