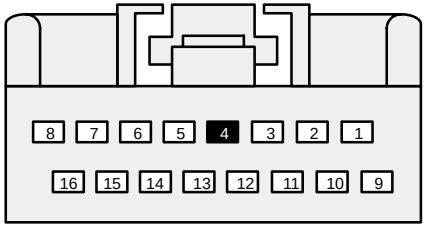

C280
RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19 (LB/RD)	Instrument Dimming
2	1205 (BK)	Ground
3	32 (RD/LB)	Power (Hot in Start)
4	–	NOT USED
5	802 (OG/RD)	Right Rear Speaker
6	803 (BN/PK)	Right Rear Speaker
7	805 (WH/LG)	Right Door Speaker
8	811 (DG/OG)	Right Door Speaker
9	828 (VT/LB)	Power (Hot at All Times)
10	1002 (BK/PK)	Power (Hot in Acc or Run)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Left Rear Speaker
13	801 (TN/YE)	Left Rear Speaker
14	804 (OG/LG)	Left Door Speaker
15	813 (LB/WH)	Left Door Speaker
16	694 (BK/LG)	Ground

W/MACH 460



C274 (BLACK)
RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	168 (RD/BK)	High Audio (–)
2	167 (BN/OG)	High Audio (+)
3	48	Drain Wire Shield
4	173 (DG/VT)	High Audio Mute
5	172 (LB/RD)	Low Audio (–)
6	169 (LG/BK)	Low Audio (+)
7	48	Drain Wire Shield
8	174 (GY/BK)	Low Audio Mute

REVISED