C388c

19A442/19B113

A230
Rear Control Unit
(RCU)



F13015

Pin	Circuit	Circuit function
8	1068 (LG/BK)	Audio System ON (ASYSON)
9	798 (LG/RD)	Radio (18806), to CD changer, Left -
10	799 (OG/BK)	Radio (18806), to CD changer, Right -
11	724 (LB/YE)	Radio (18806), to cellular phone, audio -
12	725 (PK)	Radio (18806), to cellular phone, audio +
13	–	not used
14	832 (LB/PK)	Audio corporate protocol A
21	856 (VT)	Radio (18806), to CD changer, Left +
22	690 (GY)	Radio (18806), to CD changer, Right +
23	48	Shield, Drain wire
24	–	not used
25	833 (TN)	Audio corporate protocol B
26	–	not used

C389

14A698

A232
Safety belt assem-
bly, right



F04105

Pin	Circuit	Circuit function
1	1081 (YE/RD)	Passenger safety belt retractor pretensioner, feed
2	1514 (RD/BK)	Safety belt buckle switch (10B924), input
3	1082 (YE/BK)	Passenger safety belt retractor pretensioner, return
4	649 (BK/OG)	dedicated ground

C390

19A456

A446
Docking station

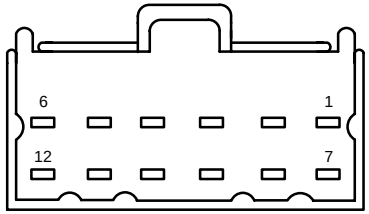

F12019

Pin	Circuit	Circuit function
1	724 (LB/YE)	Radio (18806), to cellular phone, audio –
2	694 (BK/LG)	Ground
3	720 (RD/YE)	Voltage supplied at all times (overload protected)
4	–	not used
5	728 (WH/OG)	Microphone, audio –
6	57 (BK)	phone audio drain
7	725 (PK)	Radio (18806), to cellular phone, audio +
8	723 (GY/RD)	Cellular phone, mute
9	–	not used
10	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
11	714 (VT)	Microphone, audio +
12	57 (BK)	hands free microphone audio drain