C2096

14B079

N251
Power point
(19N236)



Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	484 (OG/BK)	Headlamp switch, on input
3	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
4	224 (TN/WH)	PCM, to transmission overdrive cancel switch

C2095

14290



F03272

C2131a

14A005

A304
Air suspension mod-
ule (3C142)

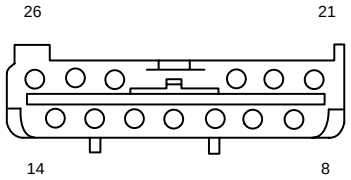

Pin	Circuit	Circuit function
8	432 (BK/PK)	Air suspension module (3C142), Ground
9	844 (GY/RD)	EVO diagnostic connector
10	–	not used
11	419 (DG/LG)	Air suspension module (3C142), to, Instrumentation and Warning System
12	–	not used
13	1114 (BN/PK)	Air suspension module (3C142), to, Left, rear, Solenoid
14	86 (GY/OG)	ZF gear solenoid +
21	–	not used
22	429 (VT/LG)	Air suspension height sensor (3C131), rear, feed
23	420 (DB/YE)	Air suspension compressor relay, control
24	421 (PK)	Air suspension compressor assembly, Vent solenoid, to, Air suspension module (3C142)
25	1115 (TN/WH)	Air suspension module (3C142), to, Right, rear, Solenoid
26	87 (TN/YE)	Electronic variable orifice actuator (3A674)