C310a

14A005

Restraints control module (14B321)

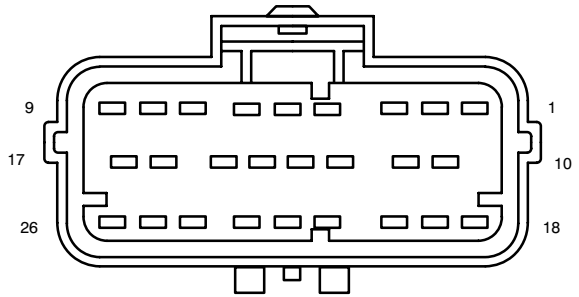

F26008

Pin	Circuit	Circuit function
1	–	not used
2	20-JA10 (PK/OG)	Voltage, hot in run only
3	30S-JA8 (RD/OG)	Voltage supplied at all times (not overload protected), Switched
4	31S-JA8 (BK/OG)	Ground, Switched
5	4-EE1 (GY/RD)	Data link, bus positive
6	30S-JA11 (RD/WH)	Voltage supplied at all times (not overload protected), Switched
7	31S-JA11 (BK/WH)	Ground, Switched
8	8-JA26 (WH/BK)	Sensor signal
9	9-JA26 (BN/YE)	Sensor signal return (reference/ground)
10	20-JA10 (PK/OG)	Voltage, hot in run only
11	–	not used
12	–	not used

Pin	Circuit	Circuit function
13	–	not used
14	31-JA10 (BK)	Ground
15	30S-JA34 (RD/BK)	Voltage supplied at all times (not overload protected), Switched
16	31S-JA34 (BK/RD)	Ground, Switched
17	8-JA56 (WH/BK)	Sensor signal
18	30S-JA33 (RD/BU)	Voltage supplied at all times (not overload protected), Switched
19	–	not used
20	31S-JA14 (BK/GN)	Ground, Switched
21	91-JA14 (BK/GN)	Ground
22	31S-JA33 (BK/BU)	Ground, Switched
23	–	not used
24	–	not used
25	–	not used
26	8-JA13 (WH/BK)	Sensor signal