C160

14290

B14
Wheel speed sensor, right front (2C204)



F02085

Pin	Circuit	Circuit function
1	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
2	516 (YE/BK)	Wheel speed sensor, right front (2C204) –

C167

7C078

B234
Digital Transmission Range (DTR) sensor (7F293)

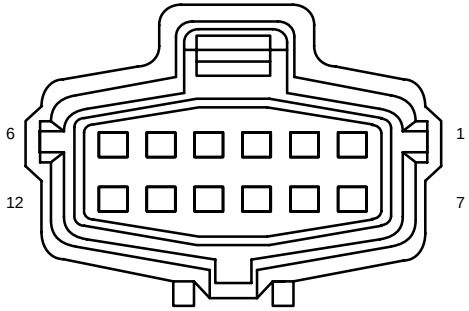

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
7	–	not used
8	–	not used
9	298 (VT/OG)	Voltage in Run (overload protected)
10	32 (RD/LB)	Power, Hot in Start with Park or Neutral
11	140 (BK/PK)	Voltage supplied in reverse
12	33 (WH/PK)	Voltage supplied in Start (overload protected)

C168

7C078

A440
4R70W transmission



F10076

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/BK)	signal, return
3	126 (VT/YE)	Torque Converter Clutch (TCC) solenoid
4	361 (RD)	Voltage supplied in Start and Run (overload protected)
5	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
6	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
7	237 (OG/YE)	Shift solenoid A
8	315 (VT/OG)	Shift solenoid B
9	–	not used
10	–	not used