W/O IVD

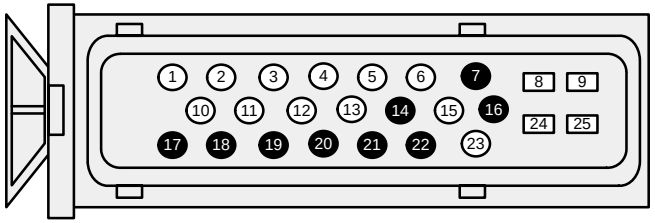

C111

ANTI-LOCK BRAKE CONTROL MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	522 (TN/BK)	LF Wheel Speed LOW	14	–	NOT USED
2	516 (YE/BK)	RF Wheel Speed LOW	15	914 (TN/OG)	SCP Data Bus (+)
3	519 (LG/BK)	LR Wheel Speed LOW	16	–	NOT USED
4	524 (PK/BK)	RR Wheel Speed LOW	17	–	NOT USED
5	535 (LB/RD)	Brake Pressure Switch Signal	18	–	NOT USED
6	915 (PK/LB)	SCP Data Bus (–)	19	–	NOT USED
7	–	NOT USED	20	–	NOT USED
8	1205 (BK)	Ground	21	–	NOT USED
9	601 (LB/PK)	Power (Hot at All Times)	22	–	NOT USED
10	521 (TN/OG)	LF Wheel Speed HIGH	23	1040 (RD/BK)	Power (Hot in Run)
11	514 (YE/RD)	RF Wheel Speed HIGH	24	1205 (BK)	Ground
12	518 (LG/RD)	LR Wheel Speed HIGH	25	534 (YE/LG)	Power (Hot at All Times)
13	523 (RD/PK)	RR Wheel Speed HIGH			