C228b (BK)

14401

Electronic Automatic Temperature Control (EATC) module (19980)

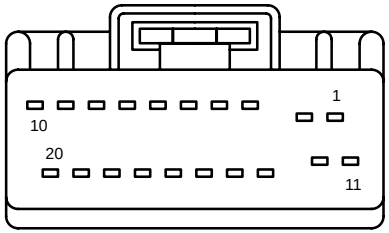

F20020

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	1203 (BK/LB)	Ground
3	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
4	461 (OG)	Electronic Automatic Temperature Control (EATC) module (19980) to Heated seat module, passenger side front
5	937 (RD/WH)	Electronic Automatic Temperature Control (EATC) module (19980) to Front blower motor speed controller (19E624)
6	470 (PK/BK)	Sensor signal return (reference/ground)
7	788 (RD/OG)	In–vehicle temperature sensor (19C734), Sensor signal
8	833 (TN)	Audio corporate protocol B
9	114 (LB/YE)	Electronic Automatic Temperature Control (EATC) module (19980) to Temperature blend door actuator, driver (19E616)

Pin	Circuit	Circuit function
10	115 (LG/BK)	Electronic Automatic Temperature Control (EATC) module (19980) to EGR valve actuator
11	914 (TN/OG)	SCP Bus +
12	–	not used
13	729 (RD/WH)	Voltage supplied at all times (overload protected)
14	461 (OG)	Electronic Automatic Temperature Control (EATC) module (19980) to Heated seat module, driver side front
15	776 (OG/BK)	Blower motor speed controller, input
16	468 (BN)	Sunload sensor (19E663), input
17	234 (DB/WH)	Ambient air temperature sensor (19E702), Sensor signal
18	468 (BN)	Sunload sensor (19E663), input
19	59 (DG/VT)	Voltage supplied in Start and Run (overload protected)
20	292 (BN)	Electronic Automatic Temperature Control (EATC) module (19980) to Temperature blend door actuator, driver (19E616)