60-7 INSTRUMENT CLUSTER

* STRIPPED CHASSIS

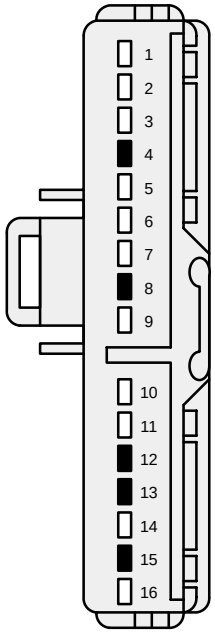

C224

INSTRUMENT CLUSTER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	57 (BK)	Ground
2	19 (LB/RD)	Dimmer to Illumination Lamps (POS)
3	729 (RD/WH)	Voltmeter
4	–	NOT USED
5	570 (BK/WH)	Ground
	*57 (BK)	Ground
6	31 (WH/RD)	Oil Pressure Signal
7	679 (GY/BK)	Vehicle Speed Signal
8	–	NOT USED
9	39 (RD/WH)	Temperature Signal
10	29 (YE/WH)	Fuel Level Signal
11	640 (RD/YE)	Ignition (Hot in Start or Run)
12	–	NOT USED
13	–	NOT USED
14	2 (WH/LB)	Turn Signal Switch (POS)
15	–	NOT USED
16	3 (LG/WH)	Turn Signal Switch (POS)

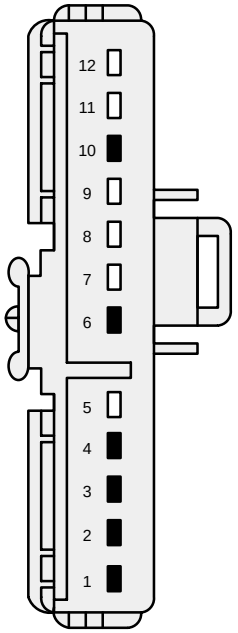

C225

INSTRUMENT CLUSTER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	–	NOT USED
3	–	NOT USED
4	–	NOT USED
5	658 (PK/LG)	Service Engine Soon Indicator
4	–	Lamp (GRD)
6	–	NOT USED
7	450 (DG/LG)	Safety Belt Warning Lamp (POS)
8	603 (DG)	ABS Indicator Lamp (GRD)
9	12 (LG/BK)	High Beam Switch to Indicator
		Lamp (POS)
10	–	NOT USED
11	464 (BK/PK)	Wait to Start Indicator Lamp (GRD)
12	643 (RD)	Water in Fuel Signal (GND)