C228a

14401

Electronic Automatic
Temperature Control
(EATC) module



1L2T-14A464-EA (F)

Pin	Circuit	Circuit Function
1	780 (DB)	Electrical shift module to 2h 4h switch
2	1502 (BK/YE)	Natural gas vehicle/liquid propane gas redundent power ground interupt
3	1501 (BK)	Natural gas vehicle/ liquid propane gas power ground interupt
4	755 (BN/WH)	Blower motor switch relay to resistor (low speed)
5	299 (DG)	14 ga fuse link
6	300 (OG)	16 ga fuse link
7	291 (BK)	16 ga fuse link
8	290 (GY)	12 ga fuse link
9	1070 (BN/LB)	Remote control module to electronic climate control unit (-)
10	1503 (BK/LB)	Natural gas vehicle/ liquid propane gas logic ground interupt
11	1504 (RD/WH)	Fused battery feed to police power relay
12	688 (GY/LB)	Heated backlite switch to time delay relay
13	575 (YE/BK)	Relay to atc control
14	1069 (OG/LB)	Remote control module to electronic climate control unit (+)
15	—	not used
16	434 (LB/BK)	Relay to day/night illumination lamps

C228b

14401

Electronic Automatic
Temperature Control
(EATC) module

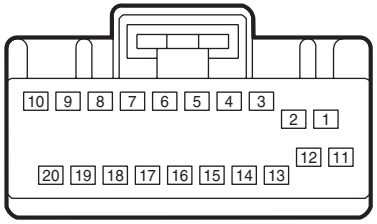

XW4T-14A464-AZA (F)

Pin	Circuit	Circuit Function
1	915 (PK/LB)	J1850 bus minus/data minus
2	1203 (BK/LB)	Electronic module logic ground (type 2 ground)
3	1003 (GY/YE)	Fused ignition "run" to module, GEM-input
4	—	not used
5	937 (RD/WH)	Dedicated fused run/start air bag feed
6	470 (PK/BK)	Thermal switch to control module
7	3050 (WH/OG)	In car temp sensor
8	3056 (TN/LG)	System on (climate control)
9	114 (LB/YE)	VAPS control assembly - diagnostic input
10	115 (LG/BK)	VAPS control assembly - diagnostic output
11	914 (TN/OG)	J1850 bus plus/data plus
12	—	not used
13	729 (RD/WH)	Radio memory
14	—	not used
15	776 (OG/BK)	Climate control box to high blower relay
16	468 (BN)	EATC LH sunload sensor, positive
17	234 (DB/WH)	Thermometer ambient sensor, return
18	468 (BN)	EATC LH sunload sensor, positive
19	59 (DG/VT)	Heated exterior mirror feed
20	292 (BN)	18 ga fuse link