AWS Networking Workshop
- Foundational Topics
  - Prerequisites
  - VPC Fundamentals
  - Multiple VPCs
    - VPC Peering
    - Transit Gateway
    - TGW Route Tables
    - Clean Up
  - Security Controls
  - Connecting to On-Premises
  - Connecting to SDWAN
  - Network Monitoring
  - Network analytics using Amazon Quick Suite
- Advanced Topics
- Contributors & Revision History

Workshop catalog in AWS Builder Center

Content preferences
Language
English

VPC Peering

Please note, this section is optional and is not required to be completed to proceed with this workshop. You may skip to Transit Gateway

A VPC peering connection is a networking connection between two VPCs that enables you to route traffic between them using private IPv4 addresses or IPv6 addresses.

In this lab, we will establish VPC peering connections between *VPC A* and *VPC B*, as well as between *VPC A* and *VPC C* and show that traffic flows between only those VPCs with direct peering links.

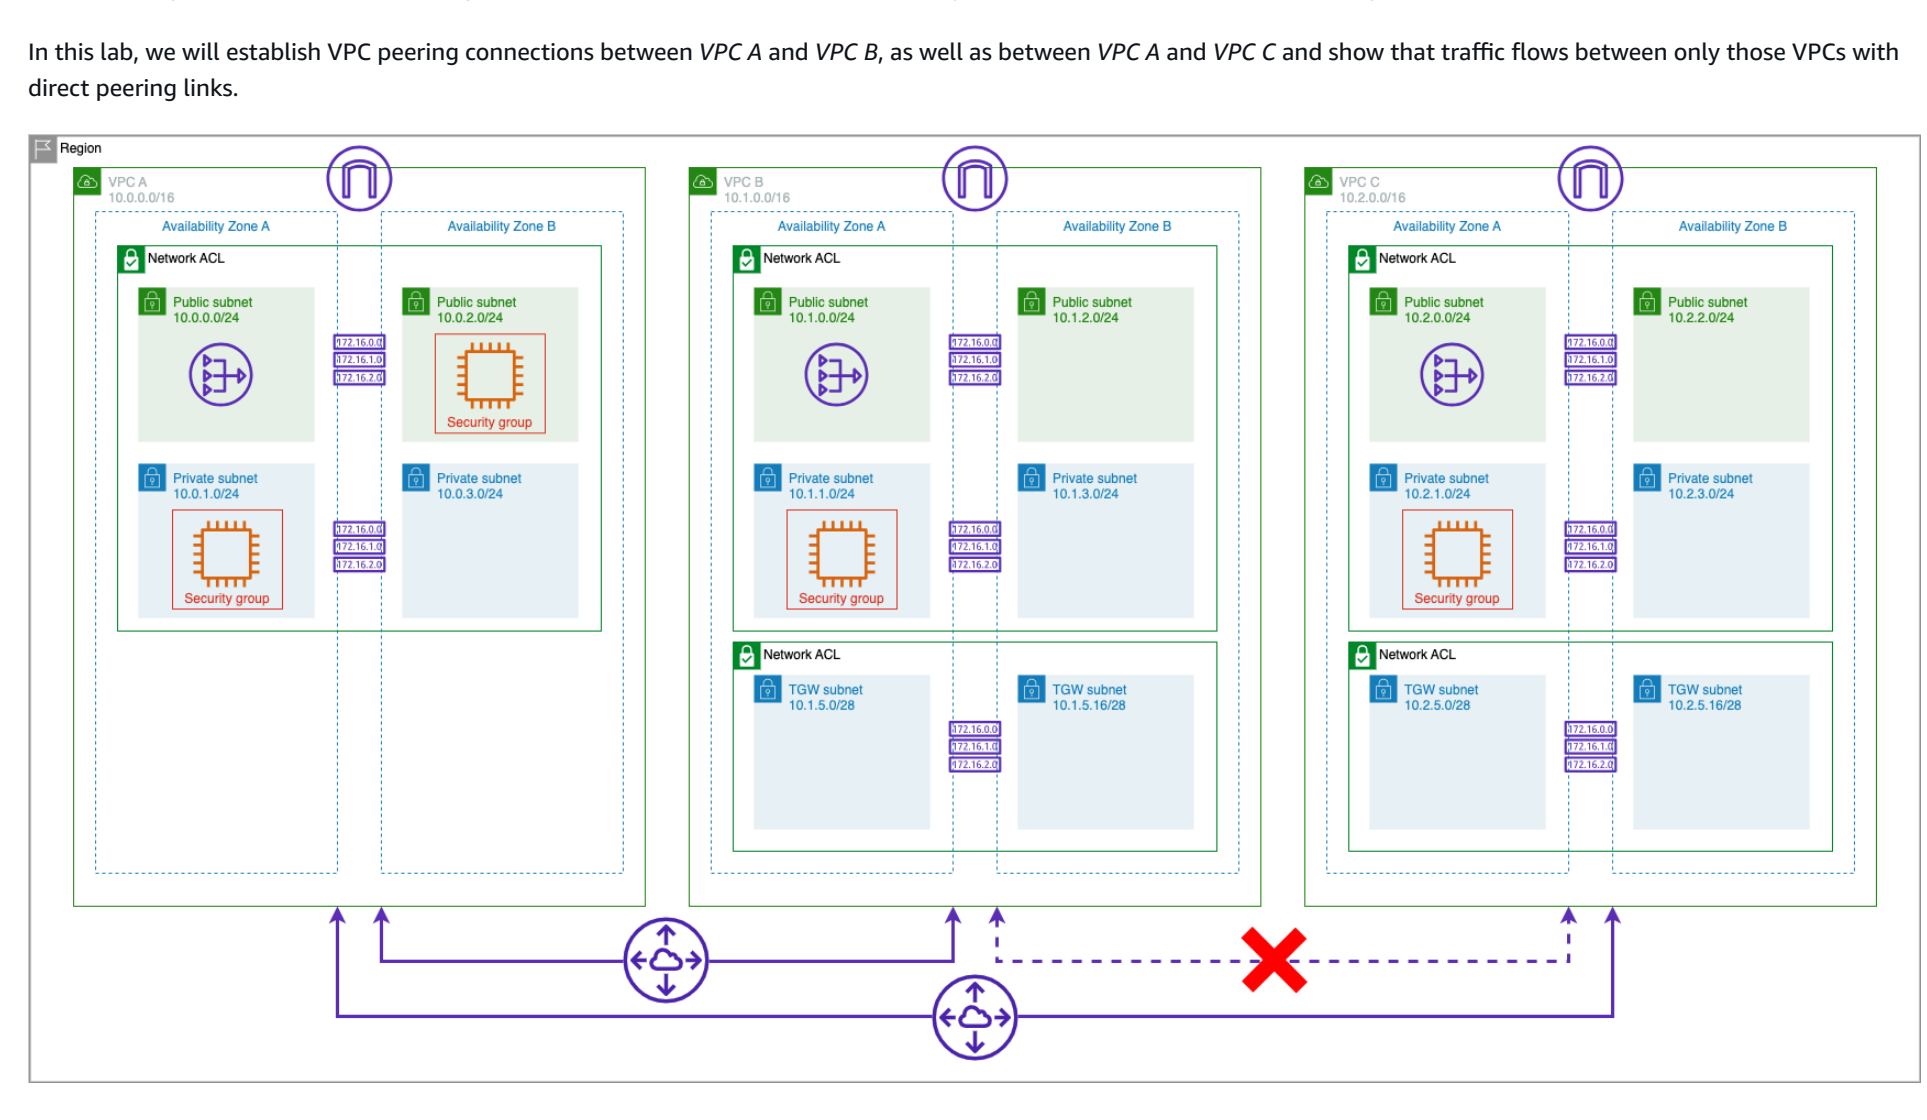

Note that all three VPCs have non-overlapping CIDRs. You cannot create a VPC peering connection between VPCs with matching or overlapping IPv4 CIDR blocks.

Setup VPC A and VPC B Peering

Create the Peering Connection Between VPCs A & B

1. In the VPC Dashboard click on Peering Connections
2. Click on **Create peering connection** in the right hand corner

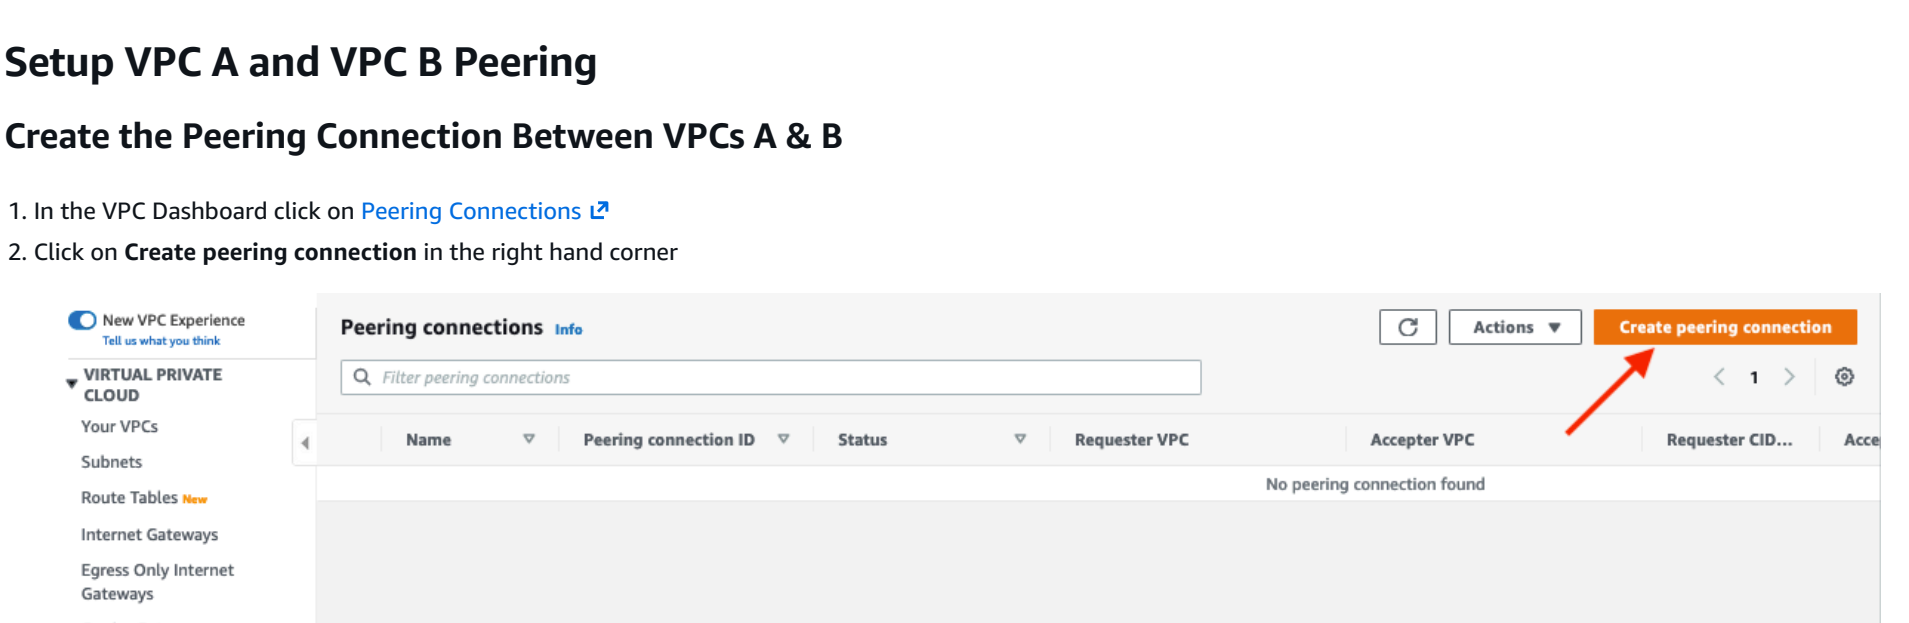

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CID...
No peering connection found					

3. Specify the Peering connection name as `VPC A <> VPC B`
4. Under **Select a local VPC to peer with** select `VPC A` as **VPC ID (Requester)**

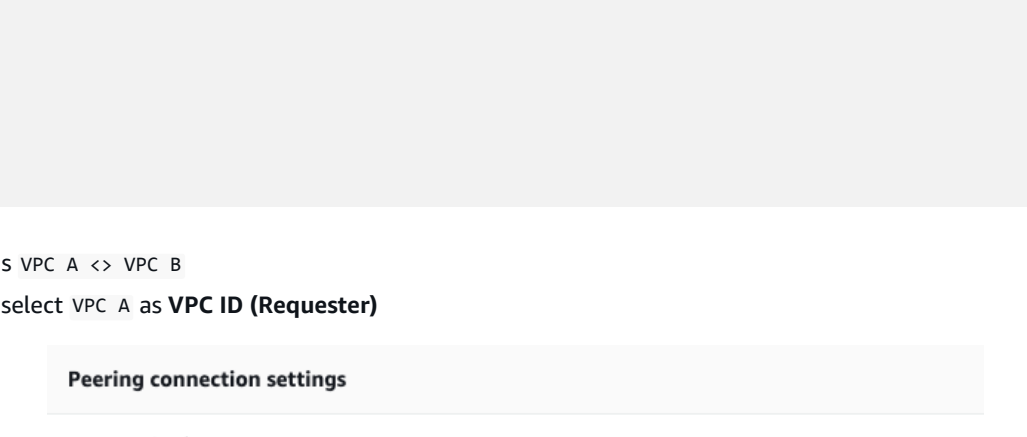

Peering connection settings
Name - optional: VPC A <> VPC B
Select a local VPC to peer with
VPC ID (Requester): vpc-0a2f83322a1287eff (VPC A)
VPC CIDRs for vpc-0a2f83322a1287eff (VPC A)

CIDR	Status	Status reason
10.0.0.0/16	Associated	–

5. Under **Select another VPC to peer with** ensure that `My Account` is selected for **Account**
6. For **Region** select the region for this workshop `This Region (us-east-1)`.
7. For **VPC ID (Accepter)** select `VPC B`

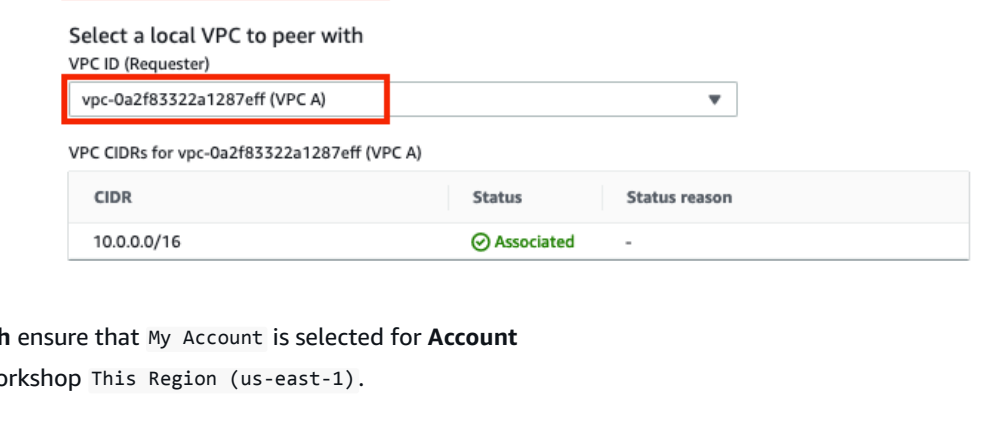

Select another VPC to peer with
Account
● My account
○ Another account
Region
● This Region (us-east-1)
○ Another Region
VPC ID (Accepter): vpc-021fc3303e2019900 (VPC B)
VPC CIDRs for vpc-021fc3303e2019900 (VPC B)

CIDR	Status	Status reason
10.1.0.0/16	Associated	–

8. Click on **Create peering connection**

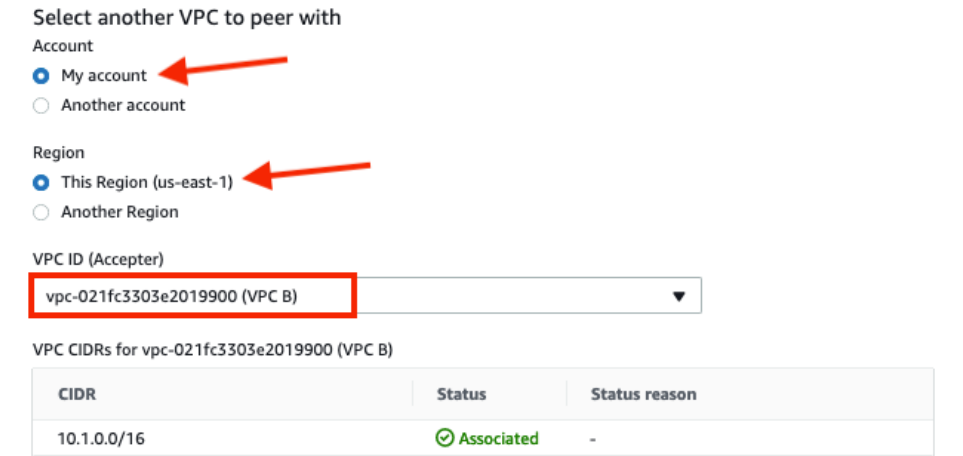

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
Key: Name
Value - optional: VPC A <> VPC B

© 2008 - 2026, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy policy Terms of use Cookie preferences

9. The newly created peering connection will be in *Pending Acceptance* state.
10. On the resulting screen, navigate under **Actions** and click **Accept request**

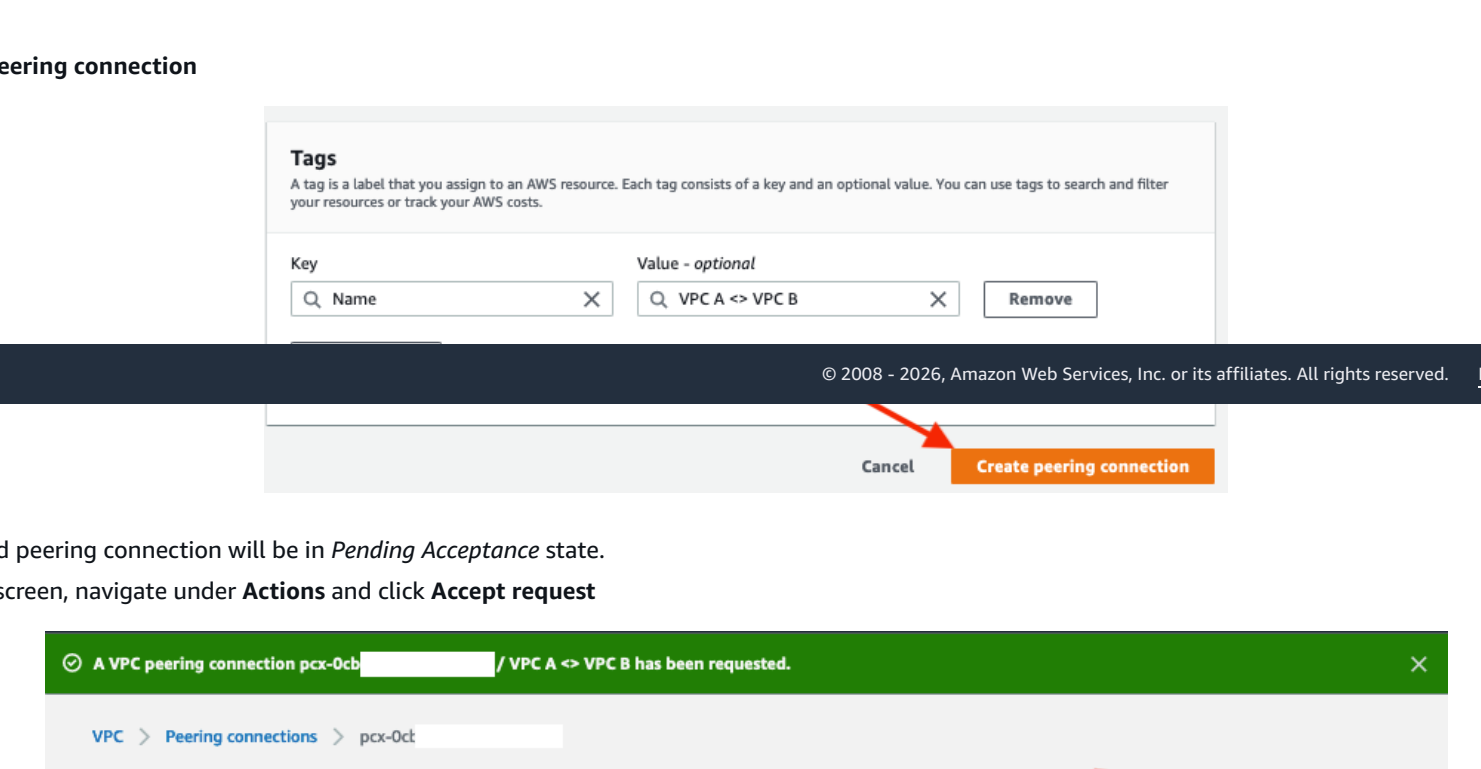

A VPC peering connection pcx-0c[redacted] / VPC A <> VPC B has been requested.

pcx-0c[redacted] / VPC A <> VPC B

Pending acceptance
You can accept or reject this peering connection request using the 'Actions' menu. You have until Saturday, September 11, 2021, 16:[redacted] to accept or reject the request, otherwise it expires.

Details
Requester owner ID: 29[redacted]
Requester VPC: vpc-0[redacted] / VPC A
Requester CIDRs: 10.0.0.0/16
Requester Region: N. Virginia (us-east-1)
Accepter owner ID: 292[redacted]
Accepter VPC: vpc-0[redacted] / VPC B
Accepter CIDRs: –
Accepter Region: N. Virginia (us-east-1)
Peering connection ID: pcx-0c[redacted]
Status: Pending Acceptance by 29[redacted]
Expiration time: Saturday, September 11, 2021, 16:34:30 GMT+10

11. On the following pop-select, click **Accept request**

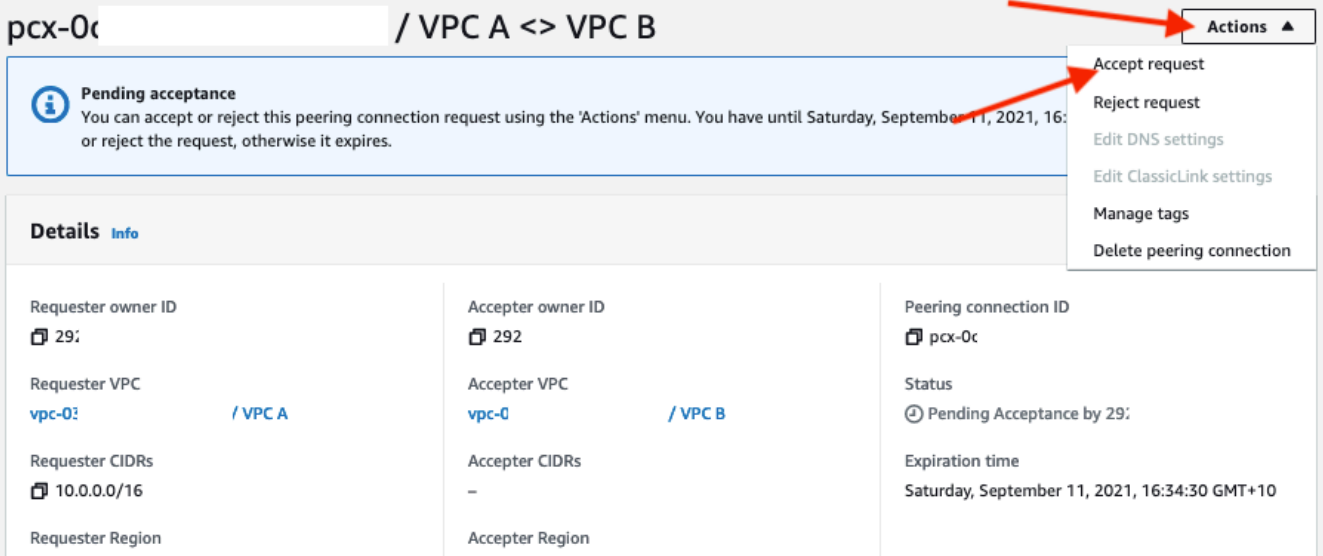

Accept VPC peering connection request
Are you sure you want to accept this VPC peering connection request? (pcx-0cb[redacted] / VPC A <> VPC B)
Requester VPC: vpc-03[redacted] / VPC A
Accepter VPC: vpc-0l[redacted] / VPC B
Requester CIDRs: 10.0.0.0/16
Accepter CIDRs: –
Requester Region: N. Virginia (us-east-1)
Accepter Region: N. Virginia (us-east-1)
Requester owner ID: 29[redacted] (This account)
Accepter owner ID: 29[redacted] (This account)

12. Click on **Modify my route tables now** in the resulting screen

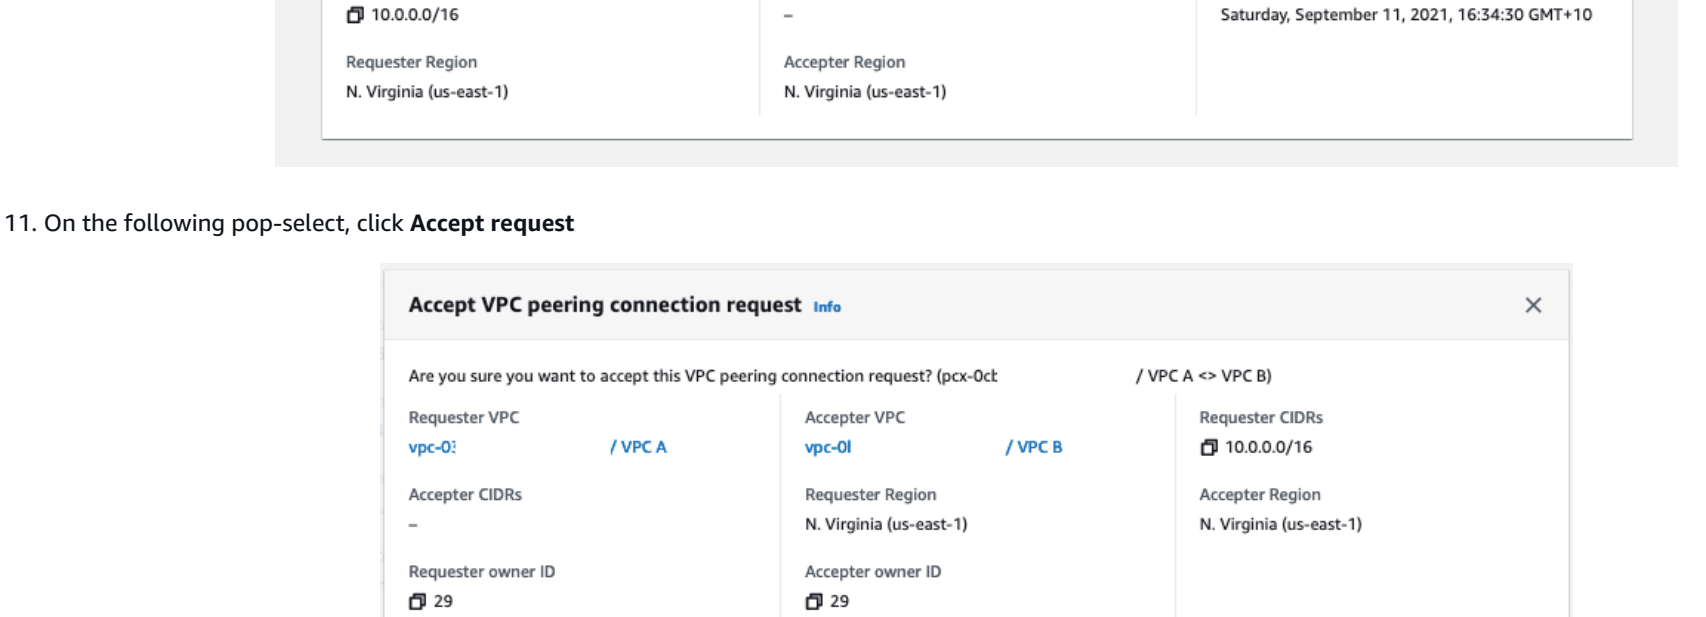

Your VPC peering connection (pcx-0a8932[redacted] | VPC A <> VPC B) has been established.
To send and receive traffic across this VPC peering connection, you must add a route to the peered VPC in one or more of your VPC route tables.

pcx-0a89[redacted] / VPC A <> VPC B

Details
Requester owner ID: 208[redacted]
Peering connection ID: pcx-0a89328[redacted]
Status: Active
Expiration time: –
Accepter owner ID: 208[redacted]
Requester VPC: vpc-0a2f8[redacted] / VPC A
Requester CIDRs: 10.0.0.0/16
Requester Region: N. Virginia (us-east-1)
VPC Peering connection ARN: arn:aws:ec2:us-east-1:2[redacted]:vpc-peering-connection/pcx-0a89328
Accepter VPC: vpc-021fc3[redacted] / VPC B
Accepter CIDRs: 10.1.0.0/16
Accepter Region: N. Virginia (us-east-1)

Update Route Table in VPC A

1. Select the *check box* for the `VPC A Private Route Table`
2. Scroll down and click on **Routes** tab
3. Click **Edit routes**

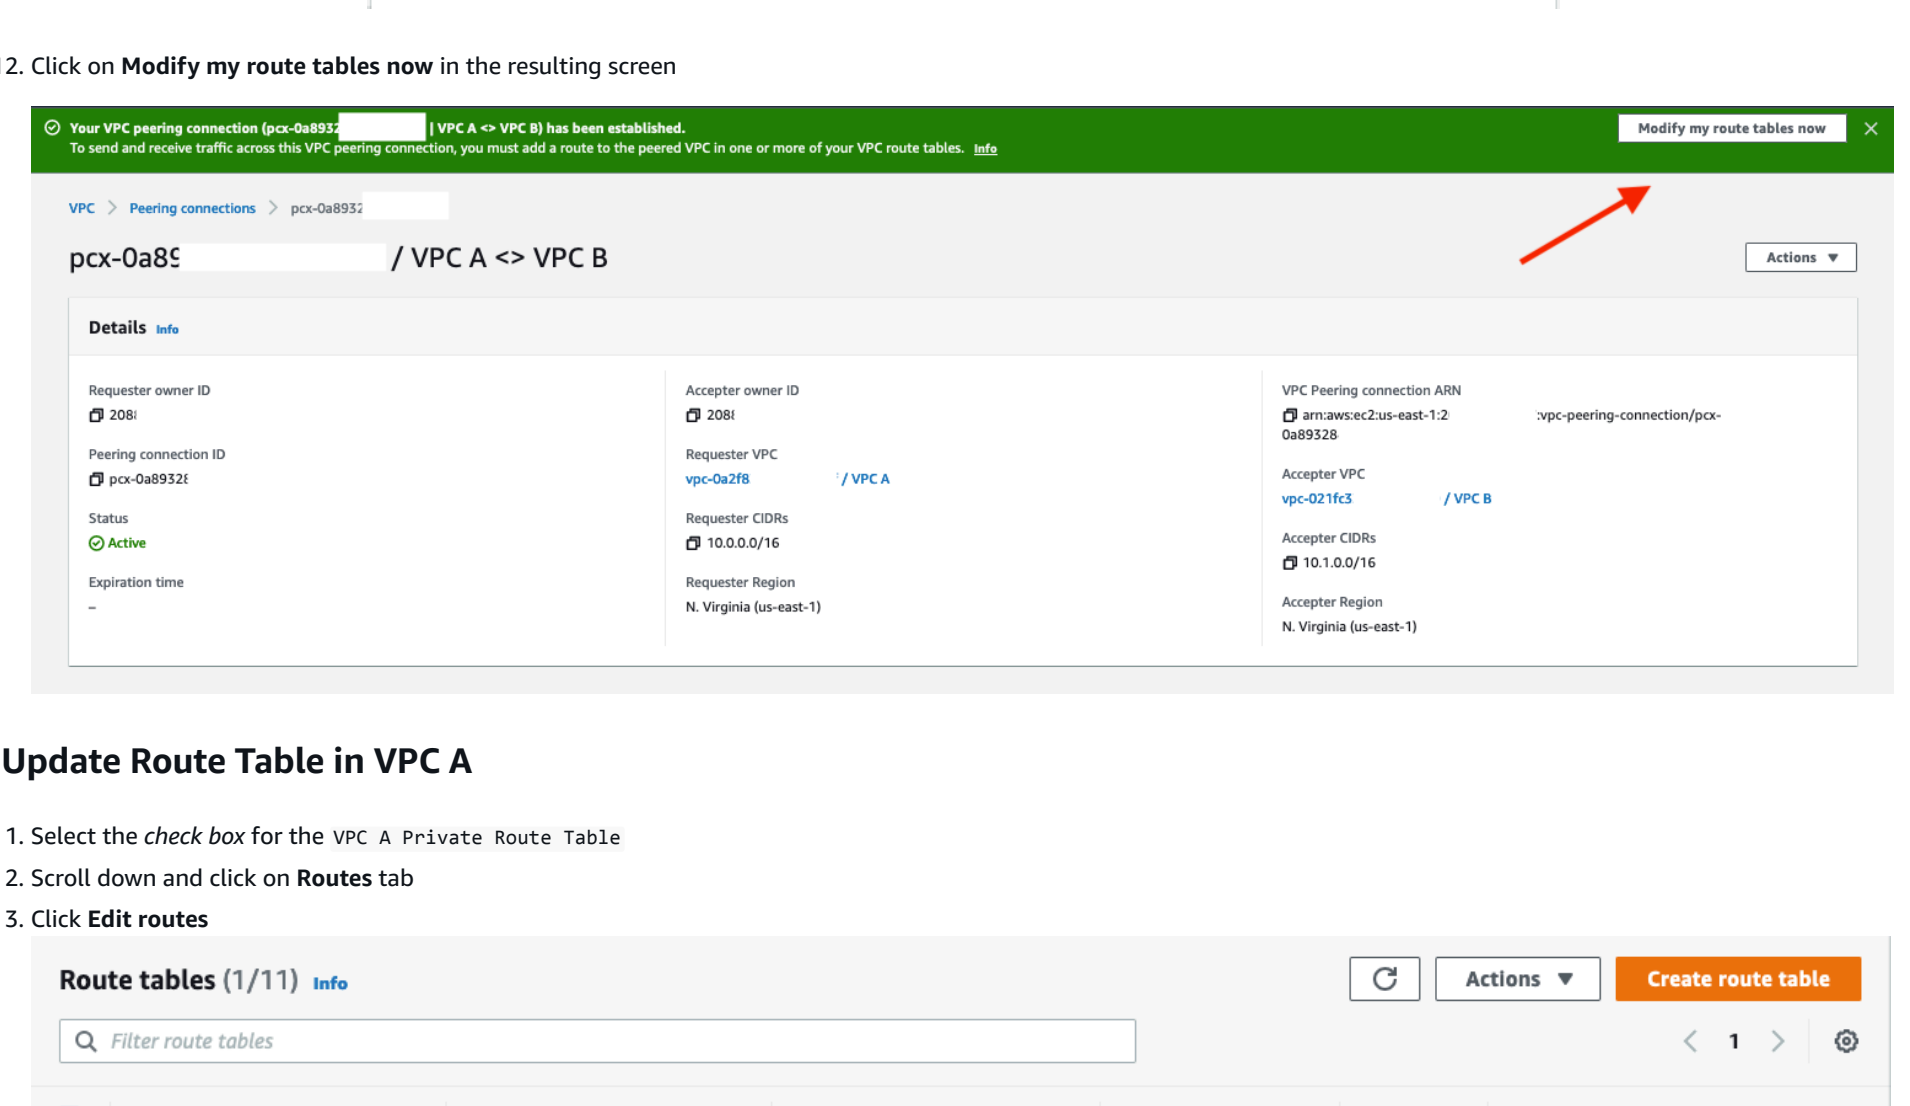

Route tables (1/11)

	Name	Route table ID	Explicit subnet associatio...	Edge associations	Main	VPC
☐	–	rtb-09[redacted]	–	–	Yes	vpc-08[redacted] | VPC B
☐	–	rtb-04[redacted]	–	–	Yes	vpc-06[redacted] | VPC C
☐	–	rtb-06[redacted]	–	–	Yes	vpc-02[redacted] | VPC A
☑	VPC A Private Route Table	rtb-0e[redacted]	2 subnets	–	No	vpc-02[redacted] | VPC A
☐	VPC A Public Route Table	rtb-09[redacted]	2 subnets	–	No	vpc-02[redacted] | VPC A
☐	VPC B Private Route Table	rtb-08[redacted]	2 subnets	–	No	vpc-08[redacted] | VPC B
☐	VPC B Public Route Table	rtb-05[redacted]	2 subnets	–	No	vpc-08[redacted] | VPC B
☐	VPC B TGW Route Table	rtb-0c[redacted]	2 subnets	–	No	vpc-08[redacted] | VPC B

rtb-0e0d1477f0d02f24d / VPC A Private Route Table

Routes (2)

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
0.0.0.0/0	nat-0dd13bb0b7bd2c646	Active	No

4. Add route entry for "VPC B" using the CIDR range `10.1.0.0/16` and selecting Peering Connection `VPC A <> VPC B` for the target

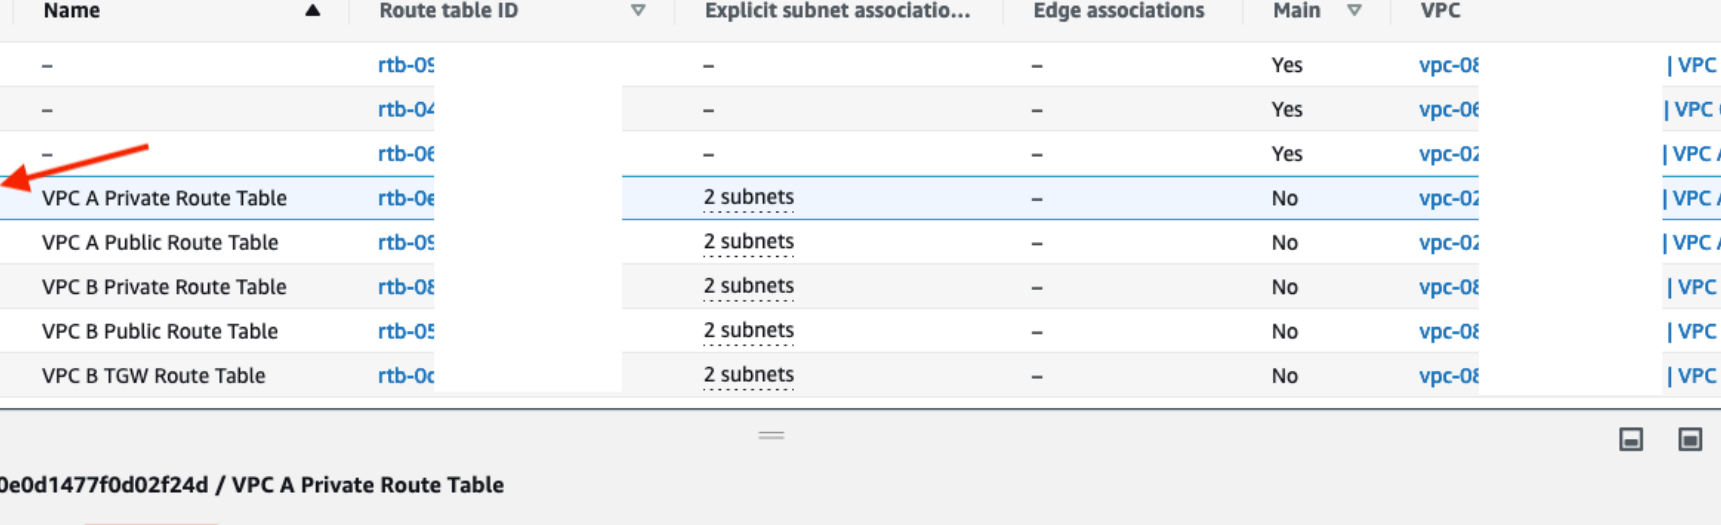

Edit routes

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
0.0.0.0/0	nat-00[redacted]	Active	No
10.1.0.0/16	pcx-	–	No

pcx-06d9[redacted] (VPC A <> VPC C)
pcx-0cb8[redacted] (VPC A <> VPC B)

5. Click **Save changes**
6. Confirm that the new route appears in the **Routes** tab of the resulting screen

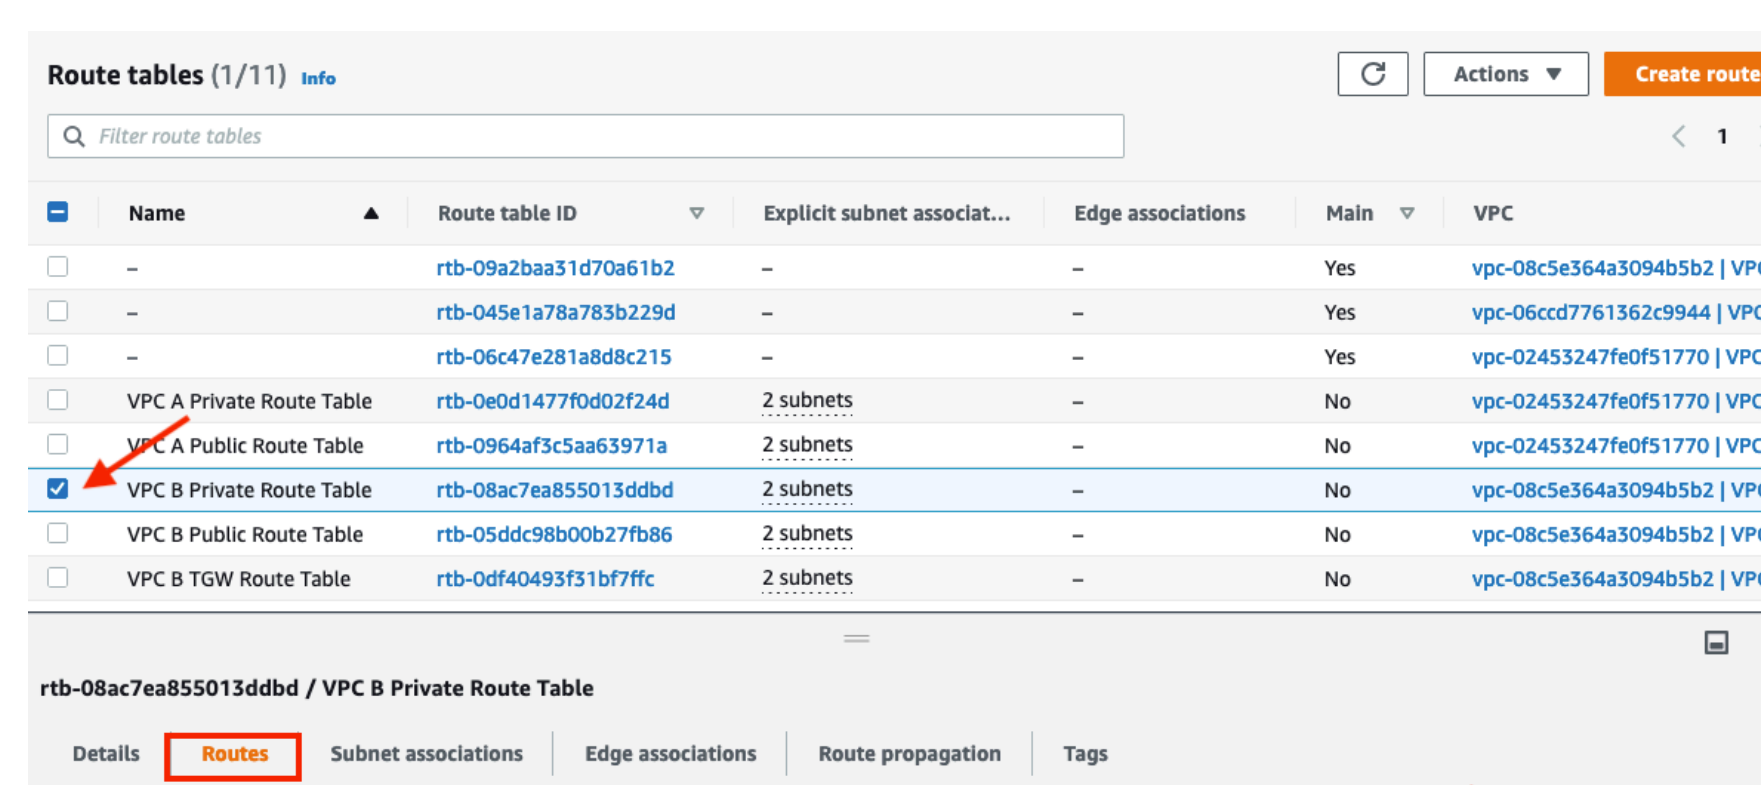

VPC > Route tables > rtb-0e0[redacted]

rtb-0e0c[redacted] / VPC A Private Route Table

Details
Route table ID: rtb-0e0d[redacted]
Main: No
Explicit subnet associations: 2 subnets
Edge associations: –
VPC: vpc-0[redacted] | VPC A
Owner ID: [redacted]

Routes (4)

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
10.1.0.0/16	pcx-0e7d6	Active	No
10.2.0.0/16	pcx-0d4de	Active	No
0.0.0.0/0	nat-0dd13	Active	No

Update Route Table in VPC B

1. Click on **Route tables**
2. Select *check box* for `VPC B Private Route Table`
3. Click on **Routes** tab
4. Click **Edit routes**

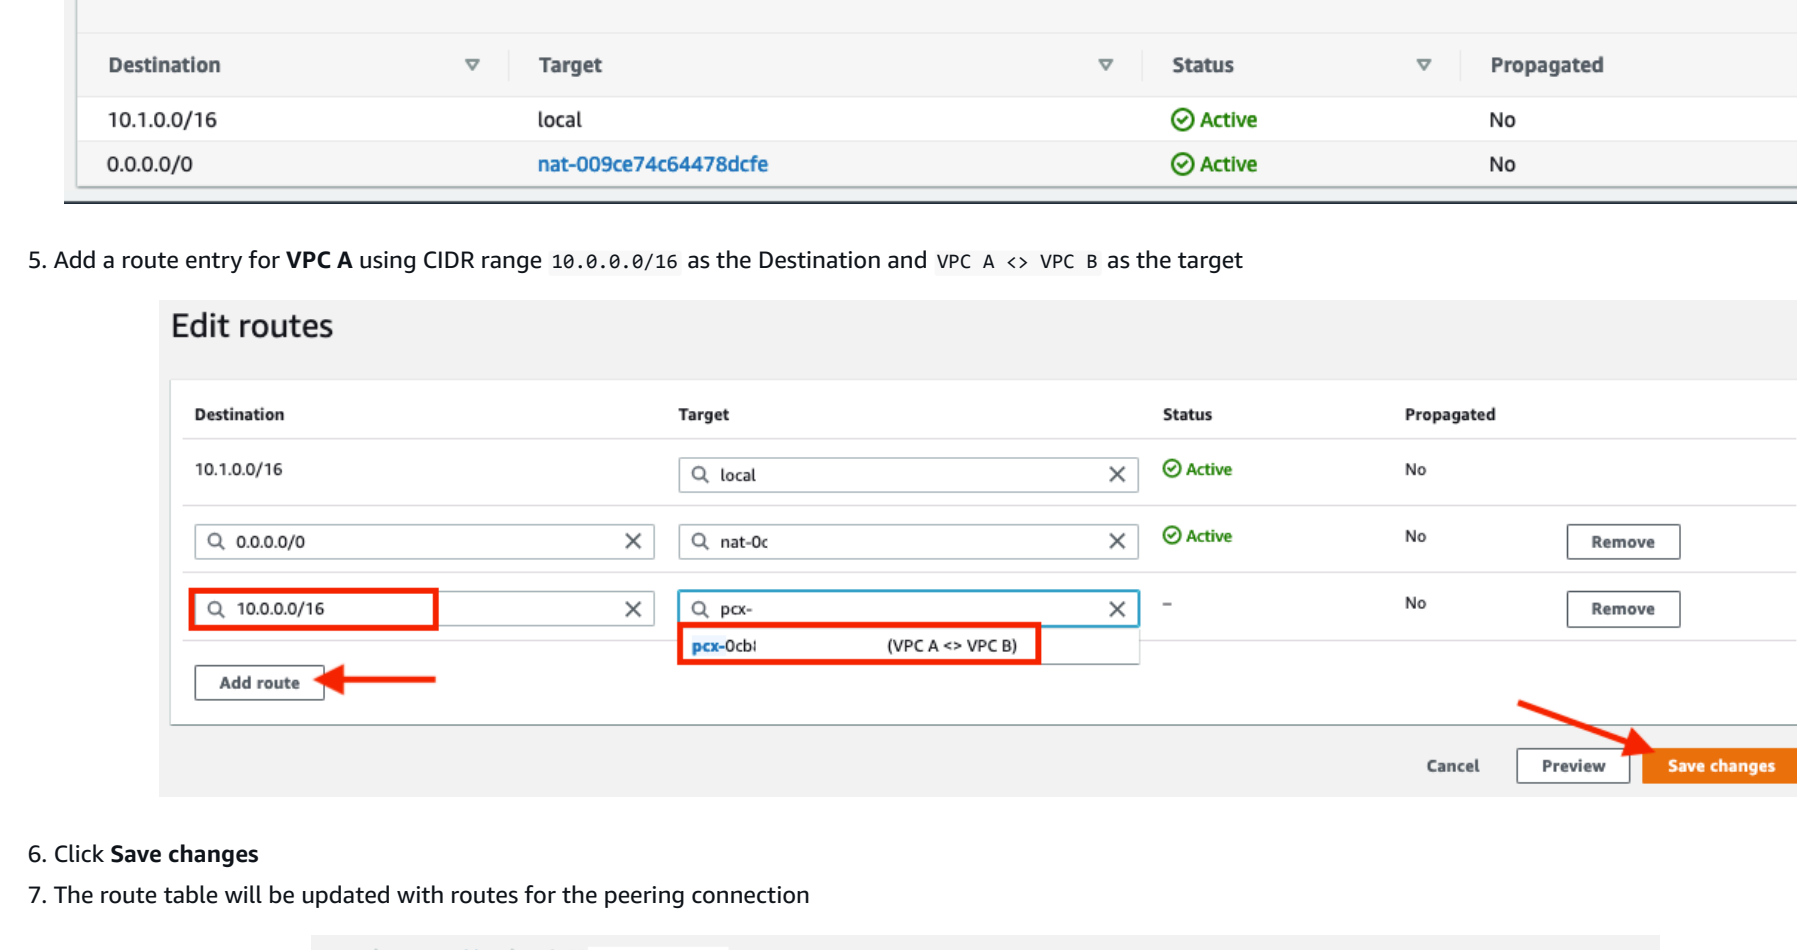

Route tables (1/11)

	Name	Route table ID	Explicit subnet associat...	Edge associations	Main	VPC
☐	–	rtb-09a2baa31d70a61b2	–	–	Yes	vpc-08c5e364a3094b5b2 | VPC B
☐	–	rtb-045e1a78a785b229d	–	–	Yes	vpc-06cd7761362c9944 | VPC C
☐	–	rtb-08c47e281a8d8c215	–	–	Yes	vpc-02453247fe0f51770 | VPC A
☐	VPC A Private Route Table	rtb-0e0d1477f0d02f24d	2 subnets	–	No	vpc-02453247fe0f51770 | VPC A
☐	VPC A Public Route Table	rtb-0964af5c5aa63971a	2 subnets	–	No	vpc-02453247fe0f51770 | VPC A
☑	VPC B Private Route Table	rtb-08ac7ea855013ddbd	2 subnets	–	No	vpc-08c5e364a3094b5b2 | VPC B
☐	VPC B Public Route Table	rtb-05ddc98b00b27fb86	2 subnets	–	No	vpc-08c5e364a3094b5b2 | VPC B
☐	VPC B TGW Route Table	rtb-0df40495f51bf7ffc	2 subnets	–	No	vpc-08c5e364a3094b5b2 | VPC B

rtb-08ac7ea855013ddbd / VPC B Private Route Table

Routes (2)

Destination	Target	Status	Propagated
10.1.0.0/16	local	Active	No
0.0.0.0/0	nat-009ce74c64478dcfe	Active	No

5. Add a route entry for **VPC A** using CIDR range `10.0.0.0/16` as the Destination and `VPC A <> VPC B` as the target

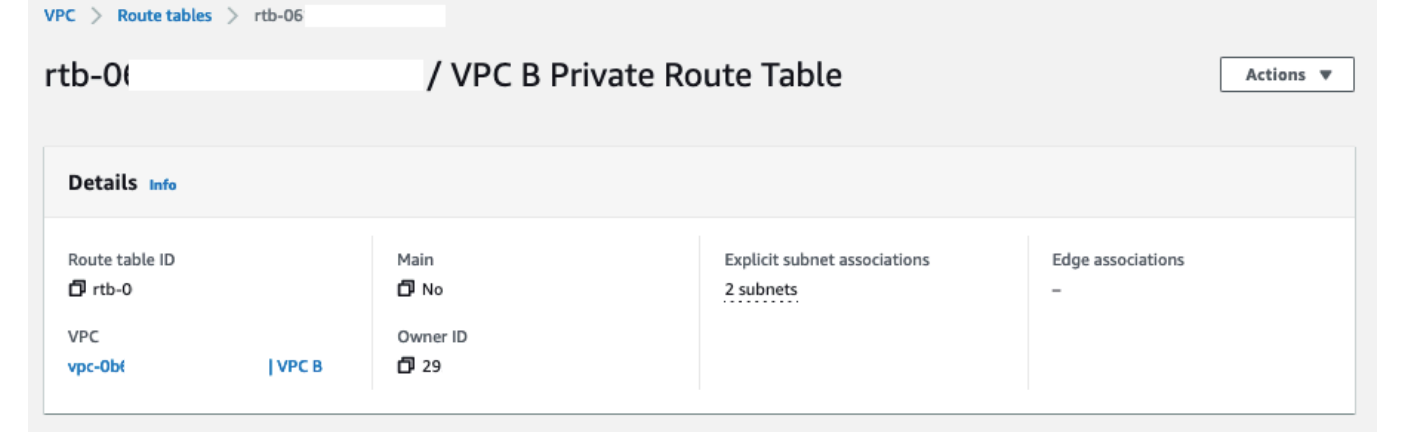

Edit routes

Destination	Target	Status	Propagated
10.1.0.0/16	local	Active	No
0.0.0.0/0	nat-0c[redacted]	Active	No
10.0.0.0/16	pcx-	–	No

pcx-0cb[redacted] (VPC A <> VPC B)

6. Click **Save changes**
7. The route table will be updated with routes for the peering connection

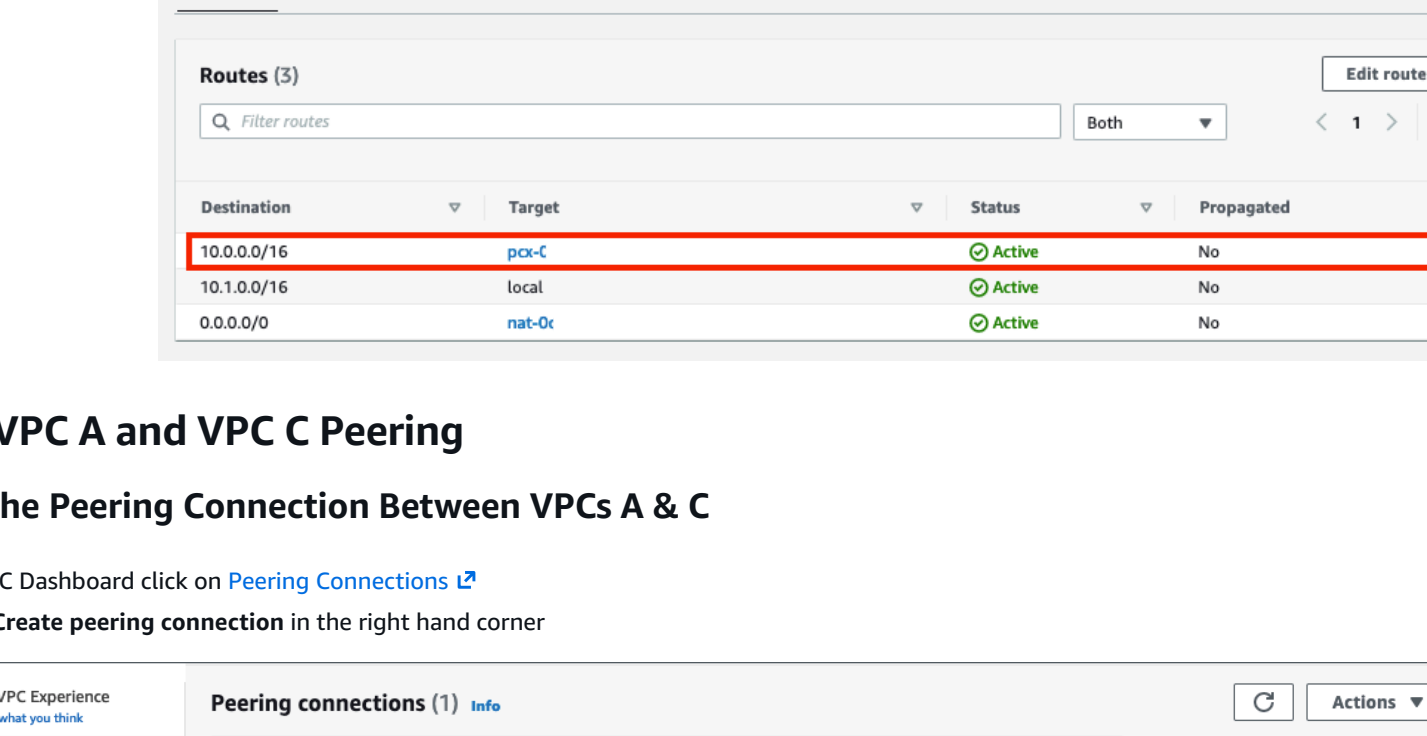

VPC > Route tables > rtb-0[redacted]

rtb-0[redacted] / VPC B Private Route Table

Details
Route table ID: rtb-0[redacted]
Main: No
Explicit subnet associations: 2 subnets
Edge associations: –
VPC: vpc-08[redacted] | VPC B
Owner ID: 29[redacted]

Routes (3)

Destination	Target	Status	Propagated
10.0.0.0/16	pcx-0[redacted]	Active	No
10.1.0.0/16	local	Active	No
0.0.0.0/0	nat-0[redacted]	Active	No

Setup VPC A and VPC C Peering

Create the Peering Connection Between VPCs A & C

1. In the VPC Dashboard click on Peering Connections
2. Click on **Create peering connection** in the right hand corner

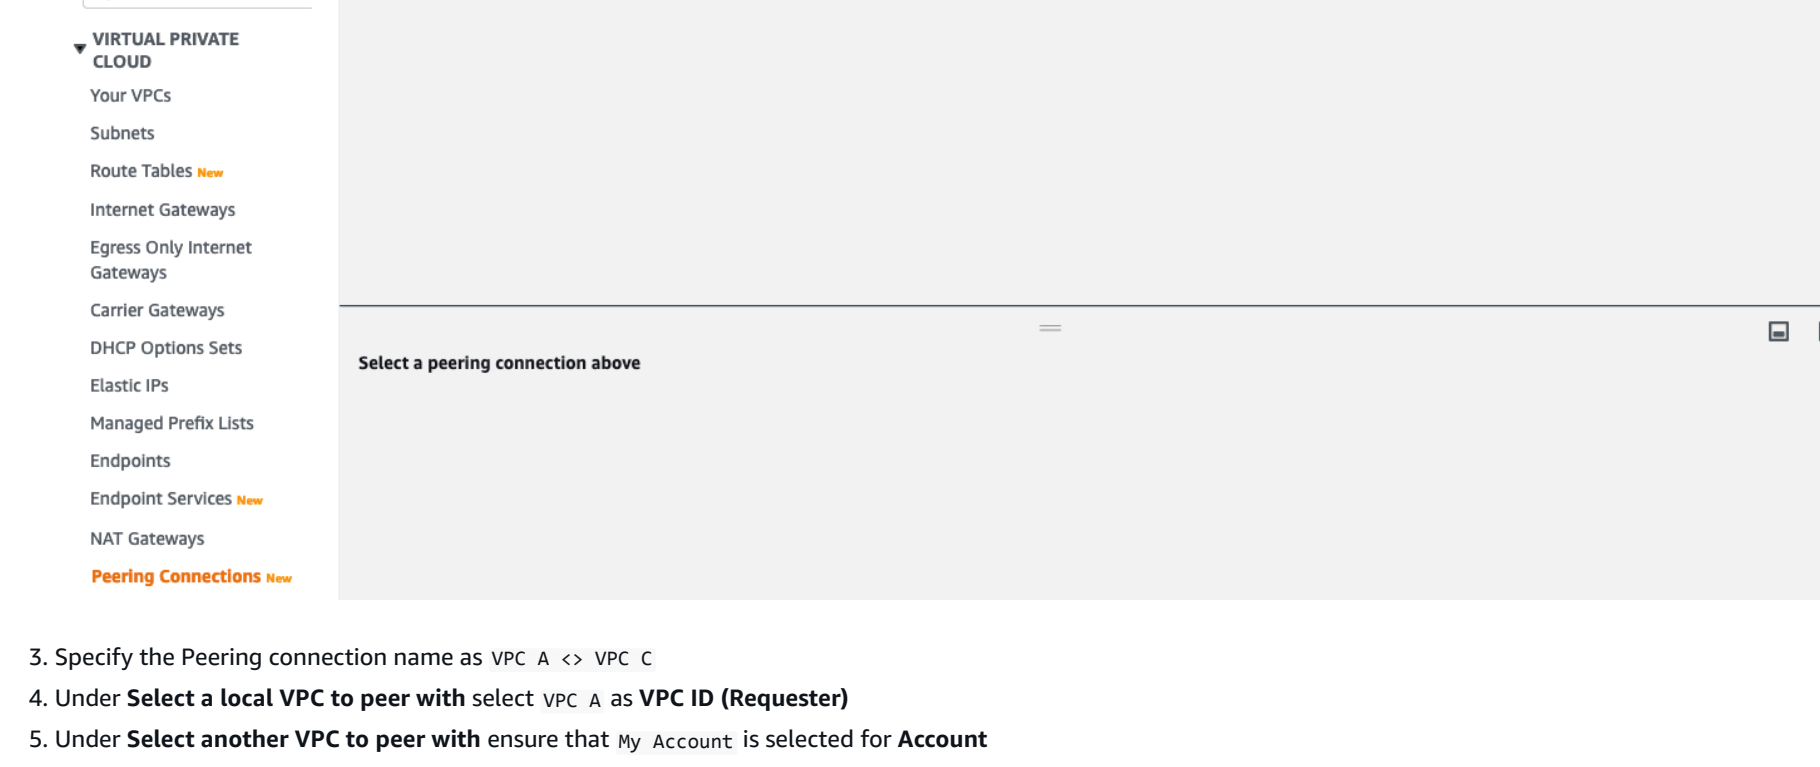

Peering connections (1)

Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Requester CIDRs
VPC A <> VPC B	pcx-0e7d6d1866170d206	Active	vpc-02453247fe0f51770 / VP...	vpc-08c5e364a3094b5b2 / VP...	10.0.0.0/16

3. Specify the Peering connection name as `VPC A <> VPC C`
4. Under **Select a local VPC to peer with** select `VPC A` as **VPC ID (Requester)**
5. Under **Select another VPC to peer with** ensure that `My Account` is selected for **Account**
6. For **Region** select the region for this workshop `This Region (us-east-1)`.
7. For **VPC ID (Accepter)** select `VPC C`

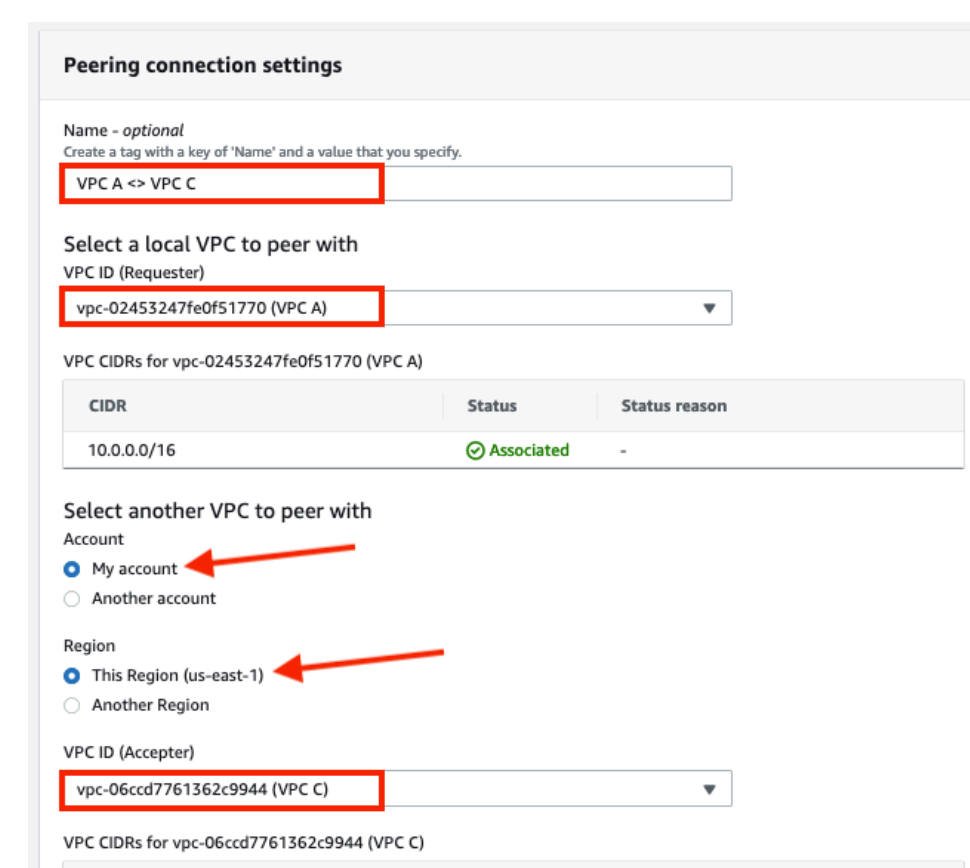

Peering connection settings
Name - optional: VPC A <> VPC C
Select a local VPC to peer with
VPC ID (Requester): vpc-02453247fe0f51770 (VPC A)
VPC CIDRs for vpc-02453247fe0f51770 (VPC A)

CIDR	Status	Status reason
10.0.0.0/16	Associated	–

Select another VPC to peer with
Account
● My account
○ Another account
Region
● This Region (us-east-1)
○ Another Region
VPC ID (Accepter): vpc-06ccd7761362c9944 (VPC C)
VPC CIDRs for vpc-06ccd7761362c9944 (VPC C)

CIDR	Status	Status reason
10.2.0.0/16	Associated	–

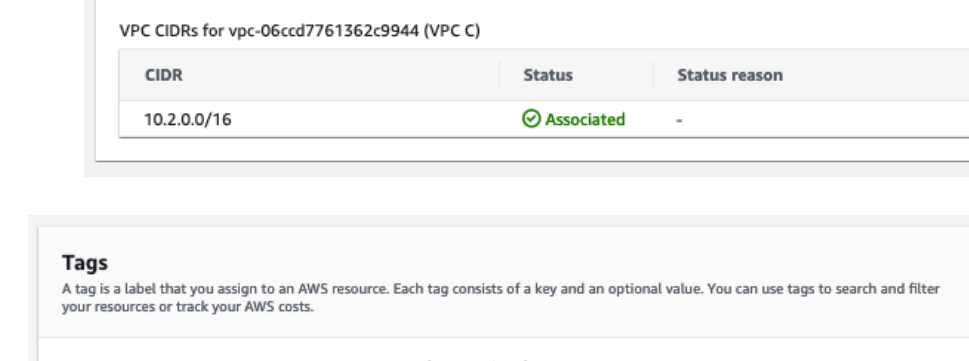

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
Key: Name
Value - optional: VPC A <> VPC C
You can add 49 more tags.

8. Click on **Create peering connection**
9. The newly created peering connection will be in *Pending Acceptance* state.
10. On the resulting screen, navigate under **Actions** and click **Accept request**

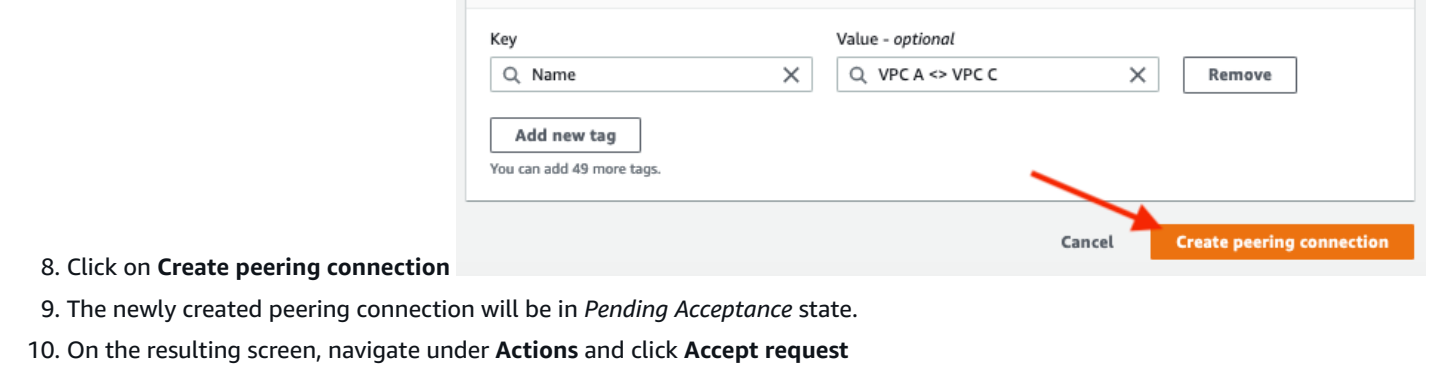

pcx-0d4de8ed2e29920c0 / VPC A <> VPC C

Pending acceptance
You can accept or reject this peering connection request using the 'Actions' menu. You have until Tuesday, September 14, 2021, 13:59:07 GMT+10 to accept or reject the re

11. On the following pop-select, click **Accept request**
12. Click on **Modify my route tables now** in the resulting screen

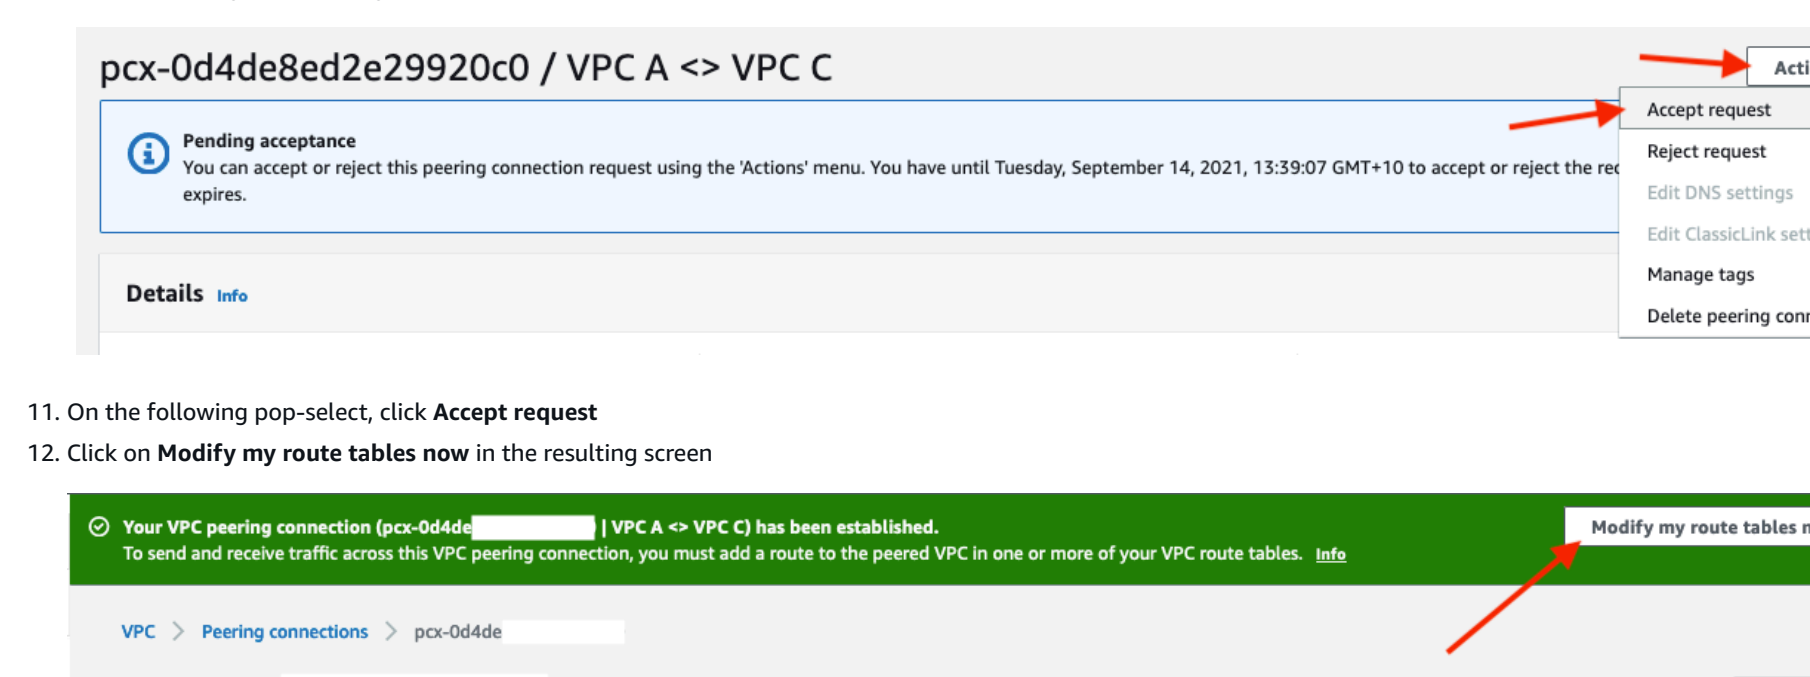

Your VPC peering connection (pcx-0d4de[redacted] | VPC A <> VPC C) has been established.
To send and receive traffic across this VPC peering connection, you must add a route to the peered VPC in one or more of your VPC route tables.

pcx-0d4d[redacted] / VPC A <> VPC C

Details
Requester owner ID: [redacted]
Requester VPC: vpc-02451[redacted] / VPC A
Requester CIDRs: 10.0.0.0/16
Requester Region: N. Virginia (us-east-1)
Accepter owner ID: [redacted]
Accepter VPC: vpc-06ccd[redacted] / VPC C
Accepter CIDRs: 10.2.0.0/16
Accepter Region: N. Virginia (us-east-1)
Peering connection ID: pcx-0d4de[redacted]
Status: Active
Expiration time: –

Update Route Table in VPC A

1. Select *check box* for `VPC A Private Route Table`
2. Scroll down and click on **Routes** tab
3. Click **Edit routes**

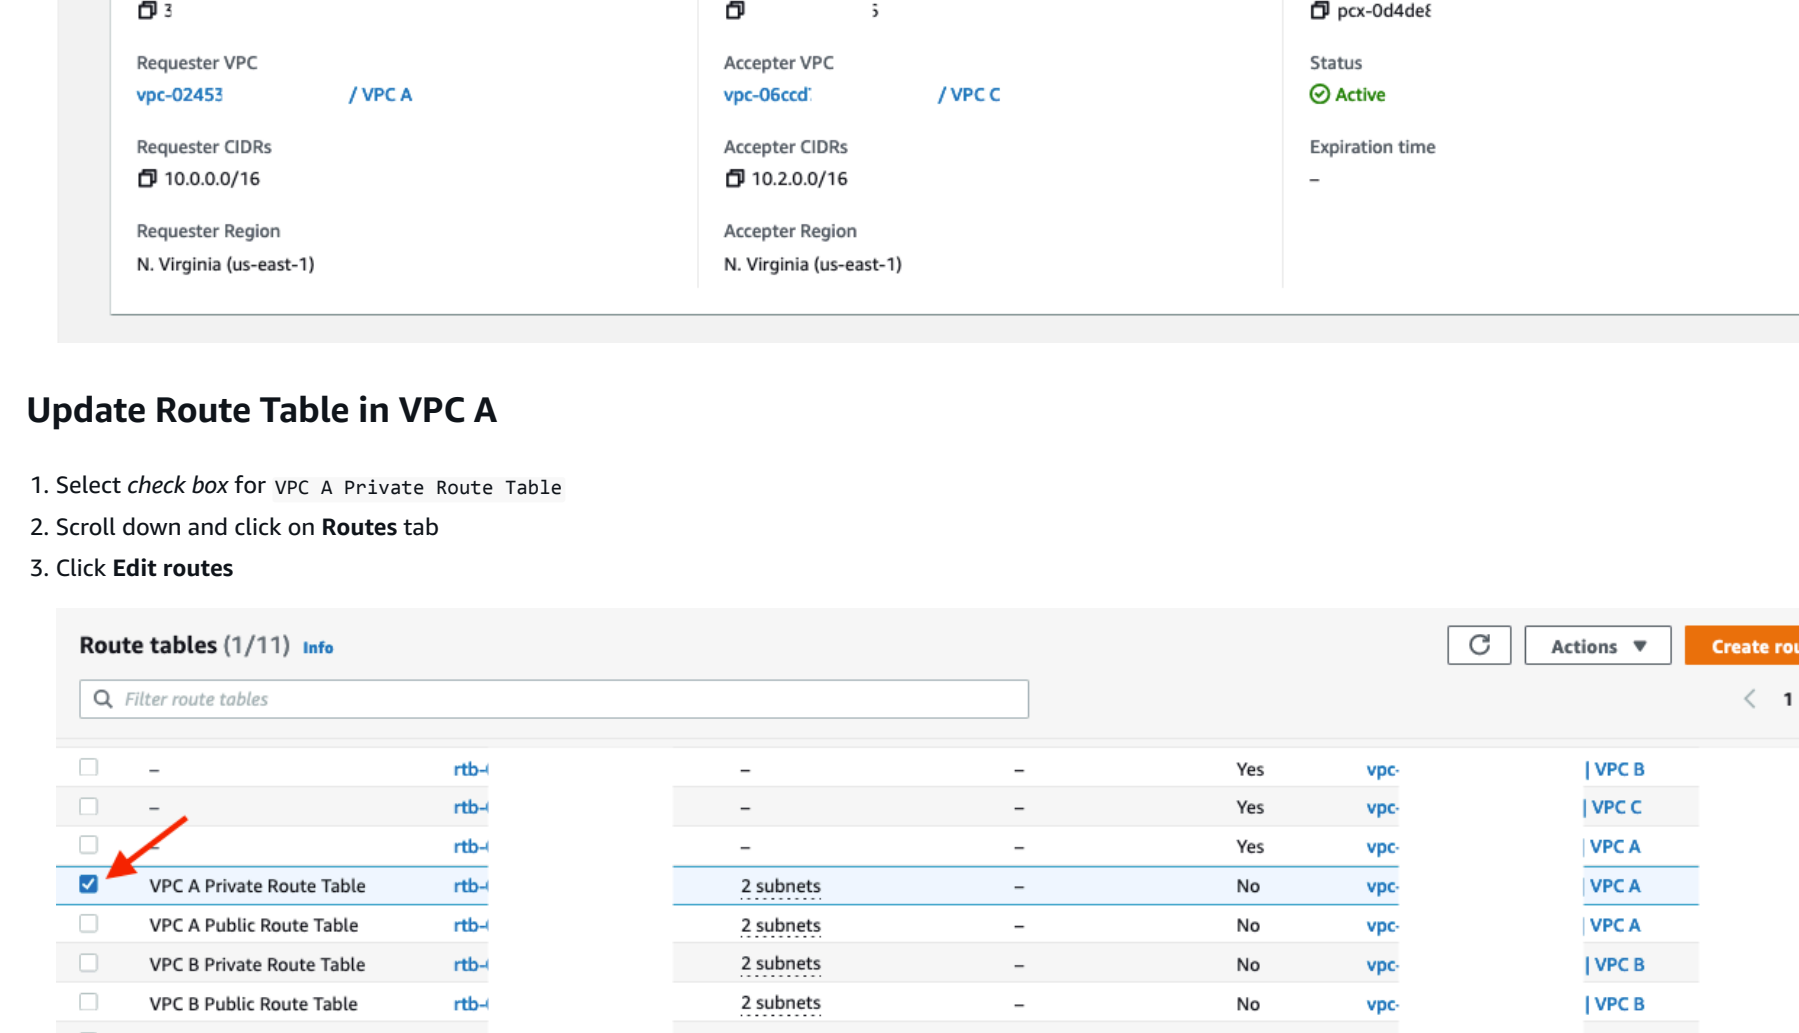

Route tables (1/11)

	Name	Route table ID	Explicit subnet associatio...	Edge associations	Main	VPC
☐	–	rtb-[redacted]	–	–	Yes	vpc-[redacted] | VPC B
☐	–	rtb-[redacted]	–	–	Yes	vpc-[redacted] | VPC C
☐	–	rtb-[redacted]	–	–	Yes	vpc-[redacted] | VPC A
☑	VPC A Private Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC A
☐	VPC A Public Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC A
☐	VPC B Private Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC B
☐	VPC B Public Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC B
☐	VPC B TGW Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC B
☐	VPC C Private Route Table	rtb-[redacted]	2 subnets	–	No	vpc-[redacted] | VPC C

rtb-0el[redacted] VPC A Private Route Table

Routes (3)

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
10.1.0.0/16	pcx-0e7d[redacted]	Active	No
0.0.0.0/0	nat-0dd1[redacted]	Active	No

4. Add route entry for "VPC C" using the CIDR range `10.2.0.0/16` and selecting Peering Connection `VPC A <> VPC C` for the target
5. Click **Save changes**

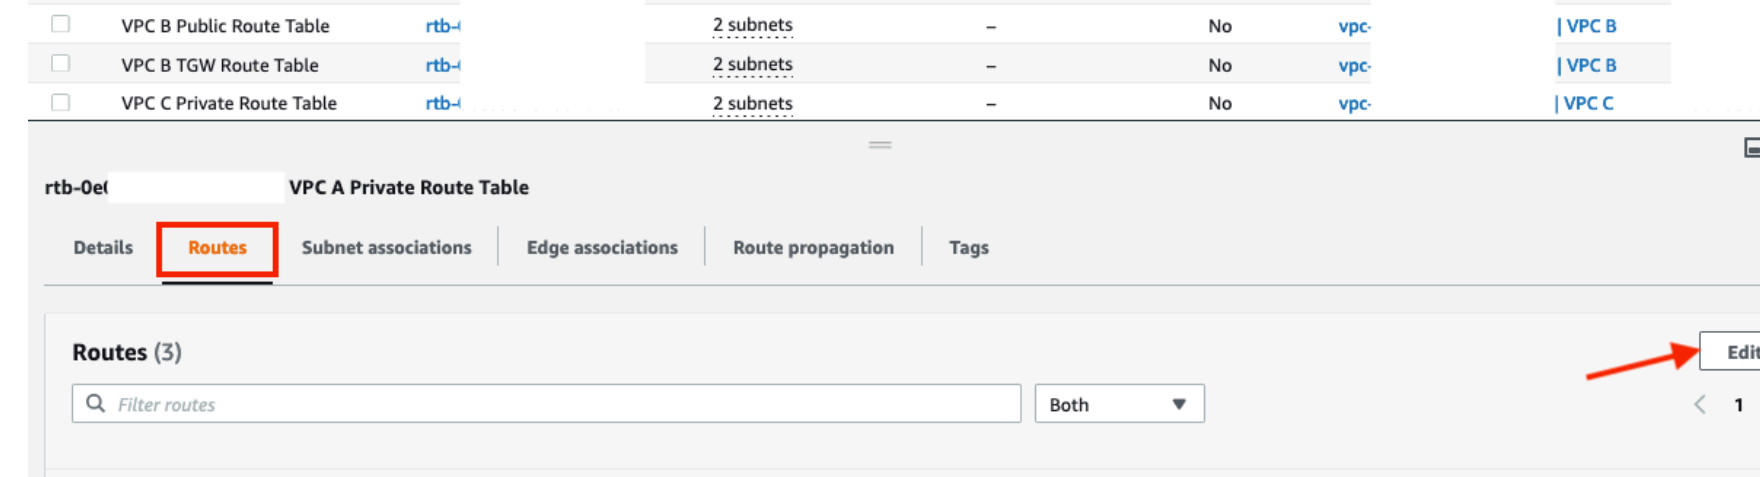

Edit routes

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
10.1.0.0/16	pcx-0e7d6d1866170d206	Active	No
0.0.0.0/0	nat-0dd13bb0b7bd2c646	Active	No
10.2.0.0/16	pcx-	–	No

pcx-0d4de8ed2e29920c0 (VPC A <> VPC C)
pcx-0e7d6d1866170d206 (VPC A <> VPC B)

6. Confirm that the new route appears in the **Routes** tab of the resulting screen

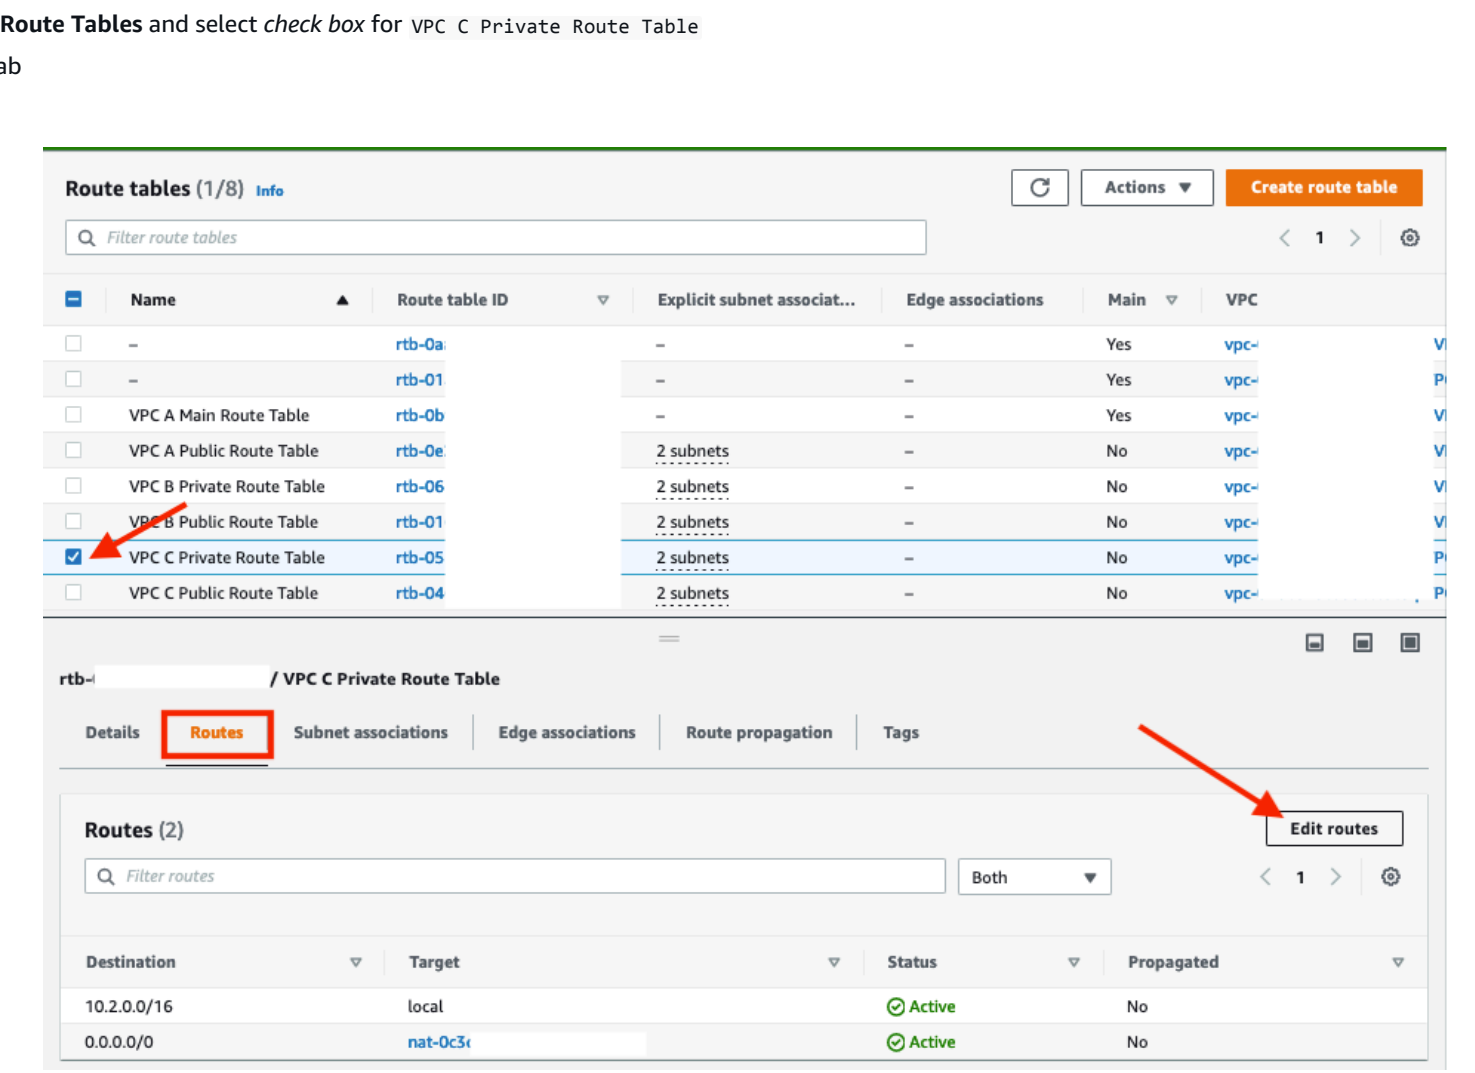

Updated routes for rtb-0[redacted] / VPC A Main Route Table successfully

VPC > Route tables > rtb-0[redacted]

rtb-0b[redacted] / VPC A Main Route Table

Details
Route table ID: rtb-0[redacted]
Main: Yes
Explicit subnet associations: –
Edge associations: –
VPC: vpc-024[redacted] | VPC A
Owner ID: 2[redacted]

Routes (4)

Destination	Target	Status	Propagated
10.0.0.0/16	local	Active	No
10.1.0.0/16	pcx-0c[redacted]	Active	No
10.2.0.0/16	pcx-06c[redacted]	Active	No
0.0.0.0/0	nat-0d[redacted]	Active	No

Update Route Table in VPC C

1. Navigate back to **Route Tables** and select *check box* for `VPC C Private Route Table`
2. Click on **Routes** tab
3. Click **Edit routes**

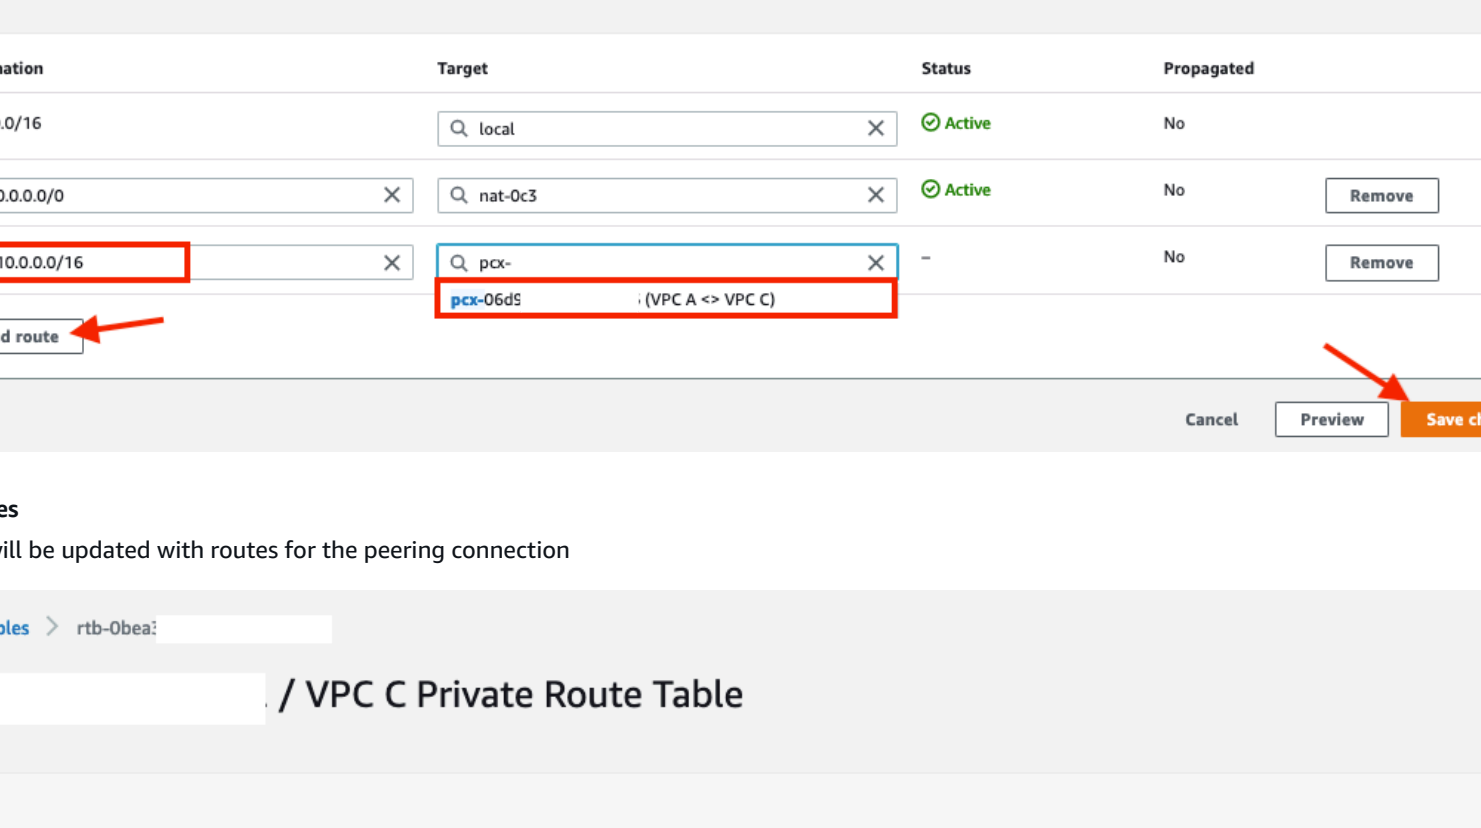

Route tables (1/8)

	Name	Route table ID	Explicit subnet associat...	Edge associations	Main	VPC
☐	–	rtb-0a[redacted]	–	–	Yes	vpc-[redacted]
☐	–	rtb-01[redacted]	–	–	Yes	vpc-[redacted]
☐	VPC A Main Route Table	rtb-0b[redacted]	–	–	Yes	vpc-[redacted]
☐	VPC A Public Route Table	rtb-0e[redacted]	2 subnets	–	No	vpc-[redacted]
☐	VPC B Private Route Table	rtb-06[redacted]	2 subnets	–	No	vpc-[redacted]
☐	VPC B Public Route Table	rtb-01[redacted]	2 subnets	–	No	vpc-[redacted]
☑	VPC C Private Route Table	rtb-05[redacted]	2 subnets	–	No	vpc-[redacted]
☐	VPC C Public Route Table	rtb-04[redacted]	2 subnets	–	No	vpc-[redacted]

rtb-[redacted] / VPC C Private Route Table

Routes (2)

Destination	Target	Status	Propagated
10.2.0.0/16	local	Active	No
0.0.0.0/0	nat-0c3[redacted]	Active	No

4. Add a route entry for **VPC A** using CIDR range `10.0.0.0/16` as the Destination and `VPC A <> VPC C` as the Target

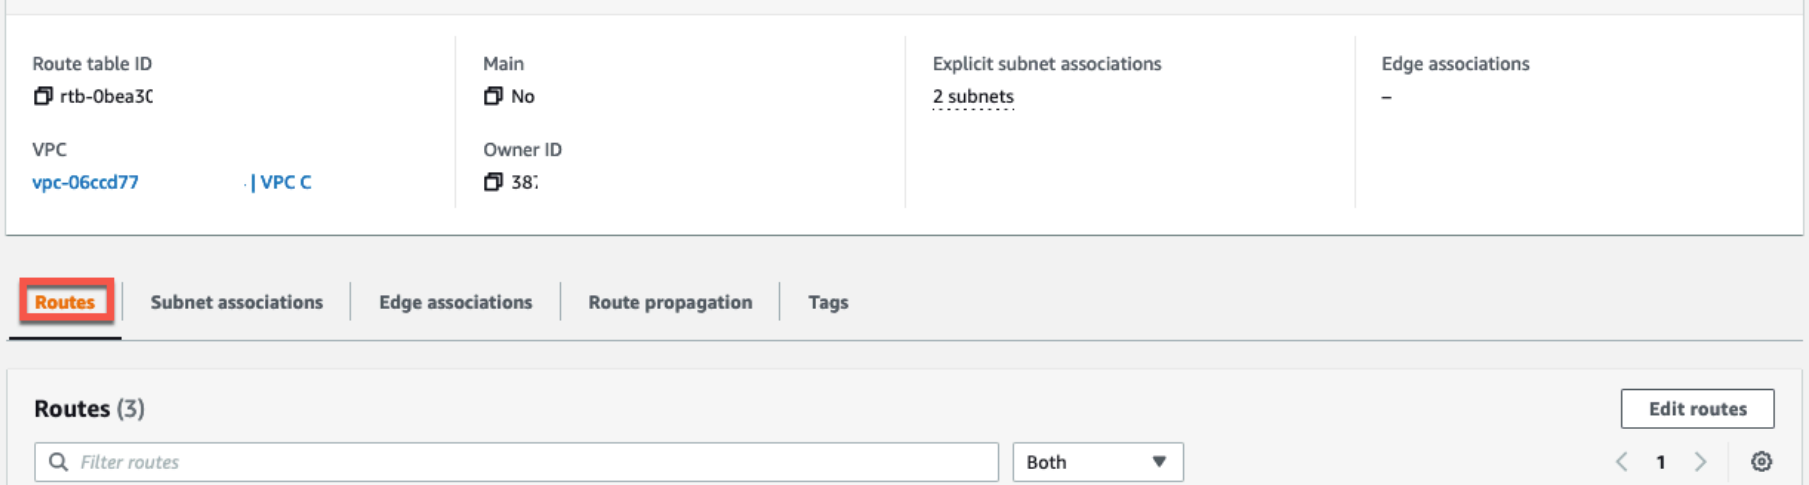

Edit routes

Destination	Target	Status	Propagated
10.2.0.0/16	local	Active	No
0.0.0.0/0	nat-0c3	Active	No
10.0.0.0/16	pcx-	–	No

pcx-06d0[redacted] (VPC A <> VPC C)

5. Click **Save changes**
6. The route table will be updated with routes for the peering connection

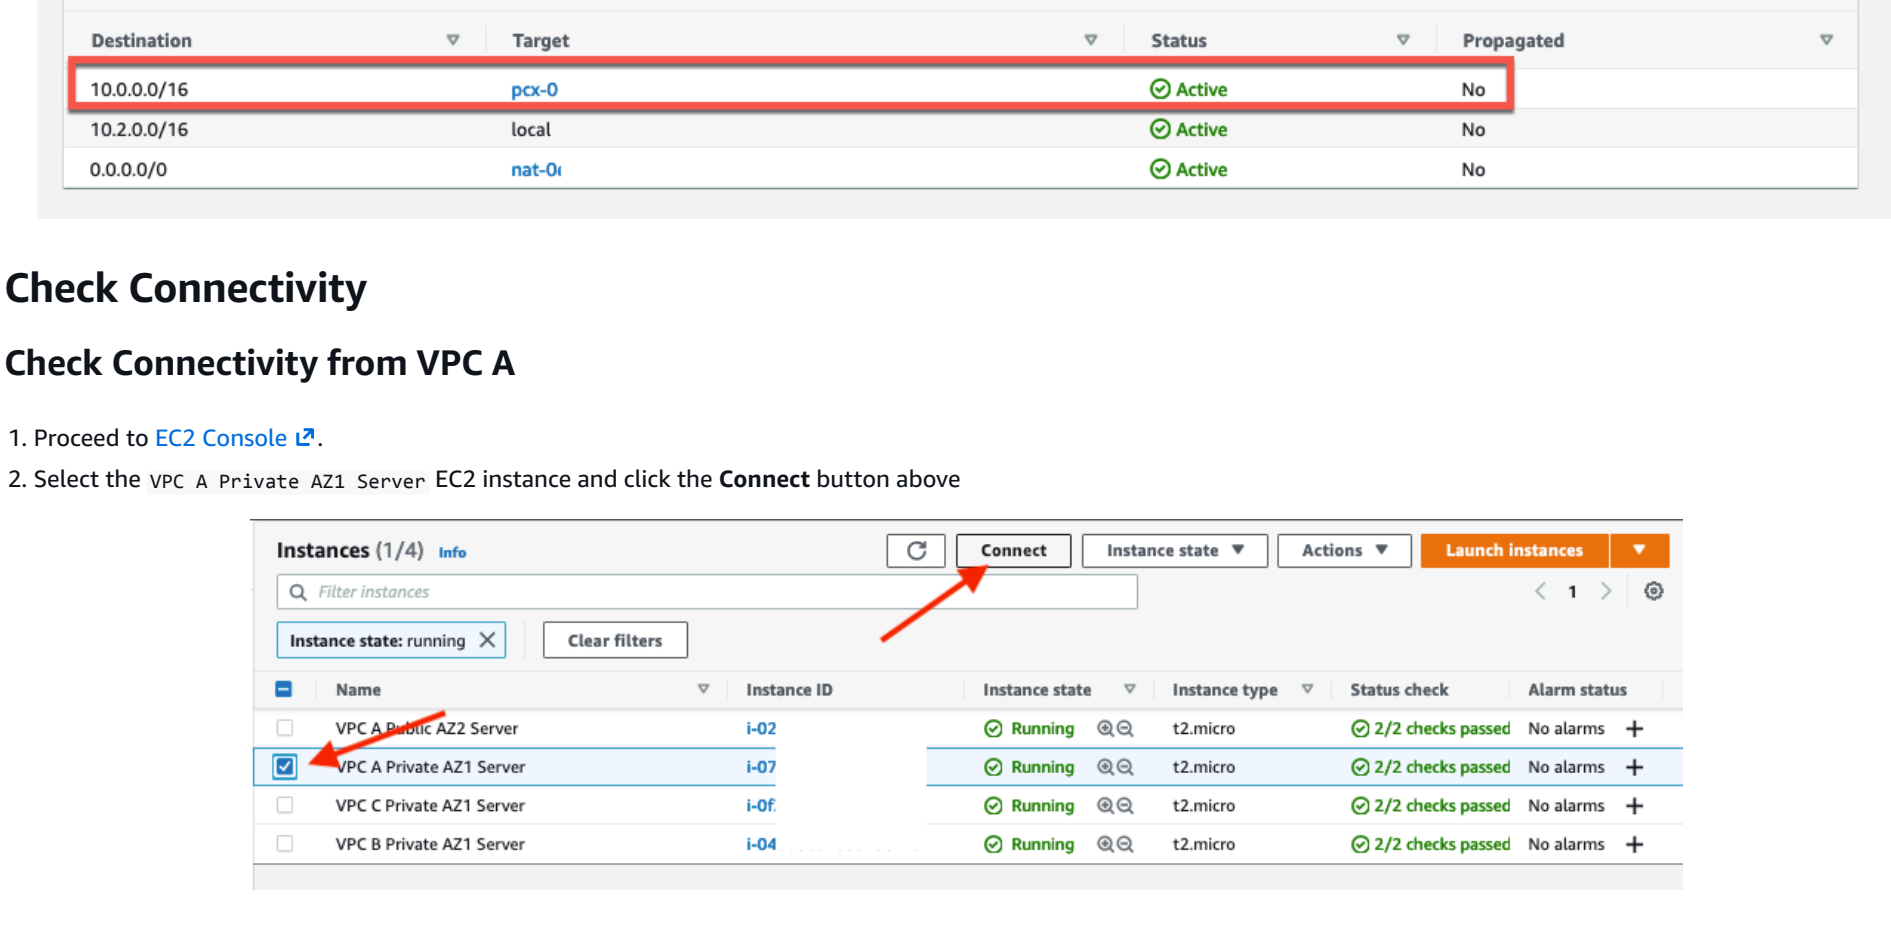

VPC > Route tables > rtb-0bea[redacted]

rtb-0bea[redacted] / VPC C Private Route Table

Details
Route table ID: rtb-0bea3[redacted]
Main: No
Explicit subnet associations: 2 subnets
Edge associations: –
VPC: vpc-06ccd77[redacted] | VPC C
Owner ID: 38[redacted]

Routes (3)

Destination	Target	Status	Propagated
10.0.0.0/16	pcx-0[redacted]	Active	No
10.2.0.0/16	local	Active	No
0.0.0.0/0	nat-0[redacted]	Active	No

Check Connectivity

Check Connectivity from VPC A

1. Proceed to EC2 Console.
2. Select the `VPC A Private AZ1 Server` EC2 instance and click the **Connect** button above

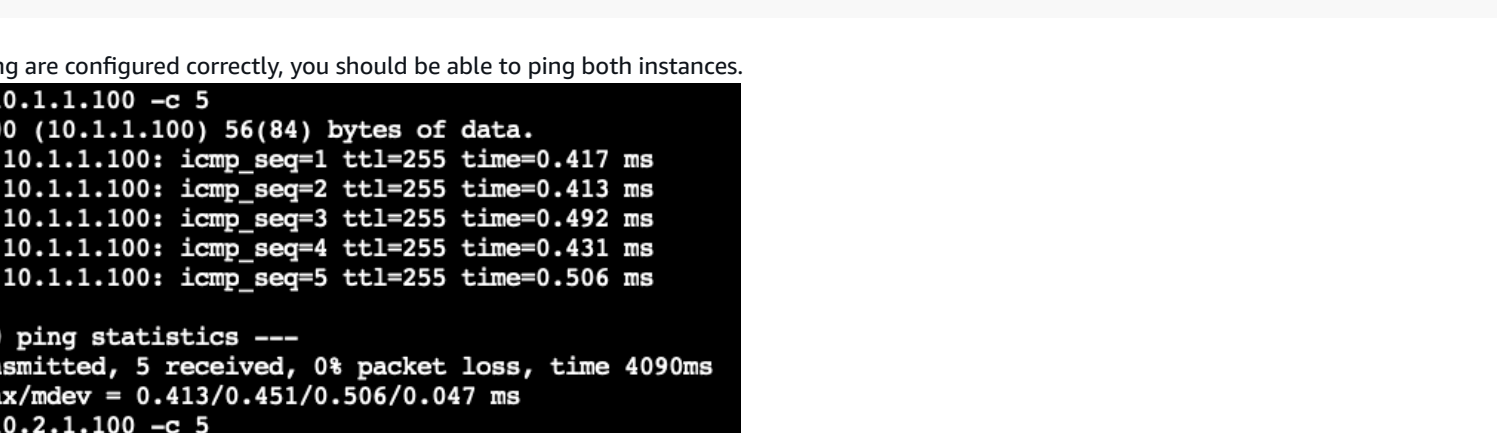

Instances (1/4)
Instance state: running

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status
☐	VPC A Public AZ2 Server	i-02[redacted]	Running	t2.micro	2/2 checks passed	No alarms
☑	VPC A Private AZ1 Server	i-07[redacted]	Running	t2.micro	2/2 checks passed	No alarms
☐	VPC C Private AZ1 Server	i-0f[redacted]	Running	t2.micro	2/2 checks passed	No alarms
☐	VPC B Private AZ1 Server	i-04[redacted]	Running	t2.micro	2/2 checks passed	No alarms

3. Click **Connect** in the **Session Manager** tab
4. Try pinging EC2 instances in **VPC B** and **VPC C** using the private addresses of the instances

```
ping 10.1.1.100 -c 5
ping 10.2.1.100 -c 5
```

If peering and routing are configured correctly, you should be able to ping both instances.

```
sh-4.2$ ping 10.1.1.100 -c 5
PING 10.1.1.100 (10.1.1.100) 56(84) bytes of data.
64 bytes from 10.1.1.100: icmp_seq=1 ttl=255 time=0.417 ms
64 bytes from 10.1.1.100: icmp_seq=2 ttl=255 time=0.413 ms
64 bytes from 10.1.1.100: icmp_seq=3 ttl=255 time=0.492 ms
64 bytes from 10.1.1.100: icmp_seq=4 ttl=255 time=0.431 ms
64 bytes from 10.1.1.100: icmp_seq=5 ttl=255 time=0.506 ms

--- 10.1.1.100 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4090ms
rtt min/avg/max/mdev = 0.413/0.451/0.506/0.047 ms
sh-4.2$ ping 10.2.1.100 -c 5
PING 10.2.1.100 (10.2.1.100) 56(84) bytes of data.
64 bytes from 10.2.1.100: icmp_seq=1 ttl=255 time=0.505 ms
64 bytes from 10.2.1.100: icmp_seq=2 ttl=255 time=0.440 ms
64 bytes from 10.2.1.100: icmp_seq=3 ttl=255 time=0.517 ms
64 bytes from 10.2.1.100: icmp_seq=4 ttl=255 time=0.428 ms
64 bytes from 10.2.1.100: icmp_seq=5 ttl=255 time=0.437 ms

--- 10.2.1.100 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4093ms
rtt min/avg/max/mdev = 0.428/0.465/0.517/0.042 ms
sh-4.2$
```

Check Connectivity from VPC B

1. Terminate the Session Manager connection and in the resulting screen click on Instances.
2. Select **VPC B Private AZ1 Server** EC2 instance and connect using Session Manager.

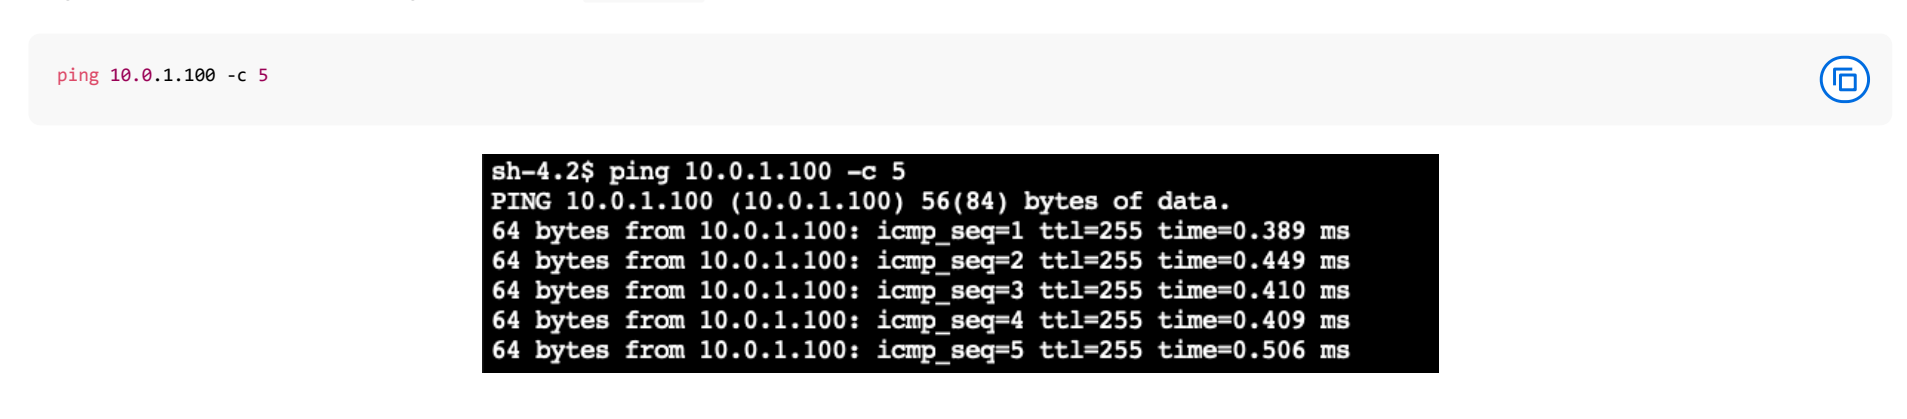

Instances (1/4)

	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Private IP address
☐	VPC A Private AZ1 Server	i-0de9f5b17c00ec...	Running	t2.micro	2/2 checks passed	No alarms	us-east-1a	10.0.1.100
☐	VPC A Public AZ2 Server	i-0c01698ce8a6c7...	Running	t2.micro	2/2 checks passed	No alarms	us-east-1b	10.0.2.100
☑	VPC B Private AZ1 Server	i-0cab9a0d81b2c...	Running	t2.micro	2/2 checks passed	No alarms	us-east-1a	10.1.1.100
☐	VPC C Private AZ1 Server	i-0c338b887cc4be...	Running	t2.micro	2/2 checks passed	No alarms	us-east-1a	10.2.1.100

3. Ping the EC2 instance in VPC A using the IP address `10.0.1.100`

```
ping 10.0.1.100 -c 5
```

```
sh-4.2$ ping 10.0.1.100 -c 5
PING 10.0.1.100 (10.0.1.100) 56(84) bytes of data.
64 bytes from 10.0.1.100: icmp_seq=1 ttl=255 time=0.389 ms
64 bytes from 10.0.1.100: icmp_seq=2 ttl=255 time=0.449 ms
64 bytes from 10.0.1.100: icmp_seq=3 ttl=255 time=0.410 ms
64 bytes from 10.0.1.100: icmp_seq=4 ttl=255 time=0.409 ms
64 bytes from 10.0.1.100: icmp_seq=5 ttl=255 time=0.506 ms
```

4. Can you ping the instance in VPC C using the IP address `10.2.1.100`?

```
ping 10.2.1.100 -c 5
```

```
sh-4.2$ ping 10.2.1.100 -c 5
PING 10.2.1.100 (10.2.1.100) 56(84) bytes of data.

--- 10.2.1.100 ping statistics ---
5 packets transmitted, 0 received, 100% packet loss, time 4095ms
```

There is no direct peering between VPC B and VPC C. VPC B and VPC C cannot communicate via VPC A because VPC peering does not permit transitive routing.

5. Terminate the Session Manager connection and close the browser tab.

Congratulations you've set up a peering architecture that connects VPC A to VPC B and VPC C but prevents VPC B and VPC C communicating.

While this approach can be used to interconnect many VPCs, managing many point-to-point connections can be cumbersome at scale. A more scalable approach is to utilize AWS Transit Gateway so we will now remove the point-to-point peering connections between VPCs in preparation for setting up Transit Gateway (TGW) to interconnect the three VPCs

Delete VPC Peering Connections

1. In the VPC Dashboard navigate to Peering Connections
2. Select the `VPC A <> VPC B` peering connectoin and delete it by clicking **Actions** and selecting **Delete peering connection**

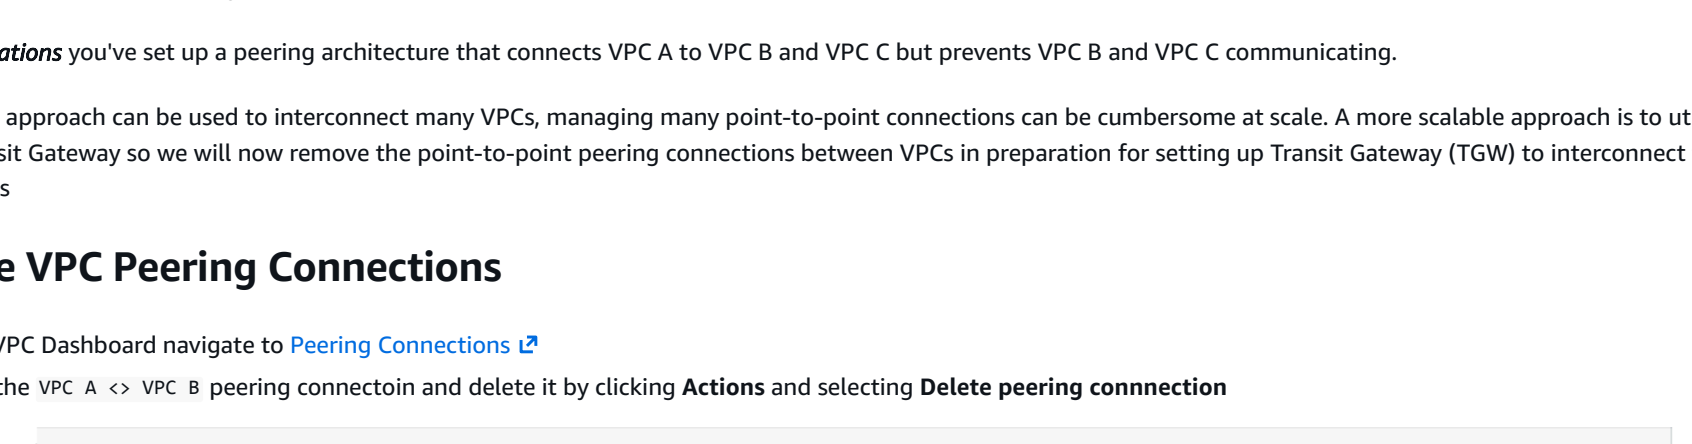

Peering connections (1/2)

	Name	Peering connection ID	Status	Requester VPC	Accepter VPC	Accepter CIDR
●	VPC A <> VPC B	pcx-0c[redacted]	Active	vpc-03[redacted] / V...	vpc-0[redacted]	10.1.0.0/16
○	VPC A <> VPC C	pcx-06[redacted]	Active	vpc-03[redacted] / V...	vpc-0[redacted]	10.2.0.0/16

Actions
View details
Accept request
Reject request
Edit DNS settings
Edit ClassicLink settings
Manage tags
Delete peering connection
Create peering connection

3. Select the checkbox to **Delete related route table entries** to avoid traffic blackholing scenario.

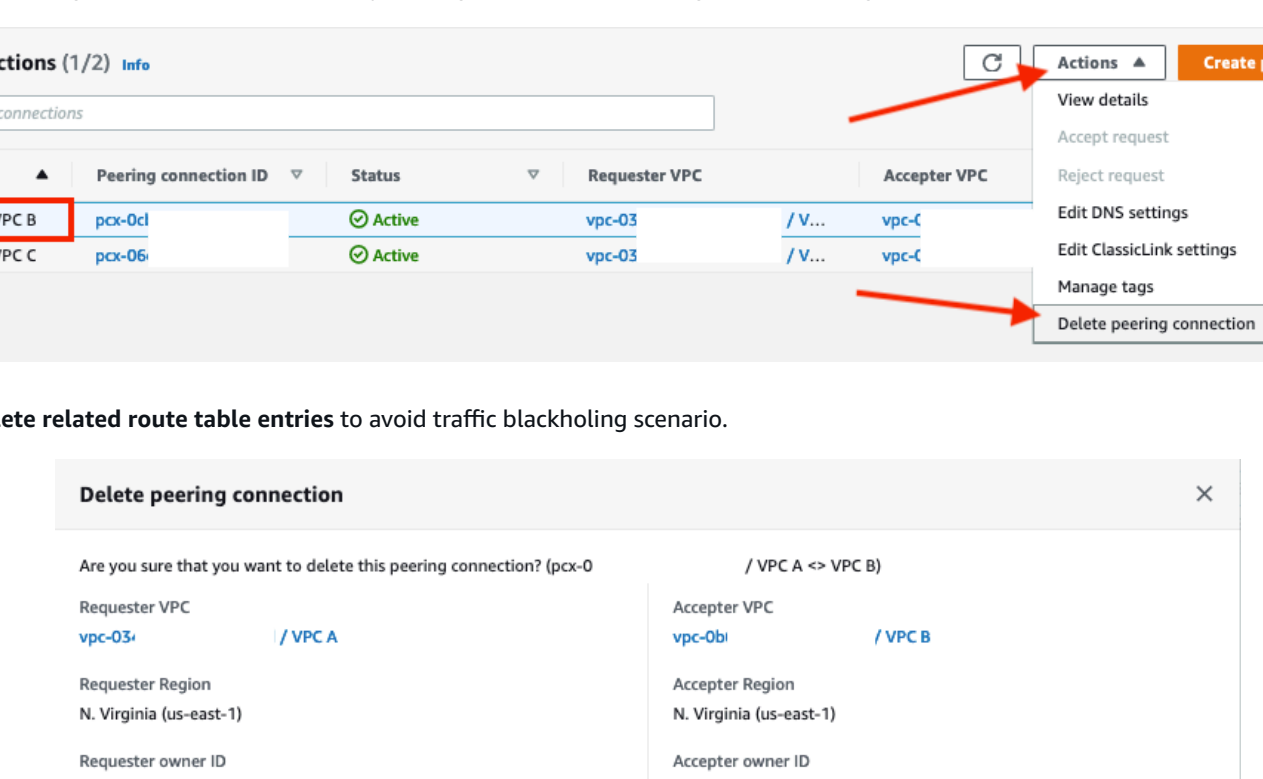

Delete peering connection
Are you sure that you want to delete this peering connection? (pcx-0[redacted] / VPC A <> VPC B)
Requester VPC: vpc-03[redacted] / VPC A
Requester Region: N. Virginia (us-east-1)
Requester owner ID: 2[redacted] (This account)
Accepter VPC: vpc-0b[redacted] / VPC B
Accepter Region: N. Virginia (us-east-1)
Accepter owner ID: 2[redacted] (This account)

Routes targeting this peering connection

Route table ID	Destination
rtb-06[redacted] / VPC B Private Route Table	10.0.0.0/16
rtb-0b[redacted] / VPC A Main Route Table	10.1.0.0/16

Route table entries
Choose whether or not to delete the entries that target this peering connection from the route tables.
● Delete related route table entries
○ Do not delete route table entries
To confirm deletion, type delete in the field:
delete

4. Type `delete` in the text box and click **Delete**
5. Repeat deletion of VPC peering for the `VPC A <> VPC C` connection.

Select your cookie preferences

We use essential cookies and similar tools that are necessary to provide our site and services. We use performance cookies to collect anonymous statistics, so we can understand how customers use our site and make improvements. Essential cookies cannot be deactivated, but you can choose "Customize" or "Decline" to decline performance cookies.

If you agree, AWS and approved third parties will also use cookies to provide useful site features, remember your preferences, and display relevant content, including relevant advertising. To accept or decline all non-essential cookies, choose "Accept" or "Decline." To make more detailed choices, choose "Customize."

Accept
Decline
Customize