

GROUP PROJECT 2.1, FLAVOR A


Some Group

Jane **Doe**
12345678

JaneJohn **Smith**
10010010

Alex **kʷikʷəʔ**
9999⁹⁹⁹⁹

```
(  
  "Jane Doe",  
  "John Smith",  
  "Alex kʷikʷəʔ\u{313}",  
)
```

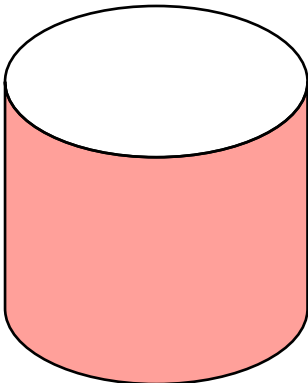

12 km $\lim_{x \rightarrow 0}^{\text{wut}}$

- 1. (3 points) one
 - (a) (Extra, no) two
 - i. (1 point) three

what

User Manual

Question

The `question()` function is to create a question block.

```
#question(4)[  
  The question.  
  #question(2)[  
    Sub-question.  
  ]  
  #question(0)[  
    Another sub-question.  
    #question(1)[  
      Sub-sub-question.  
    ]  
    #question(1)[  
      Another sub-sub-question.  
    ]  
  ]  
]  
#question[2 points, -2 if wrong][  
  The risky bonus question.  
]
```

Questions can be referenced by their automatically assigned labels. For example, question 1.b.ii has label `<qs:1:b:ii>` and can be referenced by `#link(<qs:1:b:ii>)[That question]`. Note that it cannot be referenced by `@qs:1:b:ii`.

Other helps: `introduction`, `getting-started`, `setup`, `author`, `drawing`, `solution`, `caveats`.