

BigFive: A Chinese Textual Dataset Supporting Psychology Knowledge Graph Construction

Qingren Wang

*School of Computer Science and Technology
Anhui University
Hefei, China
wqr@ahu.edu.cn*

Ao Liu

*School of Computer Science and Technology
Anhui University
Hefei, China
e22301177@stu.ahu.edu.cn*

Kang Yan

*School of Computer Science and Technology
Anhui University
Hefei, China
E20301300@stu.ahu.edu.cn*

Juan Hou

*School of Philosophy
Anhui University
Hefei, China
daisyhoujuan@gmail.com*

Wei Li

*School of Computer Science and Technology
Anhui University
Hefei, China
91019@ahu.edu.cn*

Abstract—Obtaining the personalities of users conveyed by their published short texts has a wide and important range of applications, from detecting abnormal behavior of online users to accurately customization recommendation. Advancement in this area can be improved using large-scale datasets with coarse- and fine-grained typologies, adaptable to multiple downstream tasks, i.e., psychology knowledge graph construction and intelligence collection of psychological questionnaires. Although the LIWC lexicon helps personality prediction, the larger volume of textual dataset related to Big Five personality types still cannot meet the requirements of researches and applications, especially for tasks in Chinese. Therefore, this paper introduces *BigFive*, a large, high quality Chinese textual dataset manually annotated by the psychological experts. *BigFive* contains 13,478 Chinese phrases that belong to five categories (coarse-grained) and 30 categories (fine-grained). The reliability of five categories grouped by personality level and 30 categories grouped by dimension level is demonstrated via a detailed data analysis. In addition, a strong baseline is build based on a fine-tuning BERT model. Our BERT-based model achieves an average F1-score of .33 (std=.24) in terms of 30 categories and an average F1-score of .66 (std=.05) in terms of five categories. The experimental results suggest that there is much room for improvement.

Index Terms—the Big Five, personality characteristics, user behaviors, knowledge graph, psychology

I. INTRODUCTION

Personality is of great significance in psychological researches, since it represents a set of individual-derived, stable behavioral patterns and internal processing that can effectively make interpersonal distinctions between people [1]–[3]. In the field of psychology, the framework of Big Five personality theory is widely utilized to describe aspects of personality [4]–[6]. With the significant increment of online users in social networks, massive behavior data of online users are generated. Because of anonymity of social networks, these online data are much more indicative of the psychological characteristics of a user than behavioral data of the user generated in the real world. Therefore, Obtaining the personalities of users conveyed by their published short texts has a wide and important range

of applications, from detecting abnormal behavior of online users to accurately customization recommendation.

Recently, many studies utilized statistical information of words appearing in web texts generated by users to achieve personality prediction. Intuitively, statistical information of appearing words lacks semantic information. Although some studies explored personality representations contained in semantic information in web texts, these methods lack universality since the employed datasets are not only small but also are only collected in terms of a small personality trait. In addition, by combining the questionnaire data of subjects, some studies utilized their personal data generated by social networks to conducted experiments for personality prediction [7], [8]. However, these methods still have much room for improvement as they lack large-scale textual datasets including personality labels. Advancement in this area can be improved using large-scale datasets with coarse- and fine-grained typologies, adaptable to multiple downstream tasks, i.e., psychology knowledge graph construction and intelligence collection of psychological questionnaires.

In the field of psychology, it is difficult and expensive to obtain a large amount of personalities data, since the personalities of a user is only measured by questionnaires. By constructing personality prediction models, many scholars want to directly predict the personality types of users from their text data in social networks, when a high-quality text dataset of personality types is especially important. Most of the current researches related to the Big Five personality prediction are still based on the LIWC lexicon [9], since there is not yet a larger volume of Chinese textual dataset on the Big Five personality types.

Therefore, we provide a large, high quality Chinese textual dataset, *BigFive*, manually annotated by the psychological experts. The *BigFive* contains two manually annotated subdatasets, namely *BigFive5* and *BigFive30*, respectively. The *BigFive5* is a multi-label text dataset

TABLE I
EXAMPLE ANNOTATIONS FROM OUR DATASET.

Sample Text	Label1(s)	Label2(s)
今天天气很好，我们也很好。(It's a beautiful day and we're fine.)	Extroversion	Cheerful
不是一路人怎么抄近道都追不上。(Not all the way how to take a shortcut can not catch up.)	Neuroticism	Stress-prone
我在灰烬中看到了光?在光中看到了你。(I see the light in the ashes? I see you in the light.)	Openness	Imaginative; Emotionally-aware
已经在路上了?那就不要停了!(Already on the road? Then don't stop!)	Conscientiousness	Ambitious

of the Big Five personality that contains five dimensions, i.e., *openness*, *conscientiousness*, *extraversion*, *agreeableness*, and *neuroticism*. The *BigFive30* is a multi-label text dataset with more finely granularly Big Five personality, i.e., the five dimensions are divided into 30 sub-dimensions (which can be found in Appendix). Table I shows an example exhibiting sectional *BigFive* dataset. We designed a personality classification for the *BigFive5* dataset based on the Big Five personality theory [10], and a personality classification method for the *BigFive30* dataset with reference to the studies of [11].

We performed hierarchical clustering of the 30 Big Five personality sub-dimensions and found that sub-dimensions of the same Big Five personality type can often be clustered together. In a downstream task, the potential relationships between the personality grid sub-dimensions were able to group them into higher-level categories, such as Big Five personality types. We provide a power baseline for Big Five personality classification and more fine-grained 30-dimensional personality classification modeling on *BigFive5* and *BigFive30*. By fine-tuning the BERT-based multi-label classification model [12] and the Chinese BERT-wwm pre-training model [13], we obtained an average F1 score of 0.33 on the Big Five personality coarse category of *BigFive5* and 0.66 on the Big Five personality fine-grained category of *BigFive30*. These results leave a lot of room for improvement and suggest that the most current and advanced NLU models do not yet fully address the subtask.

II. RELATED WORK

Our work contains three main components. One performs personality prediction, the other one generates personality dataset, and the last one performs classification. Therefore, we will review related works in terms of personality prediction, personality dataset and classification models in the following paragraphs.

A. Personality Prediction

In recent years, researchers in the fields of natural language processing and psychology have become increasingly interested in using social network data for personality prediction [14]. Many studies on personality prediction have focused on the Big Five personality theory model. [15] utilized the game data of players as well as predictions based on their questionnaire data to produce a dataset, to predict the Big Five personalities of the players. [16] predicts the Big Five personalities of users by

using the images and textual data published by these users in the social networks. In addition, [17] continuously collected Twitter data from 50 users to generate dataset supporting personality prediction. However, these datasets utilized in above researches are self-constructed, often relatively small, so that it is difficult to generalize to different scenarios for personality prediction.

B. Personality Dataset

The largest developed dataset on personality is *myPersonality* [18]. Its textual data was collected from *Facebook* by the *myPersonality* application. *myPersonality* not only contains personality questionnaires but also includes the personal information data filled out by users in *Facebook*. Although such datasets are significant for studying personality prediction, they are difficult to be obtained and lack sufficient labels. That is, text classification datasets for similar sentiment classification tasks [19] in the field of personality prediction are scarce.

C. Classification Models

Both feature-based models and neural network models have been utilizing to construct automatic personality classification models. Feature-based models typically use hand-built dictionaries, such as SC-LIWC [20]. The personality prediction task is similar to sentiment prediction, where both the transformer-based model [21] and the BERT model pre-trained with the language model achieved state-of-the-art performance in the sentiment prediction task, recently. That is why we select the BERT model to support our experiment construction. The experimental results also achieved better performance than the traditional models.

III. BIGFIVE

Our dataset is composed of 13,478 Chinese phrases from social networks and labeled with one or more labels of the Big Five personality. Our dataset contains two layers of labels, the first layer represents the five dimensions of the Big Five personality, which are *openness*, *conscientiousness*, *extraversion*, *agreeableness*, and *neuroticism*, and the second layer shows the 30 sub-dimensions, i.e., the more fine-grained Big Five personality that are divided from the five dimensions. Note that each dimension is divided into six sub-dimensions, as shown in Appendix. For example, *openness* is divided into *imaginative*, *artistic*, *emotionally-aware*, *actions*, *intellectual* and *liberal*.

A. Data Selection & Preprocessing

The textual data of our *BigFive* dataset comes from various social network platforms, mainly crawled from Weibo, WeChat friend zone, Qzone, comments of NetEase cloud music, Douban movie reviews, etc. Initially, 200K of rough data were obtained, non-Chinese phrase text was deleted, and the following processing was done on the text.

Filtering pornography. Phrases containing pornographic messages were removed. However, phrases containing vulgarity and aggression were retained, since some important negative personality traits that the Big Five contains are normally represented by these phrases.

Filtering discrimination. During the labeling process, labelers review phrases for discrimination on the basis of race, gender, sexual orientation or physical disability and remove these phrases.

Phrase length filtering. The lengths of the retained Chinese phrases are between 10 and 55 Chinese characters, including punctuation. Because we found that phrases with lengths longer than 10 Chinese characters contain more rich information of personality traits, and phrases with lengths below 55 Chinese characters occupied more than 60% of the crawled data, after analyzing the crawled data.

Special Noun Masking. Masking of human names and religious terms is usually done using named entity recognition techniques for identification masking.

Eliminate Popularity. In order to prevent hot events from taking up too large a proportion of the textual data, for the microblog, we only crawled 200 microblogs with the same position (i.e., city, district and town); for the NetEase cloud music reviews, we selected different songs of the top ten singers in the hotness list from different music genres; for the Douban movie reviews, we selected the top ten rated movies from different film and TV genres. Various constraints were also imposed on other platforms to ensure that the crawled data conformed to the real distributions and were not affected by the hot issues at specific time points.

B. Data Balance

Since the distributions of the personalities of people in the real world are already extremely unbalanced, the data in social networks are inevitably unbalanced as well. However, it is acceptable at the Big Five personality level.

In the more fine-grained sub-dimensional traits, the imbalance of the data is more obvious, and the requirement of the data volume is higher. For the imbalance problem of the personality grid sub-dimensional class, some measures have been taken, and the current main methods are: in terms of data sources, no more than 5% proportion of manually collected data is added, and this part of data requires the collector to go to the social network to collect according to a certain sub-dimensional personality trait, which this is equivalent to pre-labeling the collected data with a label, and from the experimental results, the imbalance of this dataset can be effectively mitigated by this method.

C. Data Annotation.

Our *BigFive* dataset was labeled by the psychological experts. For each sample, there are three psychologists were assigned for labeling, at least. For some samples that only one psychologist submitted the corresponding label(s), two other psychologists will be assigned to submit the label(s) again. All the labelers are native Chinese speaking psychologists.

The labelers were asked to identify the personality sub-dimension traits embedded in the author of the text, giving predefined definitions of the personality sub-dimensions and some sample texts for each emotion. The labelers were allowed to select multiple personality traits, but were asked to select only those that they had reason to believe were embedded in the text. For uncertain phrases, uniformly were asked to label as meaning unknown.

IV. DATA ANALYSIS

Table II shows the summary statistics of our data. From the table, we can see that the majority of the samples (60%) are labeled as single labels, and 40% of the data have more than two labels. In the following subsections, we will introduce the data analysis in detail.

TABLE II
SUMMARY STATISTICS OF OUR LABELED DATA.

Number of examples	13,478
Number of personalities	5 or 30
Number of unique raters	19
Number of raters/example	3 or 4
Number of labels per example	1: 60%
	2: 28%
	3: 10%
	4+: 2%

A. Interrater Correlation

Fig. 1 shows the distributions of the personality grid sub-dimensional labels. It can be easily observed that even though some balancing steps of personality traits and sub-dimensional traits were performed in the data selection and screening process, there is a huge difference in the frequency of personality trait labels (e.g., *Cheerful* appear more than 100 times more often than *Organized*). However, given the inherent unbalanced nature of personality traits that people exhibit in the real world, the presentation of the data results is reasonable.

The consistency of annotation is estimated for each personality type or person-grid dimension by calculating the correlation between annotators. For each annotator $r \in R$, Spearman's correlation of annotation results between labelers is calculated, and the range of data annotated by the labelers is consistent.

In addition, Fig. 1 shows that *Cheerful*, *genuine*, and *artistic* have the highest labeling consistency, and *anxiety-prone*, *self-conscious*, and *organized* have the lowest

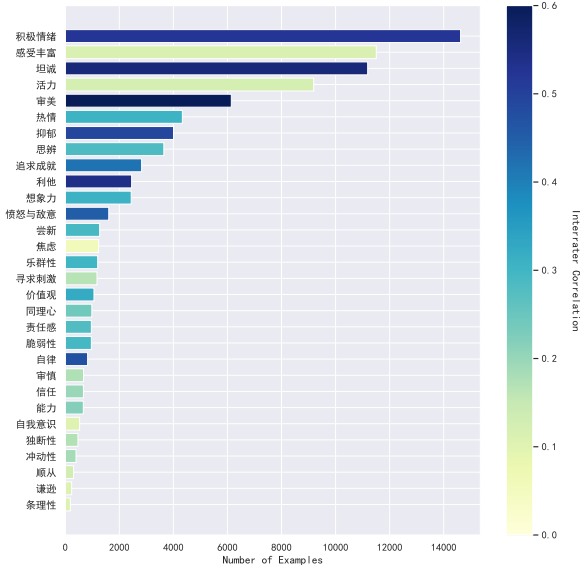


Fig. 1. Our personalities categories, ordered by the number of examples where at least one rater uses a particular label. The color indicates the interrater correlation.

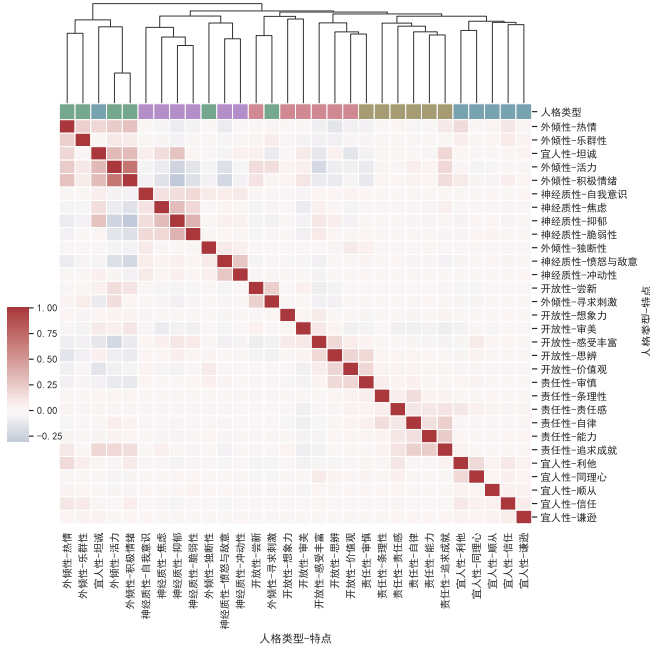


Fig. 2. The heatmap shows the correlation between ratings for each personalities. The dendrogram represents the a hierarchical clustering of the ratings. The personalities labeling was done a priori and it shows that the clusters closely map onto personalities groups.

labeling consistency. The frequency of most personality traits was positively correlated with labeling consistency, but there were exceptions; personality traits with low frequency could also have high labeling consistency (e.g., *disciplined*), while those with high frequency could also have low labeling correlations (e.g., *emotionally aware* and *energetic*).

B. Correlation Among Personalities

In order to better understand the relationships between the Big Five personality traits in our dataset, correlations between them were analyzed. Let T be the total number of samples contained in this dataset, and obtain a T -dimensional vector representation of each personality trait by averaging the annotations of each annotator, and use it to calculate the Pearson correlation coefficient between each pair of personality traits. The heat map in Fig. 2 shows that there is usually a strong correlation between the sub-dimensions of a personality type.

In addition, hierarchical clustering was used to cluster these person-grid dimensional traits to reveal the relationship between the two layers of labels employed in our dataset. The distance and the sum of squares of deviations were used to calculate the correlations among the dimensions in the annotator evaluation score data. The dendrogram at the top of Fig. 2 shows that the stronger correlations among personality traits are neighbors, with most of the sub-dimensions under the same type of Big Five personality clustered together. Some exceptions also occur (e.g., *actions* and *extraversion*). The data were also categorized at the level of Big Five personality types with multiple labels and some correlation between the labels.

C. Linguistic Correlates of Emotions

In this paper, we utilize TF-IDF method to analyze the lexical correlations of personalities on each category of data text. The labels with top 2 TF-IDF values for each category are listed in Table III. As shown in Table III, some labels belong to important lexical sets of multiple personalities. For example, the label *like* is an important word belongs to the lexical sets of personalities *aesthetic feelings*, *enthusiasm*, *vitality*, *trust*, *honesty*, *obedience*, etc. That is, the situation of multiple labels appeared in a same sample or a same label appeared in multiple samples is reasonable. Therefore, accurately obtaining personalities conveyed by labels requires more context, since it is unrealistic to explain the personality contained in samples only from the perspective of vocabulary.

V. MODELING

In this paper, a strong baseline personality prediction model is presented for our *BigFive*.

A. Data Preparation

To reduce noise in the data, our dataset was filtered out of samples with only one annotator label, and then samples with at least one label were retained, and the amount of data remaining after this operation was 86% of the original annotated data. It was randomly divided into training, development, and test sets

TABLE III
TOP 2 WORDS ASSOCIATED WITH EACH PERSONALITIES (**OPENNESS**, **CONSCIENTIOUSNESS**, **EXTRAVERSION**, **AGREEABLENESS**, **NEUROTICISM**).

Imaginative	Artistic	Emotionally-aware	Actions	Intellectual	Liberal
月亮(moon)	喜欢(like)	温柔(gentle)	尝试(try)	生活(life)	生活(life)
夏天(summer)	好听(nice)	喜欢(like)	第一次(first time)	人生(life)	永远(forever)
Self-assured	Organized	Dutiful	Ambitious	Disciplined	Cautious
天才(genius)	记录(record)	工作(work)	加油(come on)	打卡(Clock in)	止损(Stop loss)
目标(goal)	锻炼(exercise)	老师(teacher)	努力(strive)	努力(strive)	慎重(careful)
Friendly	Sociable	Assertive	Energetic	Adventurous	Cheerful
喜欢(like)	朋友(friend)	世界(world)	喜欢(like)	生活(life)	喜欢(like)
加油(come on)	快乐(happy)	真的(real)	快乐(happy)	快乐(happy)	哈哈(ha ha)
Trusting	Genuine	Generous	Compliance	Humble	Empathetic
喜欢(like)	喜欢(like)	加油(come on)	放心(relax)	低调(Low-key)	加油(come on)
陪伴(accompany)	真的(real)	希望(hope)	喜欢(like)	请教(consult)	心疼(feel sorry)
Anxiety-prone	Aggressive	Melancholy	Self-conscious	Impulsive	Stress-prone
讨厌(hate)	做作(affected)	不想(Don't want)	尴尬(awkward)	快快(hurry up)	孤独(lonely)
疫苗(vaccine)	无语(speechless)	难过(sad)	害怕(fear)	一秒(one second)	没意思(boring)

TABLE IV
RESULTS BASED ON BIGFIVE30 TAXONOMY.

BigFive30	Precision	Recall	F1
Imaginative	0.25	0.05	0.09
Artistic	0.57	0.68	0.62
Emotionally-aware	0.35	0.47	0.4
Actions	0.6	0.35	0.44
Intellectual	0.18	0.17	0.18
Liberal	0.00	0.00	0.00
Self-assured	0.71	0.53	0.61
Organized	0.00	0.00	0.00
Dutiful	0.47	0.28	0.35
Ambitious	0.44	0.33	0.38
Disciplined	0.53	0.58	0.55
Cautious	0.00	0.00	0.00
Friendly	0.43	0.27	0.33
Sociable	0.63	0.4	0.49
Assertive	0.38	0.12	0.19
Energetic	0.42	0.41	0.42
Adventurous	0.14	0.03	0.05
Cheerful	0.51	0.62	0.56
Trusting	0.38	0.10	0.16
Genuine	0.44	0.57	0.49
Generous	0.46	0.43	0.44
Compliance	0.00	0.00	0.00
Humble	0.00	0.00	0.00
Empathetic	0.83	0.63	0.71
Anxiety-prone	0.77	0.86	0.81
Aggressive	0.55	0.32	0.40
Melancholy	0.41	0.36	0.38
Self-conscious	0.76	0.6	0.67
Impulsive	0.50	0.12	0.19
Stress-prone	0.00	0.00	0.00
macro-average	0.39	0.31	0.33
std	0.25	0.25	0.24

TABLE V
RESULTS BASED ON BIGFIVE5 TAXONOMY.

BigFive5	Precision	Recall	F1
Openness	0.65	0.70	0.68
Conscientiousness	0.68	0.66	0.67
Extraversion	0.63	0.79	0.70
Agreeableness	0.55	0.59	0.57
Neuroticism	0.70	0.70	0.70
macro-average	0.64	0.69	0.66
std	0.06	0.07	0.05

and *neuroticism*. A dimension level, which is denoted as *BigFive30*, divides labels into 30 categories, such as *aestheticfeelings*, *enthusiasm*, *vitality*, *trust*, *honesty*, *obedience*, etc. The corresponding mapping relations are shown in Fig. 2.

B. Model Architecture

Experiments are conducted using the BERT-based model. This model adds a dense output layer on top of the pre-trained model for fine-tuning, and uses a sigmoid cross-entropy loss function to support multi-label classification.

C. Parameter Settings

For the hyperparameters set by Devlin et al. only the batch size and learning rate were changed. it was found that at least 12 epochs were required to learn the data, but training more epochs would lead to overfitting. After extensive experiments, it was found that a small batch size of 16 and a learning rate of 5e-6 yielded the best performance.

D. Results

Table IV summarizes the performance of our BERT-based model on the dataset *BigFive30*, which achieves an average F1-score of .33 (std=.24). As shown in Table IV, our BERT-based model performs well on personality labels with explicitness, such as *Anxiety – prone* (.81), *Empathetic* (.71)

in the ratio of 8:1:1, and the test set was evaluated only after the model was finalized.

Grouping personalities. Following [11], a hierarchical grouping of big five personality is created, and the performance that the model performs on each level of the hierarchy is also evaluated. A personality level, which is called *BigFive5*, divides labels into five categories, i.e., *openness*, *accountability*, *extroversion*, *agreeableness*

and *Self – conscious* (.67), while achieving an average F1-score of 0 on personality labels with very low frequency, such as *Liberal*, *Organized* and *Cautious*, etc.

Table V summarizes the performance of our BERT-based model on the dataset *BigFive5*, which achieves an average F1-score of .66 (std=.05). As shown in Table IV and Table V, the performance of our BERT-based model significantly increases when the number of label categories goes from 30 to five. This demonstrates that grouping with personality level significantly reduces confusions and uncertainties among categories grouped by dimension level.

VI. CONCLUSION

In this paper, we proposed *BigFive*, a large, high quality dataset manually labeled by the psychological experts for coarse- and fine-grained personality prediction. A detailed data analysis, which demonstrates the reliability of five categories grouped by personality level and 30 categories grouped by dimension level, was also reported. In addition, a strong baseline was build based on a fine-tuning BERT model. Although the experimental results demonstrated the efficiency of our *BigFive*, it suggested that there is still plenty of room for improvement.

Considering that the large-scale datasets with coarse- and fine-grained typologies are adaptable to multiple downstream tasks, e.g., psychology knowledge graph construction. In the future work, we will explore the intelligence collection of psychological questionnaires in terms of user psychological assessments, and extend to the other domains of personality theories.

Data Disclaimer: We are aware that the dataset contains biases and is not representative of global diversity. We are aware that the dataset contains potentially problematic content. Potential biases in the data include: Inherent biases and user base biases in *Weibo*, *Netease cloud review*, *Douban film review* and other social networks, the offensive/vulgar word lists used for data filtering, inherent or unconscious bias in assessment of offensive identity labels. All these likely affect labeling, precision, and recall for a trained model. Anyone using this dataset should be aware of these limitations of the dataset.

ACKNOWLEDGMENT

This work was supported by the Anhui University Collaborative Innovation center project [No.GXXT-2022-091], the National Natural Science Foundation of China [No.62006003] and the Natural Science Foundation of Anhui Province of China [No.2208085QF197].

REFERENCES

- [1] L. A. Pervin, *The science of personality*. Oxford university press, 2003.
- [2] S. D. Gosling, P. J. Rentfrow, and W. B. Swann Jr, "A very brief measure of the big-five personality domains," *Journal of Research in personality*, vol. 37, no. 6, pp. 504–528, 2003.
- [3] J. K. White, S. S. Hendrick, and C. Hendrick, "Big five personality variables and relationship constructs," *Personality and individual differences*, vol. 37, no. 7, pp. 1519–1530, 2004.
- [4] O. P. John, E. M. Donahue, and R. L. Kentle, "Big five inventory," *Journal of Personality and Social Psychology*, 1991.
- [5] L. M. Hough, "The 'big five' personality variables—construct confusion: Description versus prediction," *Human performance*, vol. 5, no. 1-2, pp. 139–155, 1992.
- [6] R. R. McCrae and O. P. John, "An introduction to the five-factor model and its applications," *Journal of personality*, vol. 60, no. 2, pp. 175–215, 1992.
- [7] R. R. McCrae and P. T. Costa Jr, "The five-factor theory of personality," 2008.
- [8] L. Li, A. Li, B. Hao, Z. Guan, and T. Zhu, "Predicting active users' personality based on micro-blogging behaviors," *PLoS one*, vol. 9, no. 1, p. e84997, 2014.
- [9] J. W. Pennebaker, M. E. Francis, and R. J. Booth, "Linguistic inquiry and word count: Liwc 2001," *Mahway: Lawrence Erlbaum Associates*, vol. 71, no. 2001, p. 2001, 2001.
- [10] O. P. John, L. P. Naumann, and C. J. Soto, "Paradigm shift to the integrative big five trait taxonomy: History, measurement, and conceptual issues," 2008.
- [11] P. T. Costa Jr and R. R. McCrae, "Domains and facets: Hierarchical personality assessment using the revised neo personality inventory," *Journal of personality assessment*, vol. 64, no. 1, pp. 21–50, 1995.
- [12] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, "Bert: Pre-training of deep bidirectional transformers for language understanding. the north american chapter of the association for computational linguistics: Human language technologies (naacl-hlt) (2019)," 2019.
- [13] Y. Cui, W. Che, T. Liu, B. Qin, S. Wang, and G. Hu, "Revisiting pre-trained models for Chinese natural language processing," in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: Findings*. Online: Association for Computational Linguistics, Nov. 2020, pp. 657–668. [Online]. Available: <https://www.aclweb.org/anthology/2020.findings-emnlp.58>
- [14] D. Nguyen, A. S. Doğruöz, C. P. Rosé, and F. De Jong, "Computational sociolinguistics: A survey," *Computational linguistics*, vol. 42, no. 3, pp. 537–593, 2016.
- [15] Z. Halim, M. Atif, A. Rashid, and C. A. Edwin, "Profiling players using real-world datasets: Clustering the data and correlating the results with the big-five personality traits," *IEEE Trans. Affect. Comput.*, vol. 10, no. 4, pp. 568–584, 2019. [Online]. Available: <https://doi.org/10.1109/TAFFC.2017.2751602>
- [16] D. Azucar, D. Marengo, and M. Settanni, "Predicting the big 5 personality traits from digital footprints on social media: A meta-analysis," *Personality and individual differences*, vol. 124, pp. 150–159, 2018.
- [17] J. Golbeck, C. Robles, M. Edmondson, and K. Turner, "Predicting personality from twitter," in *2011 IEEE third international conference on privacy, security, risk and trust and 2011 IEEE third international conference on social computing*. IEEE, 2011, pp. 149–156.
- [18] M. Kosinski, D. Stillwell, and T. Graepel, "Private traits and attributes are predictable from digital records of human behavior," *Proceedings of the national academy of sciences*, vol. 110, no. 15, pp. 5802–5805, 2013.
- [19] D. Demszky, D. Movshovitz-Attias, J. Ko, A. Cowen, G. Nemade, and S. Ravi, "Goemotions: A dataset of fine-grained emotions," in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 2020, pp. 4040–4054.
- [20] Y. Yuan, B. Li, D. Jiao, and T. Zhu, "The personality analysis of characters in vernacular novels by SC-LIWC," in *Human Centered Computing - Third International Conference, HCC 2017, Kazan, Russia, August 7-9, 2017, Revised Selected Papers*, ser. Lecture Notes in Computer Science, Q. Zu and B. Hu, Eds., vol. 10745. Springer, 2017, pp. 400–409. [Online]. Available: https://doi.org/10.1007/978-3-319-74521-3_43
- [21] T. Wolf, L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, P. Cistac, T. Rault, R. Louf, M. Funtowicz, J. Davison, S. Shleifer, P. von Platen, C. Ma, Y. Jernite, J. Plu, C. Xu, T. L. Scao, S. Gugger, M. Drame, Q. Lhoest, and A. M. Rush, "Transformers: State-of-the-art natural language processing," in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*. Online: Association for Computational Linguistics, Oct. 2020, pp. 38–45. [Online]. Available: <https://www.aclweb.org/anthology/2020.emnlp-demos.6>

APPENDIX

The five dimensions of the Big Five as well as their corresponding sub-dimensions.

1 OPENNESS: It shows that a person is emotional, creative, and imaginative. It contains *Imaginative, Artistic, Emotionally-aware, Actions, Intellectual* and *Liberal*.

1.1 Imaginative: It shows that a person likes to be full of fantasy and create a more interesting and rich world. Imaginative and daydreaming.

1.2 Artistic: It shows that a person values aesthetic experience and can be moved by art and beauty.

1.3 Emotionally-aware: It shows that a person easily perceives his emotions and inner world.

1.4 Actions: It shows that a person likes to touch new things, travel outside and experience different experiences.

1.5 Intellectual: It shows that a person is curious, analytical, and theoretically oriented.

1.6 Liberal: It shows that a person likes to challenge authority, conventions, and traditional ideas.

2 CONSCIENTIOUSNESS: It shows that this person is very organized, disciplined, and thoughtful. It contains *Self-assured, Organized, Dutiful, Ambitious, Disciplined* and *Cautious*.

2.1 Self-assured: It shows that this person is confident in his own abilities.

2.2 Organized: It shows that this person is well organized, likes to make plans and follow the rules.

2.3 Dutiful: It shows that this person is responsible, trustworthy, polite, organized, and meticulous.

2.4 Ambitious: It shows that this person pursues success and excellence, usually has a sense of purpose, and may even be regarded as a workaholic by others.

2.5 Disciplined: It shows that this person will do his best to complete work and tasks, overcome difficulties, and focus on his own tasks.

2.6 Cautious: It shows that this person is cautious, logical, and mature.

3 EXTRAVERSION: It shows that this person is very sociable, outgoing, and socially confident. It contains *Friendly, Sociable, Assertive, Energetic, Adventurous* and *Cheerful*.

3.1 Friendly: It shows that this person often expresses positive and friendly emotions to those around him.

3.2 Sociable: It shows that this person likes to get along with others and likes crowded occasions.

3.3 Assertive: It shows that this person likes to be in a dominant position in the crowd, directing others, and influencing others' behavior.

3.4 Energetic: It shows that this person is energetic, fast-paced, and full of energy.

3.5 Adventurous: It shows that this person likes noisy noise, likes adventure, seeks excitement, flashy, seeks strong excitement, and likes adventure.

3.6 Cheerful: It shows that this person easily feels various positive emotions, such as happiness, optimism, excitement, etc.

4 AGREEABLENESS: It shows that this person is very cooperative, trusting and well-loved. It contains *Trusting, Genuine, Generous, Compliance, Humble* and *Empathetic*.

4.1 Trusting: It shows that the person believes that others are honest, credible, and well-motivated.

4.2 Genuine: It shows that the person thinks that there is no need to cover up when interacting with others, and appear frank and sincere.

4.3 Generous: It shows that this person is willing to help others and feel that helping others is a pleasure.

4.4 Compliance: It shows that this person does not like conflicts with others, in order to get along with others, willing to give up their position or deny their own needs.

4.5 Humble: It shows that this person does not like to be pushy and unassuming.

4.6 Empathetic: It shows that the person is compassionate and easy to feel the sadness of others.

5 NEUROTICISM: It shows that the person is extremely anxious, unhappy, pessimistic or depressed. It contains *Anxiety-prone, Aggressive, Melancholy, Self-conscious, Impulsive* and *Stress – prone*.

5.1 Anxiety-prone: It shows that this person is easy to feel danger and threat, easy to be nervous, fearful, worried, and upset.

5.2 Aggressive: It shows that this person is easy to get angry, and will be full of resentment, irritability, anger and frustration after feeling that he has been treated unfairly.

5.3 Melancholy: It shows that this person is easy to feel sad, abandoned, and discouraged.

5.4 Self-conscious: It shows that this person is too concerned about how others think of themselves, is afraid that others will laugh at themselves, and tend to feel shy, anxious, low self-esteem, and embarrassment in social situations.

5.5 Impulsive: It shows that when the person feels strong temptation, it is not easy to restrain, and it is easy to pursue short-term satisfaction without considering the long-term consequences.

5.6 Stress-prone: It shows that this person has poor ability to cope with stress, becoming dependent, losing hope, and panicking when encountering an emergency.