



Alibaba Cloud Object Storage Services (OSS)

By: Sunil Dangal

**Guide to deploy static Web
App in Alibaba Object
Storage Services (OSS)**

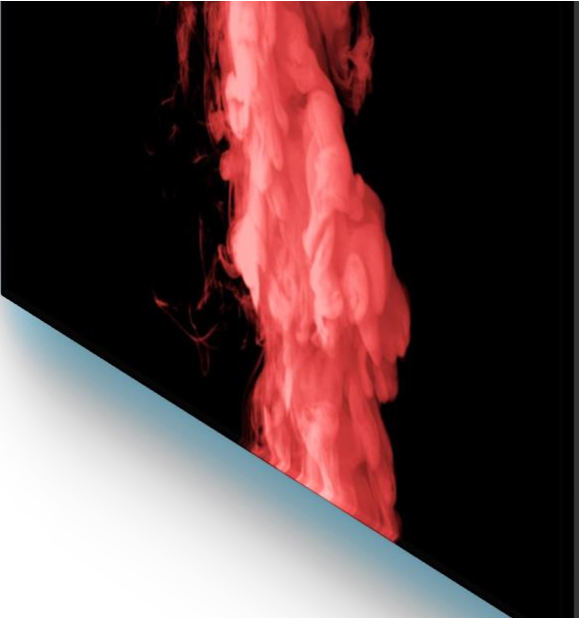


Table of Contents

Alibaba Cloud Object Storage Services (OSS) 1

TASK 1: Introduction**3**

 Stage 1:.....4

TASK 2: Prompting**5**

TASK 3**35**

Conclusion**35**

TASK 1: Introduction

Instructions to Create Portfolio and deploy to Alibaba Cloud.

I will show you how to generate static file for Portfolio App using AI IDE (Google Antigravity) and deploy it to Alibaba Cloud.

Stage 1:

For example, let's say I want to make Portfolio App.

Stage 1:


I am going to use Google AntigraVity to Develop hello-web-app.

- If you don't have Google AntigraVity Installed you can download from here: <https://antigravity.google/download>

- Download: <https://antigravity.google/download>


- After Installing you can add ChatGPT (codex), gemini, Claude, extensions in your IDE etc of your choice from the extensions menu
- For this Project I am going to use ChatGPT (codex) for this project.

- I am going to create a new folder for this “hello-web-app” project and open it.

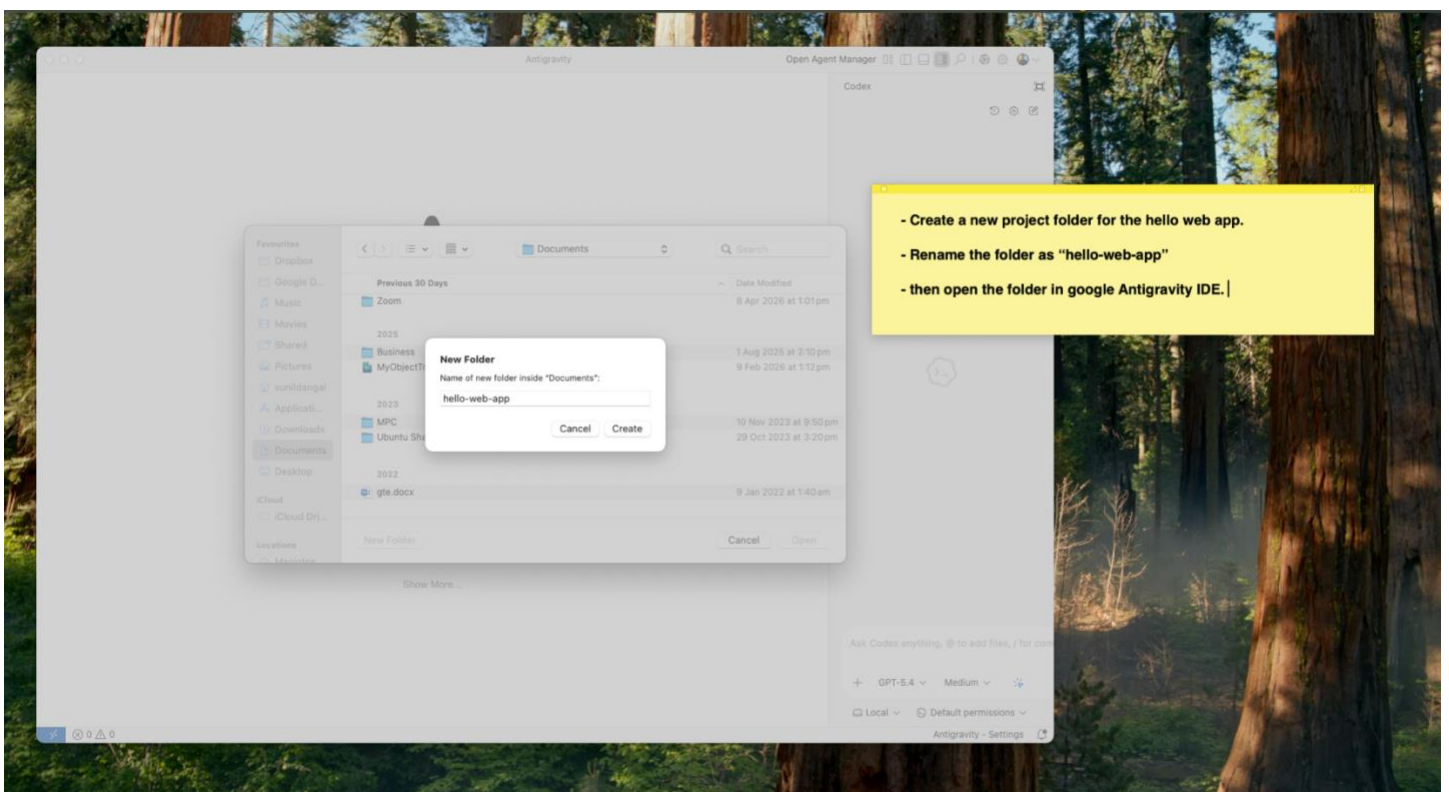

- You can add ChatGPT, Gemini, Claude, etc. any extension as shown below:

I am going to use codex for this project

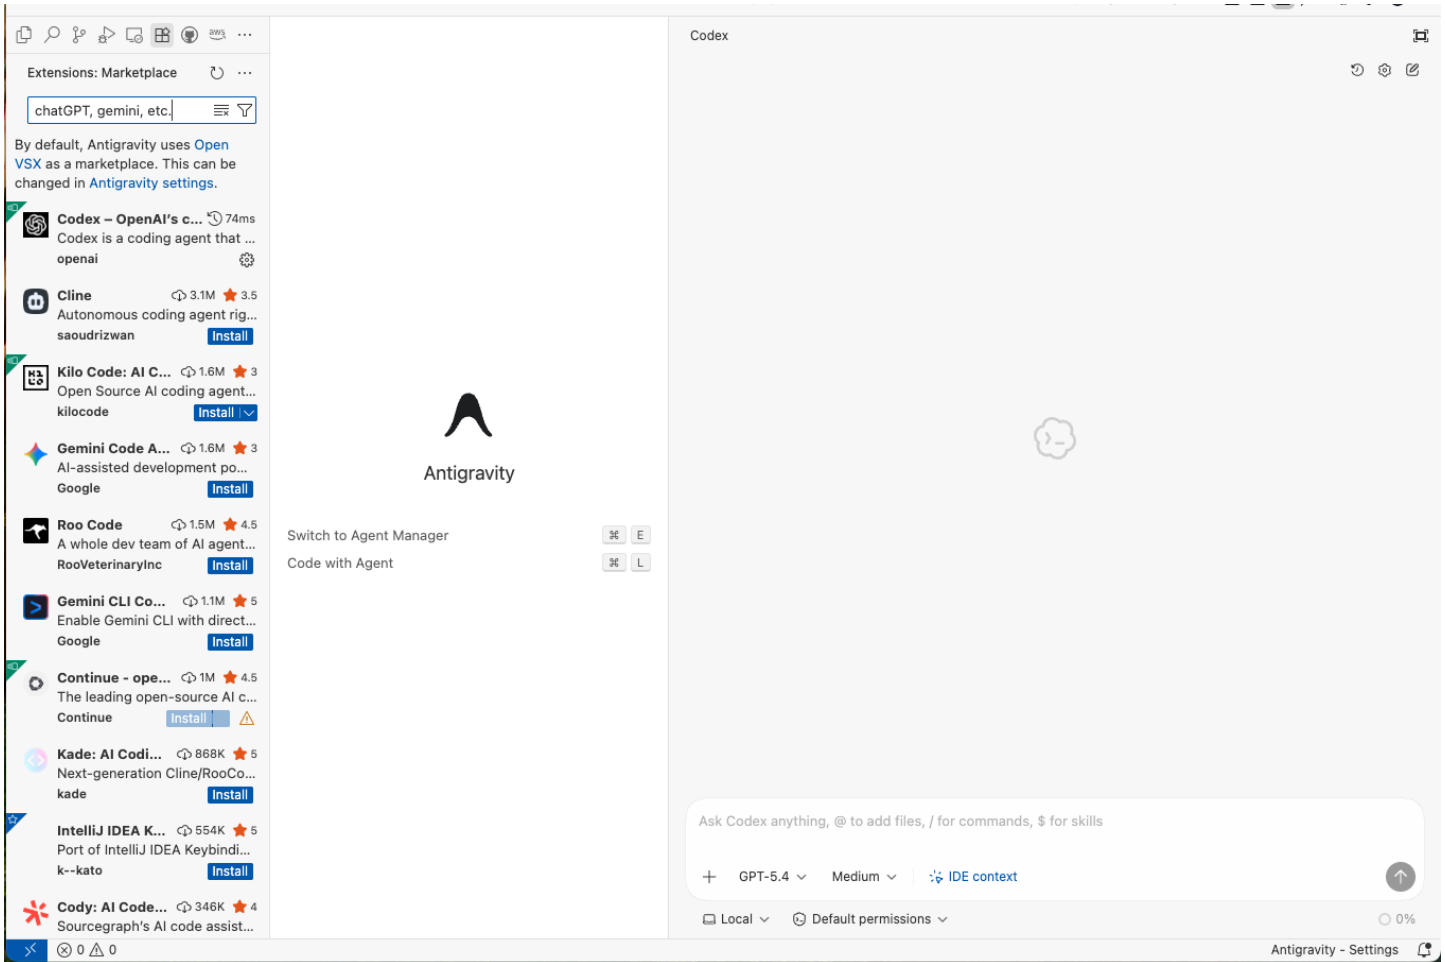

TASK 2: Prompting

- Now, I am going to copy paste below prompt to the codex.

Create a complete, visually impressive, fully responsive static portfolio website using only these 3 files:

- index.html
- style.css
- script.js

Important constraints:

- No frameworks
- No React
- No Tailwind
- No build tools
- No backend
- Must run by opening index.html directly in browser
- Must be suitable for deployment to Alibaba Cloud OSS static hosting
- Provide complete working code for all 3 files

- Code must be clean, structured, commented, and beginner-friendly
- Do not leave placeholders like “add code here”

Main goal:

Build a futuristic personal portfolio website for a student / junior cloud learner / AI Software Engineer named XYZ.

Brand concept:

The visual identity should be inspired by the meaning of the name:

- “Light” = warm orange glow, energy, light, motion
- “Dark” = cool blue/cyan glow, cloud, network, calm technology

Use a strong orange + blue color system across the whole portfolio.

Overall design direction:

- Retro-futuristic
- Dark modern cyber/cloud UI
- Premium personal portfolio
- Inspired by cloud infrastructure dashboards and terminal portfolios
- Clean, elegant, not overly cluttered
- Professional enough to showcase on LinkedIn

Theme requirements:

- Include both Dark Mode and Light Mode
- Dark mode should be the default
- Theme toggle should be smooth and polished
- In dark mode use deep navy / black background with orange + cyan / blue glow
- In light mode keep the same orange + blue identity but with softer bright backgrounds

Critical background animation requirement:

Create a visually rich animated background that feels like a cloud network map.

The background should include:

- subtle animated grid lines
- glowing nodes
- moving light pulses traveling through connection lines
- large circular radar-like rings
- floating particles
- soft animated blobs or gradients
- labels such as:
 - ALIBABA CLOUD
 - GLOBAL NETWORK
 - REGION: INDONESIA (JAKARTA)
- these labels should feel like decorative cloud-infrastructure UI elements
- background must feel alive and high-tech but not too distracting
- animations must be lightweight and smooth
- use only CSS and JavaScript
- no canvas libraries
- no external animation libraries

The animated background should feel similar to:

- futuristic infrastructure map
- global cloud routing UI
- network flow between cloud provider and regional deployment
- elegant DevOps / terminal portfolio atmosphere

Hero layout requirements:

The page should have a premium split layout:

- left sidebar / profile panel
- center large terminal-style showcase panel
- right network/cloud status panel

Include these elements:

LEFT PANEL:

- circular profile image area (use a local image path like profile.jpg)
- name: XYZ
- short role lines such as:
 - Cloud Student
 - Developer
 - AWS Learner
- short personal quote or intro
- navigation links in a stylish futuristic sidebar menu

CENTER PANEL:

- a large fake terminal window
- terminal must be simulated only, not real command execution
- terminal should type out pre-scripted commands and responses
- do not include overly advanced or fake-expert content
- terminal look should be premium and modern

RIGHT PANEL:

- cloud/network status cards
- example labels:
 - Alibaba Cloud
 - Global Network
 - Region: Indonesia (Jakarta)
- small animated status indicators
- time/date panel
- subtle deployment/infrastructure UI cards

Terminal behavior requirements:

Create a fake terminal with preloaded or clickable commands such as:

- help
- whoami
- about
- skills
- projects
- certs
- contact
- cloud
- badge

The terminal output should be based on beginner/intermediate student knowledge only.

Example tone for terminal output:

- learning cloud fundamentals
- building static web apps
- deploying front-end projects
- exploring AWS and Alibaba Cloud
- front-end development with HTML, CSS, JavaScript, React
- backend interest in Python/Django
- aspiring cloud/AI software engineer

Do NOT include:

- fake hacking content
- fake security incidents
- fake advanced Linux admin content
- fake enterprise infrastructure claims
- confusing "kernel advisory" messages that sound too advanced

Instead, create simple, stylish advisory/info messages such as:

- [SYSTEM INFO] Static portfolio ready for deployment.
- [CLOUD INFO] Alibaba OSS is suitable for static hosting.
- [AWS BADGE] AWS Academy Cloud Foundations completed.
- [STATUS] Learning today, building tomorrow.

- [REGION INFO] Deployment target: Indonesia (Jakarta).

Sections required:

1. Home / Hero
2. About
3. Skills
4. Projects
5. Certifications
6. Contact

Content requirements:

Use realistic sample content for XYZ with a student/junior cloud-dev profile.

Include:

- About section describing a learner transitioning into cloud/software development
- Skills section with cards for:
 - HTML
 - CSS
 - JavaScript
 - React
 - Python
 - Django
 - AWS
 - Cloud Fundamentals
 - Git/GitHub
- Projects section with 3 realistic sample projects:
 - Static Portfolio Deployment on Alibaba Cloud OSS
 - Cloud Learning Portfolio
 - Front-End Project Showcase
- Certifications section including:
 - AWS Academy Graduate - Cloud Foundations
 - Azure Cloud foundations
- Contact section should include ONLY:
 - LinkedIn
 - GitHub

Important:

Do not include email, phone number, contact form, Twitter, Facebook, or other social links.

Interactions required:

- smooth scrolling
- sticky nav
- mobile responsive navigation
- section reveal animations using IntersectionObserver
- hover effects
- subtle typing animation in terminal
- small panel glow/pulse effects
- theme toggle
- animated active menu states

Technical and security requirements:

- semantic HTML
- accessible structure
- keyboard-friendly buttons/links
- respect prefers-reduced-motion where reasonable
- do not use eval
- do not use unsafe user-generated HTML injection
- do not use innerHTML for untrusted input
- no inline JavaScript event handlers
- no external JS dependencies
- safe DOM manipulation only

- add code comments explaining important animation and security decisions

Performance requirements:

- optimized for static hosting
- lightweight animations
- avoid heavy effects that would lag on mobile
- no large libraries
- no unnecessary code

Extra styling details:

- give the terminal and cards glassmorphism or soft neon-panel feel
- use rounded corners
- use elegant shadows and glow
- use orange and blue as core accents throughout
- keep typography modern and readable
- add subtle labels like:
 - Built for static deployment
 - Alibaba OSS ready
 - Cloud portfolio showcase


At the top of index.html include this comment:

“This is a static personal cloud portfolio built for deployment to Alibaba Cloud OSS using only HTML, CSS, and JavaScript.”

At the end of your response provide:

1. full code for index.html
2. full code for style.css
3. full code for script.js


It will take few minutes to generate the code for index.html, script.js and style.css files

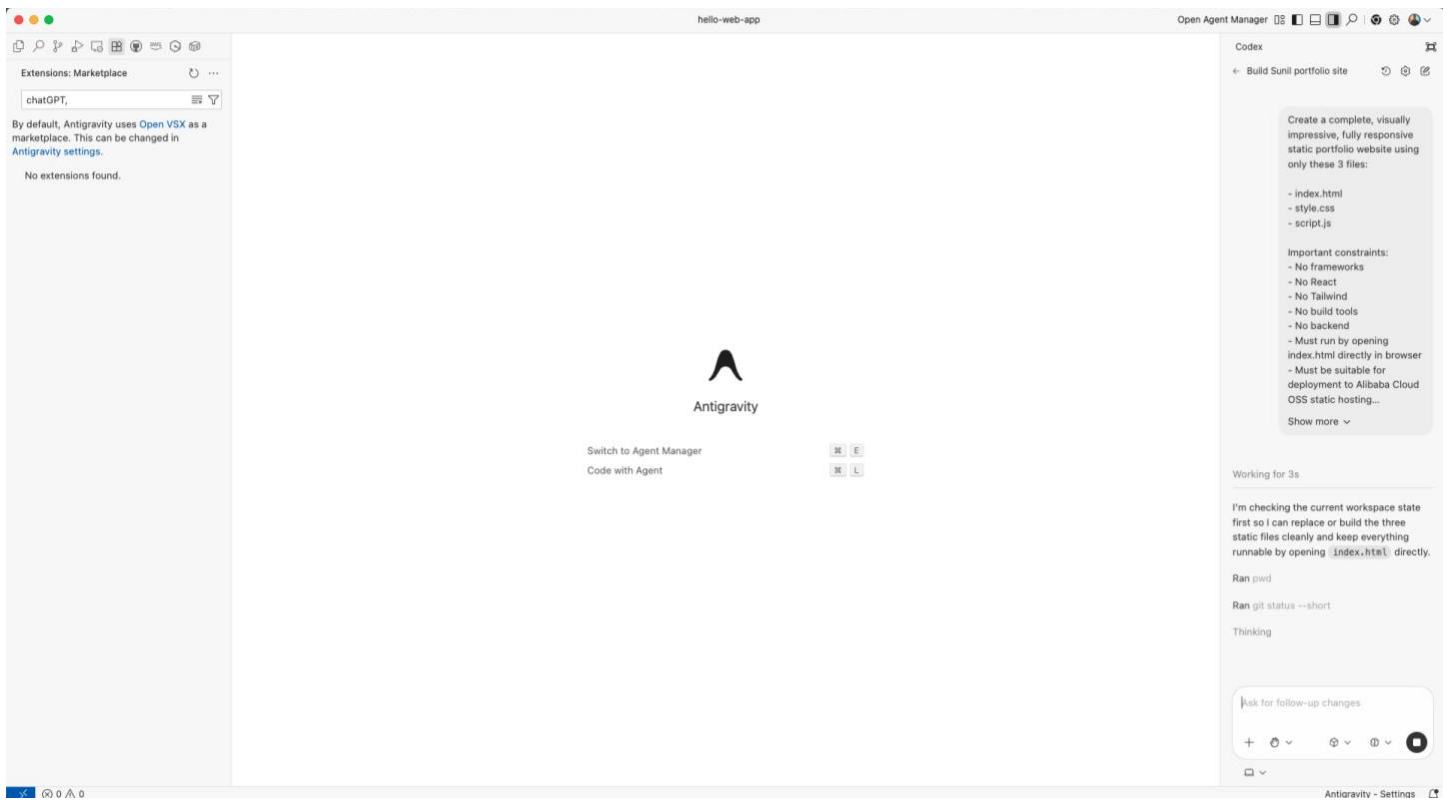

Now it has finished generating the code files




- Feel free to adjust and give prompt as per the design you want it. Tinker around, make changes and finalise the web app.
- Now, I have also uploaded my profile picture in my project directory.

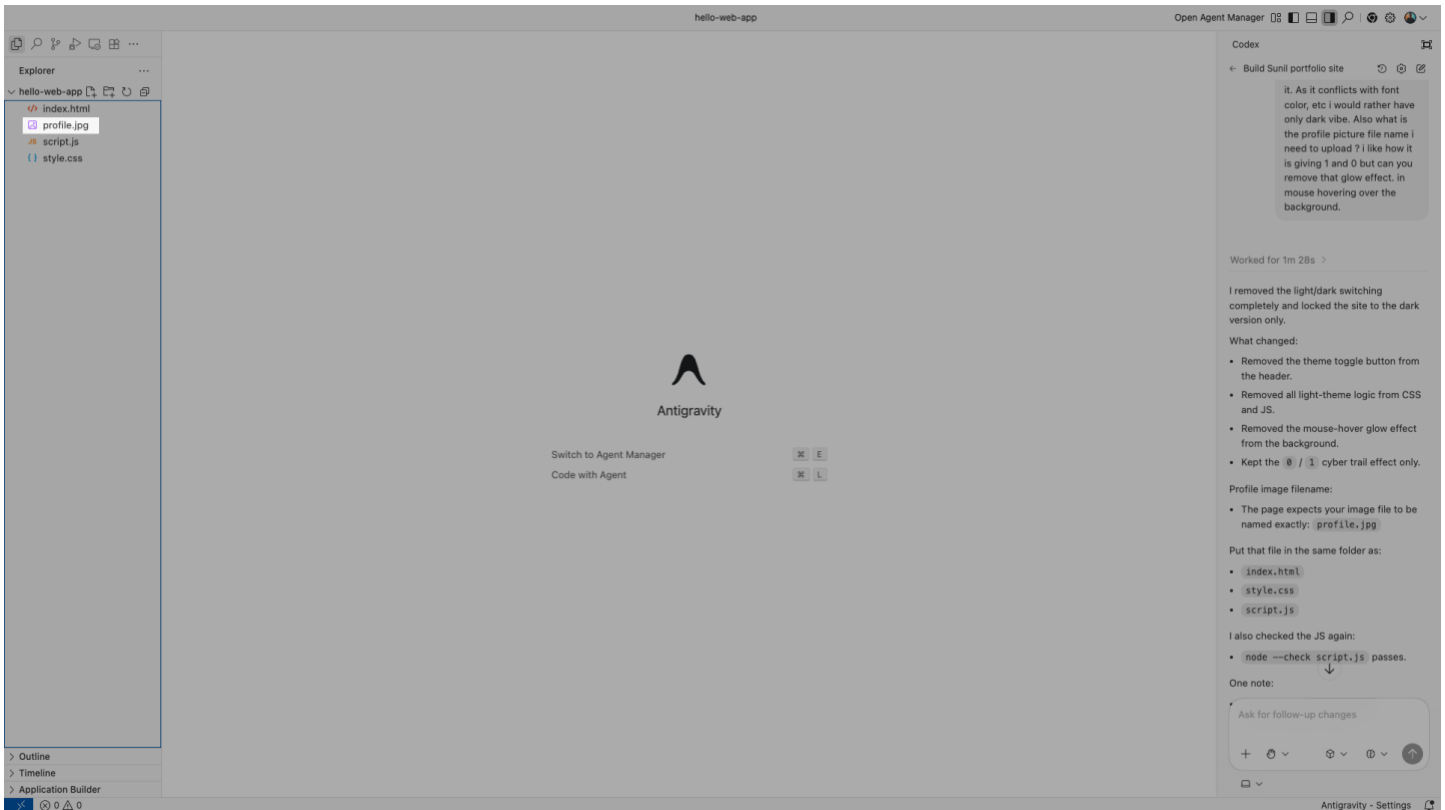

- Open index.html file to see it.

Web App look like this

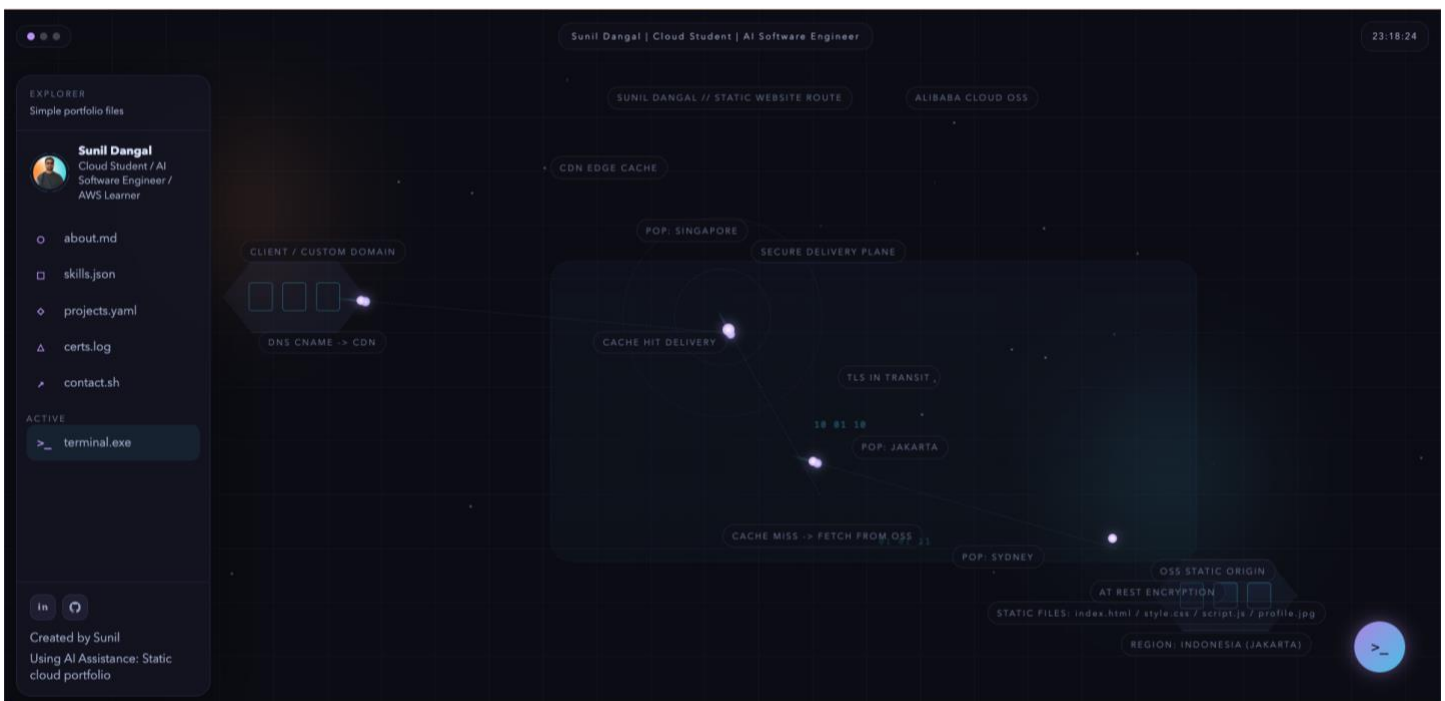

- Now I am going to deploy this app to Alibaba cloud.

- I have already created Alibaba Cloud account and ready to deploy.

Digital Transformation for Your Business in Australia

Start for Free

Register account

English Sign In

Sign up to Alibaba Cloud

Email Address *

Password *

Confirm Password *

Sign Up (Step 1 of 2)

Go Back

Already a member? [Sign In](#)

© 2009-2026 Copyright by Alibaba Cloud All rights reserved

[Privacy Policy](#) | [Terms of Use](#) | [Membership Agreement](#) | [Product Terms](#)



Sign up to Alibaba Cloud

By Phone



Select Country/Region *

Australia

Country/region will be used for currency and tax purposes and cannot be changed after registration.

1. Please enter your mobile phone number and click "Send Message". *

+61

[Redacted]

2. Please enter the verification code below. *

[Redacted]

Resend(34s)

Not receiving messages?

☒ I hereby agree to the Alibaba Cloud International Website [Membership Agreement](#), [Privacy Policy](#), [Product Terms](#) and [Terms of Use](#), under which I am contracting with Alibaba Cloud (Singapore) Private Limited.

Sign Up (Step 2 of 2)

Go Back



Digital Transformation for Your Business in Austr...

Start for Free

A Alicloud supply info





Account created. Complete sign-up and start your cloud journey!

[Return to Previous Page \[↩\]](#)

• Verify Email Address

Before you start using cloud resources, please verify your email. This will be used for account recovery, security verification. [\[↗\]](#)

Verification Code *

Re-obtain code [28s]

[Failed to obtain a verification code? \[↗\]](#)

☐ Alibaba Cloud may use my email to send the latest news and deals.

☒ Alibaba Cloud may call me to discuss deals and offers.

Next →



- I will sign in and see the Screenshots below for the deployment instruction of web app.

Alibaba Cloud Models Overview **Products** Solutions Pricing Resources Partner

Search ECS

EN Contact Us Docs Console Free Trial

Products

Search

Featured Products

- AI & Machine Learning
- Computing >
- Container
- Storage >**
- Networking & CDN
- Security >
- Middleware
- Database >
- Analytics Computing
- Media Services
- Enterprise Services & Cloud Communication
- Domain Names and Websites

Essential Storage Service

- Elastic Block Storage (EBS)**
A high-performance, high-reliability, and low-latency block storage service
- Object Storage Service (OSS)**
Store large amounts of data in the cloud and access it anywhere, anytime
- File Storage NAS**
File storage for ECS, HPC, Container
- Cloud Parallel File Storage (CPFS)**
A fully-managed and scalable parallel file system
- Tablestore**
Store data in a NoSQL database
- Storage Capacity Unit (SCU)**
Plan and optimize your storage budget with flexible storage services

Storage Data Service

- Simple Log Service (SLS)**
An all-in-one service for log-type data
- Cloud Backup**
A BaaS solution that protects your data
- Backup and Disaster Recovery Center (BDRC)**
Enhance data security and regulatory compliance with our enterprise-level...
- Drive and Photo Service**
Build Your Enterprise Storage Space Easily
- Intelligent Media Management**
Processes a large amount of data, including images, videos, audios, and...

Data Transport & Tools

- Data Transport**
Migrate massive data to Alibaba Cloud
- Cloud Storage Gateway (CSG)**
Seamless connection to the cloud storage

Hybrid Cloud Storage

- Hybrid Cloud Storage**
Enterprise-level cloud storage array

I have signed into Alibaba Cloud account

1. Go to Storage
2. Click on Object Storage Service (OSS)
3. Open the OSS Console

Building a Smarter World with Cutting-Edge Products

Explore endless possibilities using products designed for complex and dynamic environments

Object Storage Service (OSS)

Fully managed object storage service to store and access any amount of data from anywhere

[Console](#) [Storage Plan](#) [Contact Sales](#) [Schedule to Watch: OSS Powers AI: Cloud-Scale Data Intelligence >](#)

Try our storage offerings for free and enjoy up to 79% off purchases. [Learn more >](#)

- Open the console

Object Storage Service (OSS)-alibabacloud

Alibaba Cloud Workbench Global Search...

Expenses ICP Enterprise Support Tickets

sunil.*****@cq... Main Account

i OSS is not activated. Please activate OSS.

By default, OSS is billed in the pay-as-you-go method. You can purchase storage plans for some billing items to reduce costs. [Learn more.](#)

[Enable Now](#) [Product Details](#)

Click On Enable Now to Activate it

Object Storage Service (OSS)-alibabacloud

OSS Management Console

https://common-buy-intl.alibabacloud.com/package?spm=5176.8465980.un...

Alibaba Cloud

TicketsBillsEnglishsunil.da****@c...

OSS Bundle (International Site)

OSS

Object Storage Service (OSS)

Object Storage Service (OSS)

OSS Deep Cold Archive Storage Usage-International Site

Feature

OSS Deep Cold Archive

Configuration List

OSS

OSS Deep Cold Archive Storage Usage-International Site

Amount Payable: \$0.00

View Detail >

Click On Buy Now

Buy Now

Object Storage Service (OSS)-alibabacloud

OSS Management Console

Order Confirmation

Confirm Order

Parameters

OSS

Configurations	Billing Method	Quantity	Discounted Price	Discount	Amount Payable
Object Storage Service (OSS): Object Storage Service (OSS)	Pay-as-you-go	1	-	-	-

OSS Deep Cold Archive Storage Usage-International Site

Configurations	Billing Method	Quantity	Discounted Price	Discount	Amount Payable
Feature: OSS Deep Cold Archive	Pay-as-you-go	1	-	-	-

Coupon

Do Not Use Coupons

Terms of Service

By clicking "Pay", you are deemed to have read and agreed to the [Alibaba Cloud International Website Product Terms of Service](#), the relevant [Service Level Agreement](#), as well as the Additional Agreement (where applicable) that you have selected and agreed to.

I have already Setup my card after setting up the account
Now click on Pay to Start using OSS

Amount Payable: \$0.00

View Details >

Pay

Confirm Order

Parameters

OSS

Configurations	Billing Method	Quantity	Discounted Price	Discount	Amount Payable
Object Storage Service (OSS): Object Storage Service (OSS)	Pay-as-you-go	1	-	-	-

OSS Deep Cold Archive Storage Usage

Configurations	Amount Payable
Feature: OSS Deep Cold Archive	-

Expense Details

OSS Pay-as-you-go Billable Items Included	Subscription	\$0.00
OSS Deep Cold Archive Storage Usage-Intern... Pay-as-you-go Billable Items Included	Subscription	\$0.00
Pay-as-you-go: You are charged for the resources that you use.		Total \$0.00

Coupon

Do Not Use Coupon

Terms of Service

By clicking "Pay", you are deemed to have read and agreed to the [Alibaba Cloud International Website Product Terms of Service](#), the relevant [Service Level Agreement](#), as well as the Additional Agreement (where applicable) that you have selected and agreed to.

Disclaimer: This is for University Assignment Purpose only. When you follow this documentation, any payment you incur is at your own risk.

Project

I am doing this because i have done my research and i am doing this using free tier

[Click on Pay](#)

Amount Payable: \$0.00
[View Details >](#)

[Pay](#)

Purchase

Unpaid Orders

Order ID	Product	Type		Pre-tax Amount	Tax	Total Amount Payable
514353305690389	OSS Deep Cold Archive Storage Usage-International Site	Feature: OSS Deep Cold Archive	Details	\$0.00	\$0.00	\$0.00
514353305680389	OSS	Object Storage Service (OSS): Object Storage Service (OSS)	Details	\$0.00	\$0.00	\$0.00

Payment Method [Add Payment Method](#)



MASTERCARD

- Notices when I add OSS it automatically added Deep Cold Archive
- it is added automatically by default.
- Deep Cold Archive is like a long-term storage, digital warehouse, it is not for hosting websites or apps.
- In this project, I am not uploading any files inside Deep Cold Archive
- So I won't be moving any files inside it or retrieving it.
- So I am not going to get charged this way.
- I am only going to use Standard Storage

[Click On Purchase](#)

Total Amount: \$0.00



✔ Congratulations. The service is activated.

N o.	Product Name	Actions
1	OSS Deep Cold Archive Storage Usage-International Site	Console
2	Object Storage Service (OSS)	Console

Open the OSS console now
Click Here

Open the OSS console
now
- Click Here

If the console doesn't open, you must open it manually like how we did it in the beginning.

Object Storage Service (OSS)

Fully managed object storage service to store and access any amount of data from anywhere

Console


Storage Plan

Contact Sales

Schedule to Watch: OSS Powers AI: Cloud-Scale Data Intelligence >

Try our storage offerings for free and enjoy up to 79% off purchases. Learn more >

- Open the console

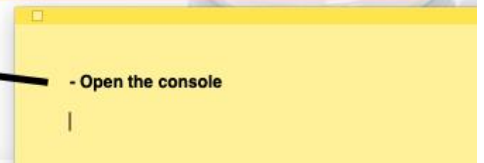

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

Download SDK

OSS / Overview

You Will See this Screen
Now Click on Buckets

Basic Data

The data on this page is not updated in real time. A latency of 1 to 3 hours exists. These statistics are for reference only. Different storage classes are billed based on different methods. [Learn More.](#)

Storage Usage

Total (Excluding ECS Snapshots)

Actual Storage Usage

0 Byte

Compare (with Previous Month) --

Compare (with Previous Month) --

Traffic of Current Month

Outbound Traffic Over Public Network

Byte

Outbound Traffic Over Public Network Last Month: --

Requests This Month

Read Request

Requests Last Month: --

Common Tools

Data Migration to OSS NEW

Supports online migration and offline migration

Online Migration

Data Transport

OSS Browser

Graphical Management Tool

Download

Provides an easy-to-use graphical interface and supports Windows, Linux, and macOS.

CLI Management Tool

Download

Uses command lines to manage OSS data and provides a variety of simple commands for you to manage buckets and objects.

OSS Util

Common Features NEW

Versioning

Stores previous versions of objects and prevents unintended overwrites and deletions of your data. You can configure the validity period of previous versions by using [Versioning](#).

Transfer Acceleration

Accelerates the upload and download of dynamic and static content over the optimal network path and protocol. The transfer acceleration feature provides an optimized [Transfer Acceleration](#).

CRR

Allows synchronization and backup of files across buckets in different regions.

OSS Health Check

Not detected

Exceptions

Last Checked At:--

Process Now

Permission ...

Access Sec...

Bucket Management

Sort by Region

Sort by Storage

Total

Create Bucket

View Buckets

Resource Plan

Effective

About to Expire

About to Be Exhausted

0 plans

0 plans

0 plans

Purchase

Manage

Usage Details

Frequently Accessed

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

Download SDK

OSS / Buckets

Buckets

The data on this page is not updated in real time. A latency of 1 to 3 hours exists. These statistics are for reference only. Different storage classes are billed based on different methods. [Learn More.](#)

Create Bucket

Click on Create Bucket

Bucket Name	Tag	Region	Storage Class	Redundancy	Capacity	Traffic This Month	Versioning	Transfer Acceleration
No Data								

Items per page: 10 < 1 >

FAQ

[Limits](#)

[Can OSS buckets be renamed?](#)

[Use ossbrowser to list buckets](#)

[Use OSS SDKs to list buckets](#)

[Use ossutil to list buckets](#)

[Use OSS API to list buckets](#)

Alibaba Cloud Workbench All Resources Search...

Object Storage Service (OSS) Buckets

Create Bucket

Mode: Custom

Basic Information

* Bucket Name: hello-web-app

* Region: Indonesia (Jakarta)

Endpoint: oss-ap-southeast-5.aliyuncs.com

* Storage Class: Standard

* Redundancy Type: LRS

Versioning: On

Block Public Access: Enabled

Create Cancel

Select a Unique bucket name below:

Note: You cannot change the bucket name after you create the bucket.

I selected indonesia because closer regions means low latency (faster loading). This is where web app data will be stored

Indonesia (Jakarta)

Asia Pacific - China: China (Hangzhou), China (Shanghai), China (Nanjing - Local Region) Closing Down, China (Qingdao), China (Beijing), China (Hohhot), China (Ulanqab), China (Shenzhen), China (Heyuan)

Asia Pacific - Others: Japan (Tokyo), South Korea (Seoul), Singapore, Australia (Sydney) Closed Down, Philippines (Manila), Indonesia (Jakarta), Malaysia (Kuala Lumpur), Thailand (Bangkok), India (Mumbai) Closed Down

Sydney region is closed for some reason anyway...

Indonesian Have 3 AZs and it is released in 2018

Billing: You are charged higher fees for ZRS compared with LRS. You can use only ZRS storage plans to offset the storage fees of ZRS objects. Learn More

Note: After you enable ZRS for a bucket, you cannot change the redundancy type of the bucket to LRS.

Description: If you enable versioning for a bucket, you can restore objects that are overwritten or deleted from the bucket to previous versions at any point in time. Learn More

Alibaba Cloud Workbench All Resources Search...

Object Storage Service (OSS) Buckets

Create Bucket

Mode: Custom

Basic Information

* Bucket Name: hello-web-app

* Region: Indonesia (Jakarta)

Endpoint: oss-ap-southeast-5.aliyuncs.com

* Storage Class: Standard

* Redundancy Type: LRS

Versioning: Off

Block Public Access: Enabled

Create Cancel

Select Standard because web app need faster loading, high availability and it can be accessed frequently

Description: High-performance, highly reliable, and highly available storage class. This storage class is suitable for data that is frequently accessed.

Note: After you create a bucket, you cannot change its storage class.

Select LRS because it is enough for small project like this. ZRS is expensive and it is for enterprise level app and it is expensive

Description: LRS data is stored in a specific zone.



Note: LRS data is stored in a specific zone. If the zone becomes unavailable, you cannot access the data. If your business requires higher availability, we recommend that you use ZRS. Learn More

Turn the Versioning Off because i dont plan to add different versions of this app later. I dont need backup versions. More versions means more storage and more cost.

Description: If you enable versioning for a bucket, you can restore objects that are overwritten or deleted from the bucket to previous versions at any point in time. Learn More

Public Access blocking is off by default and cannot be enabled at first. Maybe to prevent accidental exposure. We will later allow it.

Description: Blocking public access enables enterprises to centrally manage permissions for OSS resources, effectively reducing the risk of data theft and leakage. Once enabled, anonymous access will no longer be allowed, and

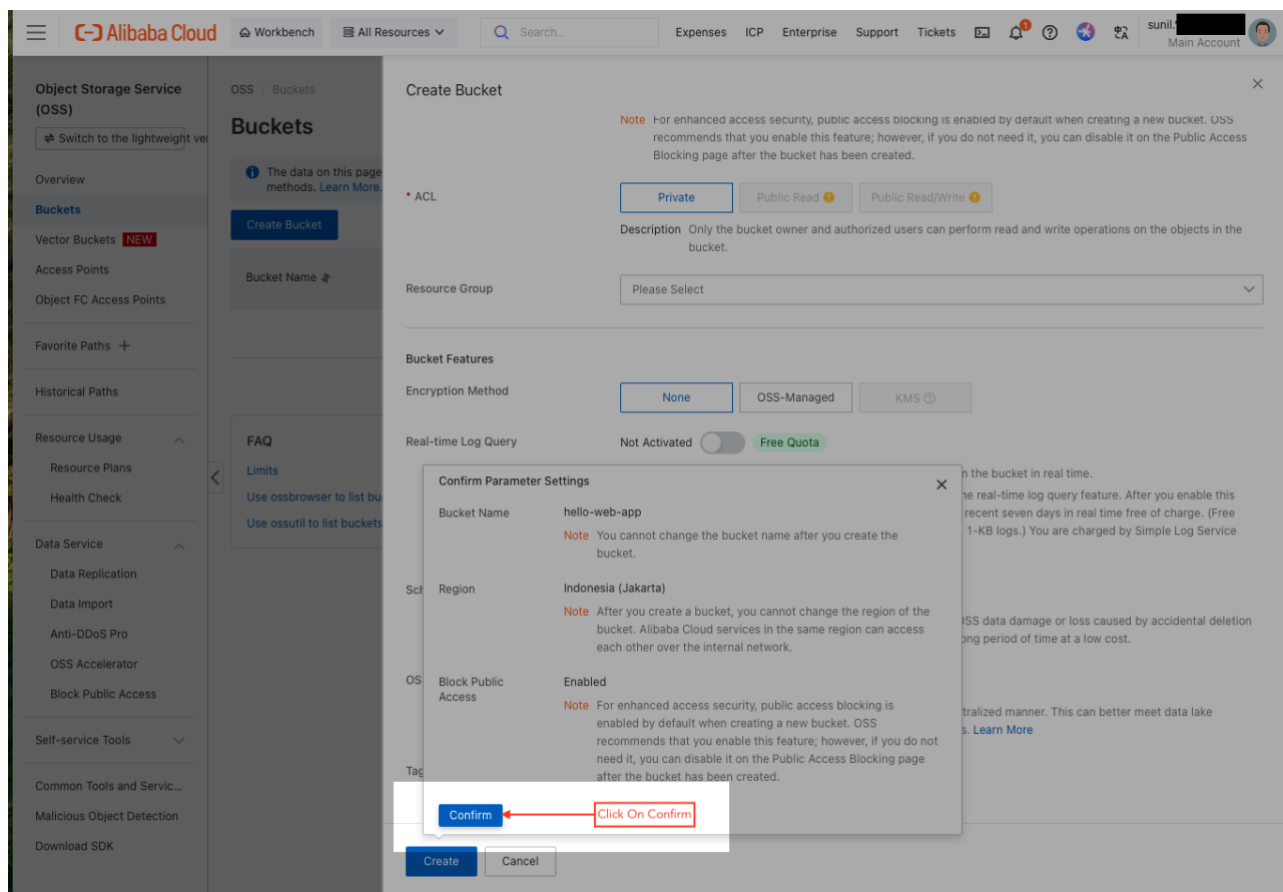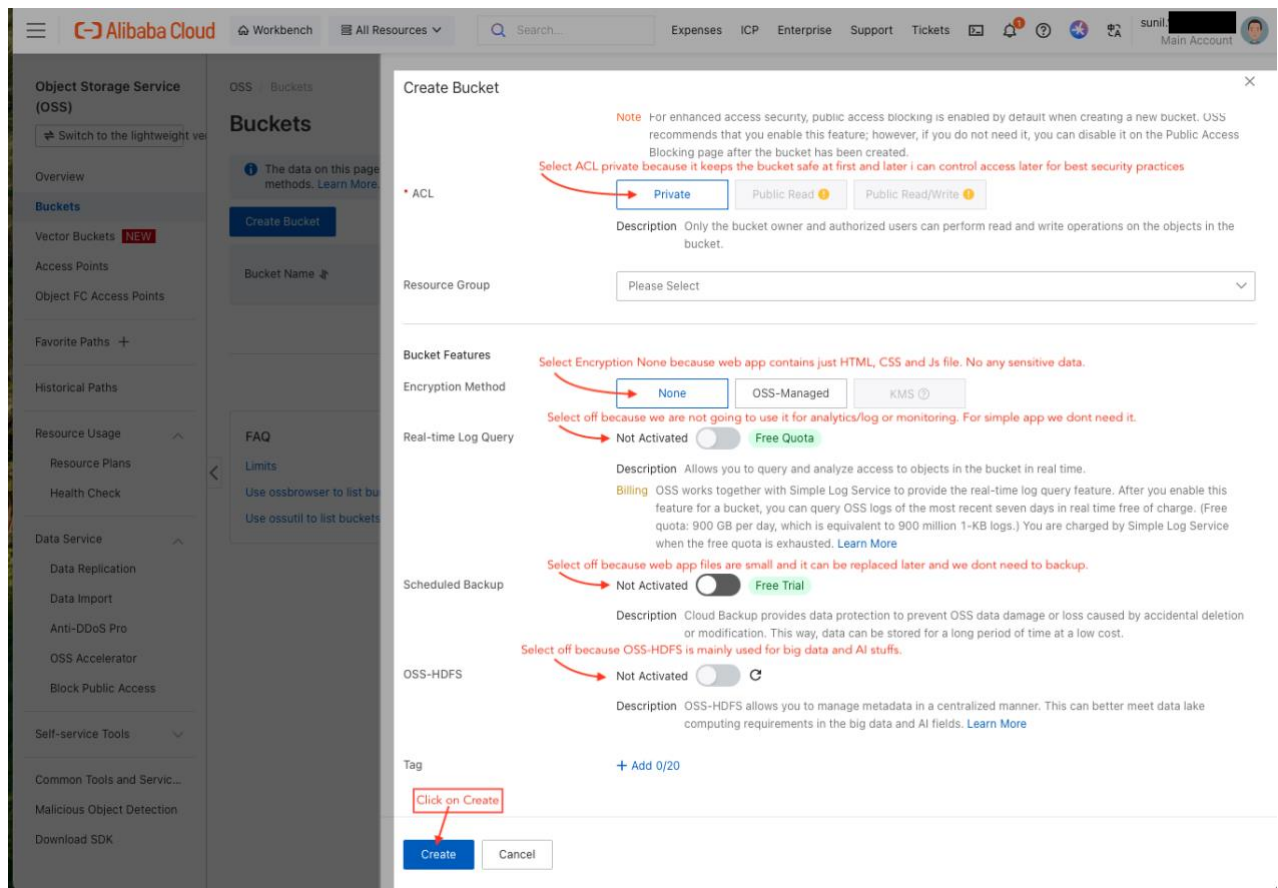

☰

Alibaba Cloud

Workbench

All Resources

Search...

Expenses

ICP

Enterprise

Support

Tickets

📧

🔔

?

🌐

👤

sunil

Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

Download SDK

OSS / Buckets

Buckets

The data on this page is not up to date. Learn More.

Create Bucket

Bucket Name ↗

FAQ

Limits

Use ossbrowser to list buckets

Use ossutil to list buckets

Create Bucket

Created.

After you create a bucket, you cannot change the bucket name, region, and redundancy type of the bucket.

Click Here

Go to Bucket

Basic Bucket Information

Bucket Name	hello-web-app	Unmodifiable
Region	Indonesia (Jakarta)	Unmodifiable
Endpoint	oss-ap-southeast-5.aliyuncs.com	
Storage Class	Standard	
Block Public Access	Enabled	
Redundancy Type	LRS	
ACL	Private	
Resource Group	Not Configured	

Bucket Features

Versioning	Not Activated
Encryption Method	None
Real-time Log Query	Not Activated
Scheduled Backup	Not Activated
OSS-HDFS	Not Activated
Tag	Not Configured

☰

Alibaba Cloud

Workbench

Search...

Expenses

ICP

Enterprise

Support

Tickets

📧

🔔

?

🌐

👤

sunil

Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

OSS / Buckets / hello-web-app / Objects

Task List

hello-web-app / Indonesia (Jakarta)

Enter the content

Overview

Data Usage

Object Management

Objects

Data Indexing

Attach OSS Buckets...

Permission Control

Content Security

Data Management

Content Detection

Data Processing

Bucket Settings

Logging

Data Lake

Access Point

Delete Bucket

Objects

Objects are the basic unit for data storage in OSS. Objects are also known as files. OSS stores all files as objects in buckets, and does not use a hierarchical structure to store objects.

Upload Object

Create Directory

Parts

Enter the...

More Criteria

Data Indexing

Turn on version control

Authorize

☐	File Name ↗	Object Size ↗	Storage Class ↗	Updated At ↗	Actions
No Data					

☐ Set Object Metadata

Export URL List

Download

Restore

Permanently Delete

Items per page: 50

Previous

Next

FAQ More

Multipart upload

How do I upload and download directories to and from OSS?



Simple download

Best Practices More

Add signatures on the server, configure upload callback, and directly...

Obtain signature information from the server and upload data to OSS

Use WeChat mini programs to upload objects

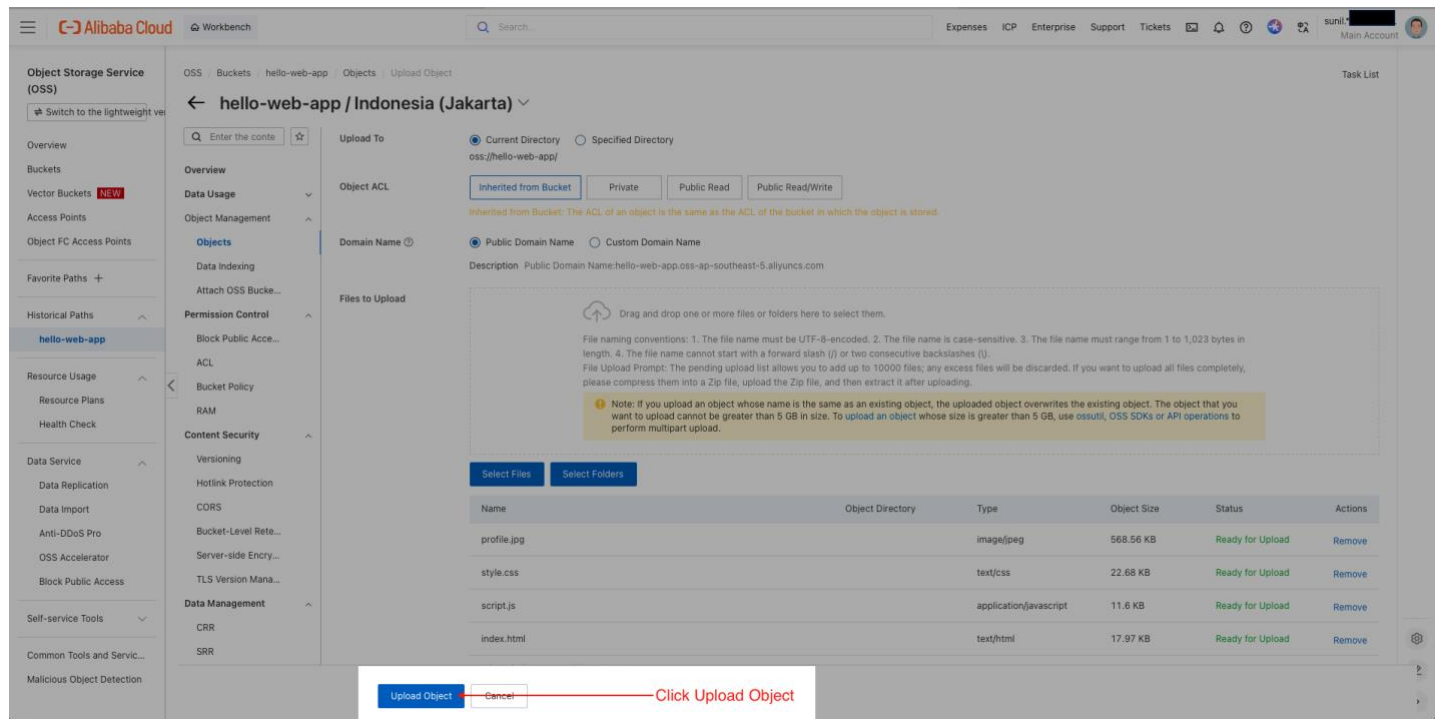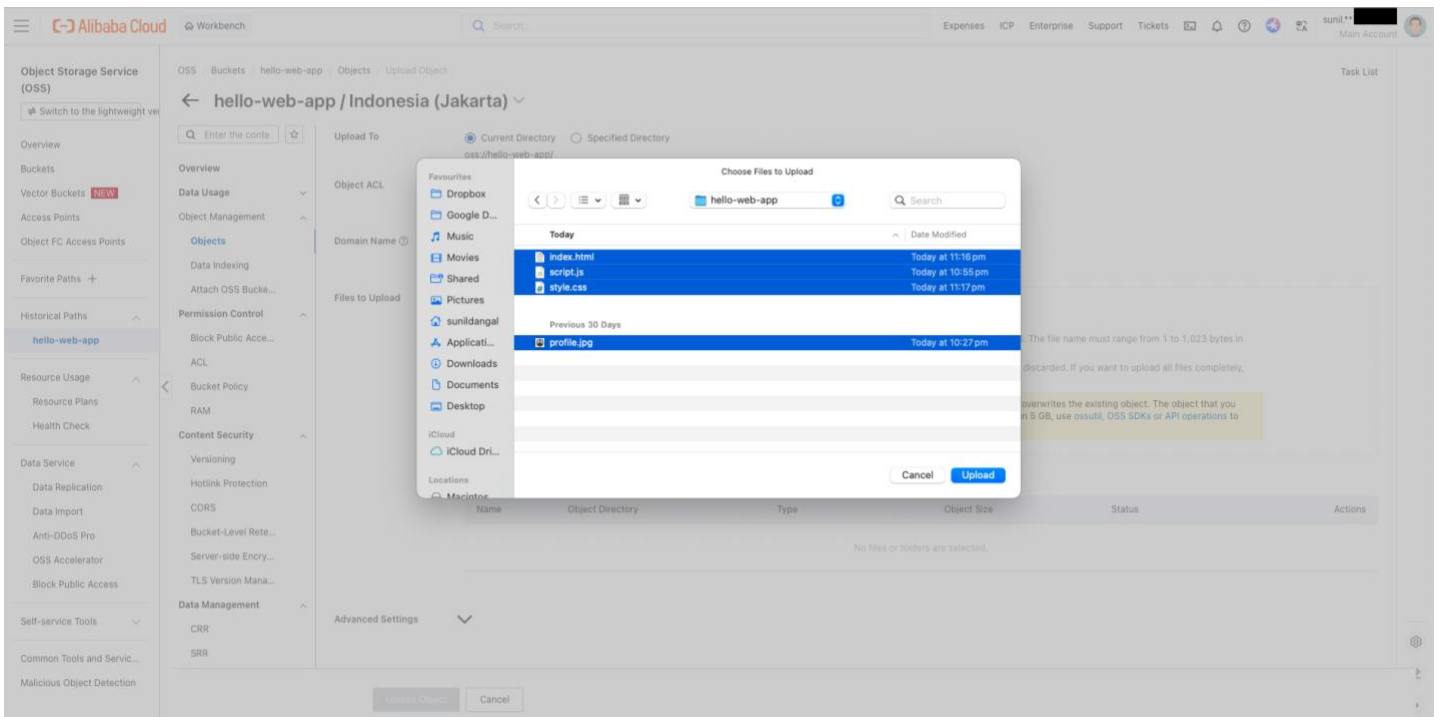

Alibaba Cloud Workbench

Search...

Expenses ICP Enterprise Support Tickets

sunil Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets **NEW**

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

hello-web-app

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

OSS Buckets hello-web-app Objects Upload Object

hello-web-app / Indonesia (Jakarta)

Enter the console

Upload To

Current Directory oss://hello-web-app/ Specified Directory

Object ACL

Inherited from Bucket Private Public

Inherited from Bucket: The ACL of an object is the same as the bucket's ACL.

Domain Name

Public Domain Name Custom Domain Name

Description Public Domain Name:hello-web-app-oss-ap

Files to Upload

Drag and drop one or more files here.

File naming conventions: 1. The file name cannot contain the following characters: \ / : * ? " < > | . 2. The file name cannot be longer than 255 characters. 3. The file name cannot be a reserved keyword. 4. The file name cannot be a reserved path. 5. The file name cannot be a reserved file name. 6. The file name cannot be a reserved directory name. 7. The file name cannot be a reserved file extension. 8. The file name cannot be a reserved file type. 9. The file name cannot be a reserved file format. 10. The file name cannot be a reserved file encoding.

Note: If you upload an object, you want to upload cannot perform multipart upload.

Select Files Select Folders

Name Object Directory

Advanced Settings

Upload Object Cancel

Task List

Files are uploaded now close this and we need to go to bucket settings.

Upload Tasks Redundancy Type Conversion

If you refresh or close the browser, the ongoing upload task is canceled and all upload records are cleared.

If you activate OSS after March 20, 2025, you will not be able to send data-related API requests to a bucket in the Chinese mainland by using its default public OSS domain name (BucketName.oss-cn-Region.aliyuncs.com), regardless of whether you are using the OSS console, tools, or SDKs. To perform these API operations, please use a custom domain name that has completed ICP filing. Learn More

All(4) Uploading(0) Stopped(0) Uploaded(4) Upload Failed(0)

Stop Uploading

Object	Upload To	Status	Actions
profile.jpg 568.56 KB	oss://hello-web-app/	Uploaded	Share Clear Record
style.css 22.68 KB	oss://hello-web-app/	Uploaded	Share Clear Record
script.js 11.6 KB	oss://hello-web-app/	Uploaded	Share Clear Record
index.html 17.97 KB	oss://hello-web-app/	Uploaded	Share Clear Record

Alibaba Cloud Workbench

Search...

Expenses ICP Enterprise Support Tickets

sunil Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets **NEW**

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

Download SDK

OSS Buckets

Buckets

The data on this page is not updated in real time. A latency of 1 to 3 hours exists. These statistics are for reference only. Different storage classes are billed based on different methods. Learn More.

Create Bucket

Bucket Name

Bucket Name Tag Region Storage Class Redundancy Capacity Traffic This Month Versioning Transfer Acceleration

hello-web-app		Indonesia (Jakarta)	Standard	LRS	Preparing data...	Preparing data...	Disabled	Disabled
---------------	--	---------------------	----------	-----	-------------------	-------------------	----------	----------

FAQ

Limits

Can OSS buckets be renamed?

Use ossbrowser to list buckets

Use OSS SDKs to list buckets

Use ossutil to list buckets

Use OSS API to list buckets

Open the hello-web-app bucket

Items per page: 10

1

Alibaba Cloud Workbench

Object Storage Service (OSS)

hello-web-app / Indonesia (Jakarta)

Overview

Data Usage

Object Management

Objects

File Name

Object Size

Storage Class

Updated At

Actions

index.html

17.969KB

Standard

Apr 20, 2026 at 23:42:58

profile.jpg

568.564KB

Standard

Apr 20, 2026 at 23:42:58

script.js

11.598KB

Standard

Apr 20, 2026 at 23:42:57

style.css

22.677KB

Standard

Apr 20, 2026 at 23:42:58

Block Public Access

Click on Block Public Access

FAQ

Best Practices

Alibaba Cloud Workbench

Object Storage Service (OSS)

hello-web-app / Indonesia (Jakarta)

Overview

Data Usage

Object Management

Objects

Data Indexing

Attach OSS Bucke...

Permission Control

Block Public Acc...

ACL

Bucket Policy

RAM

Content Security

Data Management

Content Detection

Data Processing

Bucket Settings

Logging

Data Lake

Access Point

Delete Bucket

Welcome to ACL

By default, the access control list (ACL) of buckets and objects is private to ensure data security. Only the owner of a private bucket or object and authorized users can access the bucket or object. You can configure bucket policies or RAM policies to authorize third-party users to access or use your OSS resources.

Block Public Access

ACL

Bucket Policy

RAM

Block Public Access allows enterprises to easily limit public access to OSS resources in a centralized manner. This reduces the risk of unauthorized access and data leakage. If you enable Block Public Access, OSS denies anonymous access, ignores existing public ACLs and bucket policies in which public access is granted, and prohibits new public ACLs and bucket policies in which public access is granted from being created. [Learn More](#)

Block Public Access

Disabled

FAQ

This is disabled by default which is good because right now bucket is locked and nobody can access those files

I will make the bucket access level (ACL) to public read so that user can access through browser

What is Block Public Access?

How do I check whether public access is allowed?

Alibaba Cloud Workbench Search...

Object Storage Service (OSS)

hello-web-app / Indonesia (Jakarta)

Overview

Block Public Access

ACL

Bucket Policy

RAM

Welcome to ACL

By default, the access control list (ACL) of buckets and objects is private to ensure data security. Only the owner of a private bucket or object and authorized users can access the bucket or object. You can configure bucket policies or RAM policies to authorize third-party users to access or use your OSS resources.

Allows you to configure the ACL of a bucket. You can set the ACL of a bucket to public-read-write, public-read, or private. You can access a private bucket only if you are the owner of the bucket. For more information about the ACLs of buckets, see the Bucket ACL topic. Only the owner of an existing bucket can call the PutBucketAcl operation to change the ACL of the bucket. [Learn More](#)

Bucket ACL

☒ Private ☐ Public Read ☐ Public Read/Write

Only the bucket owner or authorized users can perform read and write operations on the objects in the bucket.

Settings

Now go to ACL (Access Control List) and make it Public Read so that browser can get permission to read, load and run those files

FAQ

Usage notes

Use OSS API to configure the ACL

Use ossutil to configure the ACL

Use Alibaba Cloud SDKs to configure the ACL

Alibaba Cloud Workbench Search...

Object Storage Service (OSS)

hello-web-app / Indonesia (Jakarta)

Overview

Block Public Access

ACL

Bucket Policy

RAM

Welcome to ACL

By default, the access control list (ACL) of buckets and objects is private to ensure data security. Only the owner of a private bucket or object and authorized users can access the bucket or object. You can configure bucket policies or RAM policies to authorize third-party users to access or use your OSS resources.

Allows you to configure the ACL of a bucket. You can set the ACL of a bucket to public-read-write, public-read, or private. You can access a private bucket only if you are the owner of the bucket. For more information about the ACLs of buckets, see the Bucket ACL topic. Only the owner of an existing bucket can call the PutBucketAcl operation to change the ACL of the bucket. [Learn More](#)

Only the bucket owner or authorized users can perform read and write operations on the objects in the bucket.

Select Public Read?

You may be charged unexpected Internet traffic fees. [Learn More](#)

If you set the ACL to Public Read, all users have read access to the objects in the bucket without providing authentication information. This setting poses security risks to your data and may cause unexpected Internet traffic fees. We recommend that you set the ACL to Private. If you set the ACL to Public Read, we recommend configuring a Referer whitelist or blacklist to prevent unauthorized traffic theft. For more information, please refer to.

Select Private

Continue

Select Continue

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths ^

hello-web-app

Resource Usage ^

Resource Plans

Health Check

Data Service ^

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools ^

Common Tools and Services

Malicious Object Detection

OSS / Buckets / hello-web-app / ACL

Task List

hello-web-app / Indonesia (Jakarta) ^

Enter the content

Overview

Data Usage ^

Object Management ^

Objects

Data Indexing

Attach OSS Bucke...

Permission Control ^

Block Public Ace...

ACL

Bucket Policy

RAM

Content Security ^

Data Management ^

Content Detection ^

Data Processing ^

Bucket Settings ^

Logging ^

Data Lake ^

Access Point

Delete Bucket

Welcome to ACL

By default, the access control list (ACL) of buckets and objects is private to ensure data security. Only the owner of a private bucket or object and authorized users can access the bucket or object. You can configure bucket policies or RAM policies to authorize third-party users to access or use your OSS resources.

Block Public Access

ACL

Bucket Policy

RAM

Allows you to configure the ACL of a bucket. You can set the ACL of a bucket to public-read-write, public-read, or private. You can access a private bucket only if you are the owner of the bucket. For more information about the ACLs of buckets, see the Bucket ACL topic. Only the owner of an existing bucket can call the PutBucketAcl operation to change the ACL of the bucket. [Learn More](#)

Bucket ACL

Private

Public Read

Public Read/Write

Only the bucket owner or authorized users can perform write operations on the objects in the bucket. Other users, including anonymous users, can perform only read operations on the objects in the bucket.

Description

Public Read allows unauthorized users to read data in your bucket. This results in high security risks.

Billing Note:

You may be charged for unexpected traffic over the Internet.

Note

To ensure data security, we recommend that you set the ACL parameter to Private.

Save

Cancel

FAQ

After making Public Read, Click on Save

Usage notes

Use OSS API to configure the ACL

Use ossutil to configure the ACL

Use Alibaba Cloud SDKs to configure the ACL

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths ^

hello-web-app

Resource Usage ^

Resource Plans

Health Check

Data Service ^

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools ^

Common Tools and Services

Malicious Object Detection

OSS / Buckets / hello-web-app / Objects

Task List

hello-web-app / Indonesia (Jakarta) ^

Enter the content

Hotlink Protection

CORS

Bucket-Level Rete...

Server-side Encry...

TLS Version Mana...

Data Management ^

CRR

SRR

Scheduled Backup

Lifecycle

Bucket Inventory

Static Page

Mirroring-based B...

Real-time Access ...

File overwrite pro...

Content Detection ^

Data Processing ^

Bucket Settings ^

Bucket Tagging

Domain Names

Transfer Accelera...

Pay-by-requester

Resource Group

Objects

Objects are the basic unit for data storage in OSS. Objects are also known as files. OSS stores all files as objects in buckets, and does not use a hierarchical structure to store objects.

Upload Object

Create Directory

Parts

Authorize

Enter the prefix in the na...

More Criteria

Data Indexing

Turn on version control

Anti-deletion by mistake

File Name

Object Size

Storage Class

Updated At

Actions

index.html

17.969KB

Standard

Apr 20, 2026 at 23:42:58

View Details

profile.jpg

568.564KB

Standard

Apr 20, 2026 at 23:42:58

View Details

script.js

11.598KB

Standard

Apr 20, 2026 at 23:42:57

View Details

style.css

22.677KB

Standard

Apr 20, 2026 at 23:42:58

View Details

Set Object Metadata

Export URL List

Download

Restore

Permanently Delete

Items per page: 50

Previous

Next

FAQ

Multipart upload

How do I upload and download directories to and from OSS?


Simple download

Best Practices

Add signatures on the server, configure upload callback, and directly...

Obtain signature information from the server and upload data to OSS

Use WeChat mini programs to upload objects

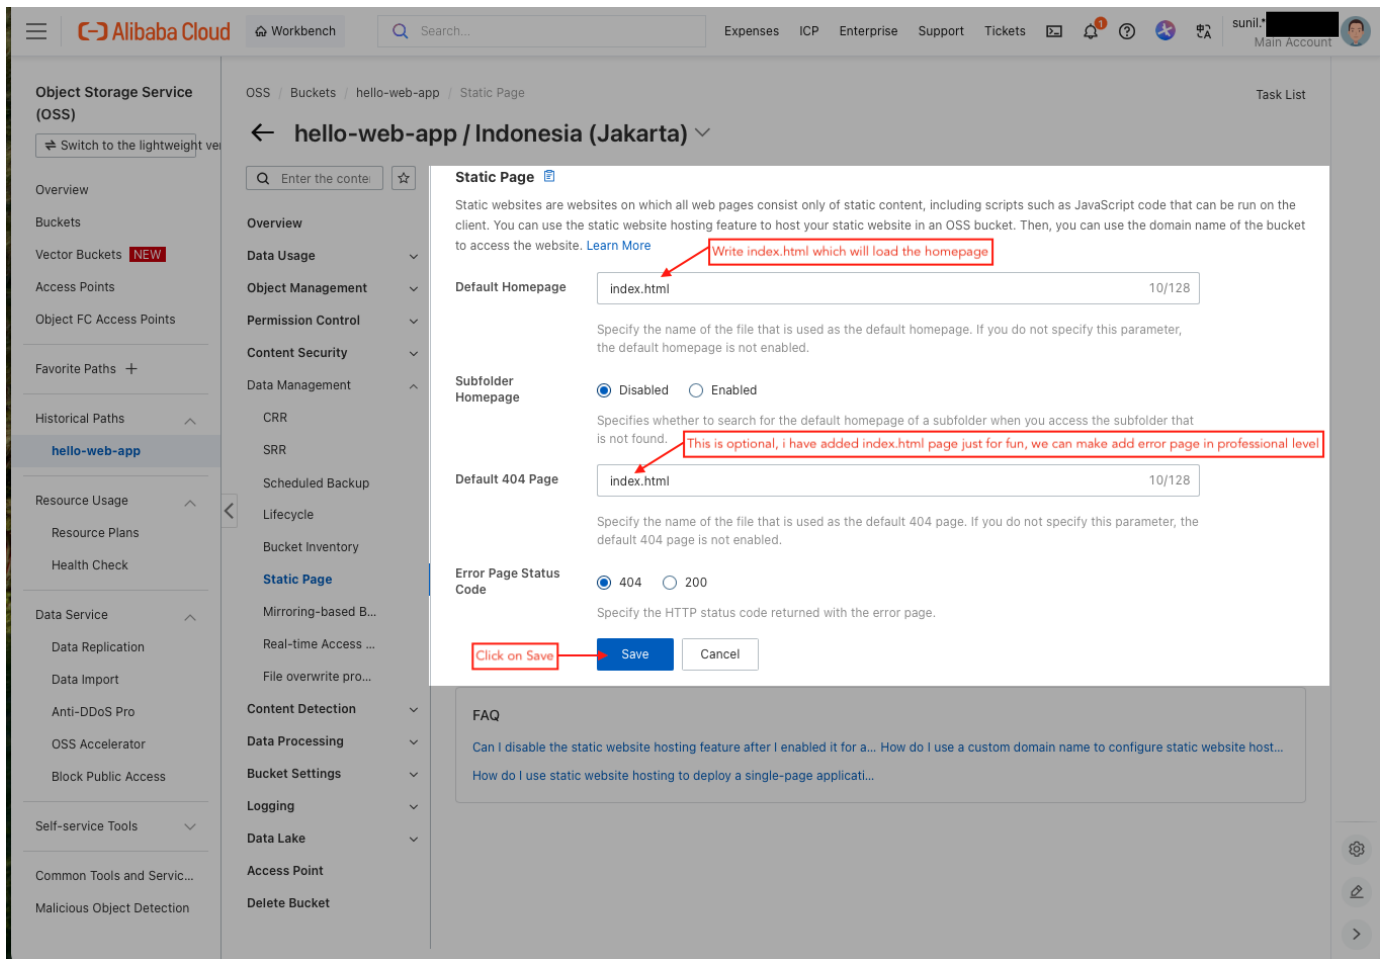

- Alibaba Cloud is bit different to AWS. When you drop static file in AWS S3 bucket, it will give you link where you can directly see the webapp running. Whereas for Alibaba it is different.
- Either you must buy your own domain name to view the site otherwise Alibaba cloud Object storage service forces html files to download for some reason and they have mentioned that manual domain mapping is required to view the web app
- <https://www.alibabacloud.com/help/en/oss/user-guide/hosting-static-websites>
- Thankfully, I have my own domain which is: sunildangal.com.au (Bought from Extra Domain)
- Now I will Map my Domain name in Alibaba.
- Please see the screenshots documentation below for mapping process:

Object Storage Service (OSS)-alibabacloud OSS Management Console

Expenses ICP Enterprise Support Tickets

sunil** Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview Buckets Vector Buckets **NEW** Access Points Object FC Access Points Favorite Paths + Historical Paths ^ hello-web-app Resource Usage ^ Resource Plans Health Check Data Service ^ Data Replication Data Import Anti-DDoS Pro OSS Accelerator Block Public Access Self-service Tools v Common Tools and Service... Malicious Object Detection

OSS / Buckets / hello-web-app / Domain Names

Task List

hello-web-app / Indonesia (Jakarta)

Enter the content

Domain Names

After you upload objects to a bucket, OSS automatically generates URLs for the uploaded objects. You can use the URLs to access the objects. If you want to access the objects by using custom domain names, you must map the custom domain names to the bucket in which the objects are stored.

It takes about 1 minute to update the domain name information and 10 minutes to update the CDN acceleration configurations. Refresh the page after the configurations are updated.

The delete and storage class transition operations performed based on lifecycle rules are not updated to objects cached on CDN nodes.

Map Custom Domain

- 1 Enter a domain name
Checks whether the format of the domain name is correct.
- 2 Verify the ownership of the domain name
Maps the domain name to the bucket after the ownership of the domain name is verified. [Learn More](#)

Activate Domain Mapping

Add a CNAME record

Uses the CNAME record to point the custom domain name to the bucket. [Learn More](#)

Now I need to go to Domain Names and Map Custom Domain Name to my Domain: sunildangal.com.au and configure DNS setting in my Domain provider which is extradomain

Map Custom Domain Name

Domain Name	Map Custom Domain Name	Domain Status	Alibaba Cloud CDN	Auto CDN C Update	Actions
No data available.					

FAQ

How can I control the preview or download behavior when accessing ... After configuration is complete, accessing the custom domain doesn...

What should I do if domain binding fails during the binding process a... What should I do if I receive a "NeedVerifyDomainOwnership" error ...

Object Storage Service (OSS)-alibabacloud OSS Management Console

Expenses ICP Enterprise Support Tickets

sunil** Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview Buckets Vector Buckets **NEW** Access Points Object FC Access Points Favorite Paths + Historical Paths ^ hello-web-app Resource Usage ^ Resource Plans Health Check Data Service ^ Data Replication Data Import Anti-DDoS Pro OSS Accelerator Block Public Access Self-service Tools v Common Tools and Service... Malicious Object Detection

OSS / Buckets / hello-web-app / Domain Names

hello-web-app / Indonesia (Jakarta)

Enter the content

Domain Names

After you upload objects to a bucket, OSS automatically generates URLs for the uploaded objects. You can use the URLs to access the objects. If you want to access the objects by using custom domain names, you must map the custom domain names to the bucket in which the objects are stored.

It takes about 1 minute to update the domain name information and 10 minutes to update the CDN acceleration configurations. Refresh the page after the configurations are updated.

The delete and storage class transition operations performed based on lifecycle rules are not updated to objects cached on CDN nodes.

Map Custom Domain

- 1 Enter a domain name
Checks whether the format of the domain name is correct.

Map Custom Domain Name

Domain Name Map Custom Domain Name Domain Status Alibaba Cloud CDN Auto CDN C Update Actions

No data available.

FAQ

How can I control the preview or download behavior when accessing ... After configuration is complete, accessing the custom domain doesn...

What should I do if domain binding fails during the binding process a... What should I do if I receive a "NeedVerifyDomainOwnership" error ...

Map Custom Domain Name

Write your domain name here

Domain Name sunildangal.com.au 18/63

Log on to the console of your DNS provider

Log on to the console of your DNS provider and go to the domain resolution page.

Add a TXT record

Add a record for the domain and retain the default settings for other parameters.

Record Type TXT -

Hostname Please enter the corresponding domain name prefix based on the type of domain name you have bound

Example

Your domain name: example.com

When you want to bind the primary domain name (example.com), please enter _dnsauth

When you want to bind a subdomain (oss.example.com), please enter _dnsauth.oss

Record Value

You will get a record value here which you need to add txt record in your DNS setting

The validity period of the CnameToken that is required to verify the ownership of a domain is 72 hours. After the CnameToken expires, click Regenerate to generate a new CnameToken.

The CnameToken is valid until Apr 12, 2026 at 21:31.

Go back to the current page to perform verification

Verify Domain Name Ownership

Go to Bucket Overview and Copy Paste the Bucket Domain name

The screenshot shows the Alibaba Cloud OSS console. On the left is a navigation menu with options like Object Storage Service (OSS), Buckets, Access Points, and various tools. The main area displays the 'Bucket Overview' for a specific bucket. It includes sections for 'Tag' (ACL, Versioning, Access), 'Usage' (Total Storage Capacity: 620.81 KB, Outbound Traffic: 4.69 MB, GET Requests: 1,470), and 'Port' configuration. A red box highlights the 'Port' section with the text: "You will need to copy the Bucket Domain Name from here". Below this, a table lists various access methods and their status.

Port	HTTPS	Endpoint	Bucket Domain Name
Access Over Internet	Supported		
CNAME Domain Name	Supported		
Access from ECS over the Classic Network (internal network)	Supported		
Access from ECS over the VPC (internal network)	Supported		
Transfer Acceleration-based Access	Supported	Disabled Enable	Disabled Enable
OSS-HDFS	Supported	Disabled	Disabled

The screenshot shows the DNS Settings page for the domain sunildangal.com.au. It includes tabs for Overview, DNS Settings, and Administration. The 'DNS Records' section displays a table of records. Red arrows point from the 'Bucket Domain Name' field in the first screenshot to the 'Hostname' field in the CNAME records, and from the 'Content' field in the TXT record. A red box at the top right contains the text: "I have added TXT Record, Two CNAME Record with sub domain and content received from ALibaba Domain Mapping screen".

Record Name	Sub Domain	Record Information	Status	Action
☐ CNAME Record	sunildangal.com.au	Hostname: Copy pastes the Bucket Domain Name inside here	Pending	Edit Delete
☐ CNAME Record	www.sunildangal.com.au	Hostname: Copy pastes the Bucket Domain Name inside here	Pending	Edit Delete
☐ TXT Record	<u>_dnsauth</u> .sunildangal.com.au	Content: Copy pastes the record value here	Active	Edit Delete

Make sure to add _dnsauth.yourdomainname

Connect to your Favourite App

[Blogger](#)[Google MX](#)[Shopify](#)[Squarespace](#)[Tumblr](#)[Weebly](#)[Yola](#)[Strikingly](#)

[SHOW MORE](#)

[Live Chat](#)

Connect to your favorite App

 Blogger Google MX Shopify Squarespace Tumblr Weebly Yola Strikingly[SHOW MORE](#)**Web Forward**

I have deleted all the Web Forward because basically it is a redirection and i have added CNAME at the top for real connection



You have no Web Forwards yet

Add your first Web Forward and all details will be available here.

[ADD WEB FORWARD](#)**Email Forward**

You have no Email Forwards yet

[Live Chat](#)

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths ^

hello-web-app

Resource Usage ^

Resource Plans

Health Check

Data Service ^

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools v

Common Tools and Services

Malicious Object Detection

OSS / Buckets / hello-web-app / Domain Names

hello-web-app / Indonesia (Jakarta)

Enter the content

Domain Names

After you upload objects to a bucket, OSS automatically generates URLs for the uploaded objects. You can use the URLs to access the objects. If you want to access the objects by using custom domain names, you must map the custom domain names to the bucket in which the objects are stored.

It takes about 1 minute to update the domain name information and 10 minutes to update the CDN acceleration configurations. Refresh the page after the configurations are updated.

The delete and storage class transition operations performed based on lifecycle rules are not updated to objects cached on CDN nodes.

Map Custom Domain

1 Enter a domain name

Checks whether the format of the domain name is correct.

Map Custom Domain Name

Domain Name Map Custom Domain Name

FAQ

How can I control the preview or download behavior when accessing ... After configuration is complete, accessing the custom domain doesn't work.

What should I do if domain binding fails during the binding process? What should I do if I receive a "NeedVerifyDomainOwnership" error ...

Expenses ICP Enterprise Support Tickets

sunil Main Account

Map Custom Domain Name

After few minutes it will show: this and it is mapped.

sunildangal.com.au mapped to the bucket

Bucket Name hello-web-app

Region Indonesia (Jakarta)

After mapping domain, we need to add CNAME record in this stage. In my case, I have already done in the above picture.

The domain mapping is not in effect. You must log on to the console of your DNS provider and add a CNAME record to the domain's DNS records to point the domain to the bucket.

Log on to the console of your DNS provider

Log on to the console of your DNS provider and go to the domain resolution page.

Add a CNAME record

Add a record for the domain and retain the default settings for other parameters.

Record Type CNAME

Hostname Please enter the corresponding domain name prefix based on the type of domain name you have bound

Example

Your domain name: example.com

When you want to bind the primary domain name (example.com), please enter @

When you want to bind a subdomain (oss.example.com), please enter oss

Record Value hello-web-app.s

Go back to the current page to perform verification

Verify Domain Mapping

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths ^

hello-web-app

Resource Usage ^

Resource Plans

Health Check

Data Service ^

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools v

Common Tools and Services

Malicious Object Detection

OSS / Buckets / hello-web-app / Domain Names

hello-web-app / Indonesia (Jakarta)

Enter the content

Domain Names

After you upload objects to a bucket, OSS automatically generates URLs for the uploaded objects. You can use the URLs to access the objects. If you want to access the objects by using custom domain names, you must map the custom domain names to the bucket in which the objects are stored.

It takes about 1 minute to update the domain name information and 10 minutes to update the CDN acceleration configurations. Refresh the page after the configurations are updated.

The delete and storage class transition operations performed based on lifecycle rules are not updated to objects cached on CDN nodes.

Map Custom Domain

1 Enter a domain name

Checks whether the format of the domain name is correct.

2 Verify the ownership of the domain name

Maps the domain name to the bucket after the ownership of the domain name is verified. [Learn More](#)

Activate Domain Mapping

Add a CNAME record

Uses the CNAME record to point the custom domain name to the bucket. [Learn More](#)

Map Custom Domain Name

It will then take some time take this in effect

Domain Name	Map Custom Domain Name	Domain Status	Alibaba Cloud CDN	Auto CDN C Update	Actions
sunildangal.com.au	Mapped	Not in effect	Not Configured		Upload Certificate Manage Mapping Configurations Unbind

FAQ

How can I control the preview or download behavior when accessing ... After configuration is complete, accessing the custom domain doesn't work.

What should I do if domain binding fails during the binding process? What should I do if I receive a "NeedVerifyDomainOwnership" error ...

Task List

Object Storage Service (OSS)-alibabacloud

OSS Management Console

Alibaba Cloud

Workbench

Search...

Expenses ICP Enterprise Support Tickets

sunil

Main Account

Object Storage Service (OSS)

Switch to the lightweight version

Overview

Buckets

Vector Buckets NEW

Access Points

Object FC Access Points

Favorite Paths +

Historical Paths

hello-web-app

Resource Usage

Resource Plans

Health Check

Data Service

Data Replication

Data Import

Anti-DDoS Pro

OSS Accelerator

Block Public Access

Self-service Tools

Common Tools and Services

Malicious Object Detection

OSS Buckets hello-web-app Domain Names

Task List

hello-web-app / Indonesia (Jakarta)

Enter the content

Domain Names

After you upload objects to a bucket, OSS automatically generates URLs for the uploaded objects. You can use the URLs to access the objects. If you want to access the objects by using custom domain names, you must map the custom domain names to the bucket in which the objects are stored.

It takes about 1 minute to update the domain name information and 10 minutes to update the CDN acceleration configurations. Refresh the page after the configurations are updated.

The delete and storage class transition operations performed based on lifecycle rules are not updated to objects cached on CDN nodes.

Map Custom Domain

1 Enter a domain name

2 Verify the ownership of the domain name

Activate Domain Mapping

Add a CNAME record

Uses the CNAME record to point the custom domain name to the bucket. [Learn More](#)

Map Custom Domain Name

Domain Name

Map Custom Domain Name

Domain Status

Alibaba Cloud CDN

Auto CDN C Update

Actions

sunildangal.com.au

Mapped

In effect

Not Configured

Upload Certificate

Manage Mapping Configurations

Unbind

After this is also in effect we can then proceed to check DNS Settings

FAQ

How can I control the preview or download behavior when accessing ... After configuration is complete, accessing the custom domain doesn...

What should I do if domain binding fails during the binding process a... What should I do if I receive a "NeedVerifyDomainOwnership" error ...

CD - Account Manager

Manage DNS Records in Account Manager

sunildangal.com.au

Premium DNS

Overview DNS Settings Administration

DNS Records

After all the DNS records are Active then we can open the site

ADD RECORD

☐

Record Name

Sub Domain

Record Information

Status

Action

☐

CNAME Record

sunildangal.com.au

Hostname: [REDACTED]

Active

☐

CNAME Record

www.sunildangal.com.au

Hostname: [REDACTED]

Active

☐

TXT Record

_dnsauth.sunildangal.com.au

Content: 6 [REDACTED]

Active

Connect to your Favourite App

Blogger

Google MX

Shopify

Squarespace

Tumblr

Weebly

Yola

Strikingly

SHOW MORE

Live Chat

Web Forward

And Finally, the website is live at:

<http://sunildangal.com.au/>

TASK 3: Conclusion

My experience making this documentation was bit challenging. I focused Alibaba Cloud because it was growing cloud provider in Asia. I particularly focused Ali Cloud because, I wanted to see how dominant it has become in Asia comparing with largest cloud provider like AWS.

My experience of hosting a static site in Object Storage in Alibaba cloud has been ok so far. Not too happy. I find the UI/UX experience to be just good enough. The color selection for Alibaba cloud console for me looks bit sad vibe. The arrangements of services, cloud tools are so tight and congested order.

Also, when I created an account and it took so long just to add a simple Object storage as compare with AWS, etc. It was quick few steps whereas with Ali cloud, it involved more than 2 or 3 steps. Likewise, I wanted to host a static site for free but unfortunately because of their policy, we can view the web app, either we must map to the domain or else it won't load the static web-app.

My overall experience was ok. I have to say, Alibaba cloud still needs lot of improvement in terms of performance, UI, UX of the website.