

Prototypical Development of a Docker-based Workflow Management System

Masterthesis

at the Department of Information Systems
Chair for Practical Computer Science

Supervisor: Prof. Dr. Herbert Kuchen

Tutors: MScIS Vincent von Hof

Submitted by: Lars Greiving
Dettenstraße 4
48147 Münster

+49-176 704 253 17

L_grei02@uni-muenster.de

Deadline: 2016-03-08

Contents

Contents.....	I
List of Figures.....	IV
List of Tables	V
List of Listings	VI
Abbreviations	VIII
1 Introduction and motivation	1
2 Workflow management systems.....	3
2.1 Concepts	3
2.1.1 Workflow.....	3
2.1.2 Process definition	3
2.1.3 Process instance	4
2.1.4 Activity instance	4
2.1.5 Workflow data.....	4
2.1.6 Workflow participant and worklist.....	6
2.2 Typical architecture	7
2.2.1 Functional areas.....	7
2.2.2 System components.....	7
3 Software containers and Docker	9
3.1 Concepts	9
3.1.1 Virtualization	9
3.1.2 Docker images and containers	10
3.1.3 Data volumes.....	11
3.1.4 Dockerfiles.....	11
3.1.5 Registries and repositories.....	11
3.1.6 Docker Engine	12
3.1.7 Docker networking	12
3.2 Docker ecosystem	13
3.2.1 Docker Swarm	13
3.2.2 Docker Machine	13
3.2.3 Docker Compose	14
3.2.4 Docker Hub	14
4 Architecture styles	15
5 Conceptual development of the WfMS.....	18
5.1 Determination of objectives.....	18
5.2 Docker in workflow enactment.....	21

5.2.1	Properties and mode of operation of the utilization variants	21
5.2.2	Identification of promising combinations	29
5.2.3	Utilization of third-party images	32
5.2.4	Execution scheduling	33
5.2.5	Implications of other design decisions	37
5.3	System architecture.....	37
5.3.1	Choice of an architecture style	38
5.3.2	User interaction with the system	39
5.3.3	Inter-component communication	40
5.4	System design	41
5.4.1	Workflow and activity images	42
5.4.2	Communication.....	44
5.4.3	Components.....	45
6	Prototypical implementation.....	53
6.1	Preliminary decisions.....	53
6.2	Execution images	54
6.2.1	Workflow image.....	54
6.2.2	Activity image.....	57
6.3	System components	59
6.3.1	Workflow definition service.....	59
6.3.2	Organization management service and worklist service	60
6.3.3	Workflow engine service	60
6.3.4	Developer gateway	62
6.3.5	User gateway.....	62
6.3.6	Message oriented middleware (MOM)	62
6.3.7	Infrastructure management service	63
6.3.8	Registry.....	63
6.3.9	Provisioning service	64
6.4	Exemplary deployment and case study	64
6.5	Implementation issues and compromises.....	67
7	Evaluation and discussion	68
8	Conclusion.....	70
	Bibliography	71
	Appendix.....	75
A	Theoretical Background.....	75
A.1	Docker	75
B	Architecture and design	75
C	Implementation.....	77

C.1	Workflow image.....	77
C.2	Activity image.....	86
C.3	Workflow definition service	94
C.4	Developer gateway	104
C.5	Workflow engine service	106
C.6	Event converter service	110
C.7	Infrastructure management service	111
C.8	Organization management service	113
C.9	Provisioning service	114
C.10	User gateway	115
C.11	Worklist handler service	116
D	Deployment	118
E	Case study	126

List of Figures

Fig. 5.1	Possible Mapping of WfMS and Docker Concepts	24
Fig. 5.2	Exemplary directory structure for G_*^{DV}	27
Fig. 5.3	Proposed choice of a suitable utilization of Docker for workflow enactment.....	32
Fig. 5.4	Layer Structure for Activity/Workflow Images	42
Fig. 5.5	UML Class Diagram for the Workflow Definition Service	48
Fig. 5.6	UML Class Diagram for the Organization Management Service	49
Fig. 6.1	Layer Contents for Element-wrapping Containers.....	55
Fig. 6.2	The processing loop of ProcessInstance	56
Fig. A.1	Docker Container Life Cycle	75
Fig. B.1	UML Class Diagram for the Organization Service.....	76
Fig. D.1	UML deployment diagram of the architecture	119
Fig. E.1	Dashboard of the prototype	126
Fig. E.2	Roles view of the prototype	126
Fig. E.3	Users view of the prototype	127
Fig. E.4	Modeling a third party container workflow.....	127
Fig. E.5	Created images for the third party container workflow	127
Fig. E.6	Provisioner reacts to pushed image by initiating pull	127
Fig. E.7	Modeling a manual activity workflow	128
Fig. E.8	Modeling a sub-workflow workflow	128
Fig. E.9	Worklist overview in the user gateway.....	129
Fig. E.10	Worklist item overview of a user in the user gateway.....	129
Fig. E.11	Manually updating worklist item in RabbitMQ admin interface.....	130
Fig. E.12	Executed containers for the case study.....	130
Fig. E.13	Multiple engine instances subscribed to the same queue.....	130
Fig. E.14	Scaling up the engine service	131

List of Tables

Tab. 5.1	Objectives and their respective requirements	19
Tab. 5.2	Required data visibility and data interaction types.....	19
Tab. 5.3	Containerization/Grouping/Communication Solution Pairings	22
Tab. 5.4	Supported types of data visibility and data interaction by the variants	30
Tab. 5.5	Possible Scheduling Criteria.....	35

List of Listings

Fig. 6.1	Instantiation of an activity image in ActivityInstance.....	57
Fig. 6.2	Configuration of the Message-oriented Middleware (MOM) service in the Docker Compose file	63
Fig. 6.3	Configuration of the registry service in the Docker Compose file	64
Fig. 6.4	Provisioning service: Loop for pulling images	65
Fig. C.1	Exported process definition in JSON format	77
Fig. C.2	JSON schema used for input validation	77
Fig. C.3	Dockerfile for workflow base image	78
Fig. C.4	ActivityInstance class in workflow image (1/2).....	79
Fig. C.5	ActivityInstance class in workflow image (2/2).....	80
Fig. C.6	FileHelper helper class in workflow image.....	81
Fig. C.7	ProcessDefinition class in workflow image.....	82
Fig. C.8	ProcessInstance class in workflow image (1/2).....	83
Fig. C.9	ProcessInstance class in workflow image (2/2).....	84
Fig. C.10	Workflow image run script	85
Fig. C.11	Dockerfile for activity base image	86
Fig. C.12	Activity instance class (1/2)	87
Fig. C.13	Activity instance class (2/2)	88
Fig. C.14	ContainerInvocation helper class	89
Fig. C.15	SubworkflowInvocation helper class (1/2).....	90
Fig. C.16	SubworkflowInvocation helper class (2/2).....	91
Fig. C.17	WorklistClient class (1/2)	92
Fig. C.18	WorklistClient class (2/2)	93
Fig. C.19	Activity information for the inclusion in the activity image	93
Fig. C.20	Definition service run script	94
Fig. C.21	ProcessDefinitionImageSerializer class.....	94
Fig. C.22	WorkflowFullSerializer class.....	95
Fig. C.23	Activity class	96
Fig. C.24	ControlFlow class.....	97
Fig. C.25	ProcessDefinition class	97
Fig. C.26	Workflow class.....	97
Fig. C.27	ImageBuilder class.....	98
Fig. C.28	ImageManager class	99
Fig. C.29	ActivityConsumer class	100
Fig. C.30	ControlFlowConsumer class.....	101

Fig. C.31	DockerConsumer class	101
Fig. C.32	ProcessDefinitionConsumer class	102
Fig. C.33	WorkflowConsumer class.....	103
Fig. C.34	ApplicationController class in developer gateway	104
Fig. C.35	WorkflowsController class in developer gateway.....	105
Fig. C.36	WorkflowEngine class in workflow engine service.....	106
Fig. C.37	WorkflowConsumer class in workflow engine service	107
Fig. C.38	WorkflowInstanceConsumer class in workflow engine service.....	107
Fig. C.39	WorkflowInstance class in workflow engine service.....	108
Fig. C.40	DockerHelper class in workflow engine service	109
Fig. C.41	Conversion of Docker events to MOM messages	110
Fig. C.42	ServerConsumer class in infrastructure management service	111
Fig. C.43	DockerHelper class in infrastructure management service	111
Fig. C.44	EnvironmentManager class in infrastructure management service	112
Fig. C.45	RoleConsumer class in organization management service.....	113
Fig. C.46	Role class in organization management service.....	113
Fig. C.47	Provisioning service.....	114
Fig. C.48	WorklistsController class in user gateway	115
Fig. C.49	WorklistItemsController class in user gateway	115
Fig. C.50	UserConsumer class in worklist management service	116
Fig. C.51	WorklistConsumer class in worklist management service	117
Fig. C.52	WorklistItem class in worklist management service	117
Fig. D.1	Setup of the machines for the exemplary deployment (1/2)	118
Fig. D.2	Setup of the machines for the exemplary deployment (2/2)	120
Fig. D.3	Setup of the services for the exemplary deployment	120
Fig. D.4	Docker Compose file of the WfMS (1/5)	121
Fig. D.5	Docker Compose file of the WfMS (2/5)	122
Fig. D.6	Docker Compose file of the WfMS (3/5)	123
Fig. D.7	Docker Compose file of the WfMS (4/5)	124
Fig. D.8	Docker Compose file of the WfMS (5/5)	125

Abbreviations

AMQP	Advanced Message Queuing Protocol
API	Application Programming Interface
cgroups	control groups
CoW	Copy-on-Write
CRUD	Create, Read, Update, Delete
ESB	Enterprise Service Bus
GUI	Graphical User Interface
HTML	HyperText Markup Language
HTTP	Hypertext Transfer Protocol
ID	Identifier
IP	Internet Protocol
IT	Information Techonology
JSON	JavaScript Object Notation
MOM	Message-oriented Middleware
MSA	Micro-services Architecture
NFS	Network File System
OASIS	Organization for the Advancement of Structured Information Standards
OS	Operating System
P2P	peer-to-peer
PID	Process Identifier (ID)
REST	Representational State Transfer
RoR	Ruby on Rails
SOA	Service-oriented Architecture
WfMC	Workflow Management Coalition
WfMS	Workflow Management System
WSDL	Web Services Description Language
YAML	YAML Ain't Markup Language

1 Introduction and motivation

and_motivation)?

The digital revolution has brought with it a variety of new challenges for many enterprises, forcing the need for agility in an increasingly fragile market environment. To cope with technological advance and competitive pressure through shortened time-to-market phases and reduced entry hurdles for market newcomers, enterprises need to adapt quickly to new technologies and business models. Coupled with the need to optimize costs, these developments have furthered the emergence of services known as Platform as a Service (PaaS) and Software as a Service (SaaS)[6, p. 606]. These concepts offer a high degree of flexibility as they can be swiftly scaled to changing consumption patterns, while at the same time allow a sharing of resources among users of these services. To be able run software in a heterogeneous infrastructure that features such services, various approaches have been presented which help to provide a predictable runtime environment [4, p. 81]. One of them is the use of software containers which provide a way of packaging and executing processes that isolates the application from the underlying Operating System (OS) of a computer and other processes that run on it.

?(acro:OS)?

The concept of software containers is no new notion: an early predecessor was the `chroot` command, which dates back to 1979, *software jails* followed in 1998 [4, p. 82]. In the second decade of the 21st century, solutions like Rocket, LXD, and Docker emerged, which aim at the introduction of standardized, re-usable software containers, usually in combination with tools for their management. Among these solutions, Docker is very popular. In the beginning of 2016, Docker's repository was the 20th most "starred" repository on the source code management platform *GitHub* – ranking four positions behind the Linux kernel repository [16]. Docker comes with a set of utilities, which extend its main container-related functionality by features that help to set up, provision, and manage a distributed environment.

Organizations perform temporal and logical sequences of actions that help to interact with business relevant entities – business processes – with the objective to reach their business goals. If these processes are coordinated in an automated way, they are also called *workflows*. Workflow

?(acro:WfMS)?

Management Systems (WfMSs) are designed to support the definition, execution and monitoring of these workflows [2, 18]. With regards to the challenges that heterogeneous and distributed Information Technology (IT) environments as described above impose on WfMSs –

?(acro:IT)?

e.g. the distribution of workflows to their location of enactment, the requirement to be able to adapt to increasing workload or manage the remote execution of tasks – it could be of interest to fathom possible benefits that may arise from the use of the Docker tool set in the context of these WfMSs. The primary objectives of the thesis at hand are thus to address the following questions and to derive artifacts from the findings that may serve as a foundation for the conceptualization and implementation of future Docker-based WfMSs:

- RQ1:** How can Docker leverage the deployment and execution of workflows in a distributed environment?
- RQ2:** Which decisions in software architecture and software design of a WFMS are complemented by Docker's functionality?

Queries on the research portal Scopus with the search terms 'docker AND wfms' and 'docker AND "workflow management system"' on November 6th 2015 yielded no results for existing research. A search conducted during the implementation with the same queries on Google Scholar returned a publication by Zheng and Thain which is focused on using Docker to provide controllable runtime environments for the execution of tasks in the Makeflow WfMS [44]. Compared to its topic, the scope of the thesis at hand broader as it aims to find general uses for Docker in WfMS.

The structure of this thesis follows the design science research process suggested by Peffers et al. [30, pp. 89-92]. The research problem is identified in this very chapter and chapters 2, 3 and 4, in which the fundamental concepts of WfMSs and Docker as well as architecture styles are introduced. Based on considerations drawn from these concepts, the objectives of a solution are inferred and a prototype is designed in Chapter 5. The design and implementation of the prototype is described in chapters 5 and 6 respectively. In Chapter 7, the developed mechanisms and the prototype are evaluated. Finally, the findings of this thesis are summarized and suggestions for subsequent research are presented in Chapter 8.

2 Workflow management systems

In this chapter, the concepts of workflows and workflow management systems will be introduced briefly and related to each other. There is a plethora of term definitions and deviating understandings of workflows and the concepts related to them [7]. This Unless noted otherwise, the concepts presented in this chapter thus rely on specifications published by the Workflow Management Coalition (WfMC), a consortium of WfMS vendors, researchers in the field of workflow management and WfMS users, which the authors claim that it “describes a common model for the construction of workflow systems and identifies how it may be related to various alternative implementation approaches” [18].

The identified properties will be used in 5.1 to identify objectives for the architecture. Also, they will be the reference to which the final architecture developed in this thesis is compared against.

2.1 Concepts

2.1.1 Workflow

In order to achieve their business goals, organizations perform temporal and logical sequences of tasks that help to interact with business relevant entities. These sequences are known as *business processes*. If the logic that controls the processes is performed in an automated way, e.g. by an information system, one refers to the processes as *workflows* [2, 18]. The WfMC defines workflows as “the computerized facilitation or automation of a business process, in whole or part” [18].

Process activities are the atomic steps that processes consist of. The WfMC differentiates between *manual activities* and *workflow activities*. The former are activities that involve user interaction in order to be completed, while the latter are automated and require no interaction [18]. As the term “workflow activity” might be misunderstood as “any activity belonging to a workflow”, in the following the term *automated activity* will be used instead.

2.1.2 Process definition

In order to be able to execute workflows, the underlying business processes must be machine processable and thus have to be formalized to an abstracted model [18]. This model is usually called *process definition* and stored in form of some high-level programming language construct

[18, 43]. The process definitions typically consist of a collection of activities with additional metadata such as associated applications or participants, and a set of rules which determine the execution order of these activities [18]. They further may contain references to other processes, which are treated as a single activity in the process definition [18, 7].

2.1.3 Process instance

process_instance)?

A *process instance* is an enactment of a process definition. A process definition may be instantiated multiple times, even at the same time. [7]. If only the automated parts of such an instance are meant, the WfMC advocates the term *workflow instance* [18].

Process instances have several states. When they are created, they are in the *initiated* state. In this state, all relevant data has been provided, but the execution has not yet begun, e.g. because not all requirements are met. When the process is started, it enters the *running* state and its activities may be started according to the process definition. If it has one or more instantiated activities, a process instance is in the *active* state. Process instances may be suspended, i.e. they enter the *suspended* state and no activities are instantiated until they leave it again. There are two states that a stopped process instance can be in. Either the completion requirements are met and the stopped process instance is in the *completed* state. Or the process instance stopped before its regular end, i.e. because of an error or manual interruption. In this case the process instance is in the *terminated* state [18]. A graphical representation of the state transitions described above can be seen in Figure ??.

2.1.4 Activity instance

activity_instance)?

Like processes, activities are instantiated during workflow execution and have a set of states that they may be in. When an activity instance is created, it is in the *inactive* state. From this state, it may enter the *suspended* state, in which it will neither be activated nor assigned a worklist item. If the activity instance is not suspended, it is activated once its entry conditions are fulfilled. It then is in the *active* state. When the execution of the activity has finished, it enters the *completed* state [18]. The possible transitions between the activity instance's states can be seen in Figure ??.

2.1.5 Workflow data

b:workflow_data)

In a WfMS, several forms of data are distinguished, as they serve different purposes. The WfMC differentiates between three types of data: workflow relevant data, workflow application data, and workflow control data [18].

WfMSs use *workflow relevant data* to determine a process instance's status and the next activity to be executed. It is normally available to the WfMS and both process- and activity instances [18].

Applications that are part of an workflow may work on domain specific data, which is called *workflow application data*. In most cases, the WfMS does not interact with this data other than providing it to the respective applications and limit access to it according to some authorization rules [18, 7].

Data that is internally managed by a WfMS is referred to as *workflow control data*. This data usually comprises the states of process- and activity instances and other internal statuses and is per se not interchanged in its default form [18, 7].

Russel et al. differentiate seven commonly used forms of data visibility in WfMSs [34, p. 6-15]:

- **Activity Data**

Data which is defined within an activity and which is accessible within the instance of this activity.

- **Sub-workflow Data**

Data which is defined within a sub-workflow activity and is accessible from everywhere within this sub-workflow.

- **Scope Data**

Data which is accessible within a subset of activities in a workflow instance.

- **Multiple Instance Data**

Data which is defined within an activity that can be instantiated multiple times. Each instance can access its own version of that data.

- **Workflow Instance Data**

Data which is specific to a process instance of a workflow and which can be accessed by all components of that workflow during its execution.

- **Workflow Data**

Data elements which are accessible to all components of all instances of a workflow and are controlled by the WfMS.

- **Environment Data**

Data which exists in the operating environment and which can be accessed by components of any workflow during execution.

Russel et al. identified six further types of data interaction between the various hierarchy levels in workflows [34, p. 16-24]:

- **Activity – Activity**

Data is passed between two activity instances which belong to the same workflow instance.

- **Sub-workflow Activity – Sub-workflow Components**

Data is passed from a sub-workflow activity instance to the corresponding sub-workflow.

- **Sub-workflow Components – Sub-workflow Activity**

Data is passed back from a sub-workflow instance to the corresponding sub-workflow activity instance.

- **Activity – Multiple Instance Activity**

Data is passed from an activity instance to a successor activity which may be instantiated multiple times. It may be passed to all instances of the multiple instance activity or distributed among them according to specific rules.

- **Multiple Instance Activity – Activity**

Data is passed from an activity which may be instantiated multiple times to a successor activity instance.

- **Workflow Instance – Workflow Instance**

Data is passed from one instance of a workflow during its execution to another workflow instance that is being executed in parallel.

Workflow data may either be made available from a common datastore, get passed along with the control flow of a workflow, or be explicitly passed to the receiving component [34, pp. 16-21].

2.1.6 Workflow participant and worklist

w_participants)?

There are workflows that contain activities which require user interaction. A WfMS thus provides the functionality to assign workflows and activities to workflow participants. The assignment can either be a specific one, targeting an individual person, or be more general, targeting a set of users from which the WfMS may choose during execution time. These sets are usually based on an organizational structure that manifests itself in roles, of which a user may have one or more [18, 7].

Each user owns a so called *worklist* that consist of activities to which he or she is assigned to and which are scheduled for execution. Depending on the actual implementation, activities may appear on multiple users' worklists until one of them signals that he or she will work on it [18, 7].

2.2 Typical architecture

For large and complex organizations, the need arises to manage the creation, distribution and execution of workflows in a structured manner. An information system is a WfMS if

- it is able to define, create and manage the execution of workflows by using software that runs on one or more workflow engines;
- it is able to interpret process definitions;
- it can interact with involved participants; and
- it may invoke external applications [22].

According to the WfMC, a workflow management system is “a system that defines, manages and executes workflows through the execution of software whose order of execution is driven by a computer representation of the workflow logic” [18]. The components of this system interlock in order to provide the overall functionality of a WfMS. In the following, the typical characteristics of WfMS architectures identified by the WfMC are presented.

2.2.1 Functional areas

The WfMC divides the responsibilities of a WfMS in three functional areas: *build-time* functions, *run-time process control* functions and *run-time activity interaction* functions [18, 1].

The *build-time* functionalities are concerned with the abstraction of workflows, i.e. the creation of process definitions. The *run-time process control* functionalities of a WfMS are dealing with instanciating and controlling processes, coordinating the execution of activities within a process instance, initiating (but not performing) both participant interaction and application invocation [18].

Some activities require users to enter data or applications to perform a specific task. The *run-time activity interaction* functions of a WfMS provide the possibilities to do so. They make forms available to users, instruct other applications, and collect any resulting outcomes [18].

2.2.2 System components

The WfMC identified four high-level groups of software components that most WfMSs have in common: *Process Definition Tools*, *Administration and Monitoring Tools*, *Workflow Client Applications*, and *Workflow Enactment Service* [18].

Process definition tools are designed for analysis, modelling, description and documentation

of business processes. The output of process definition tools – process definitions – can be interpreted by workflow engines in order to enact the respective workflow. The WfMC notes, that process definition tools do not necessarily have to be part of a WfMS, since the definition may take place in another tool as long as it is passed along in a standardized format [18].

The **administration and monitoring tools** are responsible for high-level monitoring and control of the system. Their functionalities may include user management, role management, logging, performance auditing, resource control, and supervision over running processes.

The core function of the **workflow client applications** is to let the user retrieve worklist items that were assigned to him/her. In the WfMC reference model they are thus sometimes referred to as *worklist handlers* [18]. Yet, the WfMC stresses that their functionality may be much broader, e.g. letting him/her enter data that is associated to one worklist item, allow him/her to alter the worklist, signing in or off, or control the processes' statuses. The WfMC thus advocates for the term *workflow client applications* [18]. The user interface may be part of the workflow client applications or exist as a separate software component.

In order to enact workflows, instances of them are created based on the interpretation of previously created process definitions. Workflow instances are usually managed by a component which is called **workflow engine**. The workflow engine decides which activities and sub-workflows of a workflow can be started, determines suitable participants, invokes external applications and it updates the users' worklists accordingly. It further manages the storage and flow of workflow control data and workflow relevant data [18].

The **workflow enactment service** groups one or more workflow engines into one logical component that exposes a single coherent external interface to other software [18].

3 Software containers and Docker

<cha:docker>

When multiple applications or application instances are intended to run on one physical machine without interfering with each other, they are usually isolated in terms of execution environments and provided with a controllable share of system resources [14]. These goals can be fulfilled by both virtual machines and software containers [33]. The difference between these two options and the basic principles of software containers are shown in 3.1.1 to give an understanding of the technology.

Docker is a tool that is intended to facilitate the creation and management of software containers. In Section 3.1 its underlying concepts will be presented. Based on that, the functionality that Docker provides will be explained in Section ???. Finally, the Docker ecosystem, i.e. the set of tools that enhance the core functionality of Docker, is introduced in Section 3.2.

3.1 Concepts

docker_concepts>

First, the concept of software containers will be presented and briefly contrasted against the concept of virtual machines to explain *what* Docker does and to identify the possibilities it offers. Internal constructs of Docker – images, containers, data volumes, dockerfiles, registries and repositories – are then introduced in order to provide an understanding on *how* Docker does what it does.

3.1.1 Virtualization

ware_containers>

The goal of *virtualization* is to simulate the presence of multiple computers on one machine. This can be beneficial for example to allow applications to run in a controllable environment, isolated from other applications. There are two types of virtualization, one that takes place on the hardware level and another that takes place on the OS level [33].

Hardware-level virtualization is usually driven by a *hypervisor* – a service that manages virtual machines and provides them with abstracted hardware devices to run on. This hypervisor either runs in the OS of the host machine or directly on its hardware [33].

Virtual machines, i.e. the computers simulated on the host machine, require their own OS to be installed.

The other kind of virtualization, *OS-level virtualization*, is the one that Docker makes use of. It utilizes functions of the host kernel which allow the execution of several isolated userspace

instances that share the same kernel, but may differ in terms of their runtime environment, e.g. file system or system libraries. These isolated userspace instances are usually called *software containers* or just *containers*. This type of virtualization is therefore also referred to as *container-based virtualization* [33].

The isolation and resource management in container-based virtualization on Linux systems are mainly achieved by two mechanisms, *control groups (cgroups)* and *namespaces*. While the former allows to group processes and manage their resource usage, the latter can be used on many system components. Namespaces may be introduced for example on network interfaces, the file system, users and user groups, Process IDs (PIDs), and other components, in order to achieve a fine grained control over the respective isolation [33]. Besides Docker, there are several solutions that are based on the aforementioned kernel features, e.g. LXC, LXD, lxcftfy, systemd-nspawn, etc. [33]. There are ongoing efforts to create a common container standard [19].

Many container solutions rely on a mechanism called *Copy-on-Write (CoW)* to provide a runtime environment, which on the one hand lets the containers reuse system libraries and the like while on the other hand limits the container in affecting its surroundings [13, 28]. CoW is an optimization strategy that makes use of the benefits of both sharing files for read access and copying them to a local version previous to changing them. Processes that require access to a file share the same instance of that file. As soon as one process needs to alter the file, the operating system creates a copy that only the process has access to. All other processes still use the original file [28, 13].

3.1.2 Docker images and containers

Docker images (referred to as *images* from here on) are the basis for Docker containers. Each image consists of a sequence of layers, with each layer summarizing one CoW step, i.e. the alterations to the file system that one command causes compared to the previous layer. Each layer is uniquely identifiable, which allows the same layer to be used by several images.

Docker containers are runtime instances of images. In the context of storage, a Docker container can be considered as an image, i.e. a set of read-only layers, with a writable layer on top of it – the *container layer*. Write operations within a container trigger a CoW operation which copies the targeted file to the container layer, where the write operation is then performed. Besides reducing the amount of space consumed by containers, the CoW strategy also reduces the time required to start a container. This is because Docker only has to create the container layer instead of providing a copy of all the files contained in the respective image [13]. The lifecycle of a container and the set of Docker commands that may influence it are depicted in Figure A.1.

3.1.3 Data volumes

b:data_volumes)?

Any data written to the container layer is deleted as soon as its Docker container is deleted. Also, Docker containers that store a lot of data are considerably larger than Docker containers that do not, since the write operations require space in the container layer. This is the reason why data volumes exist – they are designed to persist data. Data volumes are directories or files that are mounted directly into a Docker container and thus bypass the storage driver [13]. They are never deleted automatically and therefore must be cleaned up manually if they are not needed anymore [13].

Using a dedicated container that mounts a data volume which is then shared with an application container is a pattern that can be used to keep the application's data across restarts of its container [13].

3.1.4 Dockerfiles

ub:dockerfiles)?

Instead of manually creating a container, running commands on it and then committing it to create an image, a recipe file can be used to instruct Docker to perform these actions – the *Dockerfile*. In this file, the user states the name of an image that the new image should be based on and the commands that otherwise would be entered manually [13]. To build an image, Docker is given a Dockerfile and a directory with files required for the build, the *build context*, which is usually the directory the Dockerfile is located in. This enables Docker to copy files from the context to some layer within the image, if needed [13].

3.1.5 Registries and repositories

d_repositories)?

A registry stores named Docker images and distributes them on request. Each image may be available in different tagged versions in a registry [13]. Within a registry, images may be organized in collections, which are called *repositories* [13].

Using the commands `push` and `pull` in combination with the unique ID or the name of an image, developers can upload and download it to a registry. If the image name is prepended with the network address or domain of a registry, this registry will be used – otherwise, Docker tries to perform the action on Docker Hub [13].

3.1.6 Docker Engine

:docker_engine)?

The Docker Engine forms the core of Docker as it provides access to the features described in the rest of this section. The user can use the engine for example to monitor and change the status of a container, e.g. as depicted in Figure A.1, manage the images on a host or administrate the available networks.

?(acooRBT)?

Docker Engine makes use of a client-server architecture: it features a daemon, i.e. a background process that is not directly controlled by the user, which provides the functionality and a client that controls said daemon [11]. Both client and daemon may run on the same system, or be connected remotely through a Representational State Transfer (REST) Application Programming Interface (API) [13]. By passing the network addresses of nodes running the Docker daemon along commands issued to a client, it is thus possible to control several Docker hosts from a single client. An abstraction to this process is provided by Docker Swarm.

3.1.7 Docker networking

docker_networks)

Since version 1.9, which was released in November 2015, Docker features virtual networks in order to isolate containers concerning their network connections, but at the same time allow containers to communicate with the host, each other, and the outside world. These networks are based on virtual interfaces and are managed by the Docker daemon. Containers may be connected to multiple networks at the same time [13].

?(acro:IP)?

By default, Docker installs three networks: a *bridge* network, a *host* network, and a *none* network. The *bridge* network, titled *docker0*, is a subnetwork that is connected to the host's networks. Docker connects containers to this network if not instructed otherwise. Containers that are members of this network can communicate with each other by using their respective Internet Protocol (IP) addresses. They also may expose ports that can be mapped to the host's network, which makes the applications that run in them accessible from the outside. The *host* network represents the actual host's network. If containers are assigned to this network, they will be placed in the host's network stack, i.e. all network interfaces defined on the host are available to the container [13]. The *none* network provides containers with their own network stack. Containers that are only members of the *none* network are completely isolated in regards to network communication, unless further configuration is undertaken [13].

Besides the network types mentioned above, Docker features another type of network, the *overlay* network. Overlay networks are virtual networks that are based on existing network connections. They are intended to simplify the communication between containers running on multiple hosts which, in turn, run on multiple machines themselves. If a container is member

of an overlay network, it is able to communicate with all other containers that are also part of this network, no matter which Docker host (or host machine) they are running on [13]. Docker's overlay network requires a key-value store to be present in order to persist information on its own state, e.g. on lower level networks that it relies on, network members, etc.

3.2 Docker ecosystem

Around the Docker Engine, several other solutions have been developed to cope with different specialized tasks that are associated with building and running containers. In the following, a selection of these solutions will be introduced briefly.

3.2.1 Docker Swarm

Docker Swarm allows applications which rely on several Docker containers to be run on a cluster of machines. It provides an abstraction that lets a set of Docker Engines behave like a single Docker Engine. Further it assigns containers to a specific host for execution based on given rules [12].

A swarm setup typically consists of one or more *swarm managers*, multiple Docker hosts, and, in case that no remote discovery service is used, a local discovery service. By default, every new container is assigned to a swarm-specific overlay network [13].

Docker Swarm provides two kinds of mechanisms for the assignment of containers to Docker hosts, *strategies* and *filters*. Strategies tell Docker how to rank hosts for assignment by some specified criteria, e.g. available resources of a host or number of already deployed containers on it. Filters allow to specify rules, which Docker tries to apply when searching for an assignment target. Possible rules could for example be matchers for the host's name or identifier, its OS, or for custom tags, which may describe the host's role or properties like size of attached storage. It is also possible to declare the affinity of certain containers or images for being deployed on the same host [13]. Filters are examined in more detail in 5.2.4.

3.2.2 Docker Machine

The Docker Machine tool is designed to facilitate the setup of Docker hosts. In order to fulfill this goal, Docker Machine creates one virtual machine per requested host [12, 13]. This has several reasons. First, this proceeding allows several Docker hosts to run on the same computer while prohibiting them from interfering with each other. Second, it enables computers with OSs that natively do not support Docker and Docker containers, to act as a Docker host [13].

And third, as the virtual machine image is known, it lets the setup procedure make assumptions on its environment, which simplifies the installation and configuration of the Docker Engine.

3.2.3 Docker Compose

(sub:docker_compose)?

Docker Compose is a tool that enables the user to specify and run applications that consist of many containers. Similar to the way an image is described in a Dockerfile, the user lists the required containers and their respective run configuration in a descriptive file. Docker Compose interprets this file and sets the containers up accordingly [12].

Docker Compose files supports a wide range of commands to facilitate the deployment and management of containers. Only the most important ones for this thesis are thus presented briefly. Using the keyword `networks` allows to specify networks and their configurations that should be created by Docker prior to the start of the containers. If it is nested within a service configuration, the networks that a container shall be connected to can be listed. The keyword `image` can be used to specify the image that should be used for the creation of a container. In combination with the keyword `build`, Docker can be instructed to construct that very image according to a specified configuration before the container is instantiated from it [13].

When the `up` command is called, Compose first builds or pulls all required images and creates the specified networks if they do not exist. It then iterates over the specified containers in the order defined by their mutual dependencies and starts containers if they are stopped or missing or recreates them if a newer version of their underlying image is available on the node [13].

3.2.4 Docker Hub

(sub:docker_hub)?

Docker Hub is a service that allows to store, browse and distribute Docker images. The service is free of charge for public repositories and offers paid private repositories. Using the Docker Engine client or the web interface, users can search for public images and download them [5, p. 4]. GitHub repositories that contain a build context and an appropriate Dockerfile can be linked to a Docker Hub repository to let Docker Hub perform automated image builds if code is updated on these repositories [13].

4 Architecture styles

Developers of software systems have to cope with challenging factors such as high complexity within their systems, an increased need for integration of internal and external functionality and evolving technologies. Several architectural approaches emerged from the attempt to cope with these challenges. Strimbei et al. consider *monolithic architecture*, *Service-oriented Architecture* (SOA) and *Micro-services Architecture* (MSA) to be the most relevant ones [37, p. 13]. In 5.3.1, an architecture for the prototype is chosen based on the properties of the different architectures that are presented in this chapter.

Monolithic Architecture

Monolithic software systems are characterized by their cohesive structure. Usually, components in a monolith are organized within one program, often running in one process [39, p. 35]. They communicate through shared memory and direct function calls. Monolithic applications are typically written using one programming language [37, p. 14]. In order to cope with increasing workload on a monolithic system, multiple instances of it are run behind a load balancer [39, p. 35].

The strengths of monolithic architecture lie mostly in its comparably simple demands towards the infrastructure. As the application is run as one entity, deployment and networking are rather simple [39, p. 35]. Since data can be shared via memory or disk, monolithic applications can access it faster than it would be the case with networked components [37, p. 14].

Also, as the interaction between the application's components happens XYZ, the complexity of this interaction is lower compared to interaction between distributed components [37, p. 14].

The weaknesses of monolithic architecture originate from its cohesive nature. As its components are usually tightly coupled, changes to one component can affect other parts of the application, which complicates the introduction of new components as well as the refactoring of existing ones [39]. Components cannot be deployed individually, which hinders reuse of functionality across several applications more difficult and makes scaling of single bottleneck components impossible [39]. Also, if the application runs in a single process, the failure of one component may bring down the whole application [27, p. 5].

Service-oriented Architecture

d_architecture)?

SOA is based on the idea that code which provides related business functions can be bundled into one component that offers said functionality to other systems *as a service*, thus avoiding duplicated implementation of the functionalities among these systems [17, p.8]. An application may then use several services in order to fulfill its own business function [29, p. 390]. The Organization for the Advancement of Structured Information Standards (OASIS) describes SOA as an architectural paradigm that supports the organization and usage of these services [38]. Each service provider exposes its offered services in a standardized way, e.g. using Web Services Description Language (WSDL), which can then be utilized by *service consumers* [29, p. 390], [37, p. 17].

?<acro:OASIS)?

?<acro:WSDL)?

?<acro:ESB)?

Messages between services in SOA are either of direct nature, which is called point-to-point connection, or backed by a message bus, the Enterprise Service Bus (ESB) which incorporates the integration logic, e.g. on transport and transformation of messages, between services and supports asynchronous messages [29, p. 393]. While the former leads to tight coupling between the components, which becomes impractical with increasing numbers of endpoints, the latter manages this scenario better [29, p. 393].

On the one hand, SOA has some advantages in comparison to monolithic architecture. Service consumers do not have to make assumptions - or know - how services work, they only have to rely on the invocation of a service and its result to be formed as expected [29, p. 390]. As long as the interface and the output of existing services do not change, a service provider may thus be altered or its capabilities be extended without affecting its services' consumers [29, p. 390]. SOA thus enhances an organization's ability to respond quickly to changes [29, p. 390], [8, p. 254]. Since legacy applications can be provided with appropriate interfaces, SOA can help to integrate and extend them [29, p. 390].

On the other hand, SOA has some drawbacks, too. For example, the failure of a single service provider may bring down multiple applications that consume its services, if no fallback measures are in place [29, p. 408f]. Also, the overall performance of an application with SOA depends on the aggregated performances of the services it uses and their respective interactions [29, p. 408f].

Micro-services Architecture

es_architecture)

The concept of MSA is closely related to that of SOA, as it also promotes the encapsulation of functionality in standalone services which can be used by other parts of a system. There is ambiguity whether MSA is actually a concept on its own – or rather a specialized application of

SOA [39, p. 35], [37, p. 17]. Stubbs et al. describe MSA as a distributed system that consists of independent services which are narrowly focused and thus considered “lightweight” [39, p. 35]. That exact principle has been described as a version of SOA before [29, p. 395].

Strimbei et al. created a differentiation between SOA and MSA as a distinct concept based on several sources. They come to the conclusion, that while the communication in SOA is synchronous and “smart but dependency-laden”, MSA usually relies on asynchronous, “dumb, fast messaging” – meaning that there is few information on the participating services contained in the messaging infrastructure. Further, they perceive applications in SOA to be typically imperative in their programming style, while MSA would be in an event-driven programming style [37, pp. 17-20]. They see SOA applications as being usually stateful and MSA applications as stateless. Finally they characterize the databases in SOA as large relational databases and the databases in MSA as small, often non-relational databases.

One benefit of MSA, which it shares with SOA, is that each service can be developed in a language and with a toolset that suits its specific needs, e.g. a lower-level language for time-critical but simple tasks or a high-level language with some framework for complex ones, instead of having to find a compromise that suits most of the application [39, p. 35], [27, p. 4], [40, p. 113]. The narrow focus of each service makes it less specialized to certain uses, which should theoretically enable better reuse of code [39, p. 35]. Another positive aspect is the *resilience* of micro-services when it comes to service failures, that is, a single failing service does not render the whole system incapable of working [27, p. 5]. Due to the properties of the MSA, micro-services may be deployed, upgraded and scaled individually [40, p. 116].

There are also disadvantages that can emerge with the use of MSA. While MSA facilitates deploying parts of an application individually, the overall amount of work required for the deployment of all services is higher and the coordination of the deployments is complexer than the deployment of a monolithic application [39, p. 35]. As services may be unavailable at times, a mechanism has to be in place that allows the discovery of services [39, p. 35]. Unless a dedicated logging service is introduced and used, there is no central access to the services’ logs. Aggregation and analysis of errors and fixing them is thus more complicated in comparison to monolithic architecture [39, p. 35]. In order to define the different services, it is necessary to find the right size for each service, i.e. the appropriate scope of its functionality. This process poses a challenge that is not needed to this extent in monolithic architectures or SOA.

5 Conceptual development of the WfMS

In order to make sound decisions in the design process for a Docker-based WfMS, the intended outcome has to be outlined first. Bearing in mind the concepts presented in Chapter 2 and 3, objectives that together form the intended outcome are thus compiled in Section 5.1.

The potential benefit WfMSs could obtain from using the Docker ecosystem is twofold. On the one hand, the distribution and execution of workflows and their components can be enhanced, which is addressed in Section 5.2. On the other hand, the mode of operation of the WfMS itself might be improved by the use of Docker. Based on the determined objectives, the architecture of a Docker-based WfMS is thus shaped in Section 5.3 and subsequently its design in Section 5.4.

5.1 Determination of objectives

In this section, the objectives for the design and implementation are inferred from considerations regarding the desired functionalities of a Docker-based WfMS as well as its intangible properties.

In the following, expectations towards the functionality of the resulting WfMS are established in a structured manner. These functionalities are grouped by the component groups of a WfMS, which are described in 2.2.2. The resulting objectives and the requirements that need to be met in order to fulfill them are summarized in Table ??.

Infrastructure and Infrastructure Management

As the IT environment of an organization changes over time, the WfMS should be structured in a way that allows the adaption to such changes with the least possible system downtime. Further, it should be possible to add servers to the system during execution time, which then should be usable with a minimum of manual configuration.

If an organization is unable to perform its business processes, it is likely to suffer from financial losses. Any failure of a business critical WfMS can thus cause severe problems for an organization. The WfMS developed in this thesis should thus be resilient towards failures, i.e. provide as much functionality as possible if a part of it fails and try to recover autonomously. This requires well separated modules.

Objective	Requirements
Ability to alter components	<ul style="list-style-type: none">• Components can be altered on a running system
Resilience in case of failures	<ul style="list-style-type: none">• Non-failed components continue to provide their functionality• Failed components are restarted
Dynamic addition of enactment servers	<ul style="list-style-type: none">• Suitable servers are discovered• User can add servers during execution time
Third-party containers as workflow components	<ul style="list-style-type: none">• Graphical User Interface (GUI) for browsing Docker Hub images exists• Modeling GUI has a “container” element• User can specify start parameters and commands
Resource usage management	<ul style="list-style-type: none">• User can prioritize/demote activities and workflows• WfMS enforces respective resource usage
Property-based scheduling of containers	<ul style="list-style-type: none">• Properties of servers can be described• Workflows and activities can require server properties• Containers are run on suitable servers
Reduction of administrative work	<ul style="list-style-type: none">• Added servers are configured automatically• All execution related containers are started automatically• Saved/updated workflows and activities are deployed automatically

Tab. 5.1: Objectives and their respective requirements

Requirements	Feature
Support of data visibility	<ul style="list-style-type: none">• Activity Data• Sub-workflow Activity Data• Multiple Instance Activity Data• Workflow Instance Data• Workflow Data• Environment Data
Support of data interactions	<ul style="list-style-type: none">• Activity → activity• Sub-workflow activity → sub-workflow• Sub-workflow → sub-workflow activity• Workflow instance → workflow instance

Tab. 5.2: Required data visibility and data interaction types

Workflow Modeling

kflow_modeling)?

One benefit of Docker containers is, that full application stacks can be bundled with all their dependencies and pre-configured regarding their invocation [4, p. 82]. The result can be considered as a black box that provides some specific functionality and that could be used without further configuration. In combination with the facilitated sharing of images through repositories, this provides a foundation for modular reuse and combination [5, p. 6]. In order to reap this advantage, WfMS should enable modeling developers to incorporate the invocation of third party images from within their workflows. This includes the specification of parameters, with which the image should be run.

In case that an execution node is working to full capacity, a means should be provided to support the swift finalization of time-critical tasks before those that are not, e.g. the temperature analysis of a cold storage with sensitive goods which is prioritized over the automated reorder of tasks for the office. The modeling environment should thus enable the user to put restrictions on the resource usage of specific activities in order to prioritize or demote them.

Workflow Distribution

w_distribution)?

In the course of a WfMS's life cycle, many workflows are modeled and many activities are created, and both are likely to be updated occasionally. In order to reduce administrative work, workflows and their activities should be distributed to their correct execution servers after these events in an automated way.

Workflow Execution

kflow_execution)?

All containers that are related to the execution of workflows should be started by the WfMS without user interaction.

The IT infrastructure in an organization may be heterogeneous in terms of machine capabilities and environment, e.g. the amount of memory that is available or the geographic location of the machine. These factors may be of interest when it comes to performance objectives or legal regulations. The scheduling of workflows or activities to nodes for execution should thus be possible based on a structured description of said properties.

In 2.1.5, various forms of data visibility and interaction were presented. Russel et al. examined the capabilities of various workflow engines with regards to these characteristics [34]. The should support at least those forms of data visibility and interaction that are common among existing solutions. As a rough estimation for this, each capability shall be deemed as required if a

majority of solutions examined in that study supports it. The resulting capabilities are presented in Table 5.2.

5.2 Docker in workflow enactment

There are several possibilities how Docker can be utilized for the execution of workflows. Each combination of variants (abbreviated as depicted in Table 5.3) has its own advantages and disadvantages, which are elaborated in this chapter.

The first aspect is whether one wants to spread the containers associated with one workflow instance across various machines for execution (S) or constraint them to run on the same node as a group (G).

Second, it can be differentiated to which extent workflow components are wrapped in their own containers. One could encapsulate only activities in containers ($*_{AC}$) and distribute workflow information on another way, let each workflow and activity reside in a different container ($*_{SEPC}$), or wrap them in a single container ($*_{IC}$). Since such a container is an atomic unit, it cannot be spread across many nodes for execution. The idea of an one-to-one mapping between the Docker and workflow concepts could be abandoned in favor of a solution that features worker containers with specialized behavior which perform suitable tasks on request ($*_{WORK}$).

Third, it is important to define the way data is exchanged between containers. One possible solution could be a data volume that is shared by all containers in need to exchange data with each other ($*_{DV}$). Data could also be passed between containers via some system service, e.g. a database, ($*_{SER}$), or on a direct connection between the containers ($*_{D}$).

Finally, rather independent from the previous variants and hence discussed in isolation, the mechanism that decides which containers are run on which machines, i.e. the execution scheduling, can be chosen.

5.2.1 Properties and mode of operation of the utilization variants

In order to advocate for combination of variants, their characteristics are presented first. In the following, the concepts are explained in more detail and some sub-variants of them are introduced. In the course of this examination, special interrelations among the different characteristics are highlighted.

Data Exchange / Containerization	Common Data Volume	Service	Direct
Grouped execution on one node			
Activities in containers	G_{AC}^{DV}	G_{AC}^{SER}	G_{AC}^D
Workflows and activities in separate containers	G_{SEPC}^{DV}	G_{SEPC}^{SER}	G_{SEPC}^D
Workflow and activities in one container	G_{1C}^{DV}	G_{1C}^{SER}	G_{1C}^D
Worker containers	G_{WORK}^{DV}	G_{WORK}^{SER}	G_{WORK}^D
Spread execution over available nodes			
Activities in containers	\times	S_{AC}^{SER}	S_{AC}^D
Workflows and activities in separate containers	\times	S_{SEPC}^{SER}	S_{SEPC}^D
Workflow and activities in one container	\times	\times	\times
Worker containers	\times	S_{WORK}^{SER}	S_{WORK}^D

Tab. 5.3: Containerization/Grouping/Communication Solution Pairings

docker_variants)

Grouped or spread execution

read_execution)?

The “grouped and spread execution” variants are about the allocation of containers related to one workflow instance on the available nodes. While 5.2.4 deals with the mechanisms behind the scheduling, the larger concept of grouped or spread execution will be focused here.

On the one hand, the containers could be assigned to different nodes (S_*^*). This could happen at random, with regards to characteristics of the containers or their underlying workflow elements, or based on the current workload of the nodes. Balancing the workload and matching containers to specific nodes could have a positive impact on the performance of the execution. Negative effects might arise from the introduced network latency, though. Also, spread execution requires the images that belong to the workflow elements in question to be present on all nodes.

On the other hand, the first container of a workflow enactment might be assigned to one node and all subsequently started containers are launched on that same node (G_*^*). While this reduces the ability to balance the workload across nodes, it could be beneficial for the speed of communication between containers, since no transfer via network is required.

Element-wrapping Images

ping_containers)

The general idea behind this set of concepts is that activities and workflows can be represented by images, whereas containers can represent activity instances and workflow instances.

As described in 2.1, activities can be perceived as self-contained units of work, that is, they contain the information on how to autonomously perform a task on a given set of data. Analogously, Docker images contain the information on how to run processes in an instance of themselves – a container – given a set of parameters. If the work that an activity performs can be manifested in program code, this code and its required runtime environment could be contained in a Docker image. An instance of that image that is created with a specific set of data would then be the counterpart of an activity instance. This notion is the foundation for the $^{**}_{AC}$ and $^{**}_{SEPC}$ variants which resemble the “container-in-worker” approach presented in the paper by Zheng and Thain to some extent [44].

A similar conception can be applied to workflows: they contain the information that is necessary to perform sequences of tasks in an automated way. The sequence order is usually given in a formalized fashion by a process definition. In the given mindset, this process definition would be a list of Docker images in combination with a formal description of the control flow and data flow between these images. A workflow can thus be seen as a set of appropriate images and a

corresponding process definition. A workflow instance, in turn, would consist of the relevant containers, the data that is used and created by these containers, and the enactment state of the workflow. These conceptual mappings are summarized in Figure 5.1.

Like activities, workflows can thus be represented by images. Such a workflow image could contain the process definition of the respective workflow and other data that is specific to it. Alternatively, the workflow data may be passed to the workflow engine for enactment in another format. The variant in which the workflow information is distributed in a separate image along with the activity images is referred to in the following as $*_{SEPC}^*$, while the variant in which the workflow information is passed along otherwise is denoted as $*_{AC}^*$. Theoretically, a workflow could be completely encapsulated in an image, i.e. with all its related activities and its configuration. This case is referred to as $*_{IC}^*$.

Activity	→	Image
Activity instance	→	Container
Process definition	→	List of images + control flow + data flow
Workflow	→	Activity images + process definition
Workflow instance	→	Activity containers + data + enactment status

Fig. 5.1: Possible Mapping of WfMS and Docker Concepts

docker_entities)

Wrapping activities – and optionally workflows – in Docker images creates new possibilities in regard to their distribution and enactment. Images can be uploaded to public or private image registries to provide a standardized way for the deployment to nodes. This offers a way to make the deployment available as a service. Nodes can be instructed to contact these registries in order to be provided with required images or update existing ones.

The layering principle behind Docker images makes updates to activity and workflow images lightweight – as long as only the uppermost layers are changed, the lower ones do not have to be up- and downloaded again. This allows to distribute a complete runtime environment to new nodes while updating only specific layers on existing nodes using one and the same image.

Containers can be paused and unpaused, i.e. all processes within them are suspended. When applied to activity instance or workflow instance containers, this is useful to save processor capacity for suspended activities or workflows until they are resumed.

$*_{SEPC}^*$ permits to leverage the already existing communication between a container, the local daemon and the swarm master to communicate the status of workflow instances and activity instances, as changes to their container's status are published on an event stream of the swarm master. These events can be transformed and published via the MOM.

One possible variation on G_{IC}^{DV} and G_{SEPC}^{DV} would be the inclusion of engine logic in the work-

flow instance container. While the scheduling of this container and preparations on the targeted node would still be in the responsibility of the main WfMSs' workflow engine, the control over the started activity instances would be handed to a smaller, workflow instance specific engine. This setup facilitates the management of the required directory structure, since the container that issues the commands has direct access to the data volume – no information on the upcoming element instances has to be transferred.

Further, in this case suspension and resumption of workflows and activities can both be realized with the respective pause/unpause Docker commands. In combination with a checkpoint/restore tool, which provides the means to save and restore the memory state of a process, long running workflows could be paused and restored across server restarts, or be migrated to another server, if necessary. Proofs of concept for the feasibility of this procedure have been presented in the past [21, 24].

A drawback of this variant is, that the status of the enactment is then held in the workflow instance container. By following the event stream, started and stopped activity instances could be tracked by the main workflow engine, but low-level enactment details would have to be transferred to the engine separately, if they were needed there.

Worker containers

ker_containers)?

The $*_{WORK}^*$ variants take a different approach at utilizing Docker for workflow enactment, in which many unspecialized containers are running permanently. These containers, when provided with an activity description and input data, perform the required actions and return to a waiting state until they are provided with a task again.

In contrast to the variant outlined above, worker containers bear no one-to-one correlation of an image to an activity or a workflow, and also none of a container to an activity instance or a workflow instance. Hence, there is no further creation and distribution of images required – besides the initial distribution of the workers' images (and invoked third-party images). Since all information that is required for execution is passed to these workers at each invocation, changes to definitions of activities or workflows may immediately show effects. This flexibility comes at the price of a verbose communication, though.

Another benefit of worker containers is that they facilitate swift adaption to workload peaks. In case that scheduled enactments start to accumulate, more worker containers may be run. If the nodes themselves have reached their resource limitations, new nodes may be added to the swarm, which do not have to be provisioned with all activity or workflow images – as it would be the case with the wrapping-images variant – but only with the worker image.

Data exchange via data volume

via_data_volume)?

The idea behind this concept (G_*^{DV}) is that all containers involved in the execution of one workflow instance have access to a common working directory in which the data visibility scopes can be established using a file system structure. This working directory resides in a data volume owned by a container that belongs exclusively to the respective workflow instance and whose only purpose is to ensure the existence of said volume.

In its simplest form the working directory could be a simple shared directory which is managed cooperatively by all related containers. Activity instances could then read and write files to that directory. While this reduces the required complexity of the logic, it can lead to problems, too, e.g. if activities overwrite each other's output because it bears the same file name.

A more elaborate structure could be imposed on the working directory, too. In order to support the data visibility and data interaction types that are chosen in 5.1, the following directory structure could be used, which is depicted in Figure 5.2. Data defined at build time, i.e. environment data, workflow data and activity data, could each be stored in a separate subdirectory of the main working directory `workflow_relevant_data`. The directories for workflow data and activity data should have uniquely identifiable names that can be inferred from the respective workflow element, e.g. `wf_$workflow_id` and `ac_$activity_id`. Data that is shared among multiple instances of one activity could be stored in a subdirectory shared of the respective activity data directory.

Also present in the working directory should be a directory `wfi_$workflow_instance_id`, in which the working directories for subsequently started activity instances and workflow instances can be stored. Each activity instance is then assigned a directory `aci_$activity_instance_id` within that that working directory. In case that the activity instance in question is a sub-workflow activity, the respective workflow instance's working directory resides in the sub-workflow activity instance's working directory. This principle can then be applied recursively, as visible in Figure 5.2.

Depending on the desired level of isolation, the instance containers could be instructed to mount either a) the whole `workflow_relevant_data` directory or b) just their own working directory, the directories that contain the data defined at build time, and working directories of activity or workflow instances which they were configured to use. While the former is a much simpler solution, the latter gives more fine-grained control over the data that each instance is allowed to access.

G_*^{DV} natively supports all identified types of data visibility by providing respective directories and access to them, with the limitation that workflow data and environment data has to be

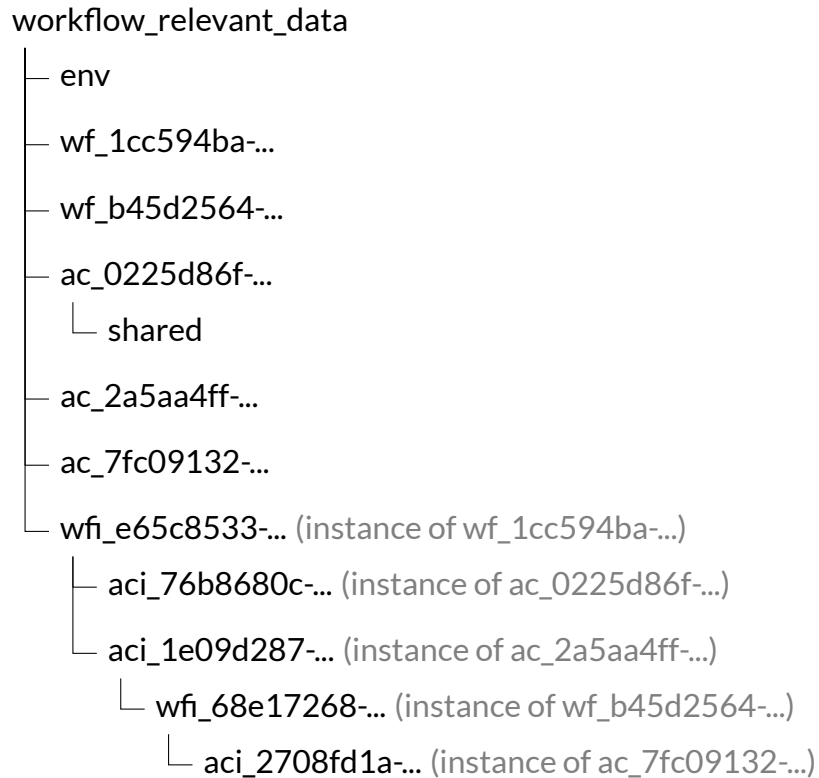


Fig. 5.2: Exemplary directory structure for G_*^{DV}

v_dir_structure)

copied to the data volume before execution and is thus restricted to the state it had at that time. Altering this data is possible, e.g. by replacing the respective files via `docker copy` or altering it in a `docker exec` session, but extra measures have to be taken to request such an up-to-date version.

Data interactions between activity instances, a sub-workflow activity and its related components and vice versa are supported by G_*^{DV} . Exchanging data between two running workflow instances is not possible this way, since mounting volumes to running containers is not supported by Docker yet. This kind of interaction thus requires additional means of communication. It would be possible to grant access to workflow instances running on the same machine – at the price of loss of control over data visibility – by mounting the top-level working directory of that machine in all containers.

As long as no requests to external sources are made within the workflow, data has to be transferred over the network only twice in this approach – for the input and output of the workflow instance. All subsequent data transfers are either implicit, e.g. by accessing the respective working directory or a symbolic link to it, or take place on the local machine, e.g. copying one or more files. Because of transfer rates *QUOTE*, G_*^{DV} has an advantage over message-based approaches when it comes to processing of large and/or many data sets, i.e. log files, genome

research data or images. Also, unless required by the activities themselves, data conversion is less of an issue since relying on the file system allows arbitrary file types to be used.

Sharing a data volume using only Docker tools requires all containers to be on the same machine, which is why there no spread version S_*^{DV} of this concept exists. Approaches exist to utilize Network File System (NFS) or peer-to-peer (P2P) file sharing for distributed access to data volumes, though [25].

G_{IC}^{DV} could theoretically work on its own file system in the editable layer of the container without a dedicated data volume, since all workflow components would have access to it. That would make the container self contained – and thus easier to export or migrate – but would couple the data life cycle to the processing container’s life cycle.

In order for G_{WORK}^{DV} to work successfully, it is inevitable that only workers on the same node as the data volume are used for the workflow enactment, since workers on different nodes could not access that data volume.

Data exchange via service

$*_*^{SER}$ represents a concept in which a service is provided that is able to store and serve workflow relevant data on request. This implies, that the instance containers have to feature a mechanism to communicate to this service.

The data-providing service could either be running as a single instance on one node in the network or as multiple instances, one on every node in the network. While the former avoids having to deal with synchronization between service instances and inconsistencies resulting from race conditions, the latter could balance the load and decrease the response time, as less network hops would be required to contact a service instance.

Since the storage of workflow related data is decoupled from the execution in $*_*^{SER}$, the coverage of data visibility and data interaction capabilities depends on the chosen underlying service. Theoretically, all forms of data visibility and interactions should thus be possible. Also, $*_*^{SER}$ exhibits the same properties for grouped and spread execution alike, for the same reason.

In this variant, data is transferred before and after each step in the workflow, i.e. when the execution starts, when it ends, whenever an activity is instantiated or an instance finished its work. This is only economical if the amount of data is sufficiently small or if the workflows consist of few activities. In order for the workflow execution to function correctly, the data-providing service must be reliably available to all containers.

Data exchange via direct communication

_communication)?

In this variant, the containers communicate with each other directly in order to exchange workflow relevant data. It can be split again in two sub-variants, according to the data passing patterns noted in 2.1.5. On the one hand, one where the workflow relevant data is passed along the control flow ($*_*^{D_a}$). On the other hand, one where containers can query each other for their data ($*_*^{D_b}$).

In $*_*^{D_a}$, the data flow is directly coupled to the control flow, i.e. all data is passed along on invocation. This requires all data that might be used in another activity instance to be passed on the succeeding activity, no matter whether the activity uses them or not [34]. While this variant allows to pass (and update) workflow and environment data, it may be problematic for larger amounts of data.

$*_*^{D_b}$ requires all containers that shall be queried for data to provide some communication mechanism and to be running. Thus, in the worst case every container related to the workflow instance in question has to be kept running. Even though the containers' use of processor time can be reduced by pausing them until they are needed, this approach could impose a considerable strain on the host machine's memory, as pausing containers has no effect on their memory consumption. Workflow data and environment data in $*_*^{D_b}$ may be provided to the first activity, which then could be queried for a (static) version of it.

Because workflow instances are not represented as containers in $*_{AC}^D$, $*_{AC}^{D_b}$ provides no means to store and access sub-workflow data, multiple instance data and workflow instance data.

$*_{WORK}^{D_b}$ is no useful solution, as keeping the worker containers occupied with one activity in order to make them queryable would block their use for other workflow instances, thus rendering the WfMS incapable of processing further workflow instances once all workers are invoked – unless further workers are spawned.

As all workflow components reside in one container in G_{1C}^D , no communication between containers is necessary – all data can be exchanged on an arbitrary way within that single container. This variant thus represents a special case.

5.2.2 Identification of promising combinations

characteristics)

Due to its shortcomings regarding the supported types of data visibility and interactions, direct communication between instance-related containers ($*_*^D$) is ruled out as a candidate for the prototype. The remaining combinations may be eligible depending on the intended use case

	Data Visibility						Data Interactions				
	Ac Data	Sub WF Ac Data	MultInst Ac Data	WFInst Data	WF Data	Env Data	Ac \rightarrow Ac	Sub WF Ac \rightarrow Sub WF	Sub WF \rightarrow Sub WF Ac	WFInst \rightarrow WFInst	
G_{AC}^{DV}	✓	✓	✓	✓	✓(†)	✓(†)	✓	✓	✓	○	
G_{SEPC}^{DV}	✓	✓	✓	✓	✓(†)	✓(†)	✓	✓	✓	○	
G_{IC}^{DV}	✓	✓	✓	✓	✓(†)	✓(†)	✓	✓	✓	○	
G_{WORK}^{DV}	✓	✓	✓	✓	✓(†)	✓(†)	✓	✓	✓	○	
G_{AC}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
G_{SEPC}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
G_{IC}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
G_{WORK}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
$G_{AC}^{D_a}$	✓	✓	○	✓	✓	✓	✓(‡)	○	○	○	
$G_{AC}^{D_b}$	✓	○	○	○	○	○	✓(‡)	○	○	○	
G_{SEPC}^D	✓	✓(‡)	✓(‡)	✓(‡)	○	○	✓(‡)	✓(‡)	✓(‡)	✓(‡)	
G_{IC}^D	✓*	✓*	✓*	✓*	○	○	✓*	✓*	✓*	✓*	
G_{WORK}^D	✓	✓(‡)	✓(‡)	✓(‡)	○	○	✓(‡)	✓(‡)	✓(‡)	✓(‡)	
S_{AC}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
S_{SEPC}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
S_{WORK}^{SER}	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
S_{AC}^D	✓	○	○	○	○	○	✓(‡)	○	○	○	
S_{SEPC}^D	✓	✓	✓	✓	○	○	✓(‡)	✓(‡)	✓(‡)	✓(‡)	
S_{WORK}^D	✓	✓	✓	✓	○	○	✓(‡)	✓(‡)	✓(‡)	✓(‡)	

✓ natively supported | ✓* natively supported, a direct connection within the container is assumed | ✓(†) can be passed on instantiation, real-time access requires additional tools
 ✓(‡) natively supported, assuming that all containers are left running for the time of workflow execution | ○ not natively supported, requires additional tools

Ac = Activity | SubWF = Sub-workflow | MultInst = Multiple instance | WFInst = Workflow instance | WF = Workflow | Env = Environment

Tab. 5.4: Supported types of data visibility and data interaction by the variants

and desired properties of the WfMS, e.g. the kind of data that is processed, the targeted infrastructure, and nature of the workflows.

The choice of the data volume approach implies a commitment to grouped execution on one node. Considering the different containerization solutions, G_{SEPC}^{DV} is favorable over G_{AC}^{DV} , because the explicit existence of containers which represent (sub-)workflow instances makes it possible to both track their state using Docker mechanisms and manage their respective working directories. Embedding workflow engine logic into these containers could enable workflows to be exported and used in a stand-alone fashion.

G_{SEPC}^{DV} is also favorable over G_{IC}^{DV} for general use, because the modularity of G_{SEPC}^{DV} permits to update single activities within the workflow by distributing new versions of their respective image. In G_{IC}^{DV} , the whole image would have to be updated due to the way layering in Docker images works. Also, G_{IC}^{DV} does not provide the means to track the activity instances' life cycles with Docker mechanisms, only that of the workflow instance. If the workflow is not meant to be updated but to be distributed to third parties as a stand-alone solution, e.g. an automated batch process for photos, which is sold to be used by photographers, this variant could be a viable option, however.


The main benefit of $*_{WORK}^*$ is that it allows to distribute the workload among several workers. Since G_*^{DV} requires all involved workers to be on the same machine, this advantage is void for the combination G_{WORK}^{DV} .

Altogether, this makes G_{SEPC}^{DV} the variant of choice for data-intense use cases.

When comparing the service-based variants with each other, G_*^{SER} and S_*^{SER} share most their advantages and drawbacks. S_*^{SER} permits the containers to run on different nodes, though. As this allows containers to be assigned to machines according to their resource requirements and the momentary workload of a machine, it is the preferred variant of the two.

Because the decoupling of data and containers is well supported by $*_*^{SER}$, it is a good fit for the worker-based approach of $*_{WORK}^*$ which in turn facilitates load balancing. A use case for S_{WORK}^{SER} could be WfMS users like market research companies, which create lots of frequently updated form-centric workflows for call center agents to use, i.e. fast-changing workflows with rather small data that has to be passed.

The results of the above reasoning are summarized in a decision tree in Figure 5.3 which is intended to give a hint on the suitable utilization of Docker for workflow enactment for a given use case.

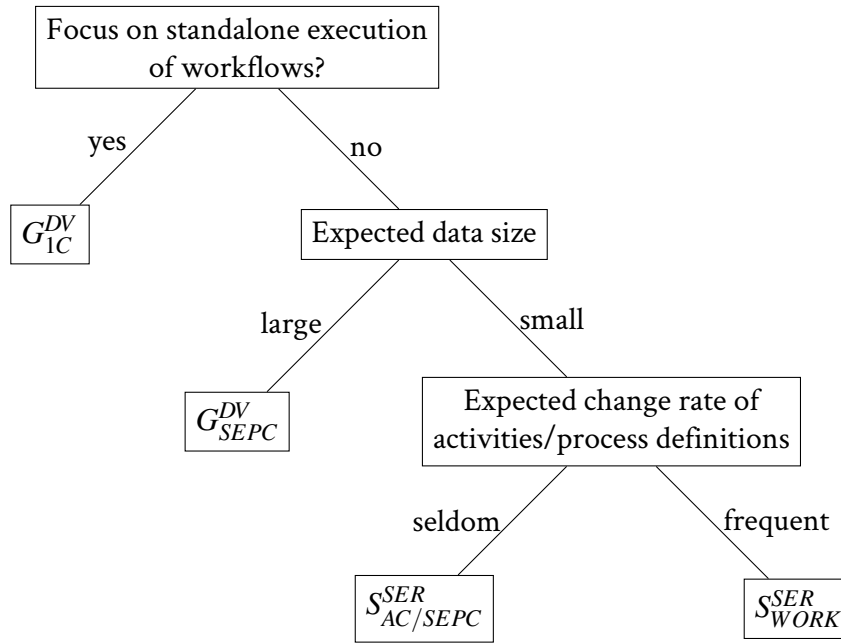

Note: 'Large' and 'small' are rather vague terms. In the end, the suitability is left to be determined based on the size of the data in relation to the achievable transfer rates.

Fig. 5.3: Proposed choice of a suitable utilization of Docker for workflow enactment

5.2.3 Utilization of third-party images

The motivation behind enabling the use of third-party images is that any program able to run in a Docker container can be incorporated in a workflow this way. In 2015, over 125.000 public repositories existed [10].

In order for these images to be used by a workflow instance, they have to be present on the node that they will run on. The provision of nodes with the required images could either happen actively, i.e. the node is instructed to pull a specific image, thus qualifying the node for the execution of said image, or passively, i.e. the node is selected for running the image in question and fetches it in the course of running it. While the former solution limits the number of nodes that are able to run the image – unless every node is provisioned with it – the latter solution is likely to delay the enactment of the workflow at its first use for the time it takes to pull the respective image.

As third-party images are likely to be unaware of their utilization in a workflow, it is not guaranteed that their output suits the needs of the WfMS. Also, these images may require some parametrization for their instantiation. On the one hand, both issues could be approached by the workflow engine, which might transform the output and provide suitable parameters based on the activity's configuration. On the other hand, an utility activity could be introduced that can be configured such that it is able to instantiate the third-party image and transform its output to a suitable format. The latter solution should be preferred, as it shifts the responsibility

for the aforementioned tasks away from the workflow engine, which reduces the engine's complexity. The engine does not need to differentiate between custom and foreign images in this case.

In order to be able to instantiate the third-party image, the adapter image requires access to its host node's Docker daemon.

5.2.4 Execution scheduling

In the course of a workflow enactment, several containers have to be instantiated – unless the worker-based approach ($*_{WORK}$) is chosen. Choosing the node on which the instantiation takes place is a task that may impact the performance of the containers and the enactment itself, as the nodes may differ regarding their available resources. It is thus of interest to examine by which rules or criteria the scheduling may take place and whether and how the user should be able to take influence on the scheduling.

Scheduling abilities of Docker Swarm

As described in 3.2.1, Docker Swarm offers two kinds of scheduling mechanisms: filters and strategies.

Docker supports three types of strategies `spread`, `binpack`, and `random`, of which one can be passed to the swarm manager when it is started. `random`, which assigns containers randomly to nodes, is usually used for debugging purposes only. The `spread` strategy makes Docker choose the node with the least number of containers. The `binpack` strategy makes Docker fill up a node with containers prior to assigning to other nodes. The default strategy is `spread`, which Docker advises for failure risk mitigation as a failing node affects fewer containers if they are distributed across nodes. As this suits the 'resilience' objective, it is the chosen strategy for Docker-based WfMSs.

Filters can be passed on instantiation as an environment variable parameter with the format `<filter-type>:<key><operator><value>`. The value of `filter-type` can either be "constraint" or "affinity" – the two types of filters supported by Swarm. `<key>` can take the values `node` or `container` (which signals a comparison to the respective name or ID), one of the default node tags, or the name of some custom label which can refer to both node labels and container labels. By default, nodes get tagged by Docker with a name, their ID, their storage driver, their execution driver, the kernel version they use and the name of their operating system. Custom labels may be applied to nodes when their daemon is started and to containers as

a parameter to the run command. In order to avoid conflicting label names, reverse domain name notation is advised by Docker. <operator> may either take the value == or !=, indicating whether a match is desired or should be avoided. It can be followed by a tilde, e.g. ==~ to signal that if the condition cannot be met, the container should be scheduled according to a strategy instead. The <value> is a string made of alpha-numeric characters, dots, hyphens, and underscores. It may be either a regular expression or a globbing pattern, to which names, IDs tags or labels will be matched against.

Constraints focus on the characteristics of nodes for scheduling; either a) some identifier or b) node tags or c) labels:

```
itm:const_first) a) constraint:node==...
itm:const_second) b) constraint:operatingsystem==...
itm:const_third) c) constraint:com.example.label==...
```

Affinities can be specified to schedule containers based on the presence of images or containers on the target node. Possible criteria are a) container names or IDs, b) image names or IDs or c) a custom label on a container:

```
<itm:aff_first) a) affinity:container==...
<itm:aff_second) b) affinity:image==...
<itm:aff_third) c) affinity:com.example.label==...
```

Further, there are some implicit forms of scheduling. First, containers will not be executed on nodes that Docker Swarm considers *unhealthy*, i.e. that do not respond or otherwise exhibit faulty behavior. Second, some Docker features imply scheduling rules. If the container requires an exposed port, it will not be scheduled on nodes where this port is already occupied. Mounted volumes of, a shared network stack with or a link to another container imply an affinity to that container, which will prohibit the execution if it is not met.

Identification of possible scheduling criteria

scheduling_criteria)?

In order to examine scheduling solutions, it must first be determined what types of scheduling criteria are required. A set of possible scheduling criteria types is compiled in the following which is depicted in Table 5.5. Then, mechanisms are developed that permit the scheduling of containers with regards to these criteria types.

Scheduling may be performed based on the properties of the nodes, which can be of qualitative or quantitative nature, their tags or the execution environment they have to offer. Examples for qualitative node properties could be its name, present containers or images, geographical

Data Source	Criterion Type	Examples
Docker	Node tags	Name ID Storage driver Execution driver Kernel version Operating system
	Qualitative node properties	Geographic location Custom grouping membership Ownership status
	Quantitative node properties	Available memory Available storage Network speed
	Execution environment	Existing containers Existing images Currently running containers
WfMS	Live data	Enactment status Activity input/output data Workflow input/output data
	Activity/workflow properties	Expected data-intensity Compliance requirements

Tab. 5.5: Possible Scheduling Criteria

duling_criteria)

location, the nature of its storage device, or its membership in some arbitrary groups. Quantitative properties of interest might be the amount of available memory or storage, the number of currently running containers or the node's network speed.

Additionally to the above methodology, containers may be assigned to nodes based on WfMS-specific data. This could be for example properties of the underlying activities and workflows, the status and data of their instances or the state of a custom scheduling mechanism of the WfMS. For example, if a user specifies his/her current location in the course of a workflow enactment, all subsequent containers could be scheduled to run on nodes that suit the laws of that country.

Both qualitative and quantitative properties of a node can be stored in custom labels on that node. Qualitative values can simply be stored as strings and used in constraints via globbing and regular expressions. Assuming, for example, the nodes had their location stored as a label with the format

`com.example.location=$country`

with `$country` being the respective ISO 3166-1 alpha-2 code [36]; and the information whether they internal or third-party servers can be stored as a label with the format

```
com.example.internal=$internal
```

with `$internal` being the string representation of a boolean value. Then, in order to schedule a container to a self-owned node in Germany running any version of the *Ubuntu* operating system, the following combination of tag and label constraints could be used:

```
constraint:operatingsystem==Ubuntu*
constraint:com.example.location==de
constraint:com.example.internal==true
```

Quantitative values stored in a label may be queried with comparisons using regular expressions. Assuming all nodes have a label that specifies their amount of memory, which has the form

```
com.example.ram=$mem
```

with `$mem` being the amount of memory in megabytes. In this setting, a container can be scheduled to a node with at least 650 megabytes of memory by enforcing the constraint

```
constraint:com.example.ram==/(\d\d\d\d+|[7-9]\d\d|[6][5-9]\d)/
```

This regular expression will match a) any number with four or more digits and b) any three digits number that starts with a number in the range of 7-9 and c) any three digits number that starts with 6 and continues with a number in the range of 5-9. Analogously to this, other quantitative measures may be stored and queried.

Scheduling constraints regarding present images and containers can be realized using the appropriate affinity filters. One possible use case is to ensure, that all images and containers required for the enactment of a workflow element are present:

```
affinity:image==required-image-name
affinity:container==required-container-name
```

At the current development state of Docker Swarm, it is not possible to verify that the containers are not only present but also running. If required, this criterion has to be addressed by some custom mechanism of the WfMS, e.g. a method that queries the swarm master's API, selects a suitable node with running instances of the required container and constructs an according node constraint.

Since updating labels and tags of containers and nodes after their creation is not possible at the time of writing, all WfMS related data created during enactment has to be sent to the system and managed internally by it. The node that is chosen based on live enactment data can then be passed to new container instances using a node name constraint.

Properties of activities and workflows that have been defined at build time may be stored in the form of labels when they are created. This is possible by using the LABEL command for desired

labels in the respective Dockerfile in combination with passing their value as an argument for the build command:

in Dockerfile:

```
LABEL com.example.expected-data-intensity=$data-intensity
```

in command line:

```
docker build [...] --build-arg data-intensity=high [...]
```

In contrast to other examples given in this thesis, `$data-intensity` should not be understood as a placeholder, as it is the actual Dockerfile syntax for the interpolation of a passed build argument with the respective name.

The workflow engine could then use the image's labels to take the stored properties into account for scheduling. For complex properties, labels containing serialized JSON objects could be used [13].

5.2.5 Implications of other design decisions

WfMSs may let workflow modeling developers take influence on the scheduling of workflow containers by letting them define constraints or affinities on them at build time. This could be beneficial because of the user's potential a priori knowledge on these elements, e.g. whether they are data-intensive and thus require some large storage, or because it enables meeting compliance rules, e.g. concerning the geographical location of data storage and processing.

Since the G_*^{DV} approaches are grouped on one node by definition, the scheduling takes place for the first container only, while subsequent containers are bound to the same node by the implicit affinity created through the mounted data volume.

There is no need for scheduling in the sense of managing container startups in the $*_{WORK}$ use case, since the workers are already running. Restrictions could be imposed on the set of workers that are allowed to work on a task, though.

5.3 System architecture

With the objectives determined in Section 5.1 in mind, a Docker-based architecture is developed in this section. First, possible architecture styles are presented in 4, of which one is then chosen with regards to potential benefits in combination with Docker. Subsequently, the way how users interact with the system is chosen in 5.3.2 and the high-level mode of communication between containers in 5.3.3.

5.3.1 Choice of an architecture style

hitecture_model)

One central requirement for the stated objectives is the modularization of the application. It enables the containment of failures, the replacement or upgrading of components at runtime, and the individual scaling of parts of the WfMS. In 4, three architecture styles are introduced. The concept of SOA and MSA inherently requires the modularization of code, while it is optional – yet advisable – in a monolithic architecture.

While measures can be taken in monolithic applications to limit the effect of component failures, the whole application is rendered inoperative if the underlying machine fails or the process dies [27, p. 55]. SOA and MSA both strongly advocate to account for the possibility of a non-responding service – in the first place because of the limited reliability of network communication, but the outcome applies to any other reason for failure, too. They hence inherently support the objective of resilience better than monolithic architecture.

Upgrading or replacing components of an application at runtime is possible in each of the presented architectures. In SOA the service may be replaced at will by directing requests to an instance of the new version of that service, given that the previously exhibited behavior does not change. The same applies for MSA, but as there is no direct messaging, the replaced components only have to adhere to the expected messaging scheme. Monolithic applications may introduce patterns such as dependency injection and dynamic loading to make changes at runtime possible.

SOA and MSA both permit scaling individual parts of an application by duplicating services. With a monolithic architecture, scaling the whole application is usually easier than in SOA and MSA – in most cases, another instance of the application may be started for that purpose – but it is not possible to scale only those parts of an application where performance bottlenecks arise.

In regards of the above considerations, monolithic architecture is ruled out as the favored application structure. Thus, only SOA and MSA are left for the decision regarding the WfMS' architecture of choice.

The Docker Ecosystem facilitates the setup of the infrastructure for a MSA. As stated in 4, the MOM itself contains little to no knowledge about the system using it. Thus, the MOM and all application components may simply be started in separate containers and connected using an overlay network. Docker further permits the configuration of restart policies for specific containers. In case that one container crashes, it is restarted with its previous settings, if configured so.

This reasoning leads to the overall conclusion, that MSA is the architecture of choice for the prototype with regards to the chosen objectives.

5.3.2 User interaction with the system

In a monolithic architecture, the use of a single user interface that provides access to the whole functionality of the WfMS would appear to be the obvious choice. In contrast to that, the modular structure of a MSA with clearly defined borders intuitively promotes separate user interfaces for different functionalities. In a MSA, either each service offers its own user interface or there is a component at some point between the user and the WfMS that consolidates the interaction. As this architectural style is chosen in 5.3.1, the advantages and disadvantages of both options are briefly discussed in the following.

Separate user interfaces increase the flexibility regarding changes in both frontend and backend of a service. While the adaption of a consolidating component to a change within one service would likely require its redeployment and thus affect the availability of other services, this is not the case if a dedicated user interface is in place, which can be restarted without affecting other services. A disadvantage of separate access to the different services is, that the user needs to know the location of each service in order to address it. Another drawback is that in this setting, tasks such as authentication, load balancing etc. would have to be performed for each service separately. Also, if the API of a service changes, all clients have to be adapted.

One way to provide a unified access to the system is the introduction of an API gateway. This component can forward incoming requests to the appropriate services or send multiple concurrent requests and return their aggregated responses. This reduces the amount of requests the client has to send to the system. API gateways also eliminate the need of client software to incorporate knowledge on the WfMS' internal structure, e.g. which services exist and how to contact them. A downside of the API gateway pattern is, that it introduces a new single point of failure to the system which has to be countered, e.g. by replicating the gateway and let a proxy server route requests to healthy instances. Another downside is that the gateway represents another independent service that has to be maintained.

API gateways are used for this prototype, as they allow to de-duplicate the logic required to transform client requests to messages to the MOM, since this is the way of communication chosen in 5.4.2. Further, they minimize the complexity of the prototype's services, as separate user interfaces for the services would require each service to provide server functionality with routing configuration, view rendering, etc.

5.3.3 Inter-component communication

t_communication)

Since all services reside in separate containers, i.e. are isolated through namespaces for processes, networks etc, a means must be found to let them communicate with each other.

The naïve approach would be to let each container expose its required ports on the host's network interface. In order to communicate with a service in another container, an application would then contact the host machine IP address on the respective port. While this solution appeals because of its simplicity, it comes with considerable drawbacks. First, a port can only be used by one application at a time. This poses a problem as soon as a container is run more than once simultaneously, e.g. if multiple services require an instance of the same database application or a service is started several times for scaling. Second, this exposes the services in question to requests from any computer that can communicate with the host machine. Unless this is desired behavior, it creates an unnecessary attack surface.

Another approach is the use of a Docker feature called *links*, which allows to specify direct connections between containers based on their names. Docker creates a secure tunnel between the specified containers and provides information on how the link source container may be addressed to the recipient container. This happens at two places: it passes along all environment variables of the link source container to the targeted container and updates the `/etc/hosts` file, which is responsible for manual resolution of hostnames to IP addresses. Links can be specified when a container is created by referring to one or more already running containers. Linked containers can be contacted via their hostname from within the started container [13].

While links – in contrast to the first approach – allow the same port to be used in different containers and do not expose the containers, they have disadvantages, too. First, and most important, they are static [13]. That is, restarting one container breaks the link functionality. This is problematic, as the re-deployment of a service that relies on links or is linked to may require a domino-like chain of container restarts to restore the linking behavior. Second, they do only work on the same host [13]. This solution thus does not support the distributed execution of the WfMS micro-services, unless directly related containers, e.g. a service and its database, are placed on the same node and all other communication takes place via exposed ports on the respective host machines. Third, *all* environment variables that Docker created within a container are passed to any container that links to it, which could pose problems regarding security if they contain sensitive data such as passwords [13].

To cope with these disadvantages, the ambassador pattern was introduced [13]. The idea behind that pattern is the introduction of a container that acts as an intermediary between two services. This container is linked to both original containers and forwards their requests. In case that one of them needs to be restarted, this container is restarted to restore the connection – in place of

the other container. By using two ambassador containers that point at each other, a multi-host setup can be created. An obvious drawback of this pattern is, that it does not scale well, since each connection requires at least one additional container to be added to the setup. In a clique-like connection setup between five containers *on the same host*, the ambassador pattern would already require ten additional containers. In a two-host setup, this number would grow to twenty additional containers.

Another solution is based on the Docker networking feature set, which was introduced in the end of 2015. This solution utilizes overlay networks, which were briefly presented in 3.1.7. During the development of this feature set, the *Container Network Model* was added, which allows containers to become member of multiple networks [41]. This enables the creation of purpose-oriented networks, e.g. a “backend” and a “frontend” network. Containers that are members of both networks can communicate with all containers, while containers which are exclusively connected to the frontend network can only see other containers of this network. This way, one could for example force access to a database to be routed through a container that filters malicious requests. This concept can be adapted for the prototype by adding a third network “enactment”, which permits both custom and third-party containers that are started in the course of workflow enactments to communicate with some components of the WfMS, e.g. the MOM, while keeping these containers isolated from the rest of the WfMS.

With Docker networking, each service can simply be addressed by its container’s name and its corresponding port. As long as their required ports are not exposed on the host’s network interface, any number of containers may be reachable on the same port. This is especially beneficial for running multiple containers that offer the same application, since they all can use their default ports.

As the last approach offers the required capabilities and, at the time of this writing, had no known drawbacks, it should be favored over the other presented ones.

5.4 System design

<sec:design>

While high-level decisions are made in Section 5.3, this section is concerned with the more detailed view on the system design. First, the structure and desired behavior of workflow images and activity images is determined in 5.4.1. Then, the mode of communication between the system components is chosen in 5.4.2. Finally, the system’s components are identified and designed in 5.4.3.

5.4.1 Workflow and activity images

To reap the benefits of the layering mechanism, the structure of the images should be chosen with care. Layers should be created in a way that enables reusability among the different use cases and they should be ordered by the frequency that they are likely to be changed by.

The proposed structure of workflow and activity images, which is depicted in Figure 5.4 and reflected in the respective Dockerfiles C.11 and C.3, is thus as follows.

The proposed structure consists on three images which should build on each other consecutively, as they are meant to be increasingly specialized. The first image should provide the runtime environment. This image could be provided by a third-party vendor that specializes in building such images, i.e. an OS community or framework developers. Based on this image, a generic activity image `ac_base` (and, for `*SEPC`, a generic workflow image `wf_base`) should be created. Such an image can be extended with element-specific information for each element of a workflow when that workflow is exported for deployment, to obtain the uppermost images `ac_$activity_id` (and `wf_$workflow_id`). An instance of this last image would then be a container with a suitable name of the form `aci_$activity_instance_id` (and respectively `wfi_$workflow_instance_id`).

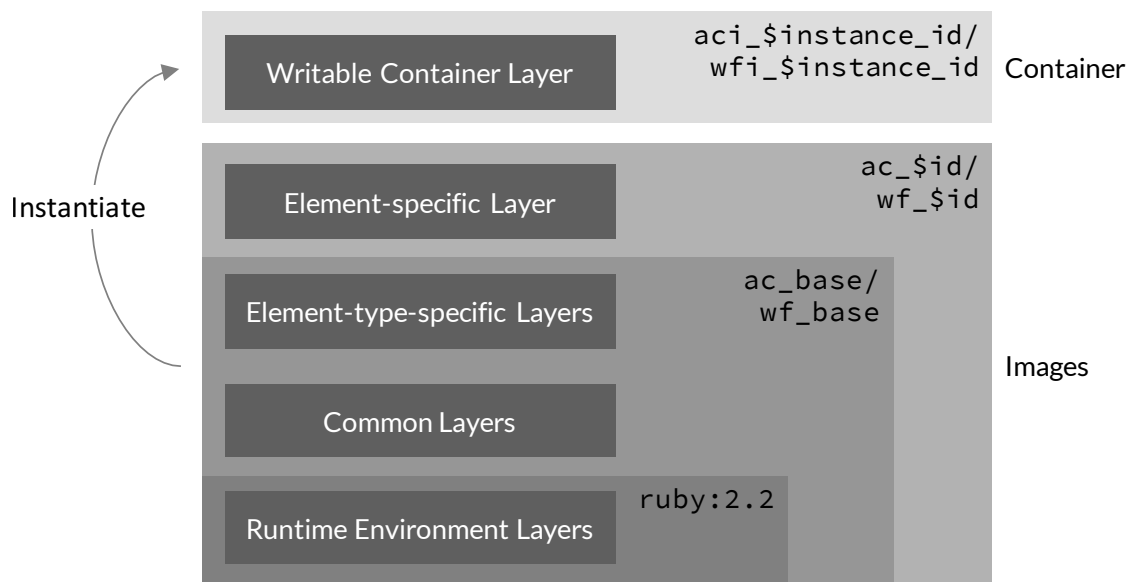


Fig. 5.4: Layer Structure for Activity/Workflow Images

Regarded in a more detail, the images' structure should look as follows. The foundation should be formed by *runtime environment layers*, as they are expected to change seldom and are required by all derived images. Usually, these layers contain an OS, common libraries and utility programs.

The layers that form the `*_base` images can be separated in two groups, *common layers* and

element-type-specific layers. The *element type* refers to either activity or workflow. The common layers should be created on top of these runtime environment layers. They are intended to contain the effects of invoked commands, added directory structures and files which are required by both activity images and workflow images. Even though these layers are not explicitly named, they will be stored by Docker in its cache and used during the build process of similar images. In the next step, element-type-specific layers should be added. These layers are meant to contain data that is required for the execution of an activity *or* a workflow, for example scripts which perform validation tasks (if not provided by a service) or general-purpose data transformation.

The element-specific layer, which is added in the course of the export of an element (activity or workflow), contains files that are particular to single activities or workflows. In an activity image, this layer would contain the activity configuration and the schemas for data validation. In a workflow images, for example, it would contain the process definition.

By instantiating the resulting image a container is created at runtime, which owns the uppermost, writable layer. This is where the activity or workflow may store data during execution.

At the time of writing, Docker registries do not reuse layers across repository borders during uploads yet – even though it is a proposed feature [23]. In order to benefit from the layering in the previously described way, it is thus necessary to let all activity images reside in the same repository by tagging them in the format

`$repository_url/activity`

and using the respective activity's ID as a version tag to differentiate between them. They can then be referred to as

`$repository_url/activity:ac_$activity_id`

Analogously, this is done with workflow images. Since it implies losing the internal image versioning mechanism, this solution should only be used as a workaround until cross-repository sharing of layers is possible.

The workflow instance is structured as depicted in **Fig. 10**. It contains the classes `ProcessInstance` and `ActivityInstance` which coordinate the enactment of the workflow instance, and the utility classes `ProcessDefinition`, `FileHelper`, `Configuration`, and `Validator`, which provide auxiliary functionality. `ProcessDefinition` parses the process definition file and creates objects for the process definition itself and its contained activities to facilitate accessing their respective properties. `Configuration` wraps the access to relevant environment variables in methods, which may provide defaults for missing values. Everything that is related to file system access, e.g. constructing paths, linking and creating directories etc, is per-

formed by the `FileHelper` class. The `Validator` is used to validate the workflow instance's input data.

The activity image contains the classes `ActivityInstance`, `WorklistClient`, `ContainerInvocation`, `SubworkflowInvocation`, `FileHelper`, `Configuration`, and `Validator`, as depicted in ???. `FileHelper`, `Configuration`, and `Validator` have the same functionalities as their counterparts in the workflow image. The image should be able to start a sub-workflow or a third-party container, or create a worklist item and wait for its completion. The classes `SubworkflowInvocation`, `ContainerInvocation`, and `WorklistClient` encompass these functionalities respectively. The decision as to which class is invoked for the actual functionality is made by the `Instance` class.

5.4.2 Communication

l_communication)

The considerations in 5.3.3 are directed at finding a model for low-level communication, i.e. the communication between containers. In the following, an application-level solution for the inter-service communication is chosen. To harmonize with the objectives worked out in 5.1, the solution should support the exchange of service versions on a running system, it should be able to handle service failures, and it should allow the dynamic addition of servers.

MSA advocates the use of messaging on a general-purpose channel which does not incorporate any application logic [37, pp. 20]. Such messaging could be either be performed directly between services using REST calls over Hypertext Transfer Protocol (HTTP) or via MOM [27, pp. 23-24, p. 30].

?{acro:HTTP}?

The principle of REST is the abstraction of a services' functionalities into *resources*, nameable pieces of information, whose state and value can be exposed in the form of a *representation* and altered using a specific set of actions [15, p. 3].

A common protocol used by MOM is Advanced Message Queuing Protocol (AMQP). Central elements of AMQP are *exchanges* and *message queues*. An exchange receives messages and forwards them to specific queues based on a set of rules or criteria [42, p. 88]. These rules are called *bindings*. Message queues store messages and send them to those consumers which have signaled an interest in these queues [42, p. 88]. Multiple clients, called *consumers*, may be subscribed to a queue.

?{acro:AMQP}?

Servers can be added dynamically in both variants. In the REST variant, services on new servers can register at a service discovery tool, which is then queried by client services prior to sending

requests [32]. If MOM is used, services on added servers may subscribe to relevant message queues, given that the middleware's network location is known to the service.

REST based communication takes place between two components, whereas the actual target of a request may be determined by an intermediate proxy server [15, p. 6]. However, in the end both parties involved have to be present and available for communication. In contrast to that, MOM that implements AMQP permits to store messages until they are delivered. In case of service failure, the messages will remain on the queue and can be received by the restarted service or another instance of that service. This makes MOM more favorable than REST calls over HTTP in terms of failure resilience.

Another objective determined in 5.1 is that components of the WfMS should be alterable without a full system restart. In a setup that uses REST calls, this can be accomplished by starting an instance of the new version and instructing the service discovery tool to forward upcoming requests to the address of that service version. AMQP allows the consumers of multiple instances of a service to be subscribed to the same queue, which enables the creation of worker pools that can be scaled to suit the workload. In order to deploy a new version of a service this new version can be started in parallel to the old version – as long as the externally perceived behavior of the currently used functions of that service has not changed. The two versions of the service will work on incoming requests in round robin if they are subscribed to the same queue. If the new version of the service is deemed stable, the old version may be shut down.

With regards to the above considerations, a communication structure based on MOM that implements AMQP is chosen for the prototype.

5.4.3 Components

(sub:components)

As noted in 4, one of the downsides of MSA is that it is crucial to determine suitable service boundaries. In case of WfMSs, the identification of system components by the WfMC for their reference model is interpreted as such an analysis for this thesis. Based on those components further micro-services for the prototype are identified. As presented in 2.2.2, the WfMC identified the following components [18, p. 13]:

- Software Components
 - Definition Tool
 - User Interface
 - Workflow Engine(s)
 - Worklists Handler
 - (Administration and Monitoring Tool)

- Data Components
 - Organization Data
 - Process Definitions Data
 - Workflow Control Data
 - Workflow Relevant Data
 - Worklists Data

The administration and monitoring component can be subdivided in an organization management service and an infrastructure management service, as these functionalities are completely independent from each other.

According to the WfMC's description, the definition tool, the worklists handler and the organization management tool each utilize one data component respectively. Combined with its respective datastore, each of them can be considered an autonomous micro-service since each would be able to provide its functionality without any further service.

The workflow control data component can be considered to be part of a workflow engine service. Depending on the chosen mode for the enactment, workflow relevant data is either managed by the workflow engine service, too, or accounted for by a data volume ($*_{*}^{DV}$). Only in the $*_{*}^{SER}$ variant, a dedicated service for its management and storage is needed.

According to the decision to use the API gateway pattern (5.3.2) to hide the internal system structure from its users, the two contact points – one for administrative work and one for end-user work – are realized using an appropriate gateway. The *developer gateway* enables requests to the definition service, the infrastructure service and the organization management service through a GUI. The *user gateway* emits requests to the worklists service which are also issued through a GUI.

In addition to the services derived above, the need for some additional services originates from considerations regarding the use of Docker for workflow execution in Section 5.2 and the objectives that were stated in 5.1. One of these objectives is that the distribution of images can be performed in an automated way. A Docker image registry in combination with a service that uses it can be used for the distribution of images to all nodes. Unless an external service such as Docker Hub is used, an own registry service should be a component of the WfMS. The decision made in 5.4.2 to use MOM for the communication between services creates the need for a service which acts as such middleware. To meet the requirement of automatically distributed images, a provisioning service should be introduced, which performs the appropriate actions. An infrastructure management service could be used to monitor the status and properties of the available nodes in the swarm.

Besides the major components, independent functionalities which are frequently used could be singled out to separate services. For example, a micro-service that addresses the validation of input and output data might be extracted. Given a dataset and a schema, such a service would be able to perform its task autonomously. As validation is a frequently recurring action in the execution of workflows – before and after each activity and workflow – it is beneficial to be able to scale the execution of this task independently.

In the following, the resulting set of services is presented.

Workflow Definition Service

inition_service)

The workflow definition service encompasses the functions envisioned by the WfMC as *process definition tools*, i.e. it is concerned with the analysis, modeling, description and documentation of business processes in form of workflow models and their process definitions. It further manages the assignment of activities to roles.

With regards to its functional scope, the workflow definition service is also the service that handles the transformation of workflows into their distributable format, e.g. a self-contained description file or Docker images. In case of the latter, the workflow definition service would require access to a Docker daemon in order to perform the export. Once a workflow is transformed, the service should publish it. The transformations of workflows is performed by the `ImageBuilder` class, which relies on the `ProcessDefinitionImageSerializer` for the serialization of the process definition. The logic required for publishing the images is defined in the `ImageManager` class.

As depicted in Figure 5.5, the service has the model classes `Workflow`, `Activity`, `ProcessDefinition`, and `ControlFlow`, which provide the object-relational mapping for the respective objects. The roles assigned to activities have only to be dealt with in the form of unique identifiers, relying on the assumption that components which have to use them may resolve these identifiers themselves.

As a user interface is provided by the developer gateway service; the workflow definition service thus does not offer its own user interface, but rather exposes its functionality via the MOM. This allows workflow definitions to be created and altered by other services, e.g. an conversion service which translates other process definition formats or some feedback mechanism that alters workflows based on their execution performance – or a gateway service that provides a user interface.

In order react to requests of other services, the workflow definition service features consumer

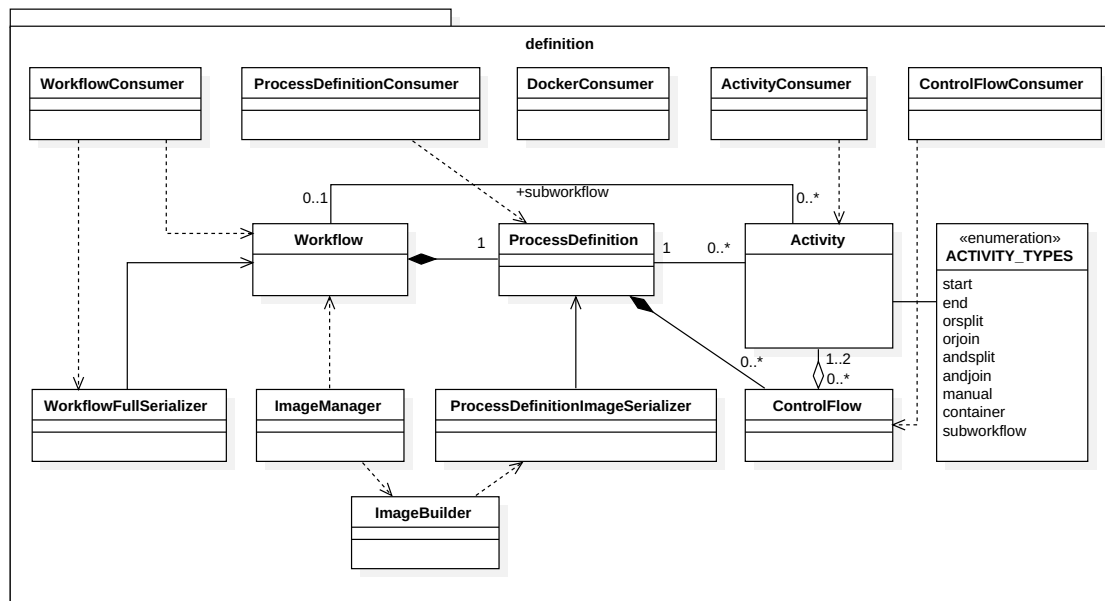


Fig. 5.5: UML Class Diagram for the Workflow Definition Service

classes, which perform the required actions and publish a response, if required. `WorkflowConsumer`, `ActivityConsumer`, `ProcessDefinitionConsumer`, and `ControlFlowConsumer` response to Create, Read, Update, Delete (CRUD) and index requests. The `WorkflowConsumer` additionally provides the means to react to requests for the export of a workflow.

There exist two classes in this service which deal with the serialization of objects. The serialization of a workflow with its components nested inside takes place in the `WorkflowFullSerializer`. Such a serialized version is required to avoid separate requests when the workflow is requested for modeling. The `ProcessDefinitionImageSerializer` is used to generate a serialized version of a process definition which can then be incorporated in workflow images.

Since one of the previously determined requirements for the prototype is that developers should be supported to use third-party images, the workflow definition service further reacts to relevant requests in the `DockerConsumer` by initiating a search for images with a specified name on Docker Hub.

In order to be able to communicate with the MOM, the workflow definition service is connected to the `wmfs_backend` network. As it is not involved in the enactment and is not intended to be available to external applications, it is neither member of the enactment nor the frontend network.

Organization Management Service

gement_service)?

The organization management service is part of the *administration and monitoring tools*. As its name suggests, its functionality is aimed at the management of actors within an organization and their mutual relationships. The service may be queried for users or roles, or to authenticate users for the use of the WfMS.

As depicted in Figure 5.6, the service consists of the classes `User`, `Role`, `UserConsumer`, and `RoleConsumer`. The model classes `User` and `Role` provide the object-relational mapping for the database, while the `UserConsumer` and `RoleConsumer` classes enable the service to react to CRUD and index requests that concern these objects.

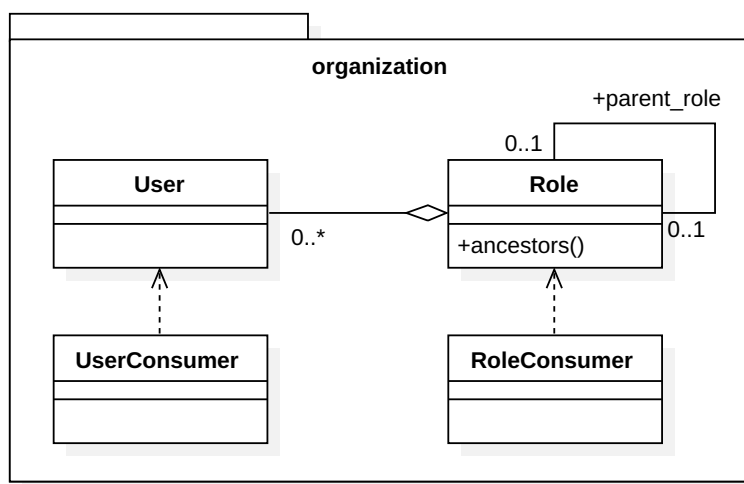


Fig. 5.6: UML Class Diagram for the Organization Management Service

ization_service)

Like the workflow definition service, the organization management service is connected to the `wfms_backend` network to be able to communicate with the MOM.

Worklist Service

orklist_service)?

The sole responsibility of this service is the management of users' worklists. It handles CRUD requests for worklist items and publishes the data submitted to it by users to the other services. If a role is deleted, it should remove the worklist item or reassign it to another role. The former tasks are performed by the `WorklistConsumer`, which reacts to related events. The latter task is in the responsibility of the `RoleConsumer`, which reacts to the deletion of a role. The worklist items' object-relational mapping is performed by the `WorklistItem` model class.

Workflow Engine Service

engine_service)?

The way how Docker is utilized for the workflow enactment chosen in 5.2 has an impact on the range of functionalities that this service has. In case of the selected G_{SEPC}^{DV} variant, the engine is responsible for the creation of a workflow instance container from the appropriate workflow image on a suitable node. It further pauses, unpauses or terminates the enactment of a workflow.

The `WorkflowEngine` class is notified by the `WorkflowConsumer` and `WorkflowInstanceConsumer` on incoming messages. To alter the state of a running workflow instance, it contacts the swarm master directly. The more complex instantiation of a workflow is handled by the `WorkflowInstance` class.

Developer Gateway

developer_gateway)?

Since it only offers a unified access to the WfMS and does not store any data itself, the developer gateway does not require any database. The service is realized in a two-tier architecture, with a backend part that handles requests to and responses from the various WfMS services, and a frontend part that presents the received data to the developers and accepts their input.

The only task of the backend is forwarding the user's requests to the message queue and the corresponding responses back to the user. The controller classes that are responsible for this (`ActivitesController`, `ControlFlowsController`, `DockerController`, `ProcessDefinitionsController`, `RolesController`, `ServersController`, `UsersController`, `WorkflowsController`) are thus very lean – they only contain the logic to forward requests to suitable routing keys. Each of them inherits from the `ApplicationController`, which manages the messaging logic and gives access to a shared single connection to the MOM.

The `TemplatesController` is different from the other controller classes, as is not involved in forwarding requests, but serves the purpose to render and deliver the HyperText Markup Language (HTML) fragments required by the frontend.

Following the API gateway pattern that is chosen in 5.3.2, this service and the user gateway service are the only services that can be reached from outside of the WfMS.

User Gateway

s:user_gateway)?

Analogous to the developer gateway, the user gateway provides access to those WfMS services that are relevant to its users, that is, in the chosen setup, only the worklist management service.

Due to the few responsibilities of this gateway, there are only two controller classes in this service: `WorklistItemsController`, which forwards CRUD requests that concern worklist items and `WorklistController`, which provides the means to access all existing worklists.

Infrastructure Management Service

gement_service)?

The infrastructure management service fetches and refines the information related to the swarms nodes. That is, it lists all nodes and can inform on their properties, (running) containers and available images. Supported by the `DockerHelper`, which provides the connections to the different nodes, the `EnvironmentManager` contains the required logic to fulfill these tasks. The `ServerConsumer` waits for relevant requests via the MOM, instructs the `EnvironmentManager` accordingly, and returns the results. Further, there is a `Server` model class, which is used to structure the obtained information.

Additionally to its role in the information retrieval, the `EnvironmentManager` subscribes to events of new nodes joining the swarm and launches the provisioning service on joining nodes.

Registry

?(subs:registry)?

All solutions presented in Section 5.2 feature custom Docker images, be it workers or containerized activities or workflows. These images can contain information on business processes and other information whose disclosure should be avoided. In order to store and distribute such images, a private registry is thus required. A possible alternative for less sensitive images could be the utilization of a private remote repository on the Docker Hub.

Provisioning Service

ioning_service)?

The objectives stated in 5.1 include the reduction of administrative work. In order to prevent the user from having to distribute the Docker images required for the execution of workflows manually, a service should perform this task. This service should provision each machine with said images whenever such an image is created or updated. To do so, the `ImageConsumer` and

ServerConsumer classes react to relevant events by invoking the appropriate Docker commands.

The service could either run as an instance on each machine, performing the required Docker operations locally, or run on the Docker Swarm master machine as one instance and perform the operations remotely on all machines. The former variant enables all nodes to react concurrently to the event of a published image, while in the latter variant, the distribution would take place sequentially – unless the service is implemented in a multi-threaded or multi-process way. While the idea of provisioning all nodes at the same time might be appealing, the workload imposed on the registry node by a big swarm should be considered.

6 Prototypical implementation

Based on the considerations in the previous chapter, a Docker-based WfMS prototype was implemented which is described in this chapter.

6.1 Preliminary decisions

All of the variants highlighted in 5.2.2 represent possible approaches for the utilization of Docker for the enactment of workflows for different use cases. G_{DV}^{SEPC} with a partially integrated workflow engine is the implemented variant for several reasons. First and foremost, this combination enables the use of basic Docker commands for the suspension and continuation of a workflow and single activities, as described in 5.2.1. Second, $*_*^{SEPC}$ leverages the already existing communication between the local daemon of a node and the swarm master daemon to publish the status of both workflow instances and activity instances, in the form of events concerning container statuses. Third, G_{DV}^* is a promising variant for the demonstration of various scheduling mechanisms introduced in 5.2.4, since this variant includes implicit affinities by default. While partially integrating the workflow engine is mainly interesting for its role in the previously mentioned native pausing, it also facilitates the working directory management, as argued in 5.2.1.

The services identified in 5.4.3 are implemented using *Ruby*, a dynamically typed object-oriented programming language. Ruby provides the means to write concise, well readable code [26, p. 782]. Performance-wise, it is inferior to many other languages [26, p. 786]. However, the focus of this thesis is to explore conceptual possibilities rather than developing efficient implementations. An emphasis is thus put on the expressiveness of the used language to help the reader to grasp the underlying concept quickly.

All services that require access to any Docker API use a gem called `docker-api` which provides a client for these APIs. *Gem* is the name for distributable packages in the Ruby ecosystem. These packages can be managed using *Gemfiles* in which the package dependencies of an application may be declared.

The Ruby-based web application framework Ruby on Rails (RoR) is used for the implementation of the developer gateway and user gateway. It qualifies for this task because it comes with several functionalities that aim at the fast creation of prototypes. For example, so called *scaffolds* permit the creation of model and controller classes and appropriate views based on a specified database schema; the included library *ActiveRecord* supports adding object-relational mapping functionality to model classes [20, p. 5]. ActiveRecord is also used in those services that do not

use Rails but need to store objects in databases, namely in the definition, organization, and `worklist` services.

PostgreSQL was chosen as database solution for the services, because it supports both relational data, which is useful for storing the models and their relations, as well as the document-store-like JSONB format which allows the schema-less storage of configuration information.

RabbitMQ was chosen as message oriented middleware, because it is well documented and provides a web interface for monitoring and administration. The gems `Hutch` and `Bunny` provide different levels of abstraction for the interaction with the RabbitMQ message queue [31]. `Hutch` itself is based on `Bunny` and imposes some opinionated conventions for the use of the message queue, as well as automatic (de-)serialization of the messages' payload.

6.2 Execution images

In 5.4.1, activity images and workflow images are designed. In the following, the implementation of these images is described.

6.2.1 Workflow image

The workflow image is implemented as designed in 5.4.1. The runtime-environment layers are provided by inheriting all layers of the `ruby:2.2` image. On top of these, common layers are created, in which the required gems are installed. Then, the `/workflow` directory is created, into which the required Ruby files are copied. The file `run.rb` is set as the default command.

The code and the workflow configuration files reside in the `/workflow` directory. `process_definition.json` contains the exported process definition (Lst. C.1), `workflow.info.json` contains metadata on the workflow (e.g. the image name), and `input.schema.json` contains the JavaScript Object Notation (JSON) schema used to validate the workflow instance's input (Lst. C.2). The instance specific files are copied to `/workflow` before the container is started.

As decided in 6.1, the workflow instance features some functionality that one would usually find in a workflow engine. This functionality resides in the `ProcessInstance` class. On instantiation, the `ProcessInstance` obtains an instance of the helper classes `ProcessDefinition` and `Validator` and instructs the latter to check the validity of the provided input data against the provided JSON schema (Lst. C.8 #4-13). `ProcessDefinition` parses the process definition file `process_definition.json` and makes the contents available as an object (Lst. C.7).

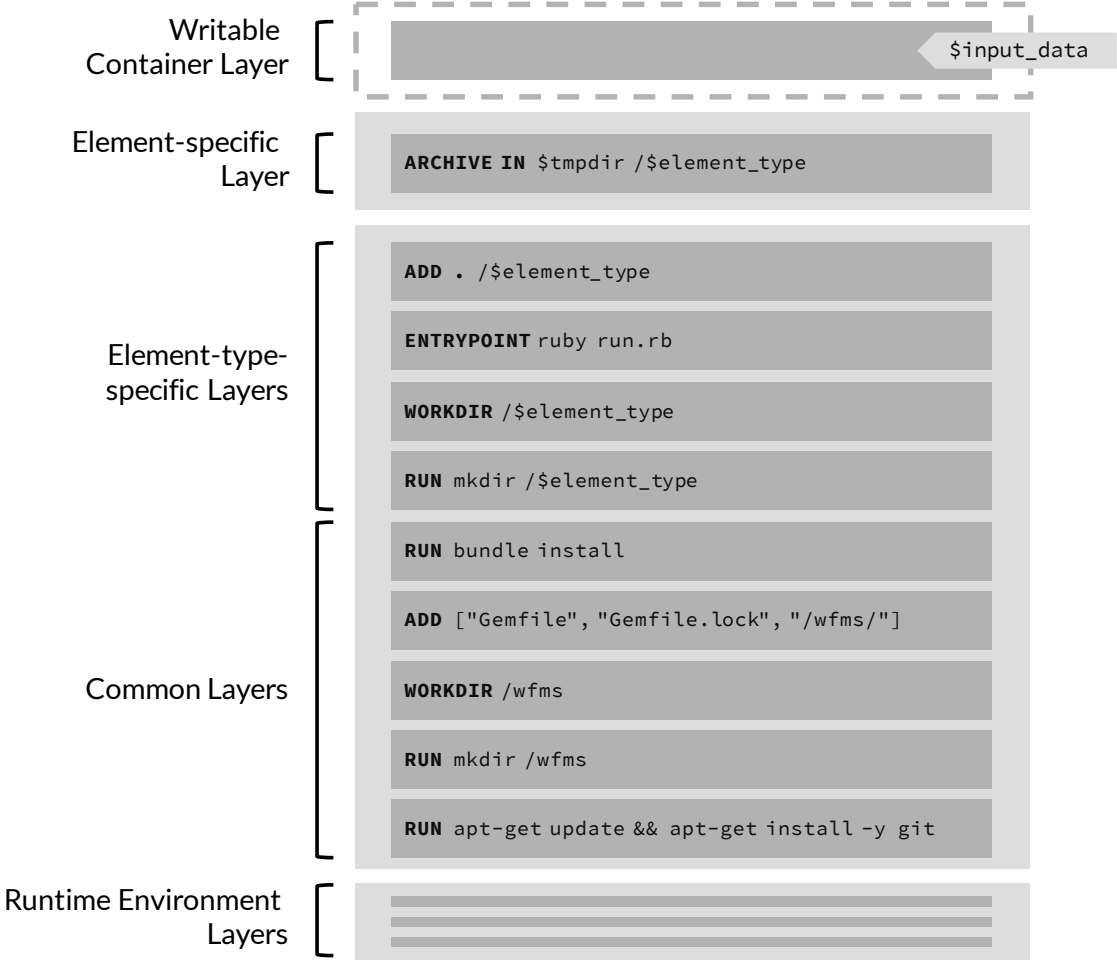


Fig. 6.1: Layer Contents for Element-wrapping Containers

ing_containers)?

The run script loads the required dependencies and ensures, that the container is connected to the enactment network. Then, it initiates the enactment by creating an instance of the `ProcessInstance` class and calling its start method (Lst. C.10). When started, `ProcessInstance` creates a new `ActivityInstance` for the start activity, creates a symbolic link to the workflow instance's input data, and adds the `ActivityInstance` to a queue for incomplete activity instances (Lst. C.8 #16-26). Then, it enters a loop in which it carries out the workflow enactment. It leaves this loop, which calls the method depicted in Listing 6.2 on each iteration, if no more activities are queued for processing.

```

28  def process_queued_activity_instances
29      uncompleted_instances.each do |instance|
30          next unless instance.required_predecessors_completed?
31
32          instance.run
33
34          instance.activity.successors.each do |successor|
35              successor_instance = find_or_create_activity_instance(successor)
36              successor_instance.completed_predecessors << instance
37              Workflow::FileHelper.link_instance_output_to_successor_input(instance,
↪  successor_instance)
38          end
39
40          if instance.activity.type == 'end'
41              @queue.clear
42              Workflow::FileHelper.link_instance_output_to_workflow_output(instance)
43          end
44      end
45  end

```

Fig. 6.2: The processing loop of `ProcessInstance`

`process_instance)`

The called method, `process_queued_activity_instances`, iterates over the queue of unprocessed activity instances. If the start conditions of such an instance are not met it is skipped for the current iteration. Otherwise, the activity instance is started. As soon as it finishes, an `ActivityInstance` object is created for each of its succeeding activities. The finished activity instance is added to the successors' lists of completed predecessors, and a symbolic link from its output directory to the respective successor's input directory is created. If the activity was an end activity, a symbolic link is created from its output directory to the workflow's output directory and all pending activity instances are removed from the queue. The loop ends and the workflow instance terminates together with the process instance.

The actual creation and start of an activity instance container takes place in the `ActivityInstance` class, which invokes Docker with the command depicted in Listing 6.1. The container is named with an instance ID, labeled with this very ID and also with the IDs of the directly superordinate workflow instance as well as the overall superordinate workflow instance. The container is based on the suitable activity image and launched without an additional command,

as the right command is already specified in the image. To enable the instance container to communicate with the local Docker host, the respective socket is mounted on the container's file system. The data volume that contains the workflow relevant data is bound to the activity instance container, too. Environment variables are set on the container in order to pass along configuration: `MAIN_WORKFLOW_ID`, `WORKFLOW_ID`, `WORKFLOW_INSTANCE_ID`, `ACTIVITY_ID`, and `ACTIVITY_INSTANCE_ID` are passed to inform the activity instance container about its activity/activity instance ID `a`, as well as the directly superordinate workflow/workflow instance, and finally the ID/instance ID of the originally called workflow. It is further passed the path of the directory that is designated to be its working directory in the `WORKDIR` environment variable. The container can then be started using the `run` command of the `ActivityInstance` (Lst. C.4 #27-37).

```

40 def container
41     config = Workflow::Configuration
42
43     Docker::Container.create({
44         'name' => "aci_#{@id}",
45         'Labels' => {
46             "main_workflow_instance" => "#{config.main_workflow_instance_id}",
47             "workflow_instance" => "#{config.workflow_instance_id}",
48             "activity_instance" => "#{@id}",
49         },
50         'Image' => "#{config.image_registry}/activity:ac_#{@activity.id}",
51         'Cmd' => [''],
52         'WorkingDir' => '/activity',
53         'Tty' => true,
54         'Env' => [
55             "MAIN_WORKFLOW_ID=#{config.main_workflow_id}",
56             "MAIN_WORKFLOW_INSTANCE_ID=#{config.main_workflow_instance_id}",
57             "WORKFLOW_ID=#{config.workflow_id}",
58             "WORKFLOW_INSTANCE_ID=#{config.workflow_instance_id}",
59             "ACTIVITY_ID=#{@activity.id}",
60             "ACTIVITY_INSTANCE_ID=#{@id}",
61             "WORKDIR=#{Workflow::FileHelper.activity_instance_workdir(self)}",
62             "DATA_CONTAINER=#{config.workflow_relevant_data_container}"
63         ],
64         'HostConfig' => {
65             'Binds' => ['/var/run/docker.sock:/var/run/docker.sock'],
66             'VolumesFrom' => [config.workflow_relevant_data_container],
67         }
68     })

```

Listing 6.1: Instantiation of an activity image in `ActivityInstance`

`ctivityinstance)`

6.2.2 Activity image

`ity_containers)?`

Analogous to the workflow image, the activity image is implemented according to its design in 5.4.1. Instead of a `/workflow` directory, the `/activity` directory is created which contains

the necessary code for the activity instance. The file `run.rb` is set as the default command for the container.

The code and the activity configuration files reside in the `/activity` directory. These files are `activity.info.json` and `input.schema.json`. `activity.info.json` contains configuration data of the activity, e.g. name, version and parameters for a third-party container for a container-type image, or the assigned role for a manual-typed image (Lst. C.19). `input.schema.json` contains the JSON schema that is used to validate the activity instance's input.

Depending on the activity type, the activity instance either starts a specified third-party container (container activity), a workflow instance container (sub-workflow activity), or issues a worklist item for manual data input (manual activity), by using the `ContainerInvocation`, `SubworkflowInvocation`, or `WorklistClient` classes respectively. The outcome of these actions is then stored in the output data file. For this prototype all other activities, i.e. the control flow activities, log the activity and activity instance IDs to that data file as a proof of their invocation.

```

18  def start
19    case @activity_info['type']
20    when 'manual'      then start_user_input
21    when 'container'   then start_container
22    when 'subworkflow' then start_subworkflow
23    else log_self_to_data
24    end
25
26    write_output
27  end

```

Fig. 6.3: Instantiation of an activity image in `ActivityInstance`

`of_ac_instance)?`

The invocation of another container is performed in the `ContainerInvocation` class. The container is created based on the specified image and is labeled with the IDs of the overall superordinate workflow instance, the directly superordinate workflow instance, and the activity instance (Lst. C.14 #27-38). Once the container's execution has finished, its standard output stream and error output stream can be accessed with the `results` method (Lst. C.14 #18-23). `SubworkflowInvocation` acts similar to `ContainerInvocation`, but it uses another configuration for the container – the same that a workflow engine uses, but with an explicit working directory specified (cf. Lst. C.15 #43-68). A workflow container is thus not aware of whether it is started by a sub-workflow activity or by a workflow engine.

6.3 System components

implementation)?

In the following, the implementation of the prototype's system components according to the design from 5.4.3 is described.

Since the principle of event-driven service invocation is already demonstrated in the definition service, a detailed documentation of the organization and worklist services would not contribute further relevant insights. They are thus only described regarding their realization with Docker containers and the network configuration of these containers.

6.3.1 Workflow definition service

inition_service)?

The workflow definition service is composed of three components: one container running a Ruby on Rails application which is configured to expose a JSON API, one container running a PostgreSQL database and a data volume container which provides persistent storage to that database (Lst. D.4 #128-148).

The PostgreSQL database's support for relational data is used for storing the workflow, its elements and their relations. Its capability to store data in the JSONB format is used to store the schema-less storage of configuration information. This is valuable because the structure of those configurations is not known in advance, e.g. input validation schemas. In order to keep the stored data during container restarts or migrations across nodes, the database makes use of a data volume container which provides its working directory.

The application container is granted access to the Docker daemon of its host node in form of a mounted volume to build and push images.

As planned in 5.4.3, the service has the model classes `Activity`, `ControlFlow`, `ProcessDefinition` and `Workflow`, which act as object-relational mappers for persistence to the database as well as ensure some validity constraints. Further, there exists a controller class for each of the aforementioned models, which provides CRUD actions for the respective model. The `Activity` model provides the means to store the IDs of an assigned role, a referenced sub-workflow, validation schemas, and a configuration for a third-party container (Lst. C.23 #8-13). In order to have more fine-grained control over the serialization of a workflow, the `WorkflowFullSerializer` is used if a specific workflow is requested. It nests all relevant workflow elements into the workflow model before it is serialized (Lst. C.22).

While the modeling logic is contained in the model and controller classes and in the underlying data schema, the export logic resides in the classes `ImageManager` and `ImageBuilder`, which are supported by the class `ProcessDefinitionImageSerializer`.

The `ProcessDefinitionImageSerializer` provides the means to create the consolidated JSON representation of a process definition with all information that is necessary to execute the corresponding workflow. An example for the serialized output can be seen in Listing C.1.

Whenever the user requests the export of a workflow, the request is forwarded to the `ImageManager` (Lst. C.28). In order to export a workflow, the first step is to identify all of its elements that require to be wrapped in an image. Obviously, one of them is the workflow itself. The other required images are determined by traversing the workflow's process definition recursively (Lst. C.23 #37-43, Lst. C.26 #11-13). Each of the workflow's activities has to be exported. Each sub-workflow has a method that exposes the Docker images it requires beyond that. It does so by passing the call for required images on to the referenced workflow – which collects its required images analogously – and returning the result. The `ImageBuilder` then iterates over all these elements and creates a corresponding image for each (Lst. C.27 #6-28). Starting with the respective base image – `ac_base` or `wf_base` – it adds additional layers to do so. The `ImageBuilder` creates the files which are specific to the current element from the activity's or workflow's configuration, i.e. the input/output validation schemas, the element's description file, and in case of a workflow the serialized process definition, in a temporary directory. The `ImageBuilder` then copies these files to the image and names it after the workflow element that it represents (Lst. C.27 #32-95). The `ImageManager` then uploads all images that were successfully built to the private registry.

6.3.2 Organization management service and worklist service

gement_service)?

As envisioned in 5.4.3, the organization management service and the the worklist service are structured analogously to the workflow definition service. Just like it, the services consist of three Docker containers: an application that is backed by a PostgreSQL database that is persisted to a data volume (Lst. D.4 #52-126). They respond to CRUD requests which they receive through consumer classes that accompany each of their model classes.

6.3.3 Workflow engine service

engine_service)?

As it does not require any data persistence in the chosen setup, the workflow engine service only consists of an application container. The consumer classes `WorkflowConsumer` and `WorkflowInstanceConsumer` listen to events that concern the corresponding element types and instruct the `WorkflowEngine` to perform the according action. The `DockerHelper` class provides the connection to the swarm master that is used to manage the workflow instances. The `WorkflowInstance` class takes care of the actual instantiation of a workflow and the required preparations that come along with it.

The WorkflowEngine can pause, unpause or terminate a workflow instance, by querying the swarm master for all containers which bear a label with the workflow instance's ID, and then calling the command `pause`, `unpause`, or both `kill` and `delete` on each of them (Lst. C.36 #26-44).

WorkflowInstance begins with the enactment of a workflow by creating the data container, which is used later to store the workflow data. The data container is based on the image `cogniteev/echo`, a small image that provides a single executable – `echo` – because Docker expects one executable to be present in a container [9]. The container's name is configured to equal the workflow instance's ID with the prefix `data_` and the ID is also passed to the container as value for a `main_workflow_instance` label (Lst. C.39 #40-51). To show some of the scheduling possibilities, a randomly drawn constraint of the following

```
"constraint:edu.proto.machine_env==external"
```

```
"constraint:edu.proto.ram==/(\d\d\d\d+|[7-9]\d\d|[6][5-9]\d)/"
```

is passed, such that the data container is either scheduled on a external node or a node with at least 650MB of memory (Lst. C.39 #49). Each node on which workflows are executed obtains a directory `/workflow_relevant_data`, in which the working directories for the various workflow instances are kept. WorkflowInstance passes the instruction

```
"/workflow_relevant_data/#{@instance_id}:/workflow_relevant_data"
```

to create a such a working directory under the name of the workflow instance ID and to make it available in the data container at the path `/workflow_relevant_data` (Lst. C.39 #48).

Then, WorkflowInstance resolves the appropriate image name from the workflow's ID and creates the workflow instance container – but it does not start it yet. The container's name is configured to equal the workflow instance's ID with the prefix `wfi_`. The container is labeled with the workflow instance's ID as value for both `main_workflow_instance` and `main_workflow_instance`. WorkflowInstance passes the instructions to mount both the local Docker daemon's socket and the data volume of the previously created data container. The passed affinity

```
"affinity:container==#{@data_container.id}"
```

instructs the swarm master to create the container on the same node as the data container. Since the workflow instance is the root of the enactment's instance hierarchy, its workflow and workflow instance IDs are passed to the container as the values of the environment variables that inform the workflow instance about the superordinate workflow and its instance as well as its own and its workflow's ID (Lst. C.39 #76-99).

When instructed to start the workflow instance container, `WorkflowInstance` connects the container to the `wfms_enactment` network, copies the input data into the container, starts it and waits for it to stop. Then, it copies out the output JSON file, parses and returns its content as an Ruby object to the engine. In a non-prototypical implementation, the containers would be deleted at this point – in this prototype, they are left on the node for inspection (Lst. C.39 #14-29, #40-60).

6.3.4 Developer gateway

`developer_gateway)?`

The developer gateway does not require any database, as it merely forwards requests to the services via the MOM. Hence, it consists of a single Docker container that contains a RoR application. To be reachable by the users, this container needs to expose the port that the RoR application is listening on to the host's network (Lst. D.4 #204-218).

The RoR application serves a web interface that offers the means for the inspection of the available nodes, the management of users and roles, and for the modeling of workflows. It does so by sending requests to the application's controllers and presenting the outcome. In order to request data from the micro-services, a controller class creates a response queue to which it subscribes. Then it publishes a message on an appropriate queue, in which it declares the need for a specific information. One of the services instances that are subscribed to this queue receives the request and publishes the answer to the respective response queue. The result is then returned to the frontend, where it can be displayed (e.g. as in Lst. C.35). The required methods are provided by the `ApplicationController`, from which all other controllers inherit (Lst. C.34 #24-49).

6.3.5 User gateway

`b:user_gateway)?`

Just like the developer gateway, the user gateway does not require any storage mechanism. It thus also consists of only one Docker container, which contains the RoR application. To make the service accessible from outside of the system, the user gateway service's container exposes the port that the application is listening on the host's network. The user gateway is connected to the frontend network to isolate it from the internal services – to which it may only communicate through the MOM. While the backend functionality is implemented in Ruby, the frontend is served by RoR as simple HTML pages.

6.3.6 Message oriented middleware (MOM)

`ted_middleware)?`

RabbitMQ exists as a pre-configured Docker image (`rabbitmq`) on the Docker Hub and can thus put to use swiftly. The configuration of RabbitMQ in this image takes place when the re-

spective container is started which allows its configuration in the docker-compose configuration file as depicted in Listing 6.2. For the sake of simplicity, no authentication mechanism was introduced besides the simple default username/password combination. As the central point of communication, the MOM is the only container which is connected to all three overlay networks. While one would probably avoid exposing this service in a real use case, it is exposed to the host's network for its use in a prototype, as this allows to monitor the messaging activity of the services.

```

23     image: rabbitmq:3-management
24     restart: on-failure:3
25     networks:
26         - backend
27         - enactment
28         - frontend
29     ports:
30         - "8080:15672"
31     environment:
32         - "constraint:node==internal-machine"
33

```

Listing 6.2: Configuration of the MOM service in the Docker Compose file

6.3.7 Infrastructure management service

The data this service offers – the state of the Docker swarm and its nodes – should always be up-to-date. It is thus gathered ad-hoc when a request arrives. This proceeding makes a database obsolete, that is why the infrastructure management service solely consists of one Docker container which contains the application (Lst. D.4 #170-186).

The `EnvironmentManager` queries the Docker daemon to gather the requested information and processes the response (Lst. C.44). It is supported by the `DockerHelper`, which provides the means to point the local Docker client at arbitrary members of the swarm or the swarm manager.

6.3.8 Registry

A local registry is deployed in its own container in order to distribute the created images. Docker provides the `registry` image for this purpose, of which the version `registry:2.3` is used, since it is the newest stable version at the time of this writing.

The registry is configured to be restarted automatically in case that itself or the node it runs on fails. Further, it is exposed on the host's network to make it reachable for all nodes in the

swarm. This is necessary as their daemons are not containers and thus cannot be connected to the overlay network. This configuration is reflected in the WfMS' Docker Compose file as follows:

6.3.9 Provisioning service

The provisioning service is implemented in a simple way – it consists of a single script that listens to the events published to the swarm master. If a named image is pushed by one of the nodes, the provisioner pulls its own node, as visible in Listing 6.4.

6.4 Exemplary deployment and case study

To show the feasibility of the developed solution, the prototype is deployed exemplarily. This process is supported by Docker Machine, Docker Swarm, and Docker Compose. Four machines are created to simulate an organization setup (Lst. D.1). The first machine that is started will serve as a host for the image registry and the key-value store that Docker Swarm uses. It is thus named `coordination-machine`. To account for the increased need for memory of the registry, this machine receives twice the amount of memory that the other machines will be granted. Three other machines are created, which are equal in their available resources: `development-machine`, `internal-machine`, and `cloud-machine`. The latter is not actually located on a remote location, but its daemon is labeled with

```
edu.proto.machine_env=external
```

while the other nodes receive the value `internal`, to show how such a node could be distinguished for scheduling. Each of the nodes is also labeled with a fictional amount of available memory, e.g.

```
edu.proto.ram=1024.
```

```

12 registry:
13   image: registry:2.3
14   restart: always
15   ports:
16     - 5000:5000
17   networks:
18     - backend
19   environment:
20     - "constraint:node==coordination-machine"
21
```

Listing 6.3: Configuration of the registry service in the Docker Compose file

```

19 begin
20   Docker::Event.stream do |event|
21     if event.status == 'push' && !event.id.match(/sha\:\/)
22       puts "pulling #{event.id}"
23       Docker::Image.create({fromImage: event.id}, local_connection)
24     end
25   end
26 rescue Exception => e
27   puts e
28   retry
29 end

```

Listing 6.4: Provisioning service: Loop for pulling images

provisioner_loop)

While the allocation of services to specific nodes would not matter in practice, it is done in a static manner for this prototype to facilitate referencing to them during examination and documentation. The services are assigned to the nodes as follows: the registry is started on `coordination-machine`; the MOM, worklist, and user gateway services reside on `internal-machine`; all other services are allocated on `development-machine`. Creating the registry on the `coordination-machine` is a good practice, as every Docker daemon that is part of a swarm knows the IP address of this machine if the key-value store is also hosted there. Its address can thus be resolved by accessing the daemon's configuration. Further, it may be used to distribute the WfMS' images during the installation of the system.

To recover from service failures, all containers are configured with the option `restart: on-failure:3`. That is, if a container terminates because of an error, Docker tries to restart it up to three times. While this is not a solution for actual errors in the code, since they will occur again, it may help to recover from failures induced by external factors.

The deployment of all services is performed using Docker Compose (Lst. D.3). The configuration of all services and the required networks that connect them can be specified in a single YAML file. YAML Ain't Markup Language (YAML) is designed with a focus on human readability [3]. The configuration file, which is depicted in Listing D.4-D.8 can thus serve as a textual documentation of the system's architecture. For example, the existence of the three overlay networks determined in 5.3.3 is expressed by the lines

?{acro:YAML)?

```

3 networks:
4   frontend:
5     driver: overlay
6   backend:
7     driver: overlay
8   enactment:
9     driver: overlay

```

and the connection of a container (in this case the workflow engine application container) to these networks is declared as

```
34     engine:
43     networks:
44         - backend
45         - enactment
```

A graphical visualization of the exemplary deployment described by the Docker Compose configuration file is presented in Figure D.1.

To demonstrate the ability of the prototype to actually operate, an exemplary workflow (`everything-workflow`) is modeled and executed which consists of two sub-workflow activities: one sub-workflow contains a third-party container activity (`third-party-workflow`) and another that contains a manual activity (`manual-workflow`).

When the installation of the prototype is finished, the developer gateway can be visited in a web browser at the network address of the development-machine (Figure E.1). First, a role is added, followed by a user (Figure E.2, Figure E.3). The `third-party-workflow` is configured to utilize the small `alpine` image which is instructed to print out some text (Figure E.4). As soon as this workflow is saved, the exported images are pushed to the registry and instantaneously pulled by the provisioner (Figure E.5, Figure E.6). In the same fashion, the `manual-workflow` and the overarching `everything-workflow` are modeled (Figure E.7, Figure E.8).

After the `everything-workflow` is instantiated and its start activity is completed, the enactment of the first sub-workflow (`third-party-workflow`) is started. The container activity runs the `alpine` image and exits, followed by the `third-party-workflow`. Thereafter, the `manual-workflow` is started. The manual activity requests the creation of a worklist item and begins to wait for its completion. The worklists and worklist items can be inspected on the user gateway (Figure E.9, Figure E.10). As the user gateway does not feature the capabilities to render dynamic forms in this prototype, the worklist item is manipulated using the RabbitMQ administration web interface as visible in Figure E.11. The manual activity receives the result and exits. This allows the `manual-workflow` to exit too, which has been waiting on the activity to finish. The sub-workflow activity, which has been waiting for its workflow to finish, exits too. Finally the overarching workflow exits and the enactment is completed. A glance at the output of the container list (`docker ps -a`) confirms this order of execution (Figure E.12).

To demonstrate the ability of the prototype to scale components dynamically, the workflow engine is replicated three times by using the command `docker-compose -p wfms -f wfms.yml`

`scale engine=3` (Lst. E.14). The effect of this is that three instances of the engine are created which share one message queue from which they receive messages in round robin (Lst. ??). It must be added here, that scaling services' databases can be a not-so-trivial task as it may require additional measures to ensure consistency among the databases.

6.5 Implementation issues and compromises

mentation_issues)?

The requests that are sent from the frontends to the gateways are implemented in a synchronous fashion, i.e., the frontend sends the requests and blocks the execution until a response is received. This is also imposed on the onward communication to the other services in this prototype by the way the gateways' consumers are implemented – a blocking queue listens to the response to a specific request. In cases where multiple independent requests are made, an asynchronous implementation would enable performance gains, as these requests could be performed in parallel. However, this would raise the complexity of both frontend and gateway, as they have to account for the unknown order of incoming responses.

While a worklist item should be rescheduled in a real-world scenario if its assigned role is deleted, it is simply deleted by the `RoleConsumer` in the prototype as this is a less complex way to handle this case.

Since Ruby code is interpreted rather than compiled to executables and run, it requires the runtime environment to be served as part of the images, which are thus considerably larger as images that container only contain a self-sufficient executable. Due to the previously presented benefits that come along with the layer structure, this is only relevant for image transfers for the first time that an image is up- or downloaded, though.

7 Evaluation and discussion

<cha:evaluation>

In Chapter 6, the prototypical implementation of a Docker-based WfMS is presented. This implementation is based on the design decisions that are made in Chapter 5. In that chapter, objectives for the prototypical implementation were gathered, together with the requirements that must be met in order for these objectives to be considered fulfilled (see Table 5.1).

The first objective was that the solution supports updates of its components at runtime. In 5.4.2 is explained how the loose coupling of micro-services via MOM and the encapsulation of these services in separate containers can enable such updates.

Regarding the requirements that concern the failure resilience of a service, the prototype is able to let all parts of the system that do not rely on failed services continue to offer their functionality. If, for example, the organization service failed, it would still be possible to model and execute a workflow (besides assigning participants to manual activities). This is achieved through the decoupling introduced by MSA, which is in turn mainly enabled by the networking functionality of Docker and the maintenance with Docker Compose. Further, the possibility to instruct Docker to restart failing containers can help to keep the system available. In case of a micro-service failure, the unanswered requests to it remain in the queue and can be processed as soon as the service is available again. The prototype's ability to cope with failure can thus mainly be attributed to the combination of Docker with a MSA.

The management of nodes that are available for execution is mostly handled by Docker Swarm. By starting appropriately configured swarm agent containers on them, new nodes may be added to the swarm at any time. They can be equipped with the required images by starting the respective provisioning service and exporting the workflows again.

The prototype supports the user in using third-party images by providing the means to specify images that are available on the public Docker Hub registry. Further, the command that is passed to utilized third-party images can be set. The graphical modeling environment abstracts from the fact that the container is started by an intermediate activity container, which furthers the impression of using third-party images as workflow elements.

Some of the objectives were addressed in theory, but the according solutions were just partially implemented in the prototype – or not at all. As described in 5.2.4, nodes can be labeled and these labels can be used to enforce required properties of nodes for certain workflows or activities. The prototype applies this concept, but in a static way – not on a dynamic, per-element level. The G_{SEPC}^{DV} approach was chosen as it was deemed well suited to demonstrate the scheduling criteria despite its inability to natively perform data interactions between workflow instances.

This capability would have to be added to fulfill the goal to support all data visibility and - interaction types depicted in Table 5.2.

Software developers in charge of creating a Docker-based WfMS may use the decision tree depicted in Figure 5.3 and the overview in Table ?? to find a starting point for choosing the suitable use of Docker for the intended use case of their WfMS. The UML models provided in this thesis can serve as a foundation for the design of such an WfMS. Finally, the prototype's source code itself can provide inspiration for the realization of some functionalities that are specific to a Docker-based WfMS.

Considering the duplicate code among the workflow- and activity images, it could have been beneficial to use a different (recursive) definition of workflows rather than the workflow/activity concept defined by the WfMC. This would have allowed the use of a single base image, which could be implemented to differ in behavior depending on whether subordinate workflows were given to it or not. A similar insight was had by Schulze et al. [35, p. 119].

The above assessments of the thesis' outcome are all of qualitative nature. If the presented mechanisms and design solutions perform poorly in comparison to other approaches that can be taken to reach the stated objectives, they are merely of interest as intellectual pastime. A quantitative evaluation of the outcome should thus be performed in future research to judge the overall usefulness of the solutions.

Note by the author: With hindsight, the chosen scope would appear too wide for a master thesis with the given limitations, leading to shortcuts at places where more in-depth research documentation would have been warranted. Still, the eventual outcome of the paper, i.e. the ultimate decisions on software architecture and -design are founded on solid examination of the available alternatives. A preliminary decision to focus on either the architecture or the execution aspect could have been beneficial.

8 Conclusion

<cha:conclusion>

In the thesis at hand, mechanisms and implementation possibilities that Docker and its related tools can provide for WfMSs were proposed and discussed. In particular, the focus lay on figuring how Docker can support the deployment and execution of workflows in a distributed environment, as well as on which decisions in software architecture and software design of a WFMS are complemented by Docker's functionality.

After introducing the concepts of WfMSs, Docker and its related tools, as well as prevalent architecture styles, variants for the utilization of Docker to enact workflows were explored. One such variant that features the encapsulation of all workflow elements in separate images as well as a shared data volume for the resulting containers was selected for implementation.

Thereafter, the attention was directed to the question as to how Docker can be used to create a flexible, failure resilient WfMS. Given the choice between monolithic architecture, SOA, and MSA, it was found that the benefits Docker has to offer can be reaped best in combination with a MSA and inter-service communication using MOM. Consequently, service boundaries for the micro-services were derived from the WfMS reference model provided by the WfMC.

The outcome of these considerations was manifested in the design and implementation of a prototype. In the course of both design and implementation of the prototype, artifacts were created that can be the starting point for both future research and WfMS development. It was demonstrated that the prototype can be used to model a workflow and automatically distribute it to other machines in the form of images.

With regards to the variants that were deemed promising in 5.2.2, follow-up research could be done on how these variants compare to each other as regards performance. Possible performance gains through the use of a compiled language instead of the used language Ruby could also be of interest. Further, the utilization of checkpoint and restore techniques to enable the migration of paused containers across nodes could be investigated [21, 24].

To conclude, it was demonstrated that Docker and its ecosystem offer useful functionality for both WfMSs themselves as well as for the enactment of workflows and – given that such a WfMS has an reasonable performance -- is thus to be considered a fitting option for software architects that are charged with building WfMSs for enterprises that are confronted with the various challenges of the digital revolution.

Bibliography

- 997Functionality [1] Alonso, G. ; Agrawal, D. ; Abbadi, A. E. ; Mohan, C.: Functionality and Limitations of Current Workflow Management Systems. In: *IEEE Expert* 12 (1997)
- r1999Identifying [2] Becker, J. ; Uthmann, C.V. ; Muhlen, M. zur ; Rosemann, M.: Identifying the workflow potential of business processes. In: *Proceedings of the 32nd Annual Hawaii International Conference on Systems Sciences, 1999. HICSS-32 Bd. Track5, 1999, S. 10 pp.*–
- Kiki2009Yaml [3] Ben-Kiki, Oren ; Evans, Clark: *YAML Ain't Markup Language Version 1.2*. 2009. – URL <http://www.yaml.org/spec/1.2/spec.html#id2759572>
- in2014Containers [4] Bernstein, David: Containers and Cloud: From LXC to Docker to Kubernetes. In: *Cloud Computing, IEEE* 1 (2014), Nr. 3, S. 81–84. – ISSN 2325-6095
- 2015Introduction [5] Boettiger, Carl: An introduction to Docker for reproducible research. In: *ACM SIGOPS Operating Systems Review* 49 (2015), Nr. 1, S. 71–79. – URL <http://dl.acm.org/citation.cfm?doid=2723872.2723882>. – ISSN 01635980
- Buyya2009Cloud [6] Buyya, Rajkumar ; Yeo, Chee S. ; Venugopal, Srikumar ; Broberg, James ; Brandic, Ivona: Cloud computing and emerging IT platforms: Vision, hype, and reality for delivering computing as the 5th utility. In: *Future Generation Computer Systems* 25 (2009), Nr. 6, S. 599–616. – URL <http://www.sciencedirect.com/science/article/pii/S0167739X08001957>. – ISSN 0167-739X
- 999Specification [7] Casati, Fabio ; Ceri, Stefano ; Paraboschi, Stefano ; Pozzi, Guisepppe: Specification and implementation of exceptions in workflow management systems. In: *ACM Transactions on Database Systems* 24 (1999), Nr. 3, S. 405–451. – URL <http://portal.acm.org/citation.cfm?doid=328939.328996>. – ISSN 03625915
- 2010Implementing [8] Choi, J. ; Nazareth, D.L. ; Jain, H.K.: Implementing service-oriented architecture in organizations. In: *Journal of Management Information Systems* 26 (2010), Nr. 4, S. 253–286. – ISSN 0742-1222
- niteev2015Docker [9] Cogniteev: *Docker Hub- cogniteev/echo*. 2015. – URL <https://hub.docker.com/r/cogniteev/echo/>
- hamer2015Docker [10] DeHamer, Brian: *Docker Hub Top 10*. 2015. – URL <https://www.ctl.io/developers/blog/post/docker-hub-top-10/>
- er???DockerCom [11] Docker, Inc.: *Docker.com*. – URL <http://docker.com>
- cker2016Dockera [12] Docker, Inc.: *Docker Documentation*. 2016. – URL <https://docs.docker.com/>
- ocker2016Docker [13] Docker, Inc.: *The Docker user guide*. 2016. – URL <https://docs.docker.com/engine/userguide/>
- lter2014Updated [14] Felter, Wes ; Ferreira, Re ; Rajamony, Ram ; Rubio, Juan ; Felter, Wes ; Ferreira, Alexandre ; Rajamony, Ram ; Rubio, Juan: *An Updated Performance Comparison of Virtual Machines and Linux Containers*. 2014

- g2002Principled [15] Fielding, Roy T. ; Taylor, Richard N.: Principled Design of the Modern Web Architecture. In: *ACM Trans. Internet Technol.* 2 (2002), Nr. 2, S. 115–150. – URL <http://doi.acm.org/10.1145/514183.514185>. – ISSN 1533-5399
- 016Repositories [16] GitHub, Inc.: *Repositories by Stars*. 2016. – URL <https://github.com/search?p=2&q=stars%3A%3E1&s=stars&type=Repositories>
- e2004Enterprise [17] Hohpe, Gregor ; Woolf, Bobby: *Enterprise integration patterns: designing, building, and deploying messaging solutions*. Boston : Addison-Wesley, 2004 (The Addison-Wesley signature series). – ISBN 978-0-321-20068-6
- gsworth1995Wfmc [18] Hollingsworth, David: WfMC: Workflow Reference Model / Workflow Management Coalition. URL <http://www.wfmc.org/standards/docs/tc003v11.pdf>, 1995. – Specification
- tiative????Open [19] Initiative, Open C.: *Open Containers Initiative*. – URL <https://www.opencontainers.org>
- azayeri2007Some [20] Jazayeri, M.: Some Trends in Web Application Development. In: *Future of Software Engineering, 2007. FOSE '07*, 2007, S. 199–213
- m2015Checkpoint [21] Kim, Hirokuni: *Checkpoint and restore Docker container with CRIU*. 2015. – URL <http://blog.circleci.com/checkpoint-and-restore-docker-container-with-criu/>
- n1997Workflow [22] Lawrence, Peter (Hrsg.): *Workflow Handbook 1997*. New York, NY, USA : John Wiley & Sons, Inc., 1997. – ISBN 0-471-96947-8
- wan2015Proposal [23] McGowan, Derek: *Proposal: Cross repository push*. 2015. – URL <https://github.com/docker/distribution>
- Merker2015How [24] Merker, Kit: *How did the Quake demo from DockerCon Work?* 2015. – URL <http://blog.kubernetes.io/2015/07/how-did-quake-demo-from-dockercon-work.html>
- Miell2015How [25] Miell, Ian ; Sayers, Aidan H.: *How to share Docker volumes across hosts*. 2015. – URL <https://jaxenter.com/how-to-share-docker-volumes-across-hosts-119602.html>
- 2015Comparative [26] Nanz, S. ; Furia, C. A.: A Comparative Study of Programming Languages in Rosetta Code. In: *2015 IEEE/ACM 37th IEEE International Conference on Software Engineering (ICSE)* Bd. 1, 2015, S. 778–788
- man2015Building [27] Newman, Sam: *Building microservices: [designing fine-grained systems]*. 1. ed. Beijing : O'Reilly, 2015. – ISBN 978-1-4919-5035-7
- ontainerization [28] Pahl, Claus: Containerization and the PaaS Cloud. In: *IEEE Cloud Computing* 2 (2015), Nr. 3, S. 24–31. – URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7158965>. – ISSN 2325-6095
- glou2007Service [29] Papazoglou, Mike P. ; Heuvel, Willem-Jan van den: Service oriented architectures: approaches, technologies and research issues. In: *The VLDB Journal* 16 (2007), Nr. 3, S. 389–415. – URL <http://link.springer.com/10.1007/s00778-007-0044-3>. – ISSN 1066-8888, 0949-877X


- ffers2007Design [30] Peffers, Ken ; Tuunanen, Tuure ; Rothenberger, Marcus A. ; Chatterjee, Samir: A Design Science Research Methodology for Information Systems Research. In: *Journal of Management Information Systems* 24 (2007), Nr. 3, S. 45–77. – URL <http://www.tandfonline.com/doi/full/10.2753/MIS0742-1222240302>. – ISSN 0742-1222
- are2016Rabbitmq [31] Pivotal Software, Inc.: *RabbitMQ - Messaging that just works*. 2016. – URL <https://www.rabbitmq.com/>
- dson2015Service [32] Richardson, Chris: *Service Discovery in a Microservices Architecture*. 2015. – URL <https://www.nginx.com/blog/service-discovery-in-a-microservices-architecture/>
- 2015Performance [33] Ruiz, C. ; Jeanvoine, E. ; Nussbaum, L.: Performance evaluation of containers for HPC. In: *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)* 9523 (2015), S. 813–824. – URL <http://www.scopus.com/inward/record.url?eid=2-s2.0-84951948191&partnerID=40&md5=a3ee2487761581896f3c54aa2ca00552>
- ell2005Workflow [34] Russell, Nick ; Hofstede, Arthur H. M. ter ; Edmond, David ; Aalst, Wil M. P. van der: Workflow Data Patterns: Identification, Representation and Tool Support. In: Hutchison, David (Hrsg.) ; Kanade, Takeo (Hrsg.) ; Kittler, Josef (Hrsg.) ; Kleinberg, Jon M. (Hrsg.) ; Mattern, Friedemann (Hrsg.) ; Mitchell, John C. (Hrsg.) ; Naor, Moni (Hrsg.) ; Nierstrasz, Oscar (Hrsg.) ; Pandu Rangan, C. (Hrsg.) ; Steffen, Bernhard (Hrsg.) ; Sudan, Madhu (Hrsg.) ; Terzopoulos, Demetri (Hrsg.) ; Tygar, Dough (Hrsg.) ; Vardi, Moshe Y. (Hrsg.) ; Weikum, Gerhard (Hrsg.) ; Delcambre, Lois (Hrsg.) ; Kop, Christian (Hrsg.) ; Mayr, Heinrich C. (Hrsg.) ; Mylopoulos, John (Hrsg.) ; Pastor, Oscar (Hrsg.): *Conceptual Modeling - ER 2005* Bd. 3716. Berlin, Heidelberg : Springer Berlin Heidelberg, 2005, S. 353–368. – URL http://link.springer.com/10.1007/11568322_23. – ISBN 978-3-540-29389-7 978-3-540-32068-5
- lze1998Services [35] Schulze, Wolfgang ; Böhm, Markus ; Meyer-Wegener, Klaus: Services of Workflow Objects and Workflow Meta-Objects in OMG-compliant Environments. In: Patel, Dr D. (Hrsg.) ; Sutherland, Dr J. (Hrsg.) ; Miller, Joaquin (Hrsg.): *Business Object Design and Implementation II*, Springer London, 1998, S. 118–125. – URL http://link.springer.com/chapter/10.1007/978-1-4471-1286-0_13. – ISBN 978-1-85233-108-5 978-1-4471-1286-0
- rdization2013De [36] Standardization, International O. for: *DE - ISO 3166 - Codes for the representation of names of countries and their subdivisions*. 2013. – URL <https://www.iso.org/obp/ui/#iso:code:3166:DE>
- bei2015Software [37] Strimbei, Catalin ; Dospinescu, Octavian ; Strainu, Roxana-Marina ; Nistor, Alexandra: Software Architectures - Present and Visions. In: *Informatica Economica* 19 (2015), Nr. 4/2015, S. 13–27. – URL <http://revistaie.ase.ro/content/76/02%20-%20Strimbei,%20Dospinescu,%20Strainu,%20Nistor.pdf>. – ISSN 14531305, 18428088
- ds2006Reference [38] Structured Information Standards, Organization for the Advancement of: *Reference Model for Service Oriented Architecture 1.0*. OASIS, 2006

- 2015Distributed [39] Stubbs, Joe ; Moreira, Walter ; Dooley, Rion: Distributed Systems of Microservices Using Docker and Serfnode, IEEE, 2015, S. 34–39. – URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7217926>. – ISBN 978-1-4673-7459-0
- 15Microservices [40] Thones, Johannes: Microservices. In: *IEEE Software* 32 (2015), Nr. 1, S. 116–116. – URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7030212>. – ISSN 0740-7459
- ucker2015Docker [41] Tucker, Dave: *Docker Networking takes a step in the right direction*. 2015. – URL <https://blog.docker.com/2015/04/docker-networking-takes-a-step-in-the-right-direction-2/>
- ski2006Advanced [42] Vinoski, S.: Advanced Message Queuing Protocol. In: *IEEE Internet Computing* 10 (2006), Nr. 6, S. 87–89. – ISSN 1089-7801
- Wutke2008Model [43] Wutke, Daniel ; Martin, Daniel ; Leymann, Frank: Model and Infrastructure for Decentralized Workflow Enactment. In: *Proceedings of the 2008 ACM Symposium on Applied Computing*. New York, NY, USA : ACM, 2008 (SAC '08), S. 90–94. – URL <http://doi.acm.org/10.1145/1363686.1363712>. – ISBN 978-1-59593-753-7
- 2015Integrating [44] Zheng, Charles ; Thain, Douglas: Integrating Containers into Workflows: A Case Study Using Makeflow, Work Queue, and Docker, ACM Press, 2015, S. 31–38. – URL <http://dl.acm.org/citation.cfm?doid=2755979.2755984>. – ISBN 978-1-4503-3573-7

Appendix

A Theoretical Background

A.1 Docker

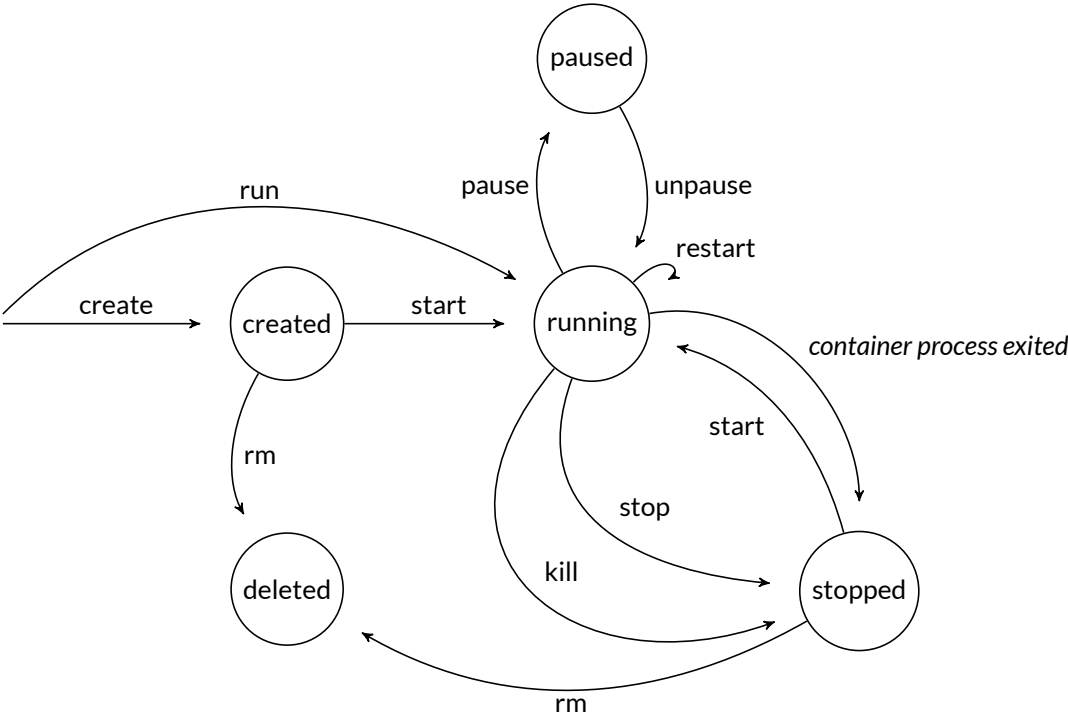

Simplified version. Commands should be understood prefixed with docker.
Based on https://docs.docker.com/engine/reference/api/docker_remote_api/#docker-events

Fig. A.1: Docker Container Life Cycle [13]

B Architecture and design

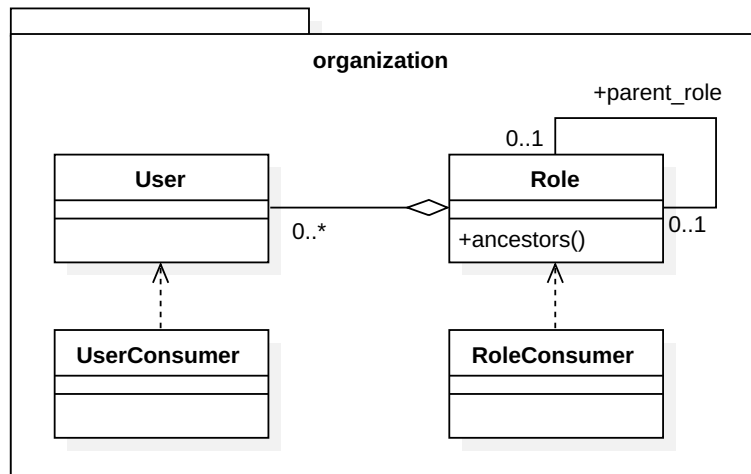


Fig. B.1: UML Class Diagram for the Organization Service

m_organization)?

C Implementation

C.1 Workflow image

```

1  {
2    "activities": [
3      {
4        "id": "81769dfd-6336-4604-a550-5264f1603269",
5        "type": "start",
6        "successors": [
7          "a0990b04-7c47-4490-8981-8e434523121b"
8        ],
9        "predecessors": []
10     },
11     {
12       "id": "5ff2892c-7325-439b-835f-d8f582005dd5",
13       "type": "end",
14       "successors": [],
15       "predecessors": [
16         "a0990b04-7c47-4490-8981-8e434523121b"
17       ]
18     },
19     {
20       "id": "a0990b04-7c47-4490-8981-8e434523121b",
21       "type": "container",
22       "successors": [
23         "5ff2892c-7325-439b-835f-d8f582005dd5"
24       ],
25       "predecessors": [
26         "81769dfd-6336-4604-a550-5264f1603269"
27       ]
28     }
29   ]
30 }

```

Listing C.1: Exported process definition in JSON format

_in_json_format)

```

1  {
2    "type": "object",
3    "required": [
4      "this"
5    ],
6    "properties": {
7      "this": {
8        "type": "string"
9      }
10   }
11 }

```

`{"this": "is a test"}` would be considered valid input data with the depicted schema

Listing C.2: JSON schema used for input validation

_in_json_format)

`** overflow`

```
1 # Base image
2 FROM ruby:2.2
3
4 # Shared files
5 RUN apt-get update && apt-get install -y git \
6     && wget -qO- https://get.docker.com/ | sh \
7     && rm -rf /var/lib/apt/lists/*
8
9 RUN mkdir /wfms
10 WORKDIR /wfms
11 ADD ["Gemfile", "Gemfile.lock", "/wfms/"]
12 RUN bundle install
13
14 # Workflow files
15 RUN mkdir /workflow
16 WORKDIR /workflow
17 ENTRYPOINT ruby run.rb
18 ADD . /workflow
```

Listing C.3: Dockerfile for workflow base image

flow_base_image\


```
1 require 'securerandom'
2
3 module Workflow
4   class ActivityInstance
5     attr_accessor :activity, :completed_predecessors, :id
6
7     def initialize(activity)
8       @id = SecureRandom.uuid
9       @activity = activity
10      @completed_predecessors = []
11      @completed = false
12    end
13
14    def completed?
15      @completed
16    end
17
18    def required_predecessors_completed?
19      return true if @activity.type == 'start'
20      return true if @activity.type == "orjoin" && @completed_predecessors.length
21      > 0
22      return true if @completed_predecessors.length > 0
23
24      completed_predecessors_activity_ids =
25      > @completed_predecessors.map(&:activity).collect(&:id)
26      (@activity.predecessors.collect(&:id) -
27      > completed_predecessors_activity_ids).empty?
28    end
29
30    def run
31      container.tap do |c|
32        Docker::Network.get(Workflow::Configuration.network).connect(c.id)
33        Docker::Network.get('wfms_enactment').connect(c.id)
34        c.start
35        c.wait(60 * 60)
36        Docker::Network.get(Workflow::Configuration.network).disconnect(c.id)
37        Docker::Network.get('wfms_enactment').disconnect(c.id)
38        c.delete unless Workflow::Configuration.keep_activity_containers?
39      end
40      @completed = true
41    end
42  end
43 end
```

Listing C.4: ActivityInstance class in workflow image (1/2)

activity_instance)

```

40 def container
41   config = Workflow::Configuration
42
43   Docker::Container.create({
44     'name' => "aci_#{@id}",
45     'Labels' => {
46       "main_workflow_instance" => "#{config.main_workflow_instance_id}",
47       "workflow_instance" => "#{config.workflow_instance_id}",
48       "activity_instance" => "#{@id}",
49     },
50     'Image' => "#{config.image_registry}/activity:ac_#{@activity.id}",
51     'Cmd' => [''],
52     'WorkingDir' => '/activity',
53     'Tty' => true,
54     'Env' => [
55       "MAIN_WORKFLOW_ID=#{config.main_workflow_id}",
56       "MAIN_WORKFLOW_INSTANCE_ID=#{config.main_workflow_instance_id}",
57       "WORKFLOW_ID=#{config.workflow_id}",
58       "WORKFLOW_INSTANCE_ID=#{config.workflow_instance_id}",
59       "ACTIVITY_ID=#{@activity.id}",
60       "ACTIVITY_INSTANCE_ID=#{@id}",
61       "WORKDIR=#{Workflow::FileHelper.activity_instance_workdir(self)}",
62       "DATA_CONTAINER=#{config.workflow_relevant_data_container}"
63     ],
64     'HostConfig' => {
65       'Binds' => ['/var/run/docker.sock:/var/run/docker.sock'],
66       'VolumesFrom' => [config.workflow_relevant_data_container],
67     }
68   })
69 end
70 end
71 end

```

Listing C.5: ActivityInstance class in workflow image (2/2)

ity_instance_2)?

```

1  module Workflow
2    module FileHelper
3      extend self
4
5      def workflow_input_dir
6        "#{Workflow::Configuration.workdir}/input"
7      end
8
9      def workflow_output_dir
10       "#{Workflow::Configuration.workdir}/output"
11     end
12
13     def activity_instance_workdir(instance)
14       "#{Workflow::Configuration.workdir}/#{instance.id}"
15     end
16
17     def activity_instance_input_dir(instance)
18       "#{activity_instance_workdir(instance)}/input"
19     end
20
21     def activity_instance_output_dir(instance)
22       "#{activity_instance_workdir(instance)}/output"
23     end
24
25     def create_activity_instance_workdir(instance)
26       FileUtils.mkdir activity_instance_workdir(instance)
27       FileUtils.mkdir activity_instance_output_dir(instance)
28     end
29
30     def ensure_workflow_input_dir
31       FileUtils.mkdir_p(workflow_input_dir) unless Dir.exist?(workflow_input_dir)
32       if File.exist? Workflow::Configuration.input_data
33         FileUtils.copy(Workflow::Configuration.input_data, workflow_input_dir)
34       end
35     end
36
37     def link_workflow_input_to_start_activity_instance_input(instance)
38       FileUtils.ln_s(
39         "#{Workflow::Configuration.workdir}/input/",
40         "#{activity_instance_input_dir(instance)}"
41       )
42     end
43
44     def link_instance_output_to_successor_input(instance, successor_instance)
45       return unless Dir.exist?(activity_instance_output_dir(instance))
46       return if Dir.exist?(activity_instance_input_dir(successor_instance))
47
48       FileUtils.ln_s(activity_instance_output_dir(instance),
49 ↪   "#{activity_instance_input_dir(successor_instance)}")
50
51       #successor_predecessors = successor_instance.activity.predecessors
52       # if successor_predecessors.nil? || successor_predecessors.length < 2
53       #   FileUtils.ln_s(activity_instance_output_dir(instance),
54 ↪   "#{activity_instance_input_dir(successor_instance)}")
55       # else
56       #   successor_input_dir = create_activity_instance_input_dir(instance)
57       #   FileUtils.ln_s(activity_instance_output_dir(instance),
58 ↪   "#{successor_input_dir}/#{instance.id}")
59       # end
60     end
61
62     def link_instance_output_to_workflow_output(instance)
63       output_dir = activity_instance_output_dir(instance)
64       if Dir.exist?(output_dir)
65         FileUtils.ln_s(output_dir, Workflow::Configuration.output_dir)
66       end
67     end
68
69     def link_workflow_output_to_instance_output(instance)
70       FileUtils.ln_s(Workflow::Configuration.output_dir,
71 ↪   activity_instance_output_dir(instance))
72     end
73
74     def link_instance_input_to_workflow_input(instance)
75       input_dir = activity_instance_input_dir(instance)
76       if Dir.exist?(input_dir)
77         FileUtils.ln_s(input_dir, Workflow::Configuration.input_dir)
78       end
79     end
80
81     def link_workflow_input_to_instance_input(instance)
82       FileUtils.ln_s(Workflow::Configuration.input_dir,
83 ↪   activity_instance_input_dir(instance))
84     end
85
86     def link_instance_output_to_instance_input(instance)
87       FileUtils.ln_s(activity_instance_output_dir(instance),
88 ↪   activity_instance_input_dir(instance))
89     end
90
91     def link_instance_output_to_instance_output(instance)
92       FileUtils.ln_s(activity_instance_output_dir(instance),
93 ↪   activity_instance_output_dir(instance))
94     end
95
96     def link_instance_input_to_instance_output(instance)
97       FileUtils.ln_s(activity_instance_input_dir(instance),
98 ↪   activity_instance_output_dir(instance))
99     end
100
101     def link_instance_input_to_instance_input(instance)
102       FileUtils.ln_s(activity_instance_input_dir(instance),
103 ↪   activity_instance_input_dir(instance))
104     end
105
106     def link_instance_output_to_workflow_input(instance)
107       FileUtils.ln_s(activity_instance_output_dir(instance),
108 ↪   Workflow::Configuration.workdir)
109     end
110
111     def link_workflow_output_to_instance_output(instance)
112       FileUtils.ln_s(Workflow::Configuration.output_dir,
113 ↪   activity_instance_output_dir(instance))
114     end
115
116     def link_instance_input_to_workflow_output(instance)
117       FileUtils.ln_s(activity_instance_input_dir(instance),
118 ↪   Workflow::Configuration.output_dir)
119     end
120
121     def link_instance_output_to_workflow_input(instance)
122       FileUtils.ln_s(activity_instance_output_dir(instance),
123 ↪   Workflow::Configuration.workdir)
124     end
125
126     def link_instance_input_to_workflow_output(instance)
127       FileUtils.ln_s(activity_instance_input_dir(instance),
128 ↪   Workflow::Configuration.output_dir)
129     end
130
131     def link_instance_output_to_instance_input(instance)
132       FileUtils.ln_s(activity_instance_output_dir(instance),
133 ↪   activity_instance_input_dir(instance))
134     end
135
136     def link_instance_output_to_instance_output(instance)
137       FileUtils.ln_s(activity_instance_output_dir(instance),
138 ↪   activity_instance_output_dir(instance))
139     end
140
141     def link_instance_input_to_instance_output(instance)
142       FileUtils.ln_s(activity_instance_input_dir(instance),
143 ↪   activity_instance_output_dir(instance))
144     end
145
146     def link_instance_input_to_instance_input(instance)
147       FileUtils.ln_s(activity_instance_input_dir(instance),
148 ↪   activity_instance_input_dir(instance))
149     end
150
151     def link_instance_output_to_workflow_input(instance)
152       FileUtils.ln_s(activity_instance_output_dir(instance),
153 ↪   Workflow::Configuration.workdir)
154     end
155
156     def link_workflow_output_to_instance_output(instance)
157       FileUtils.ln_s(Workflow::Configuration.output_dir,
158 ↪   activity_instance_output_dir(instance))
159     end
160
161     def link_instance_input_to_workflow_output(instance)
162       FileUtils.ln_s(activity_instance_input_dir(instance),
163 ↪   Workflow::Configuration.output_dir)
164     end
165
166     def link_instance_output_to_workflow_input(instance)
167       FileUtils.ln_s(activity_instance_output_dir(instance),
168 ↪   Workflow::Configuration.workdir)
169     end
170
171     def link_instance_input_to_workflow_output(instance)
172       FileUtils.ln_s(activity_instance_input_dir(instance),
173 ↪   Workflow::Configuration.output_dir)
174     end
175
176     def link_instance_output_to_instance_input(instance)
177       FileUtils.ln_s(activity_instance_output_dir(instance),
178 ↪   activity_instance_input_dir(instance))
179     end
180
181     def link_instance_output_to_instance_output(instance)
182       FileUtils.ln_s(activity_instance_output_dir(instance),
183 ↪   activity_instance_output_dir(instance))
184     end
185
186     def link_instance_input_to_instance_output(instance)
187       FileUtils.ln_s(activity_instance_input_dir(instance),
188 ↪   activity_instance_output_dir(instance))
189     end
190
191     def link_instance_input_to_instance_input(instance)
192       FileUtils.ln_s(activity_instance_input_dir(instance),
193 ↪   activity_instance_input_dir(instance))
194     end
195
196     def link_instance_output_to_workflow_input(instance)
197       FileUtils.ln_s(activity_instance_output_dir(instance),
198 ↪   Workflow::Configuration.workdir)
199     end
200
201     def link_workflow_output_to_instance_output(instance)
202       FileUtils.ln_s(Workflow::Configuration.output_dir,
203 ↪   activity_instance_output_dir(instance))
204     end
205
206     def link_instance_input_to_workflow_output(instance)
207       FileUtils.ln_s(activity_instance_input_dir(instance),
208 ↪   Workflow::Configuration.output_dir)
209     end
210
211     def link_instance_output_to_workflow_input(instance)
212       FileUtils.ln_s(activity_instance_output_dir(instance),
213 ↪   Workflow::Configuration.workdir)
214     end
215
216     def link_instance_input_to_workflow_output(instance)
217       FileUtils.ln_s(activity_instance_input_dir(instance),
218 ↪   Workflow::Configuration.output_dir)
219     end
220
221     def link_instance_output_to_instance_input(instance)
222       FileUtils.ln_s(activity_instance_output_dir(instance),
223 ↪   activity_instance_input_dir(instance))
224     end
225
226     def link_instance_output_to_instance_output(instance)
227       FileUtils.ln_s(activity_instance_output_dir(instance),
228 ↪   activity_instance_output_dir(instance))
229     end
230
231     def link_instance_input_to_instance_output(instance)
232       FileUtils.ln_s(activity_instance_input_dir(instance),
233 ↪   activity_instance_output_dir(instance))
234     end
235
236     def link_instance_input_to_instance_input(instance)
237       FileUtils.ln_s(activity_instance_input_dir(instance),
238 ↪   activity_instance_input_dir(instance))
239     end
240
241     def link_instance_output_to_workflow_input(instance)
242       FileUtils.ln_s(activity_instance_output_dir(instance),
243 ↪   Workflow::Configuration.workdir)
244     end
245
246     def link_workflow_output_to_instance_output(instance)
247       FileUtils.ln_s(Workflow::Configuration.output_dir,
248 ↪   activity_instance_output_dir(instance))
249     end
250
251     def link_instance_input_to_workflow_output(instance)
252       FileUtils.ln_s(activity_instance_input_dir(instance),
253 ↪   Workflow::Configuration.output_dir)
254     end
255
256     def link_instance_output_to_workflow_input(instance)
257       FileUtils.ln_s(activity_instance_output_dir(instance),
258 ↪   Workflow::Configuration.workdir)
259     end
260
259   end
260 end

```

```

1  module Workflow
2    class ProcessDefinition
3      attr_accessor :activities
4
5      Activity = Struct.new(:id, :type, :successors, :predecessors)
6
7      def initialize
8        file = File.read(Workflow::Configuration.process_definition)
9        @definition = JSON.parse(file)
10
11        @activities = @definition['activities'].map do |a|
12          Activity.new(a['id'], a['type'], a['successors'], a['predecessors'])
13        end
14
15        # replace list of ids with references to objects
16        @activities.each do |activity|
17          activity.successors = activity.successors.map do |successor_id|
18            @activities.find { |a| a.id == successor_id }
19          end
20
21          activity.predecessors = activity.predecessors.map do |predecessor_id|
22            @activities.find { |a| a.id == predecessor_id }
23          end
24        end
25      end
26    end
27  end

```

Listing C.7: ProcessDefinition class in workflow image

cess_definition)

```

1  module Workflow
2    class ProcessInstance
3      def initialize
4        @process_definition = Workflow::ProcessDefinition.new
5        @queue = []
6        @activity_instances = {}
7
8        Workflow::FileHelper.ensure_workflow_input_dir
9
10       Workflow::Validator.new(
11         schema: Workflow::Configuration.input_schema,
12         data: Workflow::Configuration.input_data
13       ).validate
14     end
15
16     def start
17       start_activity_instance = find_or_create_activity_instance(start_activity)
18       Workflow::FileHelper.link_workflow_input_to_start_activity_instance_input(
19         start_activity_instance
20       )
21
22     loop do
23       break if @queue.empty?
24       process_queued_activity_instances
25     end
26   end
27
28   def process_queued_activity_instances
29     uncompleted_instances.each do |instance|
30       next unless instance.required_predecessors_completed?
31
32       instance.run
33
34       instance.activity.successors.each do |successor|
35         successor_instance = find_or_create_activity_instance(successor)
36         successor_instance.completed_predecessors << instance
37         Workflow::FileHelper.link_instance_output_to_successor_input(instance,
↪   successor_instance)
38       end
39
40       if instance.activity.type == 'end'
41         @queue.clear
42         Workflow::FileHelper.link_instance_output_to_workflow_output(instance)
43       end
44     end
45   end

```

Listing C.8: ProcessInstance class in workflow image (1/2)

rocess_instance)

```
46
47     private
48
49     def uncompleted_instances
50       @queue.reject{ |ai| ai.completed? }
51     end
52
53     def start_activity
54       start_activity = @process_definition.activities.find { |a| a.type ==
→ 'start' }
55     end
56
57     def queue_activity_instance(instance)
58       @queue << instance
59       @activity_instances[instance.activity.id] << instance
60     end
61
62     def find_or_create_activity_instance(activity)
63       @activity_instances[activity.id] ||= []
64       instance = @activity_instances[activity.id].find { |ai| !ai.completed? }
65       if instance.nil?
66         instance = Workflow::ActivityInstance.new(activity)
67         Workflow::FileHelper.create_activity_instance_workdir(instance)
68         queue_activity_instance(instance)
69       end
70       instance
71     end
72   end
73 end
```

Listing C.9: ProcessInstance class in workflow image (2/2)

ess_instance_2)?

```

1  require 'rubygems'
2  require 'json'
3  require 'resolv'
4  require 'fileutils'
5  require 'docker-api'
6
7  require_relative 'configuration'
8  require_relative 'file_helper'
9  require_relative 'validator'
10 require_relative 'process_definition'
11 require_relative 'process_instance'
12 require_relative 'activity_instance'
13
14 module Workflow
15   extend self
16
17   def start
18     container = Workflow::Configuration.workflow_instance_container
19     instance_network = Docker::Network.create(Workflow::Configuration.network)
20     begin
21       process_instance = Workflow::ProcessInstance.new
22       instance_network.connect(container)
23       process_instance.start
24       instance_network.disconnect(container)
25       instance_network.remove
26     rescue
27       instance_network.remove
28     end
29   end
30 end
31
32
33 #ensure the container is connected to the required networks before starting
34   ⇨ processing
35 retries = 20
36 begin
37   Resolv.getaddress("wfms_engine_1.wfms_enactment")
38 rescue
39   sleep 0.1
40   retries -= 1
41   retry if retries > 0
42   abort "no connection"
43 else
44   Workflow.start
45 end
46
47 exit

```

Listing C.10: Workflow image run script

st:wf_image_run)

C.2 Activity image

```
1 # Base image
2 FROM ruby:2.2
3
4 # Shared files
5 RUN apt-get update && apt-get install -y git \
6     && wget -qO- https://get.docker.com/ | sh \
7     && rm -rf /var/lib/apt/lists/*
8
9 RUN mkdir /wfms
10 WORKDIR /wfms
11 ADD ["Gemfile", "Gemfile.lock", "/wfms/"]
12 RUN bundle install
13
14 # Activity files
15 RUN mkdir /activity
16 WORKDIR /activity
17 ENTRYPOINT ruby run.rb
18 ADD . /activity
```

Listing C.11: Dockerfile for activity base image

vity_base_image\

** get lines right everywhere


```

8  module Activity
9    class Instance
10     def initialize
11       @activity_id = Activity::Configuration.activity_id
12       @activity_instance_id = Activity::Configuration.activity_instance_id
13       @data = JSON.parse File.read(Activity::FileHelper.input_data)
14       @activity_info = JSON.parse File.read(Activity::FileHelper.info_data)
15       @activity_configuration = @activity_info['configuration']
16     end
17
18     def start
19       case @activity_info['type']
20       when 'manual'      then start_user_input
21       when 'container'   then start_container
22       when 'subworkflow' then start_subworkflow
23       else log_self_to_data
24       end
25
26       write_output
27     end
28
29     private
30
31     def start_container
32       require_relative 'container_invocation'
33       invocation = Activity::ContainerInvocation.new(@activity_configuration)
34       invocation.start
35       log_result(invocation.result)
36     end
37
38     def start_subworkflow
39       require_relative 'subworkflow_invocation'
40       invocation = Activity::SubworkflowInvocation.new(@activity_info)
41       invocation.start
42       log_result(invocation.result)
43     end
44
45     def start_user_input
46       require_relative 'worklist_client'
47       worklist_client = Activity::WorklistClient.new(@activity_info)
48       worklist_client.request_user_input
49       log_result(worklist_client.result)
50     end
51
52     def log_self_to_data
53       log_result({
54         activity: @activity_id,
55         activity_instance: @activity_instance_id
56       })
57     end
58

```

Listing C.12: Activity instance class (1/2)

instance_class)?

```
59     def log_result(result)
60       @data[@activity_instance_id] = result
61     end
62
63     def write_output
64       File.open(Activity::FileHelper.output_data, "w") do |file|
65         file.write(@data.to_json)
66       end
67     end
68   end
69 end
70
71
72 # ensure the container is connected to the networks before starting processing
73 begin
74   Resolv.getaddress "#{Activity::Configuration.container_name}.wfms_enactment"
75 rescue
76   sleep 0.1
77   retry
78 else
79   Activity::Instance.new.start
80 end
81 exit
```

Listing C.13: Activity instance class (2/2)

stance_class_2)?

```
1 require 'docker-api'
2
3 module Activity
4   class ContainerInvocation
5     def initialize(config)
6       @config = config
7       @registry = Activity::Configuration.image_registry
8       @image_tag = "#{config['image']}:#{config['image_version']}"
9       @container_name = "#{Activity::Configuration.container_name}_container"
10      @container = create_container
11    end
12
13    def start
14      @container.start
15      @container.wait(60 * 60)
16    end
17
18    def result
19      {
20        container_out: @container.logs(stdout: true),
21        container_err: @container.logs(stderr: true)
22      }
23    end
24
25    private
26
27    def create_container
28      Docker::Container.create({
29        'name' => @container_name,
30        'Image' => "#{@registry}/#{@image_tag}",
31        'Cmd' => @config['cmd'].split(' '),
32        'Labels' => {
33          "main_workflow_instance" =>
34            ↳ "#{Activity::Configuration.main_workflow_instance_id}",
35            "workflow_instance" =>
36            ↳ "#{Activity::Configuration.workflow_instance_id}",
37            "activity_instance" =>
38            ↳ "#{Activity::Configuration.activity_instance_id}",
39          },
40        })
41    end
42  end
43 end
```

Listing C.14: ContainerInvocation helper class

on_helper_class>

```

1  require 'docker-api'
2
3  module Activity
4    class SubworkflowInvocation
5      def initialize(config)
6        @instance_id = SecureRandom.uuid
7        @subworkflow_id = config['subworkflow_id']
8
9        @container_workdir = prepare_workdir
10       @container = create_container
11       @container.archive_in [Activity::FileHelper.input_data], "/workflow"
12     end
13
14     def start
15       Docker::Network.get('wfms_enactment').connect(@container.id)
16       @container.start
17       begin
18         @container.wait(60 * 60)
19       rescue TimeoutError => e
20         retry
21       end
22     end
23
24     def result
25       {
26         container_out: @container.logs(stdout: true),
27         container_err: @container.logs(stderr: true)
28       }
29     end
30
31     private
32
33     def registry_address
34       cluster_store = URI.parse(Docker.info['ClusterStore'])
35       cluster_store.port = 5000
36       cluster_store.select(:host,:port).join(':')
37     end
38
39     def prepare_workdir
40       Activity::FileHelper.create_subworkflow_workdir @instance_id
41     end
42

```

Listing C.15: SubworkflowInvocation helper class (1/2)

on_helper_class>

```

43  def create_container
44
45      Docker::Container.create({
46          'name' => "wfi_#{@instance_id}",
47          'Labels' => {
48              "main_workflow_instance" =>
↳   "#{Activity::Configuration.main_workflow_instance_id}",
49              "workflow_instance" => "wfi_#{@instance_id}",
50          },
51          'Image' => "#{registry_address}/workflow:wf_#{@subworkflow_id}",
52          'Cmd' => ['bash'],
53          'WorkingDir' => '/workflow',
54          'Tty' => true,
55          'HostConfig' => {
56              'Binds' => ['/var/run/docker.sock:/var/run/docker.sock'],
57              'VolumesFrom' =>
↳   [Activity::Configuration.workflow_relevant_data_container],
58          },
59          'Env' => [
60              "MAIN_WORKFLOW_ID=#{@workflow_id}",
61              "MAIN_WORKFLOW_INSTANCE_ID=#{@instance_id}",
62              "WORKFLOW_ID=#{@workflow_id}",
63              "INSTANCE_ID=#{@instance_id}",
64              "WORKDIR=#{@container_workdir}",
65
↳   "DATA_CONTAINER=#{Activity::Configuration.workflow_relevant_data_container}"
66          ]
67      })
68  end
69  end
70  end

```

Listing C.16: SubworkflowInvocation helper class (2/2)

helper_class_2)?

```

1  require 'hutch'
2  require 'securerandom'
3
4  module Activity
5    class WorklistClient
6      attr_accessor :data
7
8      def initialize(configuration)
9        Hutch::Config.tap do |c|
10          c.set :mq_host,      'wfms_mom_1'
11          c.set :mq_api_host, 'wfms_mom_1'
12          c.set :mq_exchange, 'wfms'
13        end
14        Hutch.connect
15
16        @rabbit_connection = Bunny.new(host: 'wfms_mom_1')
17        @rabbit_connection.start
18        @channel = @rabbit_connection.create_channel
19        @topic = @channel.topic('wfms', durable: true)
20        @configuration = configuration
21        @item = {}
22      end
23
24      def request_user_input
25        @item = create_worklist_item
26        wait_for_completion
27        delete_worklist_item
28      end
29
30      def result
31        { data: @item['data'] }
32      end
33
34      private
35      def create_worklist_item
36        id = SecureRandom.uuid
37        @item = {
38          id: id,
39          worklist_item: {
40            id: id,
41            role_id: @configuration['participant_role_id'],
42            config: @configuration['configuration'],
43            activity_instance_id: Activity::Configuration.activity_instance_id,
44            workflow_instance_id: Activity::Configuration.workflow_instance_id
45          }
46        }.with_indifferent_access
47
48        created_queue = new_response_queue("wfms.worklist_item.created")
49        Hutch.publish "wfms.worklist_item.create", @item
50        get_response(created_queue)
51      end
52
53      def wait_for_completion

```

Listing C.17: WorklistClient class (1/2)

t_client_class)?

```

54     finished_queue = new_response_queue("wfms.worklist_item.updated")
55     @item = get_response(finished_queue)
56 end
57
58 def delete_worklist_item
59     deleted_queue = new_response_queue("wfms.worklist_item.destroyed")
60     Hutch.publish "wfms.worklist_item.destroy", id: @item['id']
61     get_response(deleted_queue)
62 end
63
64 def new_response_queue(key)
65     response_queue = @channel.queue("", :exclusive => true)
66     response_queue.bind(@topic, routing_key: key)
67     response_queue
68 end
69
70 def is_relevant_item?(object)
71     !object.nil? && @item['id'] == object['id']
72 end
73
74 def get_response(queue)
75     response_value = nil
76
77     begin
78         queue.subscribe(:block => true) do |delivery_info, properties, body|
79             response_object = JSON.parse(body)['worklist_item']
80             if is_relevant_item?(response_object)
81                 response_value = response_object
82                 delivery_info.consumer.cancel
83             end
84         end
85     ensure
86         queue.delete
87     end
88
89     response_value
90 end
91 end
92 end

```

Listing C.18: WorklistClient class (2/2)

```
client_class_2)?
```

```

1  {
2    "image_name": "ac_cd231dda-9e65-44a8-af5a-7cf5c23dfcf2",
3    "type": "container",
4    "subworkflow_id": null,
5    "participant_role_id": null,
6    "configuration": {
7      "cmd": "echo \"esel\"",
8      "image": "alpine",
9      "image_version": "latest"
10   }
11 }

```

Listing C.19: Activity information for the inclusion in the activity image

```
ivity_info_json)
```

C.3 Workflow definition service

```

1 require 'pg'
2 require 'pry'
3 require 'active_model_serializers'
4 require 'active_record_migrations'
5 require 'docker-api'
6 require 'hutch'
7
8 db_config = YAML::load(File.open('./db/config.yml'))
9 ActiveRecord::Base.establish_connection(db_config['development'])
10
11 Hutch::Config.tap do |c|
12   c.set :mq_host, 'wfms_mom_1'
13   c.set :mq_api_host, 'wfms_mom_1'
14   c.set :mq_exchange, 'wfms'
15 end
16
17 begin
18   Hutch.connect
19 rescue
20   sleep 5
21   retry
22 end
23
24 Dir.glob(File.join('./', '{models,lib,consumers,serializers}', '**', '*.rb'),
  ↳ &method(:require))

```

Listing C.20: Definition service run script

definition_run)?

```

1 class ProcessDefinitionImageSerializer < ActiveModel::Serializer
2   has_many :activities
3
4   class ActivitySerializer < ActiveModel::Serializer
5     attribute :id
6     attribute :activity_type, key: :type
7     has_many :outgoing_control_flows, key: :successors
8     has_many :incoming_control_flows, key: :predecessors
9
10    def outgoing_control_flows
11      object.outgoing_control_flows.collect(&:successor_id)
12    end
13
14    def incoming_control_flows
15      object.incoming_control_flows.collect(&:predecessor_id)
16    end
17  end
18 end

```

Listing C.21: ProcessDefinitionImageSerializer class

age_serializer)?


```

1  class WorkflowFullSerializer < ActiveModel::Serializer
2    attributes :id, :name, :created_at, :updated_at
3    has_one :process_definition
4
5    class ProcessDefinitionSerializer < ActiveModel::Serializer
6      attributes :id
7      has_many :activities
8      has_many :control_flows
9
10     class ActivitySerializer < ActiveModel::Serializer
11       attributes :id, :name, :activity_type, :input_schema, :output_schema,
12                 :activity_configuration, :representation,
13                 :process_definition_id, :subworkflow_id, :participant_role_id
14       has_many :outgoing_control_flows, key: :successors
15       has_many :incoming_control_flows, key: :predecessors
16
17       def outgoing_control_flows
18         object.outgoing_control_flows.collect(&:successor_id)
19       end
20
21       def incoming_control_flows
22         object.incoming_control_flows.collect(&:predecessor_id)
23       end
24     end
25
26     class ControlFlowSerializer < ActiveModel::Serializer
27       attributes :id, :successor_id, :predecessor_id, :process_definition_id
28     end
29   end
30 end

```

Listing C.22: WorkflowFullSerializer class

full_serializer)

```

1  class Activity < ActiveRecord::Base
2    ACTIVITY_TYPES = [:start, :end, :orsplit, :orjoin, :andsplit, :andjoin,
   ↳ :manual, :container, :subworkflow].freeze
3    ELEMENTS_WITH_ONE_SUCCESOR = [:start, :andjoin, :orjoin, :manual,
   ↳ :container, :subworkflow].freeze
4    ELEMENTS_WITHOUT_SUCCESOR = [:end].freeze
5    ELEMENTS_WITH_ONE_PREDECESSOR = [:end, :manual, :container,
   ↳ :subworkflow].freeze
6    ELEMENTS_WITHOUT_PREDECESSOR = [:start].freeze
7
8    belongs_to :process_definition
9    belongs_to :subworkflow, class_name: 'Workflow', foreign_key: 'subworkflow_id'
10
11    store_accessor :input_schema
12    store_accessor :output_schema
13    store_accessor :activity_configuration
14    store_accessor :representation
15
16    has_many :incoming_control_flows, foreign_key: 'successor_id', class_name:
   ↳ 'ControlFlow', dependent: :destroy
17    has_many :outgoing_control_flows, foreign_key: 'predecessor_id', class_name:
   ↳ 'ControlFlow', dependent: :destroy
18
19    validates :activity_type, inclusion: { in: ACTIVITY_TYPES.map(&:to_s) }
20    validates_length_of :incoming_control_flows, maximum: 1, if: ->{
   ↳ activity_type.in? Activity::ELEMENTS_WITH_ONE_PREDECESSOR }
21    validates_length_of :outgoing_control_flows, maximum: 1, if: ->{
   ↳ activity_type.in? Activity::ELEMENTS_WITH_ONE_SUCCESOR }
22    validates_length_of :incoming_control_flows, is: 0, if: ->{
   ↳ activity_type.in? Activity::ELEMENTS_WITHOUT_PREDECESSOR }
23    validates_length_of :outgoing_control_flows, is: 0, if: ->{
   ↳ activity_type.in? Activity::ELEMENTS_WITHOUT_SUCCESOR }
24
25    ACTIVITY_TYPES.each { |type| scope "#{type}_activities", ->{
   ↳ where(activity_type: type) } }
26
27    def required_images
28      case activity_type
29      when 'container'
30        image_with_version
31      when 'subworkflow'
32        subworkflow.required_images
33      else nil
34      end
35    end
36
37    def child_elements
38      return nil unless activity_type == 'subworkflow'
39      [subworkflow] + subworkflow.child_elements
40    end
41
42    def image_with_version
43      { name: activity_configuration['image'], version:
   ↳ activity_configuration['image_version'] }
44    end
45
46    def predecessors
47      incoming_control_flows.map(&:predecessor)
48    end
49
50    def successors
51      outgoing_control_flows.map(&:succesor)
52    end

```

```
1 class ControlFlow < ActiveRecord::Base
2   belongs_to :successor, class_name: 'Activity', inverse_of:
3     ↳ :incoming_control_flows, validate: true
4   belongs_to :predecessor, class_name: 'Activity', inverse_of:
5     ↳ :outgoing_control_flows, validate: true
6   belongs_to :process_definition
7
8   default_scope ->{ order(:created_at) }
9
10  validates_presence_of :successor, :predecessor
11 end
```

Listing C.24: ControlFlow class

t:control_flow)?

```
1 class ProcessDefinition < ActiveRecord::Base
2   belongs_to :workflow
3   has_many :activities
4   has_many :control_flows
5 end
```

Listing C.25: ProcessDefinition class

ess_definition)?

```
1 class Workflow < ActiveRecord::Base
2   has_one :process_definition
3   before_create :build_process_definition
4   belongs_to :author, class_name: 'User', foreign_key: 'user_id'
5   has_many :activities, through: :process_definition
6
7   def required_images
8     activities.map(&:required_images).flatten
9   end
10
11   def child_elements
12     activities + activities.map(&:child_elements)
13   end
14 end
```

Listing C.26: Workflow class

(lst:workflow)

```

1 require 'fileutils'
2
3 module ImageBuilder
4   extend self
5
6   def build_images(subjects)
7     built_images = { successful: [], failed: [] }
8
9     subjects.each do |subject|
10      begin
11        image = build_image(subject)
12        built_images[:successful] << { image: image, subject: subject }
13      rescue Exception => e
14        built_images[:failed] << { image: image, exception: e }
15      end
16    end
17
18    built_images
19  end
20
21  def build_image(subject)
22    case subject
23    when Workflow
24      build_image_from_config(workflow_build_config(subject))
25    when Activity
26      build_image_from_config(activity_build_config(subject))
27    end
28  end
29
30  private
31
32  def build_image_from_config(build_config)
33    image = nil
34    type = build_config[:type]
35    base_name = ImageManager.image_name(type: type)
36    base_image = Docker::Image.get(base_name)
37
38    Dir.mktmpdir do |tmpdir|
39      prepare_build_enviroment(tmpdir, build_config[:build_environment])
40      image = base_image.insert_local(
41        'localPath' => Dir.glob("#{tmpdir}/*"),
42        'outputPath' => "#{build_config[:type]}/",
43        'rm' => true)
44      image.tag(repo: build_config[:name], tag: :latest, force: true)
45    end
46
47    image
48  end
49
50  def prepare_build_enviroment(tmpdir, config)
51    config[:files_to_write].each_pair { |path, content|
52      ↪ File.open("#{tmpdir}/#{path}", 'w') { |a| a.write(content) } }
53    config[:files_to_copy].each_pair { |source, target| FileUtils.copy(source,
54      ↪ "#{tmpdir}/#{target}") }
55  end
56
57  def serialize_process_definition(workflow)
58    ActiveModel::SerializableResource.new(workflow.process_definition,
59      ↪ serializer: ProcessDefinitionImageSerializer, include:
60      ↪ '**)'.serializable_hash.to_json
61  end
62
63  def activity_build_config(activity)

```

```

1 module ImageManager
2   extend self
3   SHORT_TYPES = { activity: 'ac', workflow: 'wf' }.freeze
4
5   def export_workflow(workflow)
6     elements = [workflow] + workflow.child_elements.flatten.compact
7     publish_third_party_images(workflow.required_images.flatten.compact)
8
9     images = ImageBuilder.build_images(elements)
10    images[:successful].each { |built_image| publish_image(built_image[:subject],
11    ↪ built_image[:image]) }
12    images[:failed].empty?
13  end
14
15  def image_name(type:, id: 'base')
16    "#{SHORT_TYPES[type]}_#{id}"
17  end
18
19  private
20
21  def publish_third_party_images(images)
22    images.each do |img|
23      image = Docker::Image.create fromImage: "#{img[:name]}:#{img[:version]}"
24      repo_tag = "#{registry_address}/#{img[:name]}"
25      image.tag(repo: repo_tag, tag: img[:version], force: true)
26      image.push(nil, repo_tag: "#{repo_tag}:#{img[:version]}") { |status| puts
27    ↪ status }
28    end
29  end
30
31  def registry_address
32    cluster_store = URI.parse(Docker.info['ClusterStore'])
33    cluster_store.port = 5000
34    cluster_store.select(:host,:port).join(':')
35  end
36
37  def publish_image(subject, image)
38    type = subject.class.name.underscore.to_sym
39    image_name = image_name(type: type, id: subject.id)
40    repo_tag = "#{registry_address}/#{type}"
41
42    image.tag(repo: repo_tag, tag: image_name, force: true)
43    image.push(nil, repo_tag: "#{repo_tag}:#{image_name}") { |status| puts status
44    ↪ }
45  end
46 end
47

```

Listing C.28: ImageManager class

```
t:image_manager)
```

```
1 class ActivityConsumer
2   include Hutch::Consumer
3   consume 'wfms.activity.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
→ ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7     case action
8
9     when :index
10      Hutch.publish "wfms.activity.indexed", activities: Activity.all.as_json
11
12     when :show
13      Hutch.publish "wfms.activity.showed", activity:
→ Activity.find(message[:id]).as_json
14
15     when :create
16      activity = Activity.create(message['activity'])
17      Hutch.publish "wfms.activity.created", activity: activity.as_json
18
19     when :update
20      activity = Activity.find(message['id'])
21      activity.update_attributes(message['activity'])
22      Hutch.publish "wfms.activity.updated", activity: activity.as_json
23
24     when :destroy
25      Activity.find(message['id']).destroy
26      Hutch.publish "wfms.activity.destroyed"
27   end
28 end
29 end
```

Listing C.29: ActivityConsumer class

activity_consumer)?

```

1 class ControlFlowConsumer
2   include Hutch::Consumer
3   consume 'wfms.control_flow.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
    ↪ ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7     case action
8
9     when :index
10      Hutch.publish "wfms.control_flow.indexed", control_flows:
    ↪ ControlFlow.all.as_json
11
12     when :show
13      Hutch.publish "wfms.control_flow.showed", control_flow:
    ↪ ControlFlow.find(message[:id]).as_json
14
15     when :create
16      control_flow = ControlFlow.create(message['control_flow'])
17      Hutch.publish "wfms.control_flow.created", control_flow:
    ↪ control_flow.as_json
18
19     when :update
20      control_flow = ControlFlow.find(message['id'])
21      control_flow.update_attributes(message['control_flow'])
22      Hutch.publish "wfms.control_flow.updated", control_flow:
    ↪ control_flow.as_json
23
24     when :destroy
25      ControlFlow.find(message['id']).destroy
26      Hutch.publish "wfms.control_flow.destroyed"
27   end
28 end
29 end

```

Listing C.30: ControlFlowConsumer class

_flow_consumer)?

```

1 class DockerConsumer
2   include Hutch::Consumer
3   consume 'wfms.docker.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
    ↪ ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7
8     if action == :index
9       images = Docker::Image.search(term: message[:term]).map(&:id)
10      Hutch.publish "wfms.docker.indexed", images: images.as_json
11    end
12  end
13 end

```

Listing C.31: DockerConsumer class

ocker_consumer)?

```
1 class ProcessDefinitionConsumer
2   include Hutch::Consumer
3   consume 'wfms.process_definition.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\w+)\.(\w+)(?:\.([\w-
→  ]+))?/.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7     case action
8
9     when :index
10      Hutch.publish "wfms.process_definition.indexed", process_definitions:
→ ProcessDefinition.all.as_json
11
12     when :show
13      Hutch.publish "wfms.process_definition.showed", process_definition:
→ ProcessDefinition.find(message[:id]).as_json
14
15     when :create
16      process_definition =
→ ProcessDefinition.create(message['process_definition'])
17      Hutch.publish "wfms.process_definition.created", process_definition:
→ process_definition.as_json
18
19     when :update
20      process_definition = ProcessDefinition.find(message['id'])
21      process_definition.update_attributes(message['process_definition'])
22      Hutch.publish "wfms.process_definition.updated", process_definition:
→ process_definition.as_json
23
24     when :destroy
25      ProcessDefinition.find(message['id']).destroy
26      Hutch.publish "wfms.process_definition.destroyed"
27   end
28 end
29 end
```

Listing C.32: ProcessDefinitionConsumer class

ition_consumer)?


```

1 class WorkflowConsumer
2   include Hutch::Consumer
3   consume 'wfms.workflow.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
  ↳ ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7     case action
8
9     when :index
10      Hutch.publish "wfms.workflow.indexed", workflows: Workflow.all.as_json
11
12     when :show
13      workflow = Workflow.find(message[:id])
14      Hutch.publish "wfms.workflow.showed", workflow:
  ↳ ActiveModel::SerializableResource.new(workflow, serializer:
  ↳ WorkflowFullSerializer, include: '**').serializable_hash
15
16     when :create
17      workflow = Workflow.create(message['workflow'])
18      Hutch.publish "wfms.workflow.created", workflow: workflow
19
20     when :update
21      workflow = Workflow.find(message['id'])
22      workflow.update_attributes(message['workflow'])
23      Hutch.publish "wfms.workflow.updated", workflow: workflow.as_json
24
25     when :destroy
26      Workflow.find(message['id']).destroy
27      Hutch.publish "wfms.workflow.destroyed"
28
29     when :export
30      Hutch.publish "wfms.workflow.exported", {}
31      workflow = Workflow.find(message['id'])
32      ImageManager.export_workflow(workflow)
33   end
34 end
35 end

```

Listing C.33: WorkflowConsumer class

WorkflowConsumer)?

C.4 Developer gateway

```

1 class ApplicationController < ActionController::Base
2   protect_from_forgery with: :exception
3   layout false
4
5   def initialize
6     ApplicationController.initialize_rabbitmq
7   end
8
9   def self.initialize_rabbitmq
10    @rabbit_connection = Bunny.new(host: 'wfms_mom_1')
11    @rabbit_connection.start
12    @channel = @rabbit_connection.create_channel
13    @topic = @channel.topic('wfms', durable: true)
14  end
15
16  def self.channel
17    @channel
18  end
19
20  def self.topic
21    @topic
22  end
23
24  def mq_request(key, response_key, payload)
25    rq = new_response_queue("wfms.#{response_key}")
26    Hutch.publish "wfms.#{key}", payload
27    get_response(rq)
28  end
29
30  def new_response_queue(key)
31    response_queue = ApplicationController.channel.queue("", :exclusive => true)
32    response_queue.bind(ApplicationController.topic, routing_key: key)
33    response_queue
34  end
35
36  def get_response(queue, timeout=10)
37    @response_object = nil
38    begin
39      Timeout::timeout(timeout) do
40        queue.subscribe(:block => true) do |delivery_info, properties, body|
41          @response_object = JSON.parse(body)
42          delivery_info.consumer.cancel
43        end
44      end
45    ensure
46      queue.delete
47    end
48    @response_object
49  end
50 end

```

Listing C.34: ApplicationController class in developer gateway

veloper_gateway)

```

1 class WorkflowsController < ApplicationController
2   def index
3     @workflows = mq_request 'workflow.index', 'workflow.indexed', {}
4     render json: @workflows
5   end
6
7   def show
8     @workflow = mq_request 'workflow.show', 'workflow.showed', id: params[:id]
9     render json: @workflow
10  end
11
12  def create
13    @workflow = mq_request 'workflow.create', 'workflow.created', workflow:
14    ↪ workflow_params
15    render json: @workflow, status: :created
16  end
17
18  def update
19    @workflow = mq_request 'workflow.update', 'workflow.updated', workflow:
20    ↪ workflow_params, id: params[:id]
21    @workflow = mq_request 'workflow.export', 'workflow.exported', id:
22    ↪ params[:id]
23    render json: @workflow, status: :created
24  end
25
26  def destroy
27    mq_request 'wfms.workflow.destroy', 'wfms.workflow.destroyed', id:
28    ↪ params[:id]
29    head :no_content
30  end
31
32  def export
33    rq = new_response_queue("wfms.workflow.exported", 0)
34    Hutch.publish "wfms.workflow.export", payload
35    get_response(rq)
36    head :no_content
37  end
38
39  def start_instance
40    Hutch.publish "wfms.workflow.start", id: params[:id], input_data: { this: 'is
41    ↪ a test' }
42    head :no_content
43  end
44
45  private
46
47  def workflow_params
48    params.require(:workflow).permit(:name, :user_id)
49  end
50 end

```

Listing C.35: WorkflowsController class in developer gateway

developer_gateway)

C.5 Workflow engine service

```

1  require 'hutch'
2  require 'docker-api'
3
4  Hutch::Config.load_from_file File.expand_path('config.yml')
5  Hutch.connect
6
7  Dir.glob(File.join('./', '{lib,consumers}', '**', '*.rb'), &method(:require))
8
9  module WorkflowEngine
10   extend self
11
12   def match_message(message)
13     /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
14   ↪ ]+))?/.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
15   end
16
17   def instantiate(workflow_id, input_data)
18     wfi = WorkflowEngine::WorkflowInstance.new(workflow_id, input_data)
19     begin
20       result = wfi.start
21       Hutch.publish "wfms.workflow_instance.finished", workflow_instance:
22   ↪ wfi.instance_id, result: result
23     rescue Exception => e
24       Hutch.publish "wfms.workflow_instance.failed", workflow_instance:
25   ↪ wfi.instance_id, exception: e
26     end
27   end
28
29   def pause(workflow_instance_id)
30     workflow_instance_containers(workflow_instance_id).map(&:pause)
31   end
32
33   def unpause(workflow_instance_id)
34     workflow_instance_containers(workflow_instance_id).map(&:unpause)
35   end
36
37   def terminate(workflow_instance_id)
38     workflow_instance_containers(workflow_instance_id).map(&:kill)
39     workflow_instance_containers(workflow_instance_id).map(&:delete)
40   end
41
42   private
43
44   def workflow_instance_containers(workflow_instance_id)
45     filters = { label: ["main_workflow_instance=wfi_#{workflow_instance_id}"]
46   ↪ }.to_json
47     Docker::Container.all({all: 1, filters: filters})
48   end
49 end

```

Listing C.36: WorkflowEngine class in workflow engine service

_engine_service)

```
1 module WorkflowEngine
2   class WorkflowConsumer
3     include Hutch::Consumer
4     consume 'wfms.workflow.#'
5
6     def process(message)
7       subject, action, subject_id = WorkflowEngine.match_message(message)
8       return unless action == :start
9       Hutch.publish "wfms.workflow_instance.started", id: message[:id]
10      WorkflowEngine.instantiate(message[:id], message[:input_data])
11    end
12  end
13 end
```

Listing C.37: WorkflowConsumer class in workflow engine service

engine_service)?

```
1 module WorkflowEngine
2   class WorkflowInstanceConsumer
3     include Hutch::Consumer
4     consume 'wfms.workflow_instance.#'
5
6     def process(message)
7       subject, action, subject_id = WorkflowEngine.match_message(message)
8       return unless [:pause, :unpause, :terminate].include?(action)
9
10      WorkflowEngine.send(action, message[:id])
11      Hutch.publish "wfms.workflow_instance.#{action}d", id: message[:id]
12    end
13  end
14 end
```

Listing C.38: WorkflowInstanceConsumer class in workflow engine service

engine_service)?

```

1  require 'pry'
2  module WorkflowEngine
3    class WorkflowInstance
4      attr_accessor :instance_container, :data_container, :instance_id
5      def initialize(workflow_id, input_data)
6        @workflow_id = workflow_id
7        @input_data = input_data
8        @instance_id = SecureRandom.uuid
9
10       @data_container = create_data_container
11       @instance_container = create_instance_container.refresh!
12     end
13
14     def start
15       Docker::Network.get('wfms_enactment').connect(@instance_container.id)
16       @instance_container.start
17
18       @instance_container.pause
19       copy_input_data_to_container
20       @instance_container.unpause
21
22       begin
23         @instance_container.wait
24       rescue
25         retry
26       end
27       copy_output_data_from_container
28       # @instance_container.delete(:force => true) # deactivated for the
↪ prototype
29     end
30
31     private
32
33     def random_constraint
34       [
35         "constraint:edu.proto.machine_env==external",
36         "constraint:edu.proto.ram==/(\\d\\d\\d\\d\\d+|[7-9]\\d\\d|[6][5-9]\\d)/"
37       ].sample
38     end
39
40     def create_data_container
41       Docker::Container.create({
42         'name' => "data_#{@instance_id}",
43         'Labels' => {
44           "main_workflow_instance" => "wfi_#{@instance_id}"
45         },
46         'Image' => 'cogniteev/echo',
47         'Cmd' => ['echo', "Data container for #{@instance_id}"],
48         'HostConfig' => {'Binds' =>
↪ ["/workflow_relevant_data/#{@instance_id}:/workflow_relevant_data"]},
49         'Env' => [ random_constraint ]
50       }).refresh!.tap(&:start)
51     end
52
53     def copy_output_data_from_container
54       result = @in-
↪ stance_container.archive_out("/workflow_relevant_data/output/input.data.json")
↪ do |archive|
55         pseudo_io = StringIO.new(archive)
56         data_file = Gem::Package::TarReader.new(pseudo_io).first
57         JSON.parse(data_file.read)
58       end
59       result ||= nil

```

```
1 module WorkflowEngine
2   module DockerHelper
3     extend self
4     SHORT_TYPES = { activity: 'ac', workflow: 'wf' }.freeze
5
6     cert_path = "#{ENV['SWARM_MANAGER_CERT_PATH']}"
7     swarm_manager_url = URI.parse('tcp://' + Docker.info['ClusterAdvertise'])
8     swarm_manager_url.port = 3376
9
10    Docker.url = swarm_manager_url.to_s
11    Docker.options = {
12      client_cert: File.join(cert_path, 'cert.pem'),
13      client_key: File.join(cert_path, 'key.pem'),
14      ssl_ca_file: File.join(cert_path, 'ca.pem'),
15      scheme: 'https'
16    }
17
18    def image_name(type:, id: 'base')
19      "#{SHORT_TYPES[type]}_#{id}"
20    end
21
22    def local_connection
23      Docker::Connection.new "unix:///var/run/docker.sock", {}
24    end
25  end
26 end
```

Listing C.40: DockerHelper class in workflow engine service

engine_service)?

C.6 Event converter service

```
1 require 'hutch'
2 require 'docker-api'
3
4 begin
5   Docker::Event.stream do |event|
6     Hutch.publish "wfms.docker.#{event.status}", event.as_json
7   end
8 rescue
9   retry
10 end
```

Listing C.41: Conversion of Docker events to MOM messages

o_mom_messages)?

C.7 Infrastructure management service

```

1 class ServerConsumer
2   include Hutch::Consumer
3   consume 'wfms.server.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(\\w+)\.(\\w+)(?:\\.([\\w-
→ ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
7     case action
8
9     when :index
10      servers = EnvironmentManager.all_servers
11      Hutch.publish "wfms.server.indexed", servers: servers.as_json
12
13     when :show
14      server = EnvironmentManager.all_servers.detect {|s| s.name ==
→ message[:name] }
15      server.containers = EnvironmentManager.containers(server)
16      server.images = EnvironmentManager.images(server)
17      Hutch.publish "wfms.server.showed", server: server.as_json
18    end
19  end
20 end

```

Listing C.42: ServerConsumer class in infrastructure managment service

agment_service)?

```

1 module DockerHelper
2   extend self
3   DEFAULT_DOCKER_PORT = 2376
4   CERT_PATH = "#{ENV['SWARM_MANAGER_CERT_PATH']}"
5
6   def tls_options
7     {
8       client_cert: File.join(CERT_PATH, 'cert.pem'),
9       client_key: File.join(CERT_PATH, 'key.pem'),
10      ssl_ca_file: File.join(CERT_PATH, 'ca.pem'),
11      scheme: 'https'
12    }
13  end
14
15  def swarm_manager_connection
16    swarm_manager_url = URI.parse('tcp://' + Docker.info['ClusterAdvertise'])
17    swarm_manager_url.port = 3376
18    Docker::Connection.new swarm_manager_url.to_s, tls_options
19  end
20
21  def docker_connection(server)
22    Docker::Connection.new "tcp://#{server.ip}:#{DEFAULT_DOCKER_PORT}",
→ tls_options
23  end
24 end

```

Listing C.43: DockerHelper class in infrastructure managment service

agment_service)?

```

1 module EnvironmentManager
2   extend self
3
4   def all_servers
5     swarm_info = Docker.info(DockerHelper.swarm_manager_connection)
6     raw_servers = swarm_info['DriverStatus'].select { |pairs| ip?(pairs[1]) }
7     servers = raw_servers.collect do |raw|
8       Server.new(ip: remove_port(raw[1]), name: raw[0])
9     end
10  end
11
12  def containers(server, status = :all)
13    filters = status == :all ? {} : { status: ["#{status}"] }
14    Docker::Container.all(
15      {all: true, filters: filters.to_json},
16      DockerHelper.docker_connection(server)
17    )
18  end
19
20  def images(server)
21    Docker::Image.all(
22      {all: true, filters: { dangling: [false] } }.to_json,
23      DockerHelper.docker_connection(server)
24    )
25  end
26
27  def watch_for_new_nodes
28    begin
29      Docker::Event.stream do |event|
30        if event.status == 'engine_connect'
31          server = Server.new(name: event.from.gsub('swarm node:', ''), ip: nil)
32          start_provisioner(server.name)
33        end
34      end
35    rescue
36      retry
37    end
38  end
39
40  private
41
42  def start_provisioner(server)
43    provisioner = Docker::Container.create({
44      'name' => "provisioner-#{server.name}",
45      'Image' => "provisioner",
46      'Cmd' => [''],
47      'HostConfig' => {'Binds'=>['/var/run/docker.sock:/var/run/docker.sock']},
48      'Env' => ["constraint:node==#{server.name}"],
49      'AttachStdin' => false, 'AttachStdout' => false, 'AttachStderr' => false,
50      'Tty' => true
51    }, DockerHelper.swarm_manager_connection)
52
53    Docker::Network.get('wfms_backend', DockerHelper.swarm_manager_connection)
54      .connect("provisioner-#{server.name}")
55
56    provisioner.start
57  end
58
59  def ip?(string)
60    remove_port(string) =~ Resolv::IPv4::Regex
61  end
62
63  def remove_port(ip)

```

C.8 Organization management service

```

1 class RoleConsumer
2   include Hutch::Consumer
3   consume 'wfms.role.#'
4
5   def process(message)
6     subject, action, subject_id = /wfms\.(?!\w+)(?:\.(?!\w+
7     ]+))?.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
8
9     case action
10
11     when :index
12       Hutch.publish "wfms.role.indexed", roles: Role.all.as_json
13
14     when :show
15       Hutch.publish "wfms.role.showed", role: Role.find(message[:id]).as_json
16
17     when :create
18       role = Role.create(message['role'])
19       Hutch.publish "wfms.role.created", role: role.as_json
20
21     when :update
22       role = Role.find(message['id'])
23       role.update_attributes(message['role'])
24       Hutch.publish "wfms.role.updated", role: role.as_json
25
26     when :destroy
27       Role.find(message['id']).destroy
28       Hutch.publish "wfms.role.destroyed"
29   end
30 end

```

Listing C.45: RoleConsumer class in organization management service

agement_service)?

```

1 class Role < ActiveRecord::Base
2   has_many :users
3   belongs_to :parent_role, class_name: 'Role', foreign_key: 'parent_role_id'
4   has_many :child_roles, class_name: 'Role', foreign_key: 'parent_role_id'
5
6   def ancestors
7     return [] if parent_role.nil?
8     subject, ancestors = self, []
9     ancestors << subject = subject.parent_role while subject.parent_role
10    ancestors
11  end
12 end

```

Listing C.46: Role class in organization management service

agement_service)?

C.9 Provisioning service

```
1 require 'docker-api'
2
3 cert_path = "#{ENV['SWARM_MANAGER_CERT_PATH']}"
4 swarm_manager_url = URI.parse('tcp://' + ENV['SWARM_MANAGER_IP'])
5 swarm_manager_url.port = 3376
6
7 Docker.url = swarm_manager_url.to_s
8 Docker.options = {
9   client_cert: File.join(cert_path, 'cert.pem'),
10  client_key: File.join(cert_path, 'key.pem'),
11  ssl_ca_file: File.join(cert_path, 'ca.pem'),
12  scheme: 'https'
13 }
14
15 def local_connection
16   @conn ||= Docker::Connection.new "unix:///var/run/docker.sock", {}
17 end
18
19 begin
20   Docker::Event.stream do |event|
21     if event.status == 'push' && !event.id.match(/sha\:/)
22       puts "pulling #{event.id}"
23       Docker::Image.create({fromImage: event.id}, local_connection)
24     end
25   end
26 rescue Exception => e
27   puts e
28   retry
29 end
```

Listing C.47: Provisioning service

ioning_service)?

C.10 User gateway

```

1 class WorklistsController < ApplicationController
2   def index
3     @users = mq_request 'user.index', 'user.indexed', {}
4   end
5 end

```

Listing C.48: WorklistsController class in user gateway

n_user_gateway)?

```

1 class WorklistItemsController < ApplicationController
2   def index
3     @worklist_items = mq_request 'worklist_item.index', 'worklist_item.indexed',
    ↪ role_id: params[:role_id]
4     @worklist_items = @worklist_items['worklist']
5   end
6
7   def edit
8     @worklist_item = mq_request 'worklist_item.show', 'worklist_item.showed', id:
    ↪ params[:id]
9   end
10
11  def update
12    mq_request 'worklist_item.update', 'worklist_item.updated', id: params[:id],
    ↪ worklist_item: params[:worklist_item]
13    redirect_to worklist_items_url, notice: 'Worklist item was successfully
    ↪ submitted.'
14  end
15
16  def destroy
17    mq_request 'wfms.user.destroy', 'wfms.user.destroyed', id: params[:id]
18    redirect_to worklist_items_url, notice: 'Worklist item was successfully
    ↪ destroyed.'
19  end
20
21  private
22
23  def worklist_item_params
24    params[:worklist_item]
25  end
26 end

```

Listing C.49: WorklistItemsController class in user gateway

n_user_gateway)?

C.11 Worklist handler service

```

1 class WorklistItemsController < ApplicationController
2   def index
3     @worklist_items = mq_request 'worklist_item.index', 'worklist_item.indexed',
    ↪ role_id: params[:role_id]
4     @worklist_items = @worklist_items['worklist']
5   end
6
7   def edit
8     @worklist_item = mq_request 'worklist_item.show', 'worklist_item.showed', id:
    ↪ params[:id]
9   end
10
11  def update
12    mq_request 'worklist_item.update', 'worklist_item.updated', id: params[:id],
    ↪ worklist_item: params[:worklist_item]
13    redirect_to worklist_items_url, notice: 'Worklist item was successfully
    ↪ submitted.'
14  end
15
16  def destroy
17    mq_request 'wfms.user.destroy', 'wfms.user.destroyed', id: params[:id]
18    redirect_to worklist_items_url, notice: 'Worklist item was successfully
    ↪ destroyed.'
19  end
20
21  private
22
23  def worklist_item_params
24    params[:worklist_item]
25  end
26 end

```

Listing C.50: UserConsumer class in worklist management service

agment_service)?

```

1 module Worklist
2   class WorklistItemConsumer
3     include Hutch::Consumer
4     consume 'wfms.worklist_item.#'
5
6     def process(message)
7       subject, action, subject_id = /wfms\.(\w+)\.(\w+)(?:\.([\w-
→ ]+))?/.match(message.routing_key).captures.to_a.compact.map(&:to_sym)
8       case action
9
10        when :index
11          worklist_items = WorklistItem.where(role_id: message[:role_id])
12          Hutch.publish "wfms.worklist_item.indexed", worklist:
→ worklist_items.as_json
13
14        when :show
15          worklist_item = WorklistItem.find(message[:id]).as_json
16          Hutch.publish "wfms.worklist_item.showed", worklist_item:
→ worklist_item.as_json
17
18        when :create
19          worklist_item = WorklistItem.create(message['worklist_item'])
20          Hutch.publish "wfms.worklist_item.created", worklist_item:
→ worklist_item.as_json
21
22        when :update
23          worklist_item = WorklistItem.find(message['id'])
24          worklist_item.update_attributes(message['worklist_item'])
25          Hutch.publish "wfms.worklist_item.updated", worklist_item:
→ worklist_item.reload.as_json
26
27        when :destroy
28          worklist_item = WorklistItem.find(message['id']).destroy
29          Hutch.publish "wfms.worklist_item.destroyed", worklist_item:
→ worklist_item.as_json
30        end
31      end
32    end
33  end

```

Listing C.51: WorklistConsumer class in worklist managment service

agment_service)?

```

1 class WorklistItem < ActiveRecord::Base
2   store_accessor :data
3   store_accessor :config
4 end

```

Listing C.52: WorklistItem class in worklist managment service

agment_service)?

D Deployment


```

1  #!/bin/sh
2  # This script should setup the docker machines for the example scenario
3  # Precondition: Docker, Docker-Compose, Docker Machine and VirtualBox are
   ↳ installed
4  step(){
5      echo "\n\n${@}"
6  }
7
8  step "Create machine on which the discovery service and the registry will run..."
9  docker-machine create -d=virtualbox \
10     --swarm \
11     --swarm-discovery="consul://127.0.0.1:8500" \
12     --engine-opt="cluster-store=consul://127.0.0.1:8500" \
13     --engine-opt="cluster-advertise=eth1:2376" \
14     --virtualbox-memory "2048" \
15     coordination-machine
16
17  coordination_machine_ip=$(docker-machine ip coordination-machine)
18  consul_url="consul://$coordination_machine_ip:8500"
19  registry_url=$(docker-machine ip coordination-machine):5000
20
21  step "Start consul key-value store..."
22  eval "$(docker-machine env coordination-machine)"
23  docker-compose -p consul -f ../consul.yml up -d
24
25  step "Create machine on which the swarm master and the development services will
   ↳ run..."
26  docker-machine create -d virtualbox \
27     --swarm --swarm-master \
28     --swarm-discovery="$consul_url" \
29     --engine-opt="cluster-store=$consul_url" \
30     --engine-opt="cluster-advertise=eth1:2376" \
31     --engine-label edu.proto.machine_env="internal" \
32     --engine-label edu.proto.ram="500" \
33     --engine-insecure-registry $registry_url \
34     --engine-insecure-registry registry_service_1:5000 \
35     development-machine
36
37  step "Create machine on which the internal enactment will run..."
38  docker-machine create -d virtualbox \
39     --swarm \
40     --swarm-discovery="$consul_url" \
41     --engine-opt="cluster-store=$consul_url" \
42     --engine-opt="cluster-advertise=eth1:2376" \
43     --engine-label edu.proto.machine_env="internal" \
44     --engine-label edu.proto.ram="500" \
45     --engine-insecure-registry $registry_url \
46     internal-machine
47

```

Listing D.1: Setup of the machines for the exemplary deployment (1/2)

ry_deployment_1)

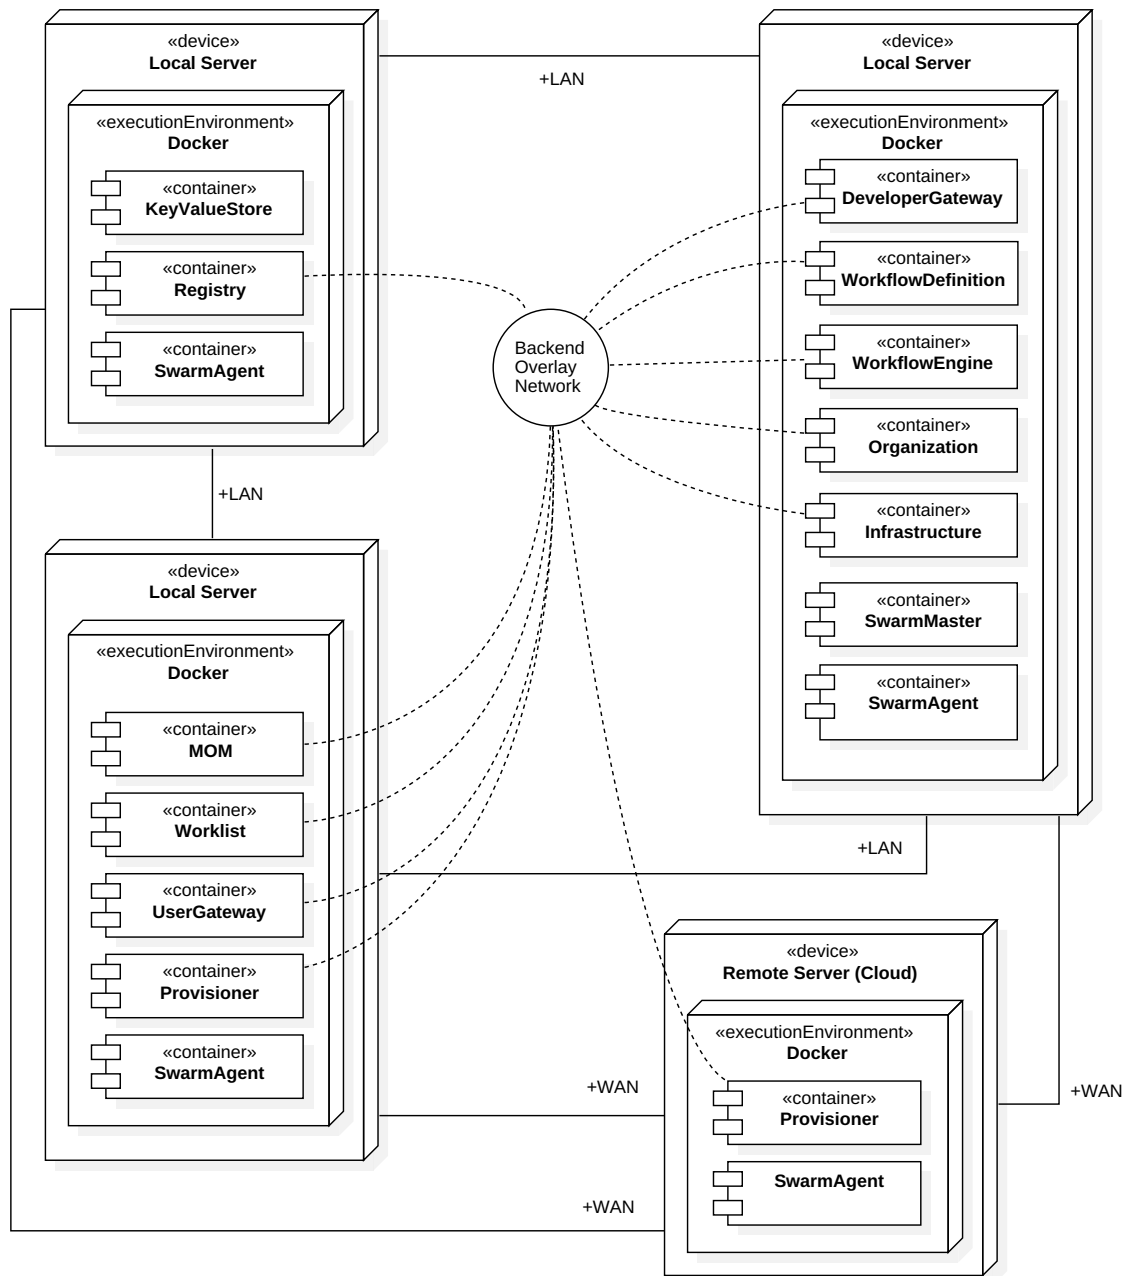

Note: the depicted distribution of containers to nodes is just exemplarily. Most of them could run on any node in the swarm. The only mandatory assignments are the swarm agents, of which each node needs one, and the provisioners, of which each node that is intended to execute workflows on needs one.

Also, the databases and their respective data volumes were omitted for the sake of clarity. ** LAN WAN**

Fig. D.1: UML deployment diagram of the architecture

he_architecture)

```
48 step "Create machine on which the external enactment for wfs with space needs
   ↳ will run..."
49 docker-machine create -d virtualbox \
50     --swarm \
51     --swarm-discovery="$consul_url" \
52     --engine-opt="cluster-store=$consul_url" \
53     --engine-opt="cluster-advertise=eth1:2376" \
54     --engine-label edu.proto.machine_env="external" \
55     --engine-label edu.proto.ram="1024" \
56     --engine-insecure-registry $registry_url \
57     cloud-machine
58
59 step "Swarm master info:"
60 docker info
61 step "Created machines with the following IPs:"
62 docker run --rm swarm list $consul_url
```

Listing D.2: Setup of the machines for the exemplary deployment (2/2)

deployment_1_2)?

62

Listing D.3: Setup of the services for the exemplary deployment

ry_deployment_2)

```
1  version: "2"
2
3  networks:
4    frontend:
5      driver: overlay
6    backend:
7      driver: overlay
8    enactment:
9      driver: overlay
10
11  services:
12    registry:
13      image: registry:2.3
14      restart: always
15      ports:
16        - 5000:5000
17      networks:
18        - backend
19      environment:
20        - "constraint:node==coordination-machine"
21
22    mom:
23      image: rabbitmq:3-management
24      restart: on-failure:3
25      networks:
26        - backend
27        - enactment
28        - frontend
29      ports:
30        - "8080:15672"
31      environment:
32        - "constraint:node==internal-machine"
33
34    engine:
35      image: wf_engine
36      build:
37        context: ./engine
38        args:
39          - "constraint:node==development-machine"
40      restart: on-failure:3
41      depends_on:
42        - mom
43      networks:
44        - backend
45        - enactment
46      volumes:
47        - /var/run/docker.sock:/var/run/docker.sock
48        - ~/.docker/machine/certs:/root/.docker
49      environment:
50        SWARM_MANAGER_CERT_PATH: /root/.docker
```

Listing D.4: Docker Compose file of the WfMS (1/5)

_compose_file_1\}

```
51
52 organization_db:
53   image: postgres
54   restart: on-failure:3
55   depends_on:
56     - organization_db_data
57   volumes_from:
58     - organization_db_data
59   networks:
60     - backend
61   environment:
62     - "POSTGRES_PASSWORD=masterarbeit"
63     - "POSTGRES_USER=organization"
64
65 organization_db_data:
66   image: cogniteev/echo
67   networks:
68     - backend
69   volumes:
70     - /var/lib/postgresql/data
71   environment:
72     - "constraint:node==development-machine"
73
74 organization:
75   image: organization
76   build:
77     context: ./organization
78     args:
79       - "constraint:node==development-machine"
80   restart: on-failure:3
81   depends_on:
82     - organization_db
83     - mom
84   networks:
85     - backend
86   environment:
87     - "constraint:node==development-machine"
88     - "POSTGRES_PASSWORD=masterarbeit"
89     - "POSTGRES_USER=organization"
90
91 worklist_db:
92   image: postgres
93   restart: on-failure:3
94   volumes_from:
95     - worklist_db_data
96   networks:
97     - enactment
98   environment:
```

Listing D.5: Docker Compose file of the WfMS (2/5)

compose_file_2)?

```
99         - "POSTGRES_PASSWORD=masterarbeit"
100         - "POSTGRES_USER=worklist"
101
102     worklist_db_data:
103         image: cogniteev/echo
104         networks:
105             - enactment
106         volumes:
107             - /var/lib/postgresql/data
108         environment:
109             - "constraint:node==internal-machine"
110
111     worklist:
112         image: worklist
113         build:
114             context: ./worklist
115             args:
116                 - "constraint:node==internal-machine"
117         restart: on-failure:3
118         depends_on:
119             - worklist_db
120             - mom
121         networks:
122             - enactment
123         environment:
124             - "constraint:node==internal-machine"
125             - "POSTGRES_PASSWORD=masterarbeit"
126             - "POSTGRES_USER=worklist"
127
128     definition_db:
129         image: postgres
130         restart: on-failure:3
131         depends_on:
132             - definition_db_data
133         volumes_from:
134             - definition_db_data
135         networks:
136             - backend
137         environment:
138             - "POSTGRES_PASSWORD=masterarbeit"
139             - "POSTGRES_USER=definition"
140
141     definition_db_data:
142         image: cogniteev/echo
143         networks:
144             - backend
145         volumes:
```

Listing D.6: Docker Compose file of the WfMS (3/5)

compose_file_3)?

```
146     - /var/lib/postgresql/data
147   environment:
148     - "constraint:node==development-machine"
149
150   definition:
151     image: definition
152     build:
153       context: ./definition
154       args:
155         - "constraint:node==development-machine"
156     restart: on-failure:3
157     depends_on:
158       - definition_db
159       - mom
160     volumes:
161       - /var/run/docker.sock:/var/run/docker.sock
162       - ~/.docker/machine/certs:/root/.docker
163     networks:
164       - backend
165     environment:
166       - "constraint:node==development-machine"
167       - "POSTGRES_PASSWORD=masterarbeit"
168       - "POSTGRES_USER=definition"
169
170   infrastructure:
171     image: infrastructure
172     build:
173       context: ./infrastructure
174       args:
175         - "constraint:node==development-machine"
176     restart: on-failure:3
177     depends_on:
178       - mom
179     networks:
180       - backend
181     volumes:
182       - /var/run/docker.sock:/var/run/docker.sock
183       - ~/.docker/machine/certs:/root/.docker
184     environment:
185       - "SWARM_MANAGER_CERT_PATH=/root/.docker"
186       - "constraint:node==development-machine"
187
188   user_gateway:
189     image: user_gateway
190     build:
191       context: ./user_gateway
192       args:
193         - "constraint:node==internal-machine"
194     restart: on-failure:3
195     depends_on:
196       - mom
197     ports:
```

Listing D.7: Docker Compose file of the WfMS (4/5)

compose_file_4)?

```
198     - "3001:3000"
199   networks:
200     - frontend
201   environment:
202     - "constraint:node==internal-machine"
203
204   developer_gateway:
205     image: developer_gateway
206     build:
207       context: ./developer_gateway
208       args:
209         - "constraint:node==development-machine"
210     restart: on-failure:3
211     depends_on:
212       - mom
213     ports:
214       - "3000:3000"
215     networks:
216       - frontend
217     environment:
218       - "constraint:node==development-machine"
219
220   provisioner:
221     image: provisioner
222     build:
223       context: ./provisioner
224       args:
225         - "constraint:node==cloud-machine"
226     restart: on-failure:3
227     volumes:
228       - /var/run/docker.sock:/var/run/docker.sock
229       - ~/.docker/machine/certs:/root/.docker
230     environment:
231       - "SWARM_MANAGER_IP=192.168.99.101"
232       - "SWARM_MANAGER_CERT_PATH=/root/.docker"
233       - "constraint:node==cloud-machine"
234
235   event_converter:
236     image: event_converter
237     build:
238       context: ./event_converter
239       args:
240         - "constraint:node==development-machine"
241     restart: on-failure:3
242     volumes:
243       - /var/run/docker.sock:/var/run/docker.sock
244       - ~/.docker/machine/certs:/root/.docker
245     environment:
246       - "SWARM_MANAGER_CERT_PATH=/root/.docker"
247       - "constraint:node==development-machine"
```

Listing D.8: Docker Compose file of the WfMS (5/5)

E Case study

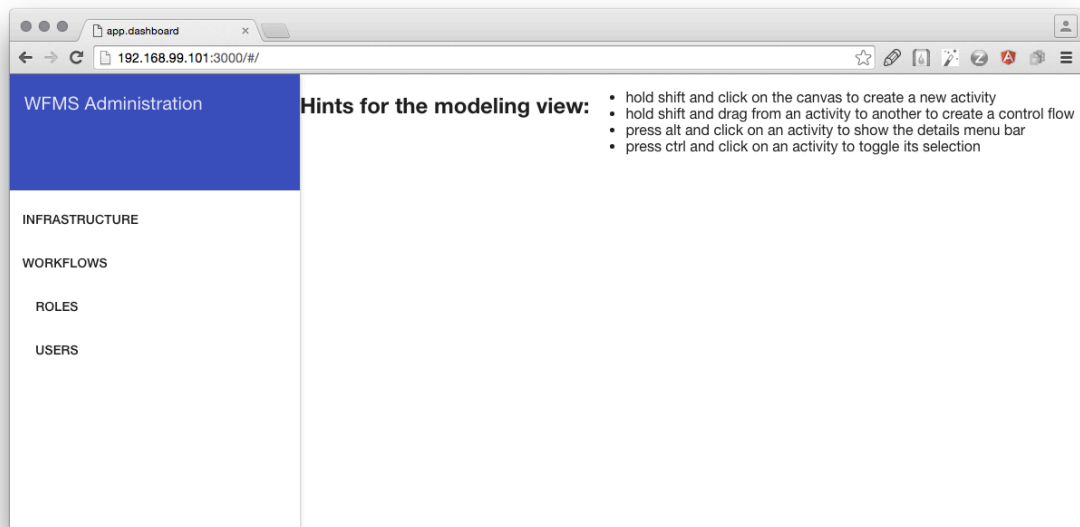


Fig. E.1: Dashboard of the prototype

{fig:dashboard}

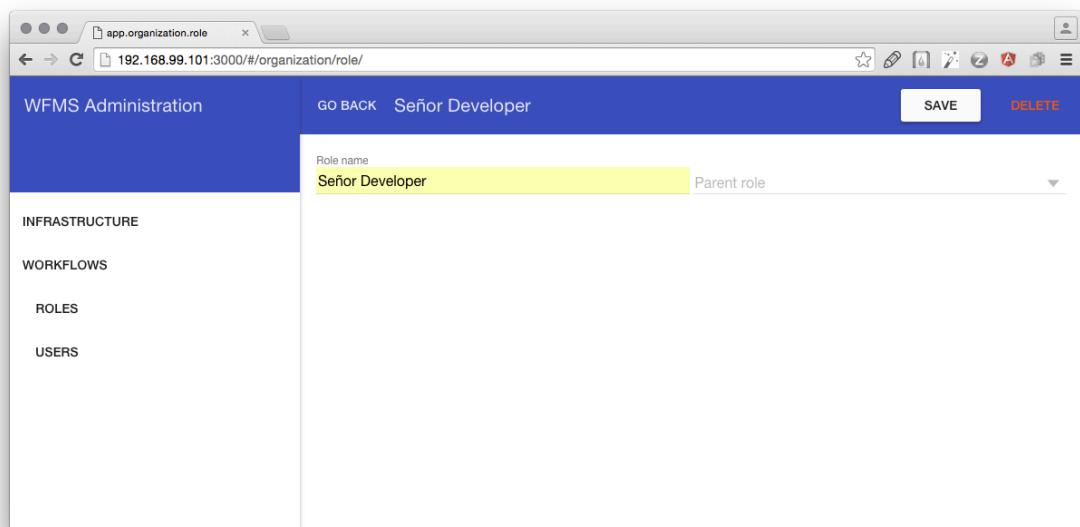


Fig. E.2: Roles view of the prototype

{fig:dev_role}

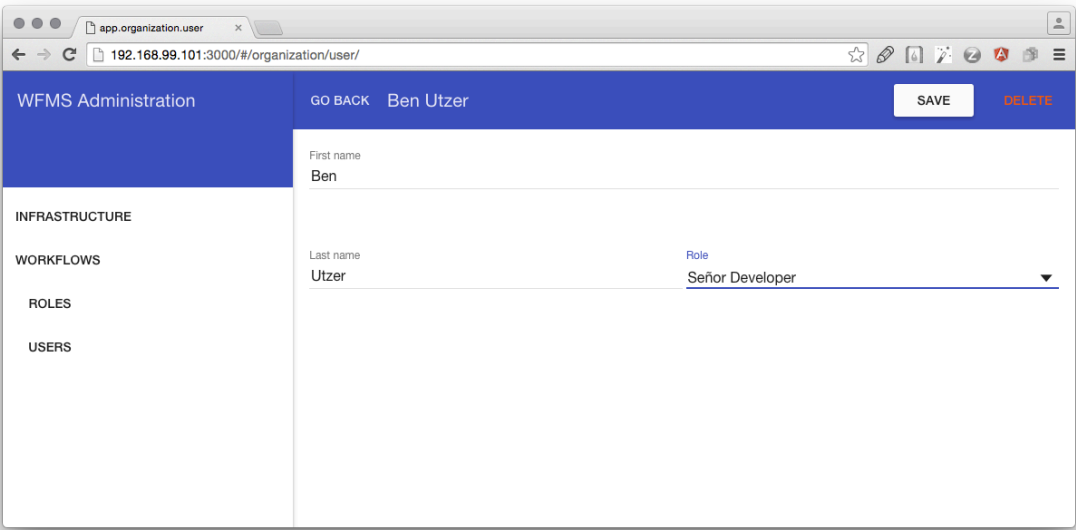


Fig. E.3: Users view of the prototype

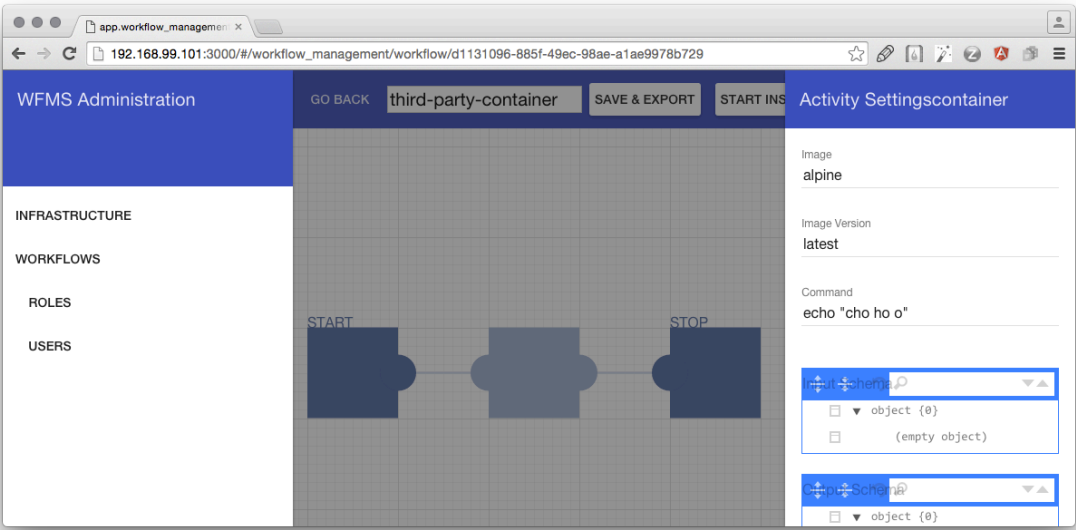


Fig. E.4: Modeling a third party container workflow

REPOSITORY	TAG	IMAGE ID	CREATED	SIZE
192.168.99.100:5000/activity	ac_818df74e-6b35-401c-a9e8-e2b3b5783f3a	ea4ee4ad913f	5 minutes ago	782.2 MB
ac_818df74e-6b35-401c-a9e8-e2b3b5783f3a	latest	ea4ee4ad913f	5 minutes ago	782.2 MB
192.168.99.100:5000/activity	ac_300d64dd-af49-4d79-ae35-049db4e23c21	96f73bb5c02e	5 minutes ago	782.2 MB
ac_300d64dd-af49-4d79-ae35-049db4e23c21	latest	96f73bb5c02e	5 minutes ago	782.2 MB
192.168.99.100:5000/workflow	wf_d1131096-885f-49ec-98ae-a1ae9978b729	69a510194fa9	5 minutes ago	776.7 MB
wf_d1131096-885f-49ec-98ae-a1ae9978b729	latest	69a510194fa9	5 minutes ago	776.7 MB
192.168.99.100:5000/activity	ac_ed1778ce-3f60-4376-80ca-6f953901a3f7	1cba51b9526d	5 minutes ago	782.2 MB
ac_ed1778ce-3f60-4376-80ca-6f953901a3f7	latest	1cba51b9526d	5 minutes ago	782.2 MB

Fig. E.5: Created images for the third party container workflow

```
2016-03-08T02:51:27.360893881+01:00 image push 192.168.99.100:5000/activity:ac_818df74e-6b35-401c-a9e8-e2b3b5783f3a (name=192.168.99.100:5000/activity)
2016-03-08T02:51:27.509067014+01:00 image pull 192.168.99.100:5000/activity:ac_818df74e-6b35-401c-a9e8-e2b3b5783f3a (name=192.168.99.100:5000/activity)
```

Fig. E.6: Provisioner reacts to pushed image by initiating pull

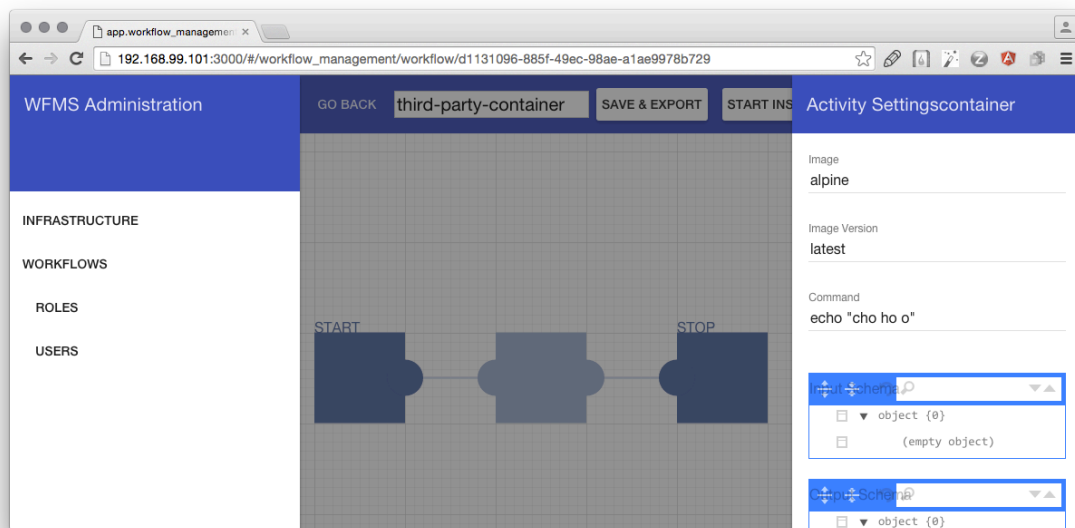


Fig. E.7: Modeling a manual activity workflow

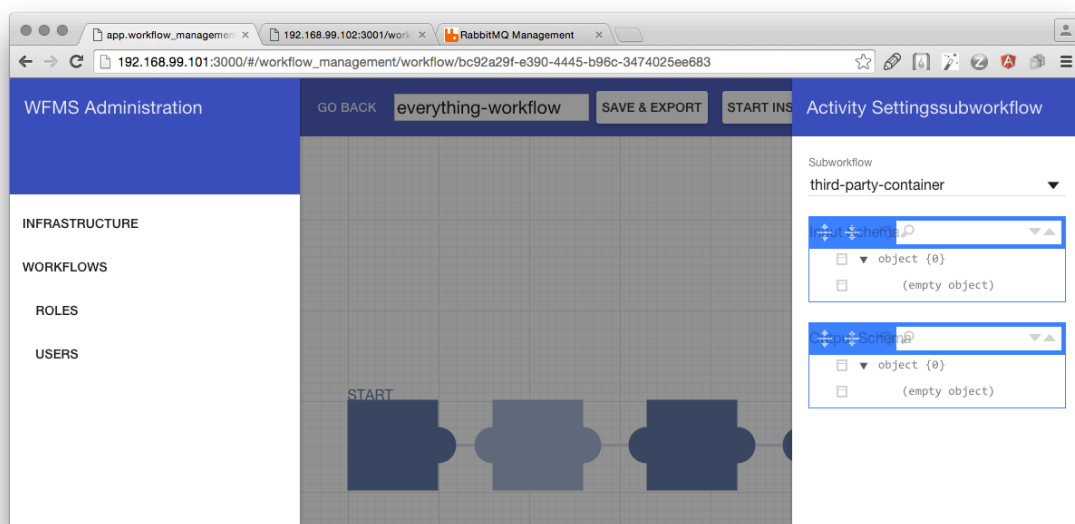


Fig. E.8: Modeling a sub-workflow workflow

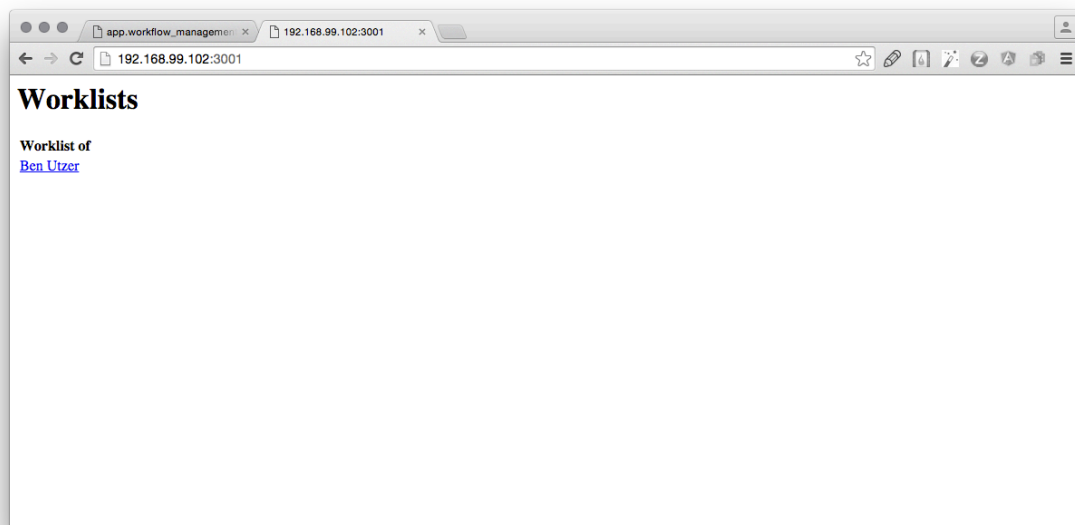


Fig. E.9: Worklist overview in the user gateway

<fig:wl_index>



Fig. E.10: Worklist item overview of a user in the user gateway

<fig:wl_user>

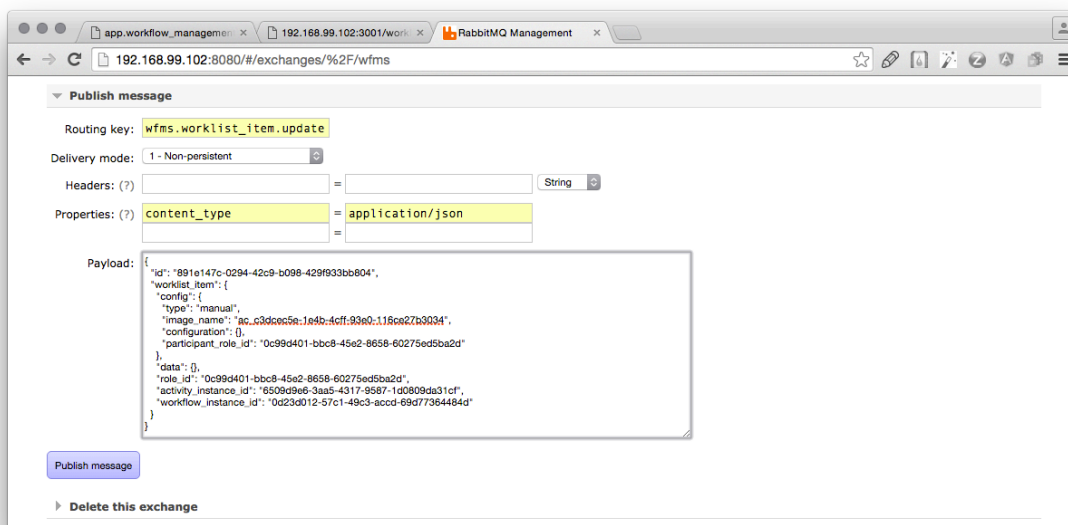


Fig. E.11: Manually updating worklist item in RabbitMQ admin interface

(fig:wl_update)

CONTAINER ID	NAMES	STATUS
84c21c2144c3	cloud-machine/aci_3ef2f1e8-564e-4b98-8808-c130a68d68de	Exited (0) 6 seconds ago
2083755665e6	cloud-machine/aci_95e06b8e-437d-4839-95b5-dbf7cb5dc1bd	Exited (0) 9 seconds ago
4b3b9a3fd2c3	cloud-machine/aci_95c508ca-c794-4fd6-ab51-eb52482ccdc7	Exited (0) 11 seconds ago
3c530d15c0ab	cloud-machine/aci_8a03c86c-c30e-4a53-ad13-5bb07e8a63f5	Exited (0) 29 seconds ago
601c0d003dfe	cloud-machine/wfi_9203e6ec-ea9f-49bd-a41c-29e98300c241	Exited (0) 8 seconds ago
bfd03ac363ec	cloud-machine/aci_ef554682-14f9-4e69-8438-2481c30cc98e	Exited (0) 8 seconds ago
c69483a65e29	cloud-machine/aci_f603bc1f-d11c-4ea2-8037-14a39a3b4f7d	Exited (0) 34 seconds ago
304d9ff4e8d1	cloud-machine/aci_0db09809-70d9-42ef-abca-25d1ea3dc5b3_container	Exited (0) 35 seconds ago
81fea2f3e545	cloud-machine/aci_0db09809-70d9-42ef-abca-25d1ea3dc5b3	Exited (0) 35 seconds ago
bf6cbl938ce	cloud-machine/aci_f1981821-3aea-447f-a0e4-7062b7ff26e2	Exited (0) 37 seconds ago
35780bc4fcb0	cloud-machine/wfi_6a9e9696-193c-4117-bbc2-d013de7409cd	Exited (0) 32 seconds ago
2c3cc2e391db	cloud-machine/aci_fb2a9411-5b7a-48b1-b7d2-34d4e0686a07	Exited (0) 32 seconds ago
c5bd0e428519	cloud-machine/aci_401f78d9-c26f-4443-ad3f-b7aa2bccb93d	Exited (0) 41 seconds ago
0c9533ef59b4	cloud-machine/wfi_4c57f66e-c117-4b28-bc6b-bf0fbf36ce66	Exited (0) 5 seconds ago
0e90a1bcf955	cloud-machine/data_4c57f66e-c117-4b28-bc6b-bf0fbf36ce66	Exited (0) 45 seconds ago

Fig. E.12: Executed containers for the case study

:exe_containers)

Details

Features	durable: <u>true</u>	State	<div><div></div> idle</div>	Total
Policy		Consumers	3	Messages (?)0
		Consumer utilisation (?)	0%	Message body bytes (?)0B
				Process memory (?)22kB

▼ Consumers

Channel	Consumer tag	Ack required	Exclusive	Prefetch count	Arguments
10.0.2.5:38846 (1)	bunny-1457403498000-933249781380	<div><div></div></div>	<div><div></div></div>	0	
10.0.2.11:54353 (1)	bunny-1457426908000-762812945848	<div><div></div></div>	<div><div></div></div>	0	
10.0.2.10:55807 (1)	bunny-1457426908000-138698346640	<div><div></div></div>	<div><div></div></div>	0	

Fig. E.13: Multiple engine instances subscribed to the same queue

g:mult_engines)?

```
▶ docker-compose -p wfms -f ../wfms.yml scale engine=3  
Creating and starting 2 ... done  
Creating and starting 3 ... done
```

Fig. E.14: Scaling up the engine service

:mult_engines_2)

Plagiarism declaration

I hereby declare that, to the best of my knowledge and belief, this Masterthesis titled “Prototypical Development of a Docker-based Workflow Management System” is my own work. I confirm that each significant contribution to, and quotation in this thesis from the work, or works of other people is indicated through the proper use of citations and references.

Münster, on the 2016-03-08