
Wednesday, October 14, 2026 9:10 AM

Python → Programming language

→ We wrote instructions

→ We also wrote some logic to solve problems.

→ Computer/machine will execute the code → o/p

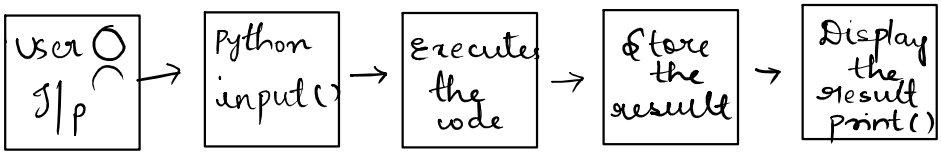


```
a = int (input ("Enter 1st no"))
b = int (input ("Enter 2nd no"))
result=a+b
print(result)
```


} addition


Groceries - total bill:


Code → ☐ → execute → ✓

local programs → web application

Zepto: → Milk → ₹30
Bread → ₹40
Eggs → ₹50
1202

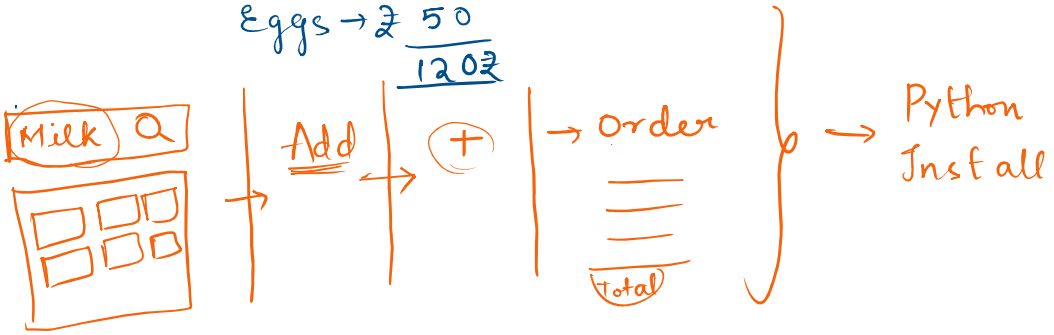

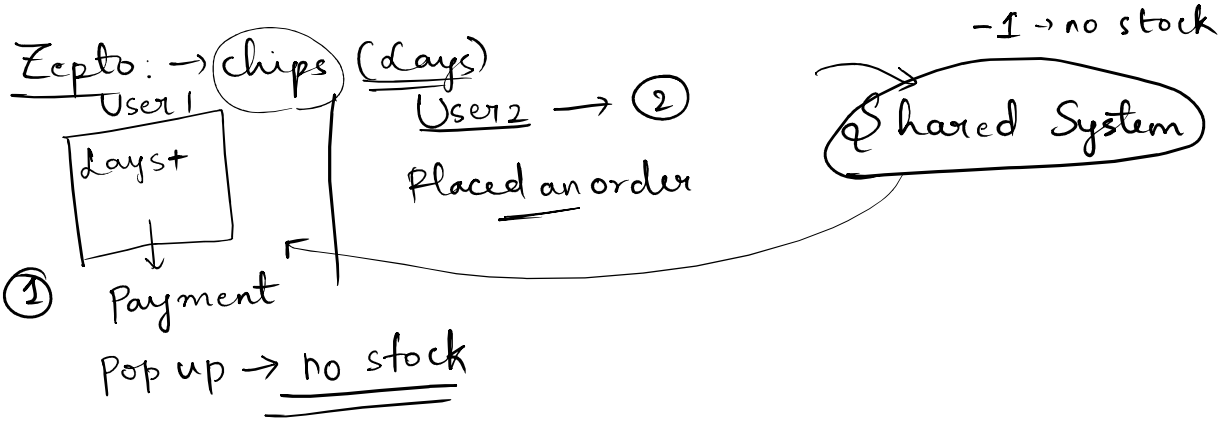

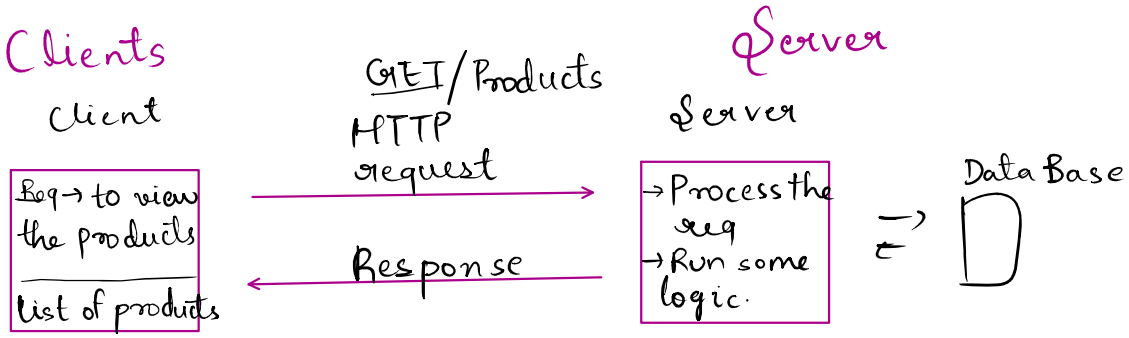

Http methods: CRUD

	Operation	Meaning	Method	Ex:
1.	Create	Create an order	POST	Add milk to the cart
2.	Read	View data/fetch	GET	View the prod information
3.	Update	Modifying existing data	PUT	Milk Quantity 1 to 2
4.	Delete	Removing existing data	DELETE	Removing milk from the cart.

Zepto.com:

Server → IP address

100 ✓ → name

Contact names
"lahari"

Domain name

Contact numbers
XXXXX XXXXX

IP address


Contact list
A → no
B → no

DNS
→ Domain Name System


Zepto.com → Client → DNS →
IP address

Server: Components of a Server:

Pizza Ordering



① Network Interface: It allows the passing of requests & responses from

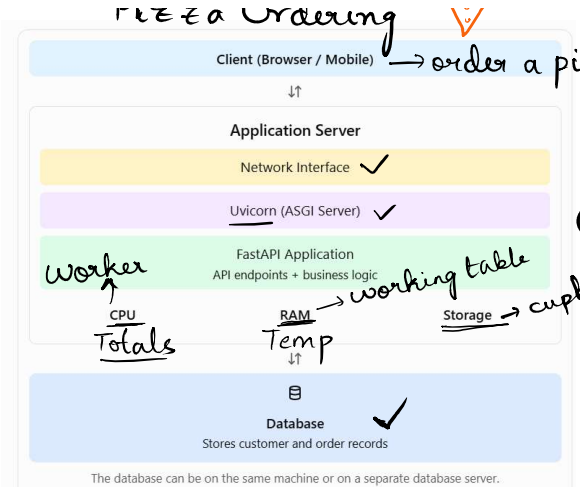

① Network Interface: It allows the passing of requests & responses from client ⇆ server

② Uvicorn (ASGI Server)


Asynchronous Server Gateway Interface

→ Req → uvicorn → FastAPI

Raw communication → Structured Python code

③ FastAPI: logic:

Uvicorn → FastAPI
waiter → kitchen

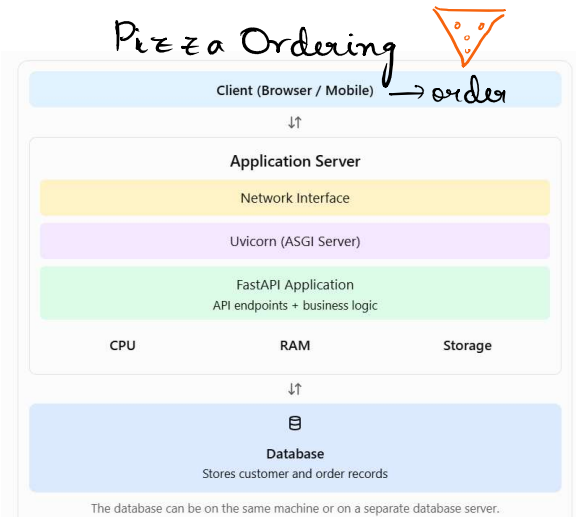

API: Application Programming Interface

It allows the communication from

1app — 1app

Pizza:

① See the menu → GET

② Order something → POST

GET/menu
POST/order
→ API end points

FastAPI: Python framework
↓ build
API's quickly & easily.

Server: (Build)

Jupyter notebook: .ipynb : → kernel

execution } cell by cell:

Project

① → Single file
→ Database
→ req

Scripts
(.py)

execution } cell by cell:

→ Database
→ req
→ main
→ frontend
.py

Folder

Code Editor
VS Code

Adv of VS Code

1) Integrated terminal: → Install dependencies/ libraries
→ Execute Python file
→ (venv) ?

2) Git: Push & Pull

3) Project files & folder: 1 workspace

4) Multiple Programming languages: Javascript, C++, Python.

Project A — B — Virtual environments

isolated

library

1 version
version x

version y

Creating

→ python -m venv {envname}

→ Activate

envname\Scripts\activate