



SUMMARY CARDS




CSS



SUMMARY CARD

INTRODUCTION TO CSS

CSS PROPERTIES

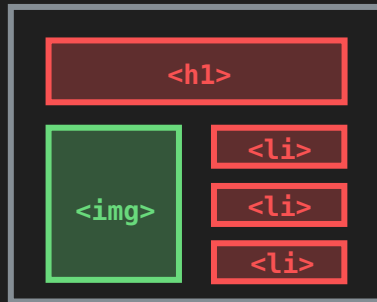INSIDE
THE BOXWHERE THE
BOX GOESTHE BOX
ITSELF

CSS RULES


SELECTOR

DECLARATION
BLOCK

DECLARATION

PROPERTY

VALUE

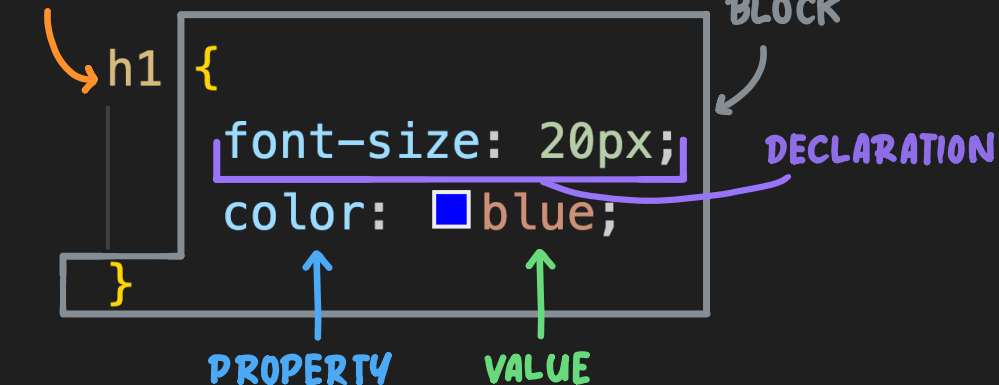

INCLUDING CSS

INLINE CSS ✗

ATTRIBUTE

`<h1 style="color: blue;">Welcome</h1>`

INTERNAL CSS ✗

EXTERNAL CSS ✓

```
<head>
  <title>Document</title>
  <style>
    h1 {
      color: blue;
    }
  </style>
</head>
```

index.html

```
<head>
  <link rel="stylesheet" href="app.css">
</head>
```

app.css

```
h1 {
  color: blue;
}
```



SUMMARY CARD

TEXT STYLING

FONT WEIGHT

```
font-weight: 700;
```

100 200 300 **400** 500 600 **700** 800 900

HEADINGS 500-900 & OTHER TEXT 300-400

FONT STYLE

```
font-style: italic;
```

normal italic oblique oblique 10deg

AVOID USING

LIST STYLE

```
font-style: disc;
```

none **disc** circle square **decimal**

REMOVE LIST STYLING

TEXT DECORATION

```
text-decoration: underline blue dotted;
```

none line-through underline overline

named rgb hex

double solid dotted dashed wavy

REMOVE UNDERLINE FROM ANCHOR TAGS

TEXT TRANSFORM

```
text-transform: uppercase;
```

none uppercase lowercase capitalize

USE SENTENCE CASE IN HTML



SUMMARY CARD

TEXT SPACING AND SIZE

TEXT ALIGN

```
font-align: center;
```

left right center justify

CAN USE CENTER BUT LEFT-ALIGN FOR BLOCKS OF TEXT

LINE HEIGHT

```
line-height: 1.5;
```

unitless pixels percentages ems

HEADINGS <1.5 AND REGULAR TEXT 1.5-2

LETTER SPACING

```
line-height: 8px;
```

pixels percentages ems

SMALL NEGATIVE VALUE APPLIED TO HEADINGS

FONT SIZE

```
font-size: 16px;
```

ABSOLUTE → pixels rem ← RELATIVE

REGULAR TEXT SHOULD BE 16PX - 32PX
AND HEADINGS CAN BE > 60PX

TYPE SCALE

62px h1 WELCOME TO QUILL

48px h2 WELCOME TO QUILL

40px h3 WELCOME TO QUILL

32px h4 WELCOME TO QUILL

24px h5 WELCOME TO QUILL

x1.25 20px p WELCOME TO QUILL

16px a WELCOME TO QUILL



SUMMARY CARD

FONT FAMILY AND COLOR

TYPEFACE

Text Text Text *Text* Text

SERIF SANS-SERIF MONOSPACE CURSIVE DISPLAY

FONT FAMILY

```
font-family: 'Tahoma', sans-serif;
```

BACK UP

USE A POPULAR SANS-SERIF FONT

COLOR

```
color: #9874F9;
```

rgb

hex

rgba

hsl


COLOR PALETTE

PRIMARY

SECONDARY

TERTIARY

GREY



Arctic
#d0ebff



Moonlight Iris
#e5dbff



Dawn
#ffe8cc



Pebble
#f1f3f5



Sky Blue
#339af0



Lavender
#9775fa



Pumpkin
#ff922b



Slate
#495057



Deep Sea
#1c7ed6



Velvet Night
#7048e8



Lava
#f76707



Graphite
#212529

TINT

BASE
COLOR

SHADE

HAVE AT LEAST 2 COLORS, A PRIMARY AND A
GREY WITH TINTS AND SHADES OF EACH



SUMMARY CARD

BASIC SELECTORS & THE CASCADE

TYPE SELECTOR

TYPE
SELECTOR

```
h1 {  
  font-size: 20px;  
  color: blue  
}
```

USED FOR SETTING GLOBAL STYLES

GROUPING SELECTORS

SELECTORS
GROUPED WHEN
SHARED STYLES

```
h1, h2 {  
  color: #495057;  
}  
  
h1 {  
  font-size: 62px;  
}
```

USE CASCADE TO ADD
NEW STYLES TO
PREVIOUS ONES

THE CASCADE

```
h1 {  
  color: blue;  
}
```

```
h1 {  
  color: green;  
}
```

CONFLICTING STYLES DECLARED
LATER TAKE PRIORITY

```
<head>  
  <link rel="stylesheet" href="app.css">  
  <link rel="stylesheet" href="app2.css">  
</head>
```

app.css

app2.css

```
h1 {  
  font-size: 12px;  
}
```

```
h1 {  
  font-size: 52px;  
}
```

CONFLICTING STYLES IN LATER
STYLESHEETS TAKE PRIORITY

ID AND CLASS SELECTORS

```
<body>  
  <p id="red-text">Copper mug</p>  
  <p class="blue-text">Biodiesel tattooed</p>  
  <p class="blue-text">Coloring book</p>  
</body>
```

HASH

ID SELECTOR

```
#red-text {  
  color: red;  
}
```

CAN ONLY BE USED ONCE

FULL
STOP

CLASS SELECTOR

```
.blue-text {  
  color: blue;  
}
```

CAN BE USED MULTIPLE TIMES

MORE
COMMONLY
USED



SUMMARY CARD

PSEUDO-CLASSES & SPECIFICITY

PSEUDO-CLASSES

IMPORTANT → **SELECTOR** → **a** : **PSEUDO-CLASS** → **hover** → **LESS IMPORTANT**

STATE → **CONDITION**

STYLING BASED ON
USER INTERACTION

```
.btn:link, .btn:visited {  
  color: blue;  
}  
  
.btn:hover, .btn:active {  
  color: darkblue;  
}
```

STYLING BASED
ON AN ELEMENTS
RELATIVE POSITION

```
li:nth-child(n + 1) {  
  color: green;  
}
```

COMBINATOR SELECTORS

DESCENDANT

div p

DIRECT
DESCENDANT

div > p

ADJACENT
SIBLING

h1 + p

ADJACENT
SIBLING

h1 ~ p

SPECIFICITY

DETERMINES PRIORITY OF A CSS RULES WHEN MULTIPLE
CONFLICTING RULES ARE APPLIED TO THE SAME ELEMENT

```
<div>  
  <div class="textbox">  
    <h1 id="heading" class="large">Organic Green Juice</h1>  
  </div>  
</div>
```

```
#heading {  
  color: red;  
}  
  
.textbox .large {  
  color: yellow;  
}  
  
div div .large {  
  color: green;  
}  
  
div div h1 {  
  color: blue;  
}
```

HIGHEST
SPECIFICITY

LOWER PRIORITY

Selector	ID	Class Pseudo-class	Type
#heading	1	0	0
.textbox .large	0	2	0
div div .large	0	1	2
div div h1	0	2	3

USE TYPE SELECTOR FOR GLOBAL STYLES & CLASS
SELECTOR TO OVERRIDE FOR SPECIFIC STYLING



SUMMARY CARD

INHERITANCE & THE UNIVERSAL SELECTOR

TEXT PROPERTIES

INHERITANCE

PROPERTIES SET ON PARENT ELEMENTS ARE PASSED TO CHILD ELEMENTS BY DEFAULT

```
<body>
  <section>
    <h1>Asymmetrical beard</h1>
    <p>etro distillery banjo</p>
  </section>
  <footer>
    <p>Fashion cold-pressed</p>
  </footer>
</body>
```

TEXT PROPERTIES INHERITED

```
body {
  color: black;
  font-weight: 400;
  font-family: Arial, sans-serif;
}
```

GLOBAL FONT STYLES SET ON THE BODY ELEMENT

INHERITANCE & TEXT-ALIGN

WHEN APPLYING TEXT-ALIGN TO A BLOCK-LEVEL PARENT BOTH BLOCK AND INLINE ELEMENTS ARE IMPACTED

```
text-align: center;


<h1> Street art
  <p> Bespoke sustainable
  <a> meditation


```

INLINE ELEMENTS ARE HAVE SPACE TO MOVE INSIDE THE BLOCK CONTAINER

BLOCK ELEMENTS INHERIT TEXT-ALIGN PROPERTY

THE UNIVERSAL SELECTOR

APPLIES STYLES TO ALL ELEMENTS

```
* {
  color: blue;
  border-top: 5px solid red;
}
```

USED FOR RESETING DEFAULT STYLES

PSEUDO-ELEMENTS

STYLES A SPECIFIC PART OF AN ELEMENT

SELECTOR

PSEUDO-ELEMENT

h2 :: first-letter



SUMMARY CARD

THE CSS BOX MODEL

PADDING

LONGHAND

```
padding-top: 5px;  
padding-right: 10px;  
padding-bottom: 5px;  
padding-left: 10px;
```


SHORTHAND

```
padding: 20px;  
padding: 10px 20px;  
padding: 10px 20px 5px;  
padding: 10px 20px 5px 15px;
```

CONTENT

```
width: 500px;    height: 100px;  
background-color: #339af0;
```

APPLIES TO CONTENT & PADDING

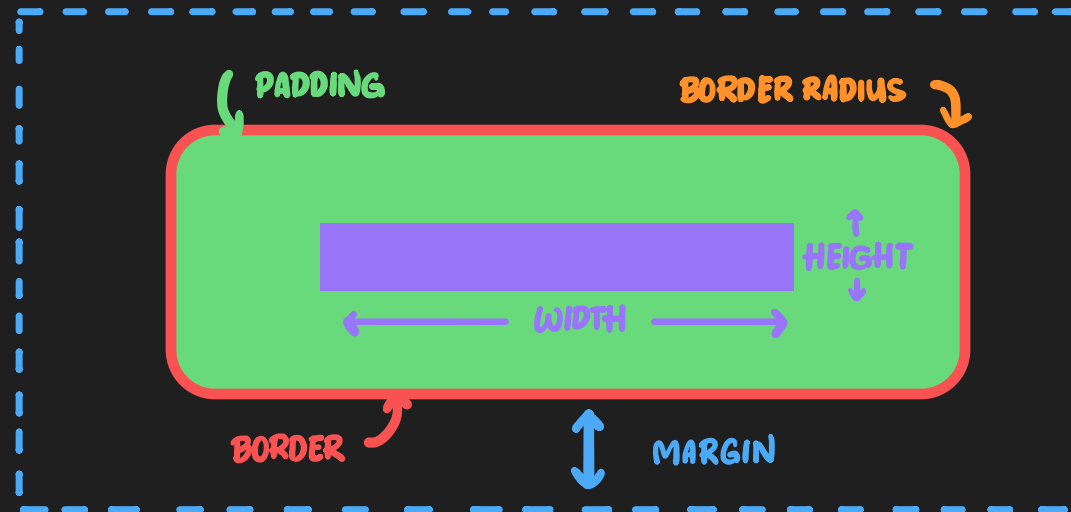BORDER
SHORTHAND

```
border: 5px solid red;
```

LONGHAND

```
border-width: 5px;  
border-style: solid;  
border-color: red;
```

INDIVIDUAL

```
border-top: 6px solid purple;  
border-right: 2px dashed blue;  
border-bottom: 1px dotted red;  
border-left: 10px solid green;
```

MARGIN

LONGHAND

```
margin-top: 5px;  
margin-right: 10px;  
margin-bottom: 5px;  
margin-left: 10px;
```

SHORTHAND

```
margin: 20px;  
margin: 10px 20px;  
margin: 10px 20px 5px;  
margin: 10px 20px 5px 15px;
```

BORDER RADIUS

```
border-radius: 12px;
```


HALF ELEMENT'S HEIGHT GIVES
FULLY ROUNDED CORNERS



SUMMARY CARD

SETTING GLOBAL RULES WITH THE CSS BOX MODEL

BOX SIZING

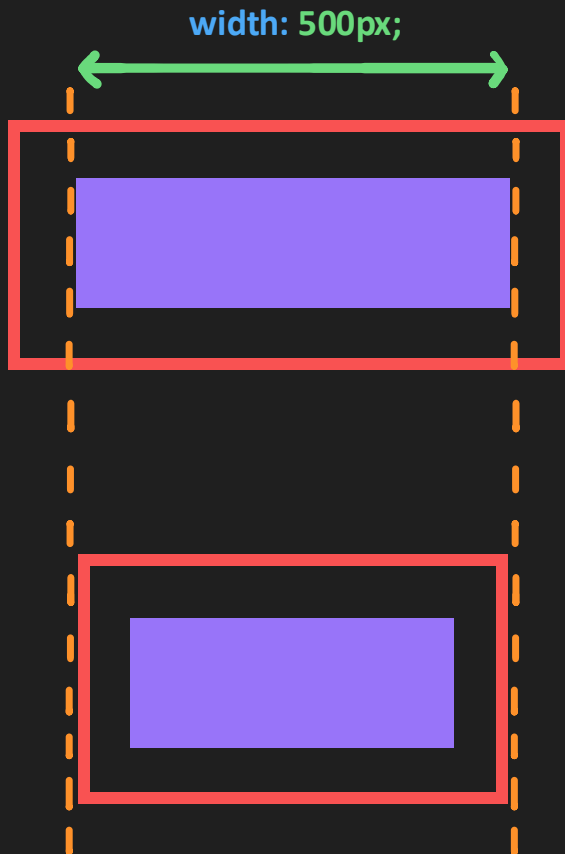

CONTENT BOX

`box-sizing: content-box;`SET WIDTH IS WIDTH
OF CONTENT ONLY

BORDER BOX

`box-sizing: border-box;`SET WIDTH WILL BE
SUM OF CONTENT,
PADDING & BORDER

CSS RESET

```
* {  
  box-sizing: border-box;  
  margin: 0;  
  padding: 0;  
}
```

MAKES SETTING
DIMENSIONS MORE
PREDICTABLEREMOVES ALL DEFAULT
MARGIN & PADDING

DISPLAY


	BLOCK	INLINE	INLINE-BLOCK
STARTS ON A NEW LINE	✓	✗	✗
TAKES UP FULL WIDTH	✓	✗	✗
WIDTH & HEIGHT	✓	✗	✓
PADDING APPLIES	✓	✗	✓
BORDER APPLIES	✓	✗	✓
MARGIN APPLIES	✓	✗	✓



SUMMARY CARD

RESPONSIVE DESIGN WITH THE CSS BOX MODEL

MAIN CONTAINER

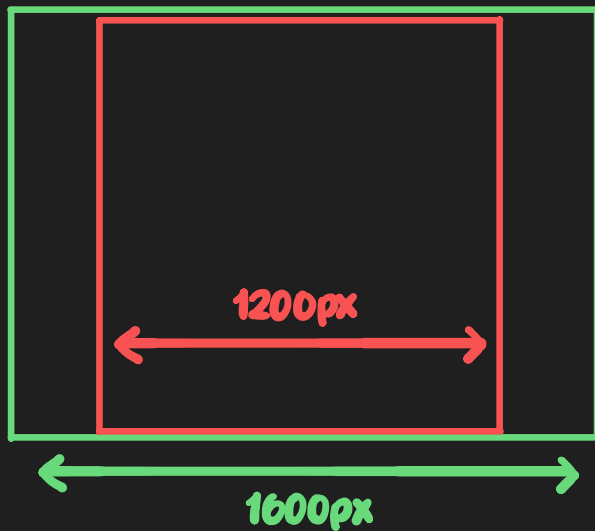

```
.container {  
  width: 1200px;  
  margin-left: auto;  
  margin-right: auto;  
}
```

MAX & MIN WIDTH

WIDTH	MAX WIDTH	MIN WIDTH
<code>width: 500px;</code>	<code>max-width: 500px;</code>	
ELEMENT HAS FIXED WIDTH	ELEMENT WON'T EXCEED WIDTH BUT CAN REDUCE	ELEMENT WON'T REDUCE WIDTH BUT CAN EXCEED
SMALL IMAGES & ICONS	CONTAINERS & LARGER IMAGES	GRIDS

MAX & MIN HEIGHT

HEIGHT	MAX HEIGHT	MIN HEIGHT
<code>height: 500px;</code>	<code>max-height: 500px;</code>	
ELEMENT HAS FIXED HEIGHT	ELEMENT WON'T EXCEED HEIGHT BUT CAN REDUCE	ELEMENT WON'T REDUCE HEIGHT BUT CAN EXCEED
NAVBAR	MODALS	SECTION CONTAINERS



SUMMARY CARD

CSS UNITS

MORE COMMONLY USED

PIXELS

BORDER RADIUS

BORDER

LETTER SPACING

LOGO AND ICONS

MAX-WIDTH

SHADOWS

PERCENTAGES

MAIN CONTAINERS

IMAGES

BORDER RADIUS

REMS

TEXT

MARGIN

PADDING

USED FOR SPECIFIC CASES

EMS

MARGIN

PADDING

REMS ARE FINE

VH

SECTION HEIGHT

DESIGN DEPENDENT

VW

TEXT

NOT COMMON



SUMMARY CARD

CSS FUNCTIONS

CSS VARIABLES

DEFINING A VARIABLE

DOUBLE DASHES

STORED VALUE

`--primary: #339af0;`

VARIABLE NAME

USING A VARIABLE

VAR FUNCTION

`background-color: var(--primary);`

VARIABLE

ROOT PSEUDO-CLASS

CSS VARIABLES SET ON ROOT PSEUDO-CLASS

```
:root {  
  --primary: #339af0;  
}
```

CSS CALCULATIONS

CALC FUNCTION

MIXED UNITS

`calc((100%/3) - 50px)`



WANT THE REST?

TOPICS IN THIS COURSE ARE BEING DRIPPED
RELEASED ON YOUTUBE AND THE SUMMARY CARDS
ARE BEING UPDATED WITH EACH NEW RELEASE



CLICK HERE TO
SUBSCRIBE ON YOUTUBE
TO STAY IN THE LOOP

A red curved arrow pointing from the text "CLICK HERE TO SUBSCRIBE ON YOUTUBE TO STAY IN THE LOOP" towards the blue YouTube play button icon.