LAB 2

Hands-On Git and Version Control

Student Name: Laiba Rani

Registration No: 2023-BCS-053
Repository: DevOps_Lab2_Practice

GitHub Username: laibarani899-cpu

Course: CS-649 — Cloud DevOps


Section: A

Getting Started

```
Last login: Sat Oct 10 08:14:10 2026 from 192
laibarani899-cpu@ubuntu:~$ git --version
git version 2.53.0
```

Git installation/version is verified successfully in the terminal using git --version.

Task 1: Create Private GitHub Repository

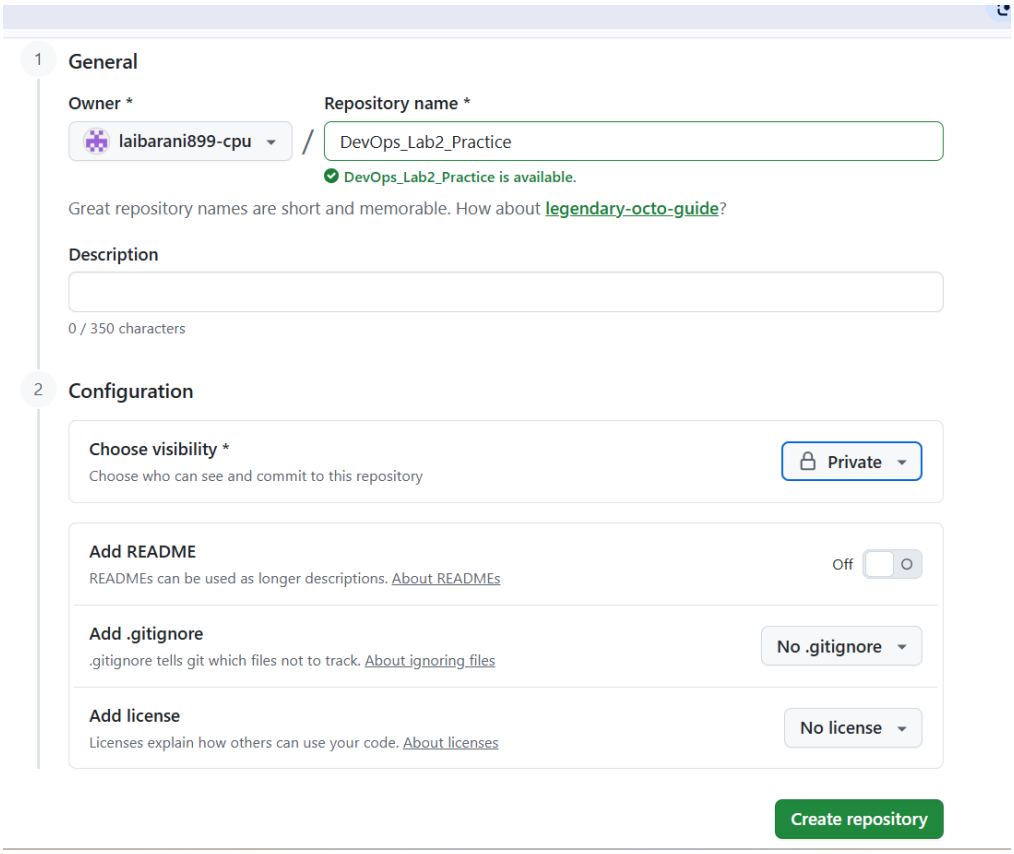

The GitHub repository DevOps_Lab2_Practice is visible and its visibility is set to Private.

Task 2: Connect Repository via SSH

An SSH key pair is generated successfully. Only the public key or safe key-generation output is shown; the private key is not exposed.

```
-rw-r--r-- 1 laibarani899-cpu laibarani899-cpu  142 Oct 10 18:05 known_hosts
laibarani899-cpu@ubuntu:~$ ssh-keygen -t ed25519 -C "laibarani899@gmail.com"
Generating public/private ed25519 key pair.
Enter file in which to save the key (/home/laibarani899-cpu/.ssh/id_ed25519):
Enter passphrase for "/home/laibarani899-cpu/.ssh/id_ed25519" (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/laibarani899-cpu/.ssh/id_ed25519
Your public key has been saved in /home/laibarani899-cpu/.ssh/id_ed25519.pub
The key fingerprint is:
SHA256:UTs5kof2G6JZpPlzeT/eytMDCe3lD8FxwMFUX/fiI3s laibarani899@gmail.com
The key's randomart image is:
+--[ED25519 256]--+
|          .  ++++|
|         + o  + *|
|        B * ...oo|
|       = = + ooo |
|      o S o + *. |
|       = . + *.o |
|      o o + o Eo.|
|         o . +ooo|
|             .=+o|
+----[SHA256]-----+
laibarani899-cpu@ubuntu:~$ cat ~/.ssh/id_ed25519.pub
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIM14V0zdXgsAexHjoLfKxtxVdcb5Pu1KHrLERZ1MCb9b laibarani899@gm
```

The SSH public key is added in GitHub Settings under SSH and GPG keys.

```
laibarani899-cpu@ubuntu:~$ ssh -T git@github.com
Hi laibarani899-cpu! You've successfully authenticated, but GitHub does not provide shell access.
laibarani899-cpu@ubuntu:~$ git clone git@github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
Cloning into 'DevOps_Lab2_Practice'...
```

The private practice repository is cloned successfully using its SSH URL.

Task 3: Configure Git Username and Email

```
laibarani899-cpu@ubuntu:~$ git config --global user.name "Laiba Rani"
laibarani899-cpu@ubuntu:~$ git config --global user.email "laibarani899@gmail.com"
```

Git global username and email are configured with git config --global.

```
laibarani899-cpu@ubuntu:~$ git config --global --list
user.name=Laiba Rani
user.email=laibarani899@gmail.com
```

The git config --list output verifies the configured Git identity.

Task 4: Explore the .git Folder

```
laibarani899-cpu@ubuntu:~$ cd ~/DevOps_Lab2_Practice
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ ls -la
total 12
drwxrwxr-x 3 laibarani899-cpu laibarani899-cpu 4096 Oct 10 16:17 .
drwxr-x--- 5 laibarani899-cpu laibarani899-cpu 4096 Oct 10 16:19 ..
drwxrwxr-x 6 laibarani899-cpu laibarani899-cpu 4096 Oct 10 16:17 .git
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ ls -a .git
.  ..  HEAD  config  description  hooks  info  objects  refs
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$
```

The hidden .git directory and its contents are displayed using ls -a .git.

Task 5: Local Repository Management

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ rm -rf .git
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git status
fatal: not a git repository (or any of the parent directories): .git
```

The .git directory is removed to demonstrate why Git commands no longer recognize the folder as a repository.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
hint:
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /home/laibarani899-cpu/DevOps_Lab2_Practice/.git/
```

The local repository is initialized again using git init.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ echo "# Lab02 Git Practice" >> README.md
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git add README.md
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git commit -m "Initial commit"
[master (root-commit) 2ce2c56] Initial commit
 1 file changed, 1 insertion(+)
 create mode 100644 README.md
```

README.md is staged and the initial commit is created successfully.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git remote -v
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git remote add origin git@github.com:laibarani899-cpu/DevOps_Lab2_Practi
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch -M main
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 237 bytes | 47.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

The local main branch is connected to the GitHub remote and pushed successfully.

Task 6: File Status & Staging

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
echo "Adding some test notes" >> notes.txt
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        notes.txt


nothing added to commit but untracked files present (use "git add" to track)
```

git status displays the new or modified notes.txt file before staging.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git add notes.txt
git commit -m "Add notes.txt"
[main c266524] Add notes.txt
 1 file changed, 1 insertion(+)
 create mode 100644 notes.txt
```

notes.txt is staged and committed; the terminal shows the commit result.

Task 7: Branch Creation Using GitHub GUI

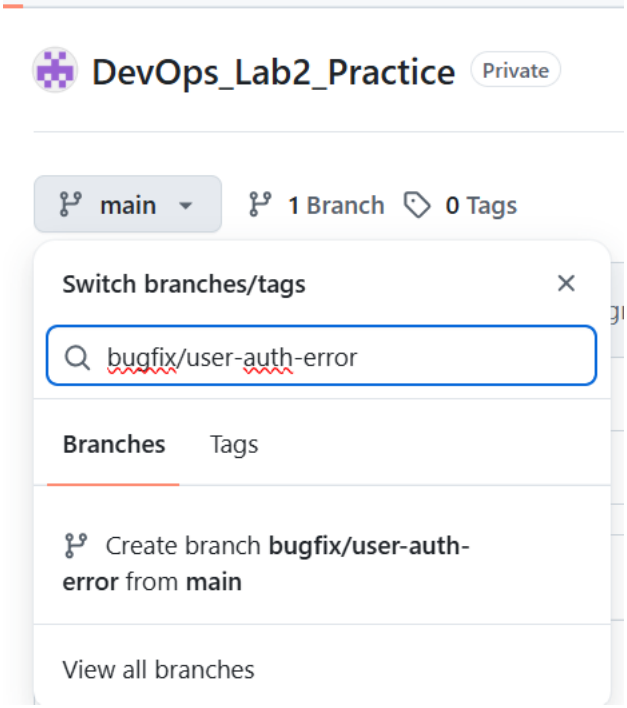

The bugfix/user-auth-error branch is created in the GitHub web interface.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
git fetch origin
git branch -a
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * [new branch]      bugfix/user-auth-error -> origin/bugfix/user-auth-error
* main
  remotes/origin/HEAD -> origin/main
  remotes/origin/bugfix/user-auth-error
  remotes/origin/main
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout -b bugfix/user-auth-error origin/bugfix/user-auth-error
branch 'bugfix/user-auth-error' set up to track 'origin/bugfix/user-auth-error'.
Switched to a new branch 'bugfix/user-auth-error'
```

The local branch list shows the fetched bugfix/user-auth-error branch.

Task 8: Branch Creation and Push Using Git Bash

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
git pull origin main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            main       -> FETCH_HEAD
Already up to date.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout -b feature/db-connection
Switched to a new branch 'feature/db-connection'
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git push -u origin feature/db-connection
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'feature/db-connection' on GitHub by visiting:
remote:      https://github.com/laibarani899-cpu/DevOps_Lab2_Practice/pull/new/feature/db-connect
remote:
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      feature/db-connection -> feature/db-connection
branch 'feature/db-connection' set up to track 'origin/feature/db-connection'.
```

The feature/db-connection branch is created locally and pushed to the remote repository.

Task 9: Branching & Merging

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout -b feature-1
Switched to a new branch 'feature-1'
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch
  bugfix/user-auth-error
* feature-1
  feature/db-connection
  main
```

A new feature-1 branch is created and checked out.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ ls
README.md  notes.txt
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cat > main.py <<'EOF'
def greet_user(name):
    return f"Hello, {name}! Welcome to Git Lab 2."


def connect_database():
    return "Database connection successful."


if __name__ == "__main__":
    print(greet_user("Laiba"))
    print(connect_database())
EOF
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ python3 main.py
Hello, Laiba! Welcome to Git Lab 2.
Database connection successful.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git add main.py
git commit -m "Add new function to main.py"
[feature-1 51a53e9] Add new function to main.py
 1 file changed, 11 insertions(+)
 create mode 100644 main.py
```

The change to main.py is staged and committed on feature-1.


```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git merge feature-1
Updating 13241c0..51a53e9
Fast-forward
 main.py | 11 ++++++++++
 1 file changed, 11 insertions(+)
 create mode 100644 main.py
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git log --oneline --graph --all
* 51a53e9 (HEAD -> main, feature-1) Add new function to main.py
* 13241c0 (origin/main, origin/feature/db-connection, origin/bugfix/user-auth-error, origin/HEAD, feature/db-connection, bugfix/user-auth-error) Update notes with lab progress
* c266524 Add notes.txt
* 2ce2c56 Initial commit
```

The feature-1 branch is merged into main and the merge result is visible.


```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
git push origin main
Already on 'main'
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 2 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 470 bytes | 156.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
   13241c0..51a53e9  main -> main
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git push -u origin feature-1
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'feature-1' on GitHub by visiting:
remote:      https://github.com/laibarani899-cpu/DevOps_Lab2_Practice/pull/new/featur
remote:
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      feature-1 -> feature-1
branch 'feature-1' set up to track 'origin/feature-1'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch -a
  bugfix/user-auth-error
  feature-1
  feature/db-connection
* main
  remotes/origin/HEAD -> origin/main
  remotes/origin/bugfix/user-auth-error
  remotes/origin/feature-1
  remotes/origin/feature/db-connection
  remotes/origin/main
```

The main and feature-1 branches are pushed to GitHub successfully.


Task 10: Pull Request and Branch Review (GitHub GUI)

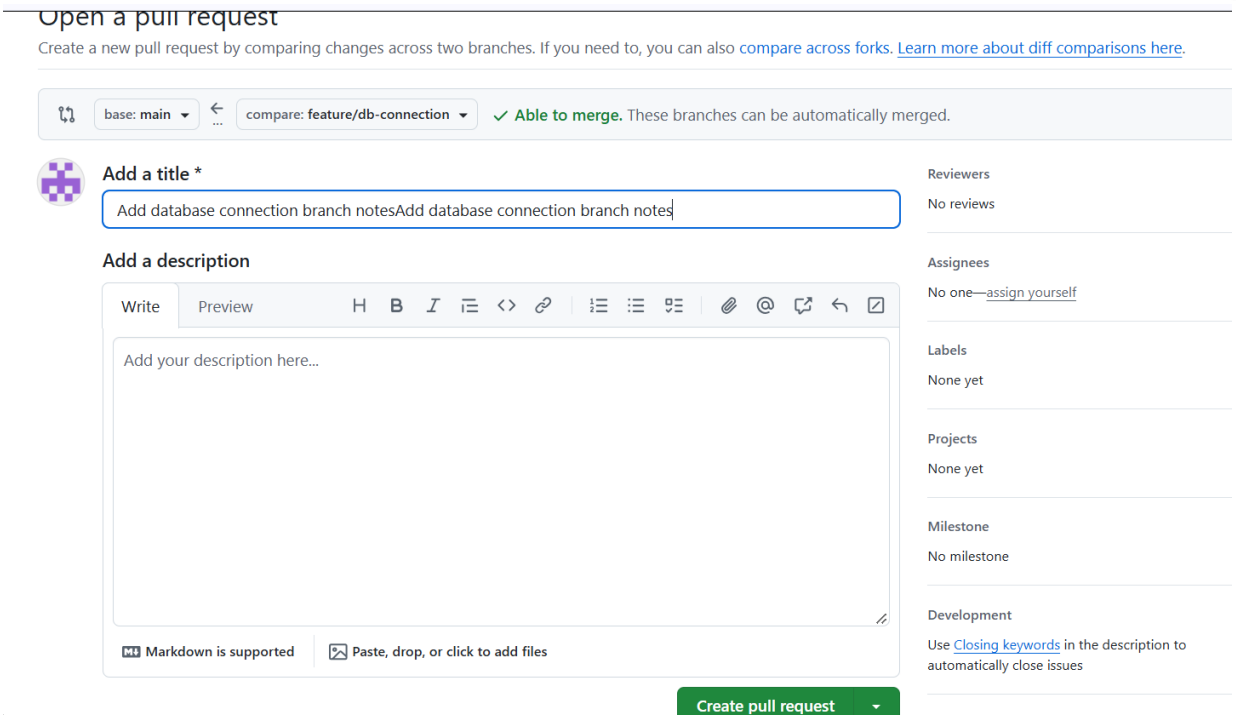

A pull request from feature/db-connection into main is created on GitHub.

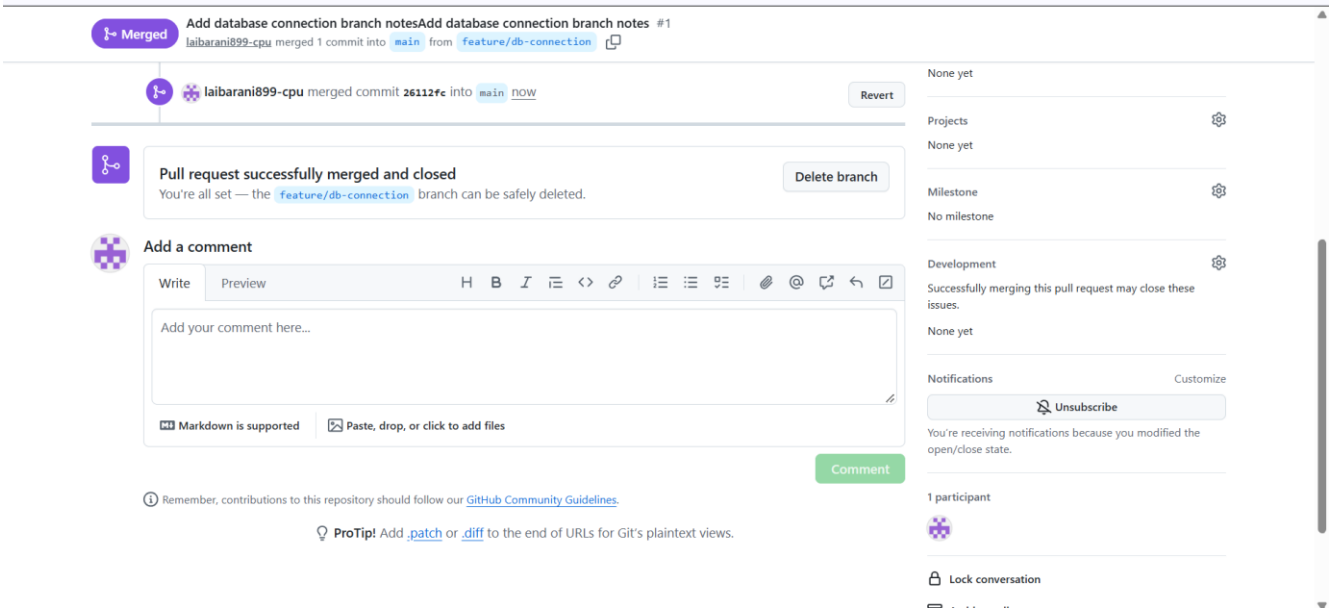

The pull request is reviewed and merged through the GitHub interface.

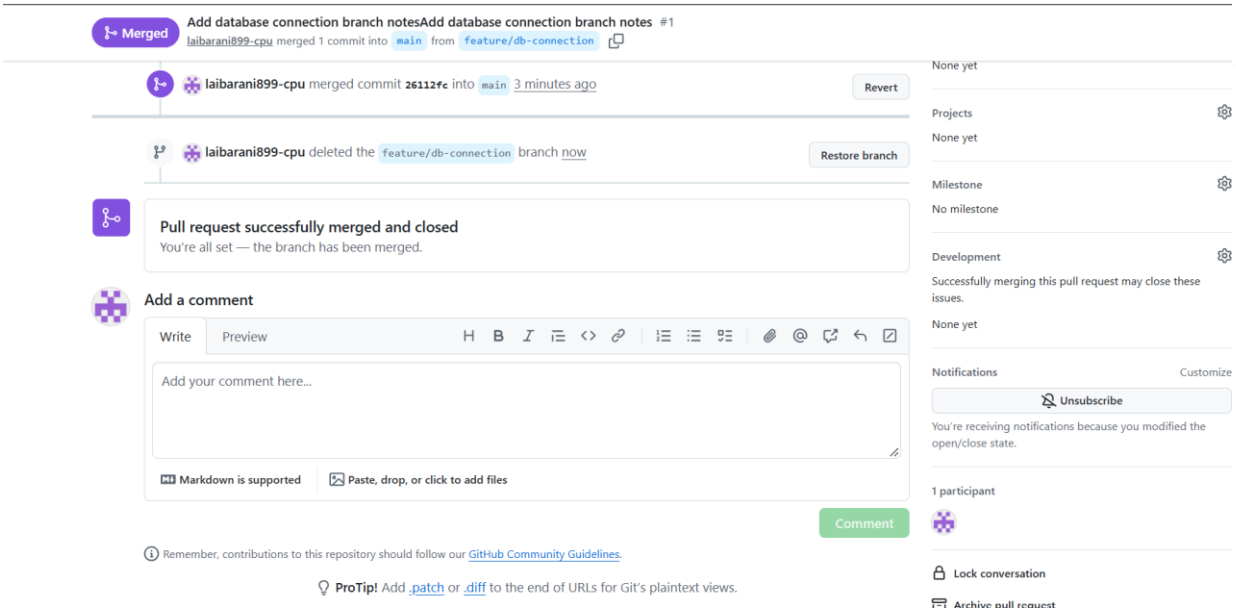

The merged feature/db-connection branch is deleted using GitHub.

Task 11: Detailed Branch Strategy (Develop/Staging)

```
  remotes/origin/main
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
git pull origin main
Switched to branch 'main'
Your branch is behind 'origin/main' by 2 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            main       -> FETCH_HEAD
Updating 51a53e9..26112fc
Fast-forward
 notes.txt | 1 +
 1 file changed, 1 insertion(+)
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout -b develop
git push -u origin develop
Switched to a new branch 'develop'
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'develop' on GitHub by visiting:
remote:      https://github.com/laibarani899-cpu/DevOps_Lab2_Practice/pull/new/develop
remote:
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      develop -> develop
branch 'develop' set up to track 'origin/develop'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
git checkout -b staging
git push -u origin staging
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
Switched to a new branch 'staging'
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'staging' on GitHub by visiting:
remote:      https://github.com/laibarani899-cpu/DevOps_Lab2_Practice/pull/new/staging
remote:
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      staging -> staging
branch 'staging' set up to track 'origin/staging'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch -a
  bugfix/user-auth-error
  develop
  feature-1
  feature/db-connection
  main
* staging
  remotes/origin/HEAD -> origin/main
  remotes/origin/bugfix/user-auth-error
  remotes/origin/develop
  remotes/origin/feature-1
  remotes/origin/main
  remotes/origin/staging
```

The branch list shows the workflow branches, including develop, staging, feature, and bugfix branches.


```
  remotes/origin/staging
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout develop
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git pull origin develop
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            develop    -> FETCH_HEAD
Already up to date.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout -b feature/lab-improvement
Switched to a new branch 'feature/lab-improvement'
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ echo "Feature improvement completed for DevOps Lab 2." >> notes.tx
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git add notes.txt
git commit -m "Add lab improvement feature"
git push -u origin feature/lab-improvement
[feature/lab-improvement 13350cf] Add lab improvement feature
 1 file changed, 1 insertion(+)
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 380 bytes | 95.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'feature/lab-improvement' on GitHub by visiting:
remote:      https://github.com/laibarani899-cpu/DevOps_Lab2_Practice/pull/new/feature/lab-improvement
remote:
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
 * [new branch]      feature/lab-improvement -> feature/lab-improvement
branch 'feature/lab-improvement' set up to track 'origin/feature/lab-improvement'.
```

The feature change is merged into develop and then promoted to staging.


```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout develop
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git pull origin develop
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            develop    -> FETCH_HEAD
Already up to date.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git merge feature/lab-improvement
Updating 26112fc..13350cf
Fast-forward
 notes.txt | 1 +
 1 file changed, 1 insertion(+)
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git push origin develop
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
   26112fc..13350cf  develop -> develop
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git log --oneline -5
git branch
13350cf (HEAD -> develop, origin/feature/lab-improvement, origin/develop, feature/lab-improvement) Add lab improvement feature
26112fc (origin/staging, origin/main, origin/HEAD, staging, main) Merge pull request #1 from laibarani899-cpu/feature/db-connection
120156f (feature/db-connection) Add database connection branch notes
51a53e9 (origin/feature-1, feature-1) Add new function to main.py
13241c0 (origin/bugfix/user-auth-error, bugfix/user-auth-error) Update notes with lab progress
  bugfix/user-auth-error
* develop
  feature-1
  feature/db-connection
  feature/lab-improvement
  main
  staging
```

The staging changes are merged into main, showing the final promotion step.


Task 12: Code Review Workflow

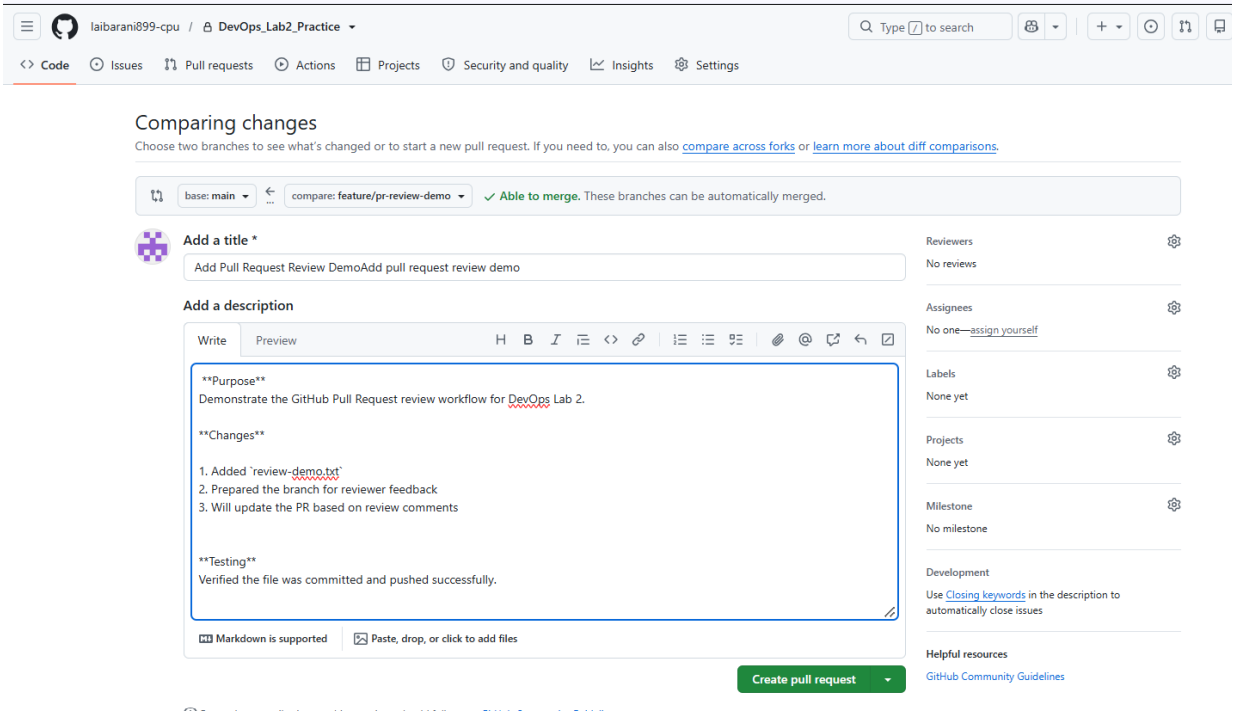


A pull request is created with a clear title and description explaining the feature changes.

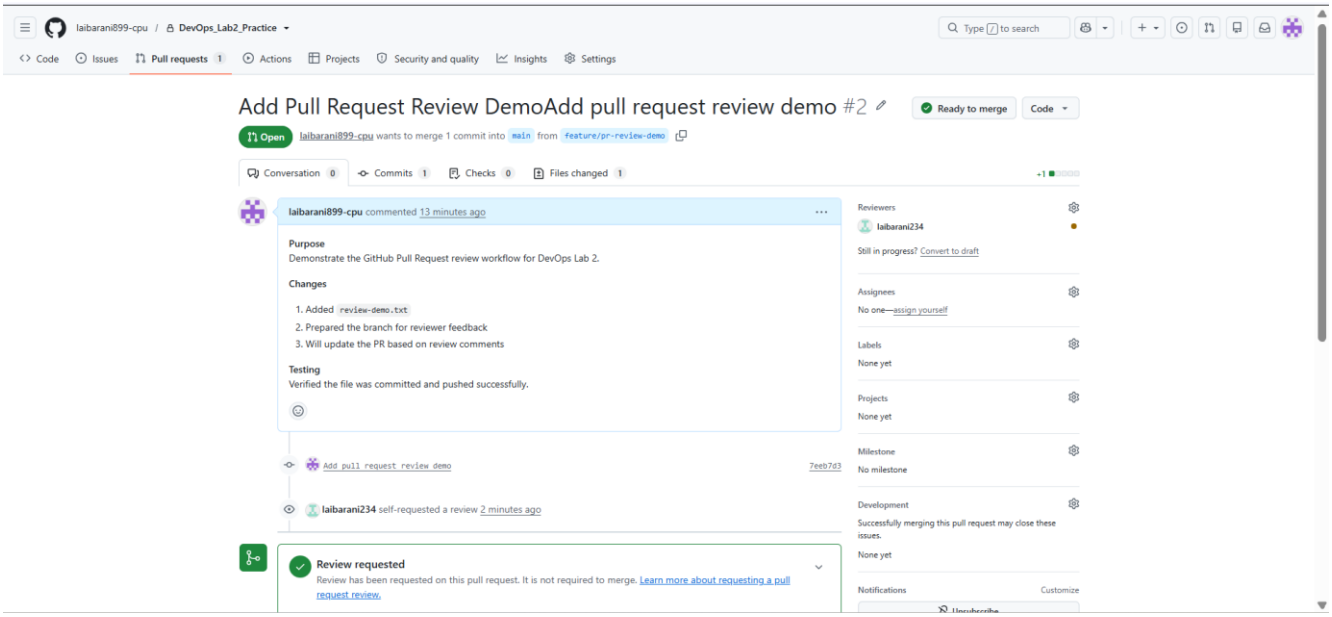

A teammate or second account is assigned as the pull request reviewer.

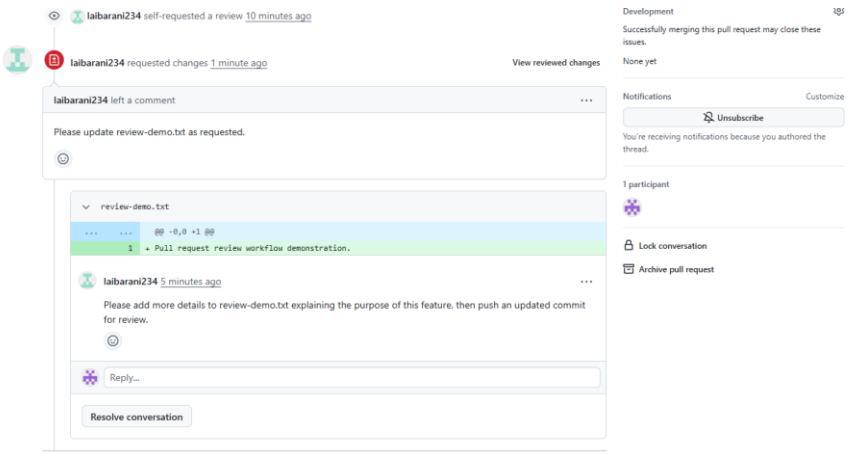

The reviewer submits comments and requests changes on the pull request.

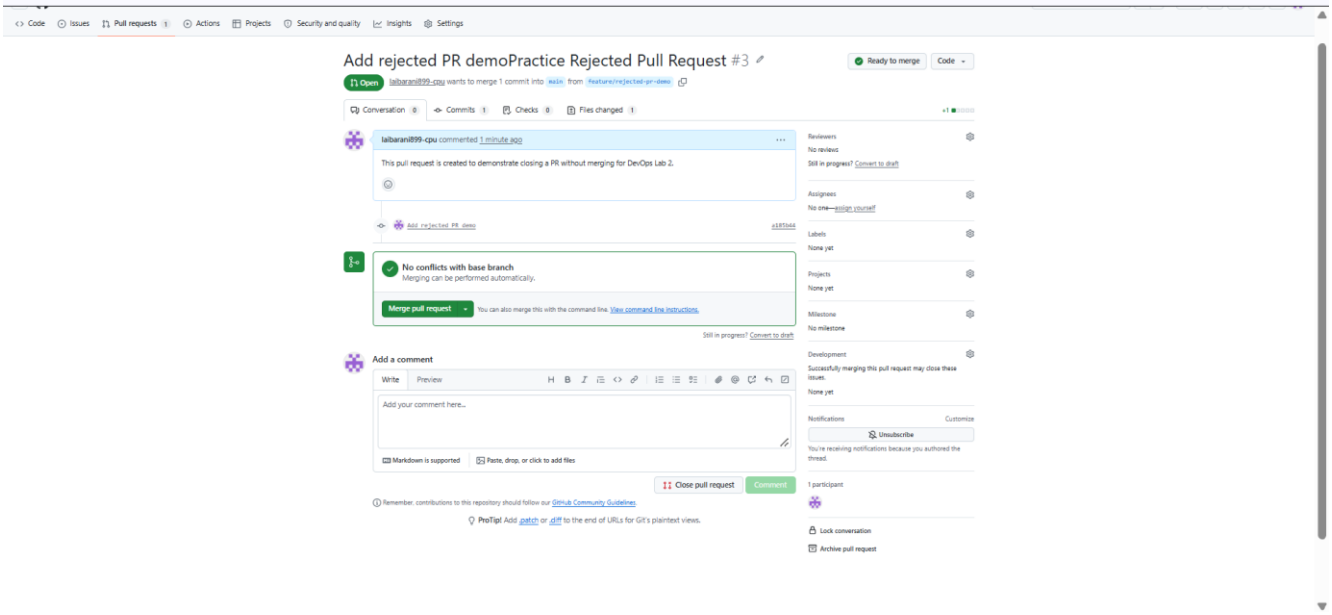


A separate practice pull request is closed without merging to demonstrate rejection/closure.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
git checkout feature/pr-review-demo
Already on 'feature/pr-review-demo'
Your branch is up to date with 'origin/feature/pr-review-demo'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cat > review-demo.txt <<'EOF'
Pull Request Review Workflow Demonstration


Purpose:
This file demonstrates how a developer responds to reviewer feedback
during the GitHub Pull Request workflow.

Workflow:
1. Create a feature branch.
2. Submit a Pull Request for review.
3. Update the file based on reviewer feedback.
4. Push the updated commit for another review.
EOF
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git add review-demo.txt
git commit -m "Address pull request review feedback"
git push origin feature/pr-review-demo
[feature/pr-review-demo 2522db4] Address pull request review feedback
 1 file changed, 11 insertions(+), 1 deletion(-)
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 474 bytes | 158.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
   7eeb7d3..2522db4  feature/pr-review-demo -> feature/pr-review-demo
```


The author pushes a fix in the same feature branch and the pull request shows the new commit.

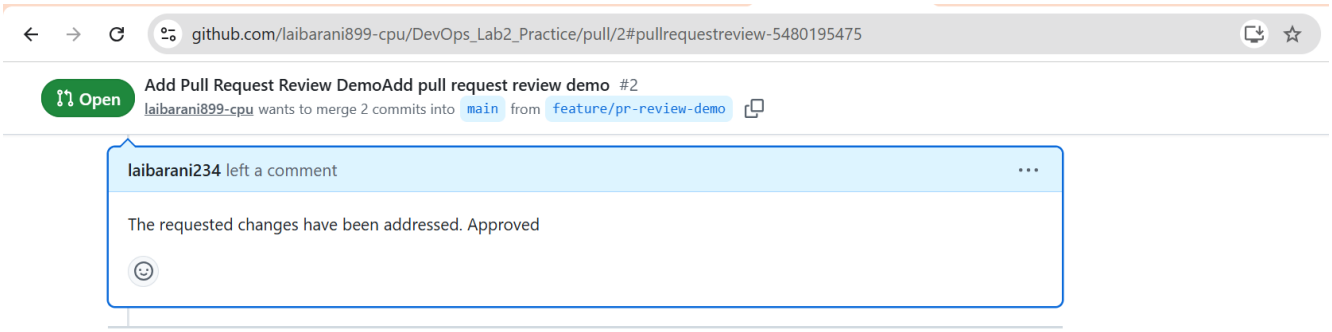

The approved pull request is ready for merge and the confirmation/action is visible.

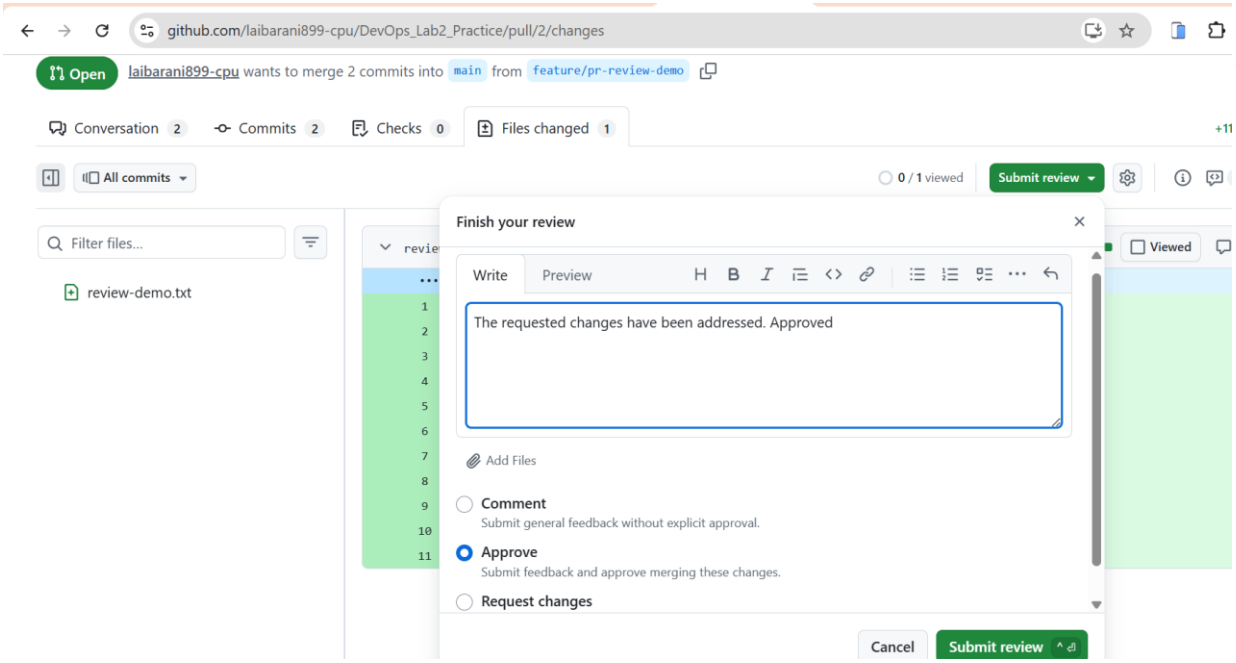

GitHub confirms that the pull request has been merged.

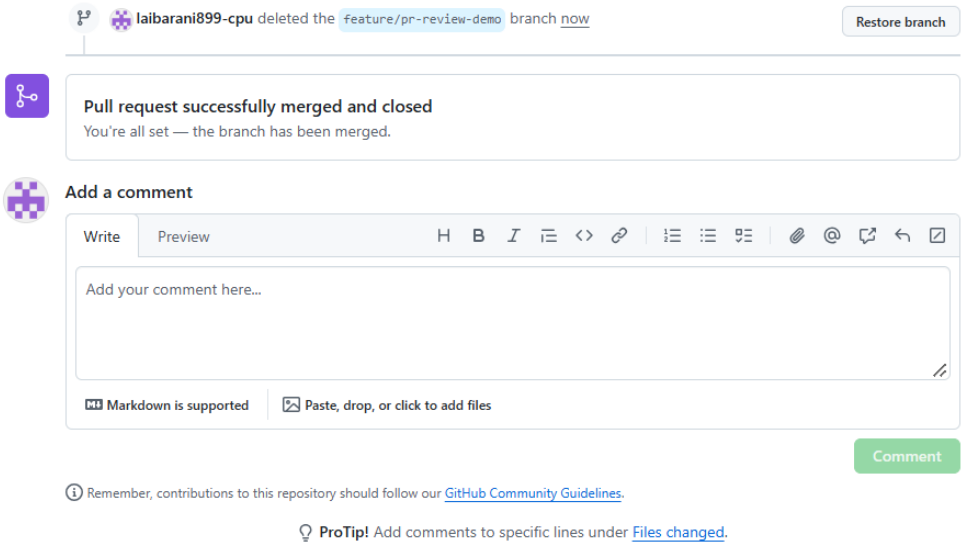

The merged pull request branch is deleted after the merge.

Task 13: Branch Cleanup Best Practices


```
   7eeb7d3..2522db4  feature/pr-review-demo -> feature/pr-review-demo
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
git fetch --prune origin
git branch -a
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 - [deleted]         (none)     -> origin/feature/pr-review-demo
remote: Enumerating objects: 1, done.
remote: Counting objects: 100% (1/1), done.
remote: Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (1/1), 921 bytes | 460.00 KiB/s, done.
   13350cf..29254f6  main       -> origin/main
  bugfix/user-auth-error
  develop
  feature-1
  feature/db-connection
  feature/lab-improvement
* feature/pr-review-demo
  main
  staging
  remotes/origin/HEAD -> origin/main
  remotes/origin/bugfix/user-auth-error
  remotes/origin/develop
  remotes/origin/feature-1
  remotes/origin/feature/lab-improvement
  remotes/origin/main
  remotes/origin/staging
```

GitHub shows that a completed remote branch has been deleted.

```
  remotes/origin/staging
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
Switched to branch 'main'
Your branch is behind 'origin/main' by 3 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git pull origin main
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            main       -> FETCH_HEAD
Updating 13350cf..29254f6
Fast-forward
 review-demo.txt | 11 ++++++++++
 1 file changed, 11 insertions(+)
 create mode 100644 review-demo.txt
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch -d feature/pr-review-demo
Deleted branch feature/pr-review-demo (was 2522db4).
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git branch
  bugfix/user-auth-error
  develop
  feature-1
  feature/db-connection
  feature/lab-improvement
* main
  staging
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ cd ~/DevOps_Lab2_Practice
git checkout main
git pull origin main
git branch -d feature/pr-review-demo
git branch
Already on 'main'
Your branch is up to date with 'origin/main'.
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            main       -> FETCH_HEAD
Already up to date.
error: branch 'feature/pr-review-demo' not found
  bugfix/user-auth-error
  develop
  feature-1
  feature/db-connection
  feature/lab-improvement
* main
  staging
```

The terminal shows git push origin --delete <branch-name> and its successful output for an unused/completed remote branch.

Bonus Task: Simulated Team Collaboration

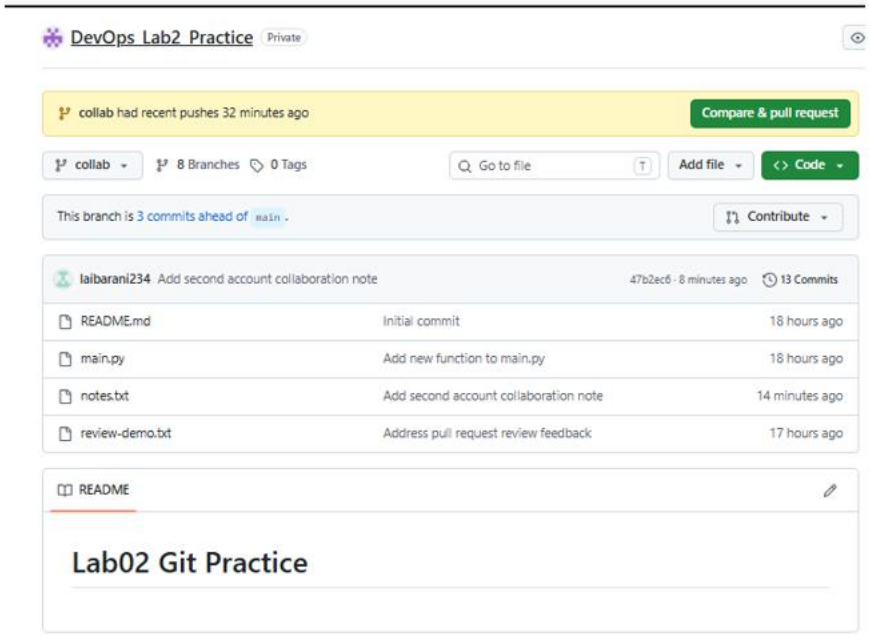



The collab branch and notes.txt show the contributors' names and fun facts with the relevant commit/push evidence.

```
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git pull origin main
From github.com:laibarani899-cpu/DevOps_Lab2_Practice
 * branch            main       -> FETCH_HEAD
Already up to date.
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git merge collab
Updating 6d3a29b..c0d83f9
Fast-forward
 notes.txt | 1 +
 1 file changed, 1 insertion(+)
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$ git push origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 354 bytes | 18.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To github.com:laibarani899-cpu/DevOps_Lab2_Practice.git
   6d3a29b..c0d83f9  main -> main
laibarani899-cpu@ubuntu:~/DevOps_Lab2_Practice$
```

The collab branch is merged into main and the updated main branch is pushed to GitHub.