
BAG · candidate distribution and experimental alternatives


Entropy 1.919 bits | Highest frozen score of four: Disjunction | Set − Ordering: -21.218

You and your friend Taylor are sitting in a park. You pull out a piece of paper and tell Taylor, 'I just had an idea that I want to remember, but don't have anything to write with.' Taylor looks through her handbag and responds, 'Sure, I have


Complete distribution: all 121,301 candidates

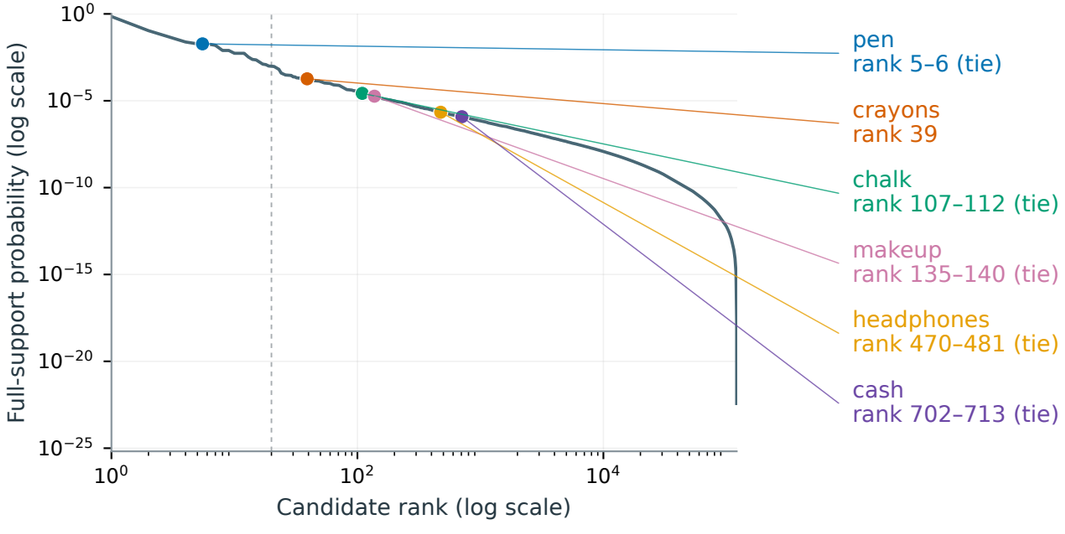

Closer view containing all six alternatives

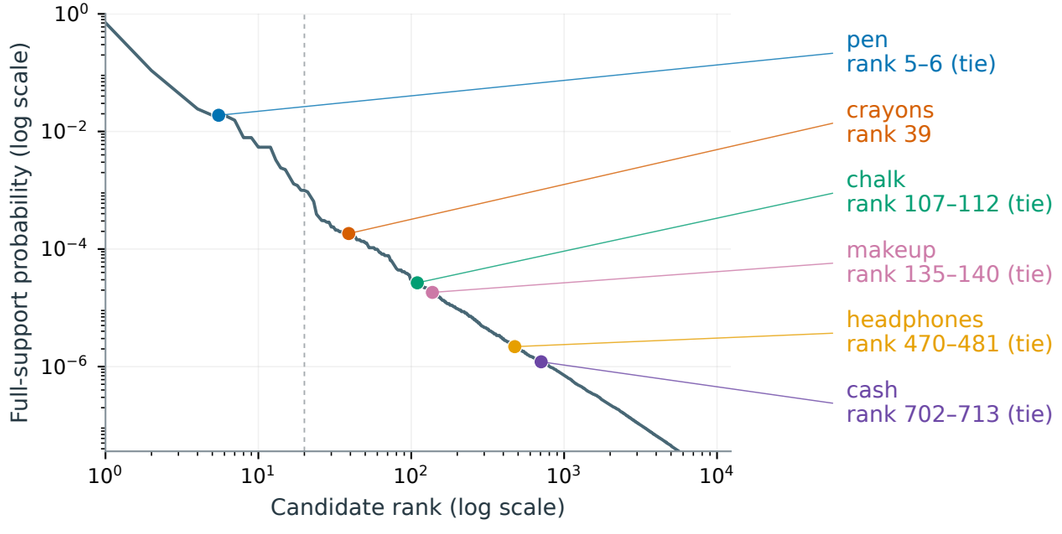

How quickly probability mass accumulates

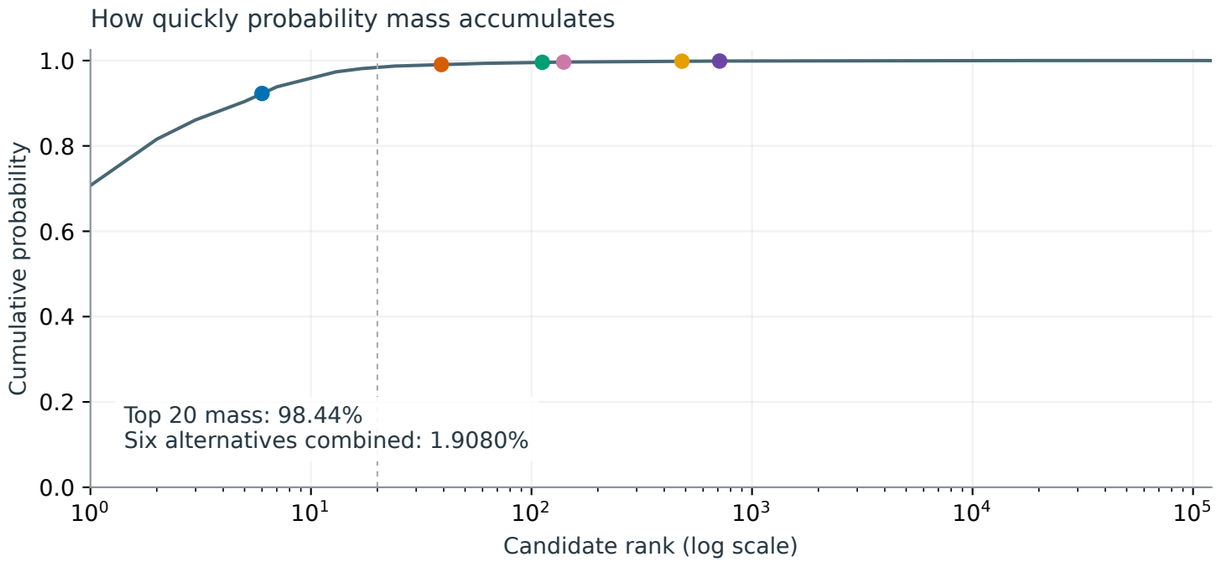

Alternative	Rank	Probability	Cum. mass	Set inclusion
pen	5–6 (tie)	0.0188	0.9228	0.990
crayons	39	0.000183	0.9907	0.068
chalk	107–112 (tie)	2.66e-05	0.9959	0.014
makeup	135–140 (tie)	1.83e-05	0.9965	0.008
headphones	470–481 (tie)	2.19e-06	0.9985	0.000
cash	702–713 (tie)	1.21e-06	0.9989	0.002

Most probable candidate: 'a' (70.73%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

BAKERY · candidate distribution and experimental alternatives


Entropy 6.168 bits | Highest frozen score of four: Disjunction | Set − Ordering: -5.367

You and your friend Chris walk by a bakery. You say, 'I want some dessert.' Chris looks inside the bakery and responds, 'Sure, they have


Complete distribution: all 121,301 candidates

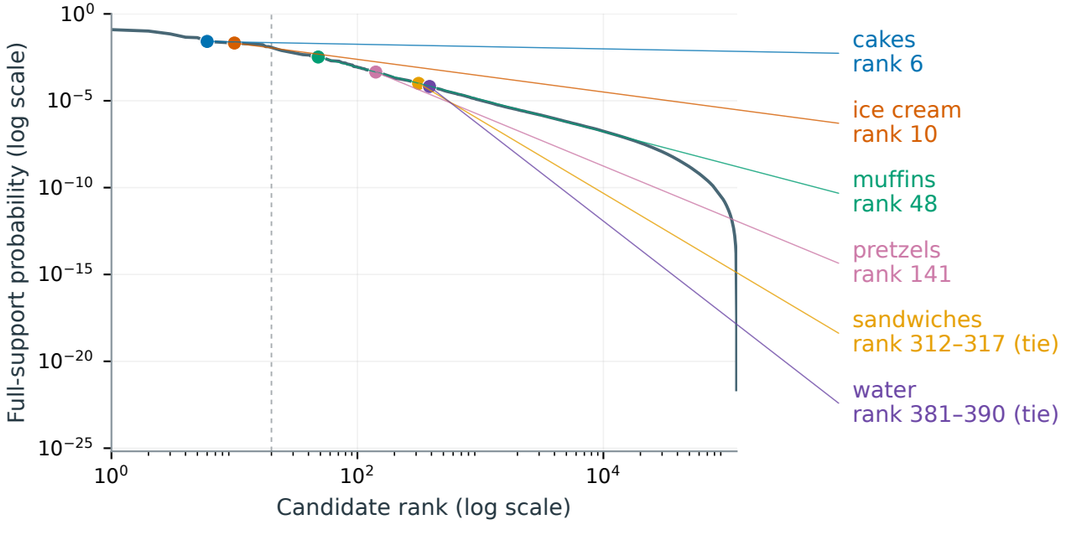

Closer view containing all six alternatives

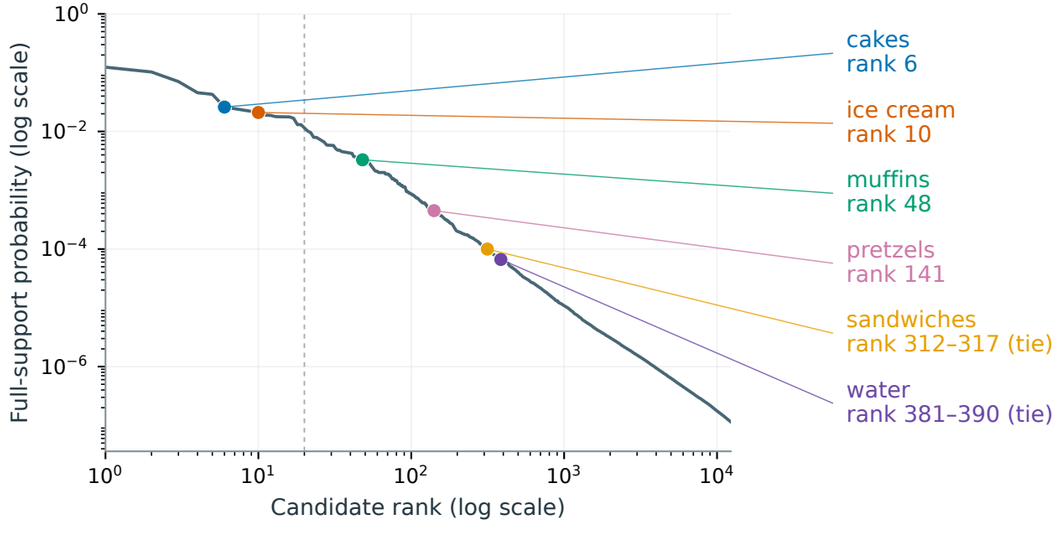

How quickly probability mass accumulates

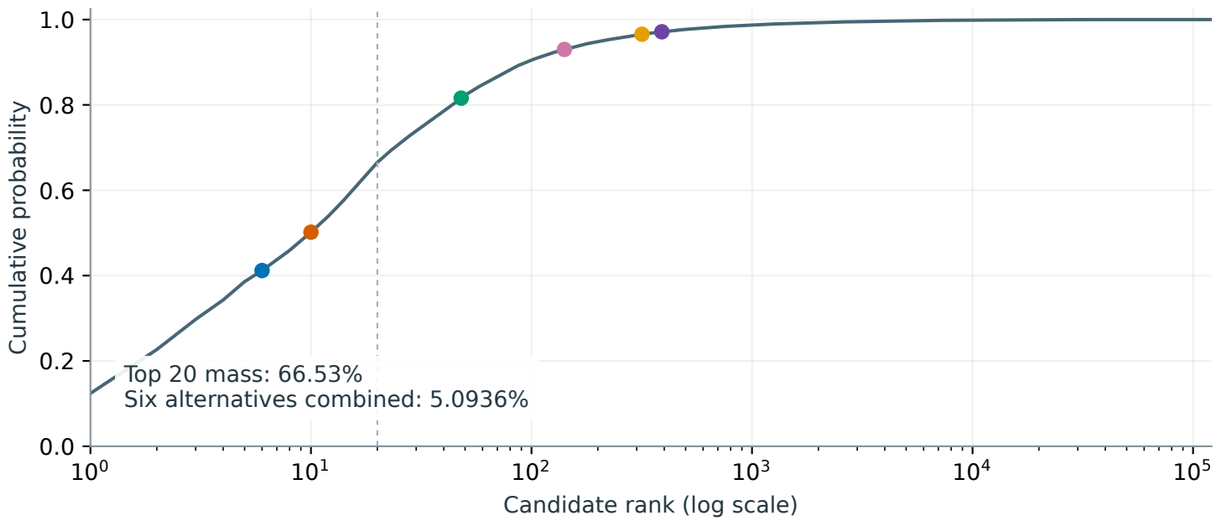

Alternative	Rank	Probability	Cum. mass	Set inclusion
cakes	6	0.026	0.4118	0.584
ice cream	10	0.021	0.5017	0.464
muffins	48	0.0033	0.8158	0.104
pretzels	141	0.00045	0.9300	0.006
sandwiches	312–317 (tie)	9.98e-05	0.9656	0.002
water	381–390 (tie)	6.65e-05	0.9713	0.002

Most probable candidate: 'some' (12.40%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

BEACH · candidate distribution and experimental alternatives


Entropy 6.807 bits | Highest frozen score of four: Disjunction | Set − Ordering: -7.273

You and your friend Jess are packing to go on vacation. You tell Jess, 'There's a nice beach near our hotel, make sure you bring something to wear.' Jess looks in the closet and responds, 'Sure, I have my


Complete distribution: all 121,301 candidates

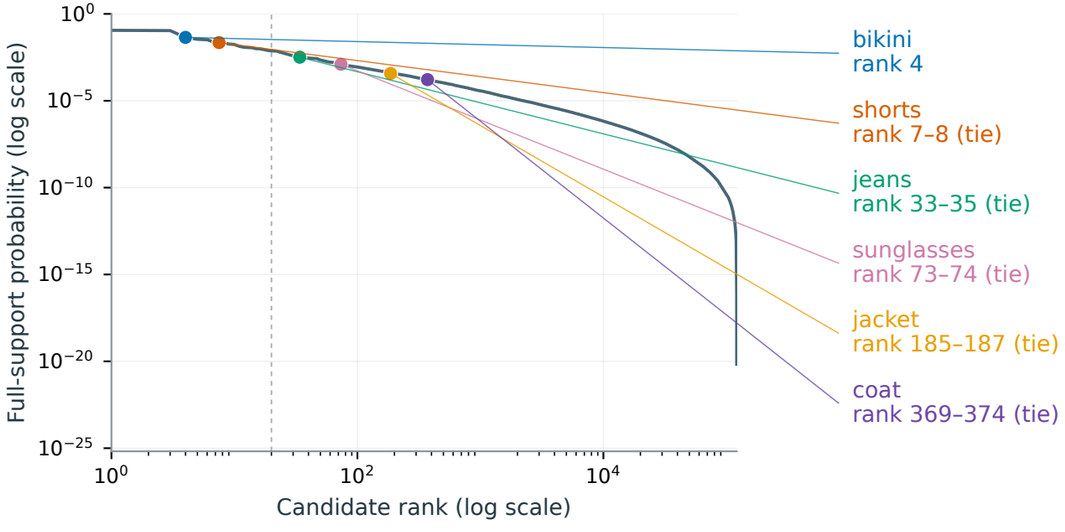

Closer view containing all six alternatives

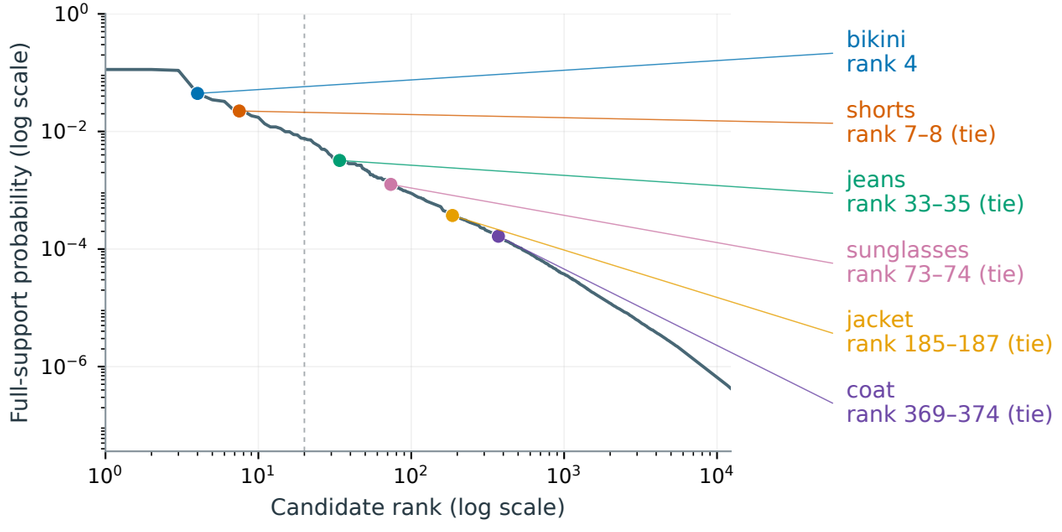

How quickly probability mass accumulates

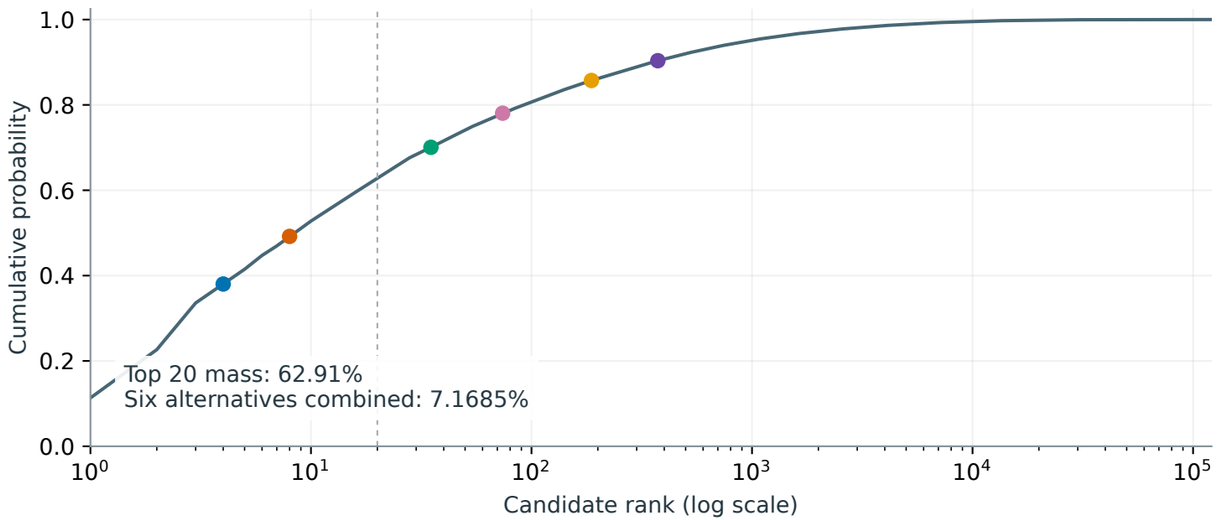

Alternative	Rank	Probability	Cum. mass	Set inclusion
bikini	4	0.0444	0.3803	0.712
shorts	7–8 (tie)	0.0223	0.4919	0.504
jeans	33–35 (tie)	0.00321	0.7006	0.090
sunglasses	73–74 (tie)	0.00126	0.7806	0.024
jacket	185–187 (tie)	0.000372	0.8573	0.004
coat	369–374 (tie)	0.000165	0.9036	0.002

Most probable candidate: 'bathing' (11.33%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

COLD · candidate distribution and experimental alternatives


Entropy 4.448 bits | Highest frozen score of four: Ordering | Set − Ordering: -36.199

You and your friend Kennedy rent a small cabin in the mountains for a weekend. When you arrive, you shiver and say 'I'm freezing!' Kennedy looks around the cabin and responds, 'Sure, they have a


Complete distribution: all 121,301 candidates

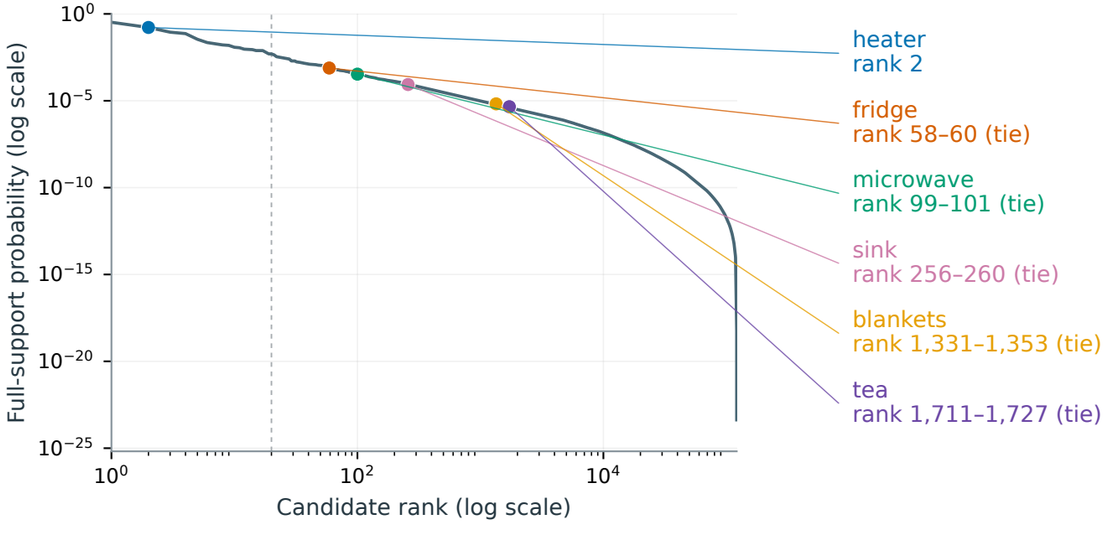

Closer view containing all six alternatives

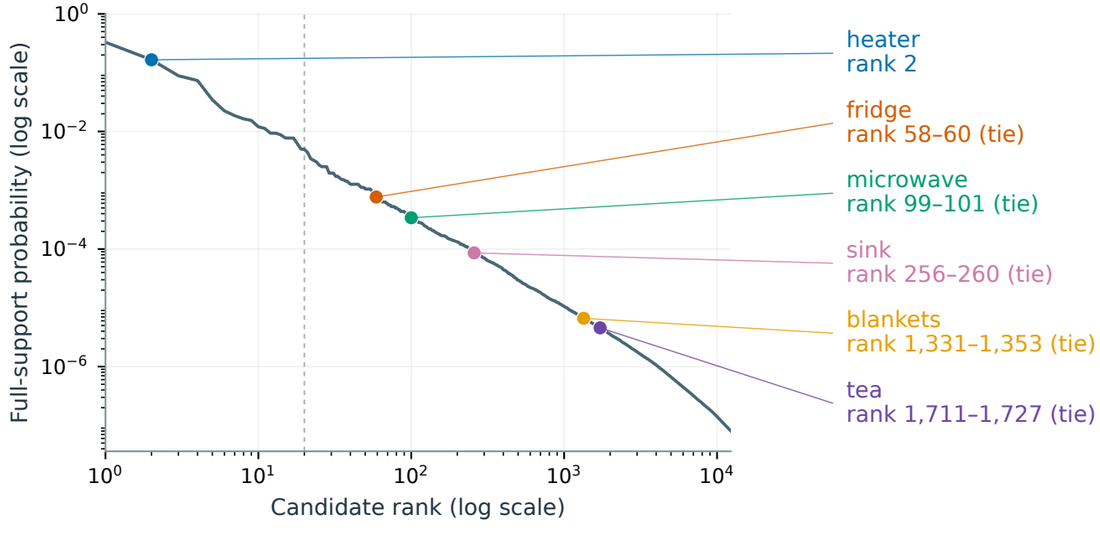

How quickly probability mass accumulates

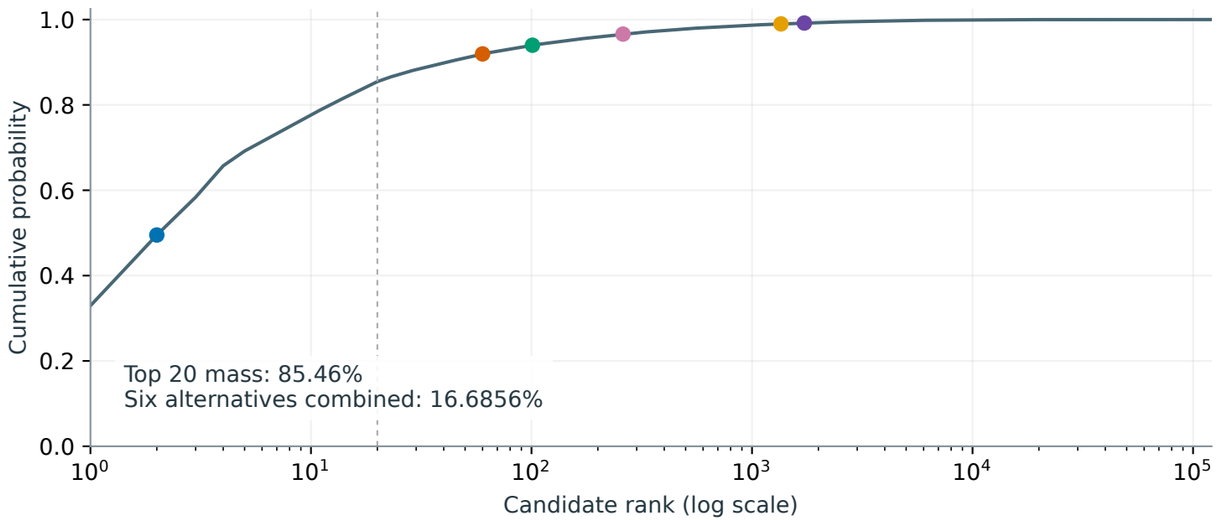

Alternative	Rank	Probability	Cum. mass	Set inclusion
heater	2	0.166	0.4951	1.000
fridge	58–60 (tie)	0.000767	0.9195	0.044
microwave	99–101 (tie)	0.00034	0.9398	0.016
sink	256–260 (tie)	8.61e-05	0.9659	0.002
blankets	1,331–1,353 (tie)	6.64e-06	0.9898	0.000
tea	1,711–1,727 (tie)	4.56e-06	0.9919	0.000

Most probable candidate: 'fireplace' (32.94%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

CUT · candidate distribution and experimental alternatives


Entropy 5.764 bits | Highest frozen score of four: Set | Set − Ordering: +25.093

You and your friend Blair come back from a long day shopping. You want to try on your new sweater, and you tell Blair, 'I want to remove this tag.' Blair looks through some drawers and responds, 'Sure, I have my


Complete distribution: all 121,301 candidates

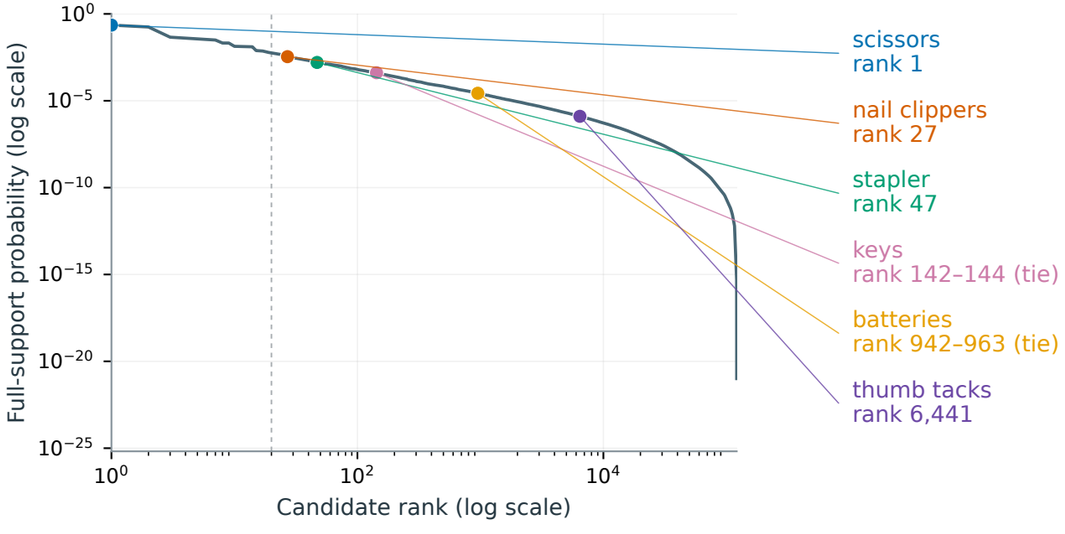

Closer view containing all six alternatives

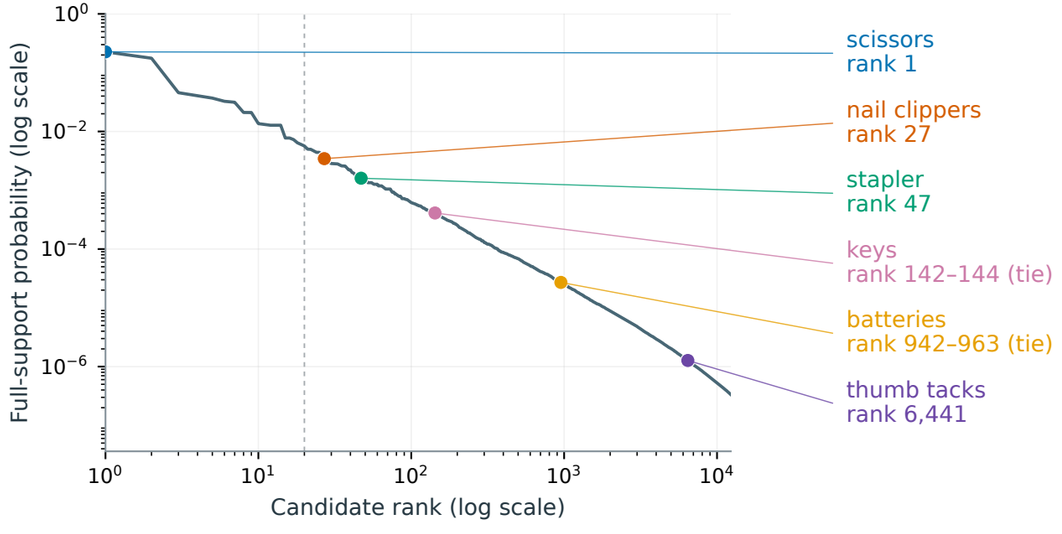

How quickly probability mass accumulates

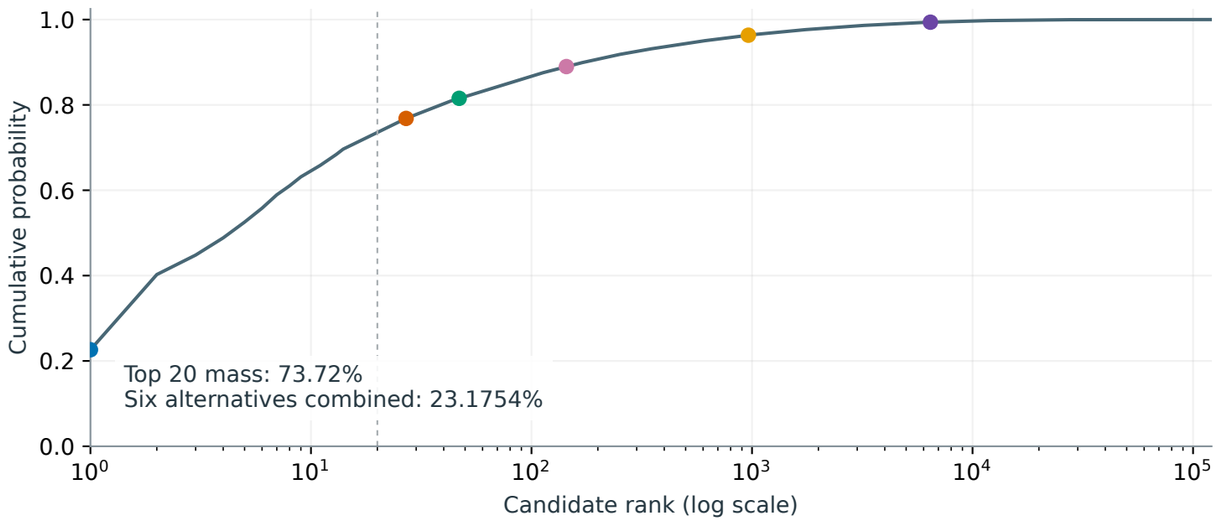

Alternative	Rank	Probability	Cum. mass	Set inclusion
scissors	1	0.226	0.2263	1.000
nail clippers	27	0.00345	0.7683	0.124
stapler	47	0.0016	0.8154	0.048
keys	142–144 (tie)	0.00041	0.8898	0.014
batteries	942–963 (tie)	2.71e-05	0.9633	0.002
thumb tacks	6,441	1.27e-06	0.9938	0.000

Most probable candidate: 'scissors' (22.63%).


Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.


FRIDGE · candidate distribution and experimental alternatives

Entropy 2.584 bits | Highest frozen score of four: Disjunction | Set − Ordering: -5.018

You and your friend Sam go for a long walk together. After the walk, you go back to Sam's house. You say to Sam, 'I'm thirsty.' Sam opens the fridge and responds, 'Sure, I have

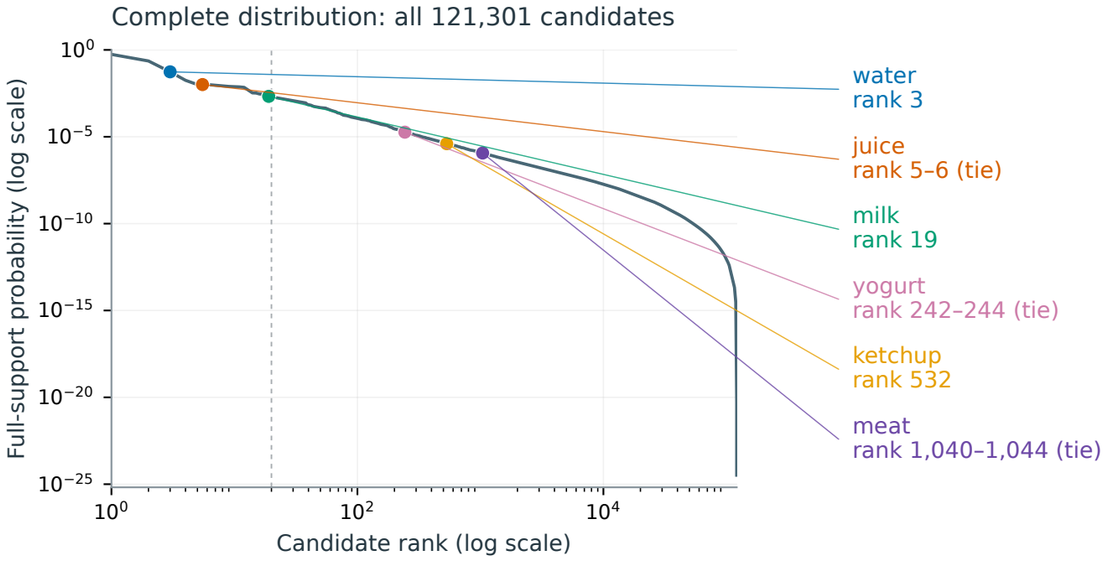

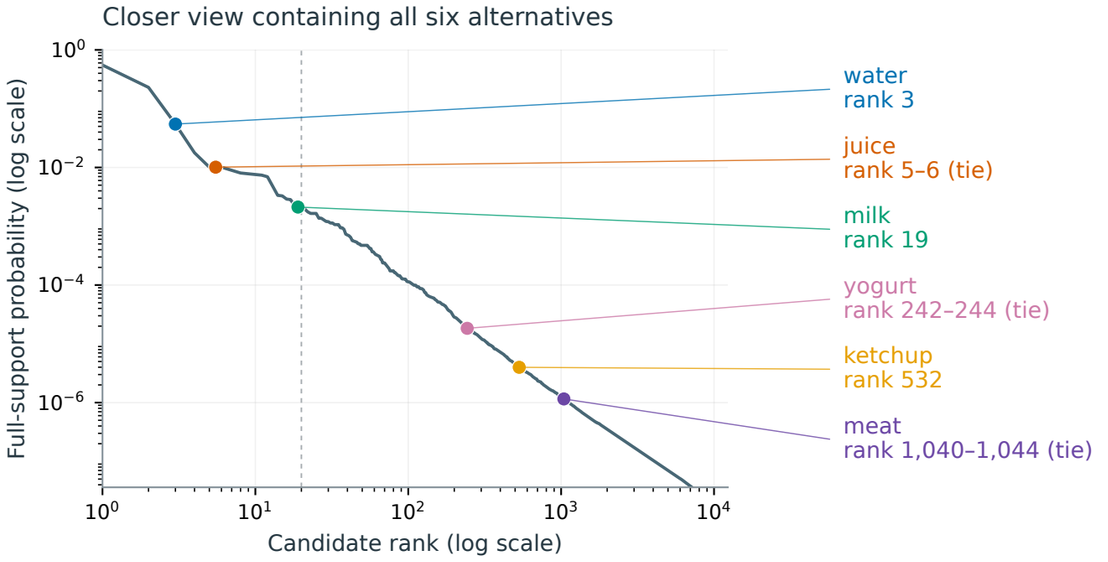

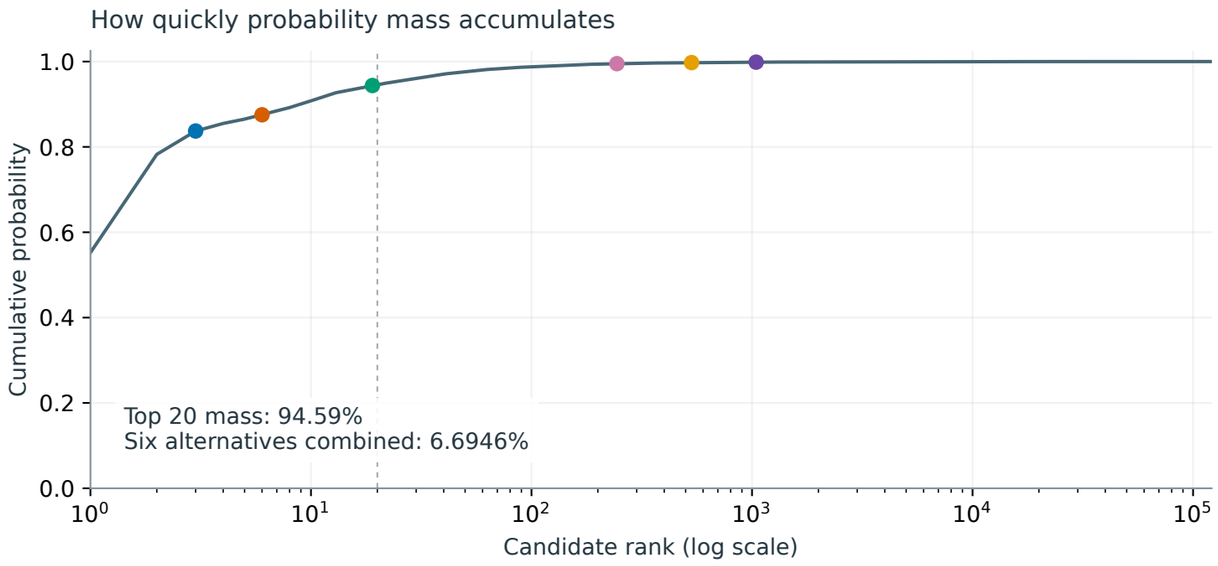

Alternative	Rank	Probability	Cum. mass	Set inclusion
water	3	0.0547	0.8372	1.000
juice	5–6 (tie)	0.0101	0.8752	0.762
milk	19	0.00212	0.9438	0.260
yogurt	242–244 (tie)	1.83e-05	0.9951	0.006
ketchup	532	3.99e-06	0.9975	0.002
meat	1,040–1,044 (tie)	1.15e-06	0.9986	0.000

Most probable candidate: 'some' (55.23%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

GYM · candidate distribution and experimental alternatives


Entropy 5.911 bits | Highest frozen score of four: Disjunction | Set − Ordering: -15.710

You and your friend Lee are registering for classes at a fitness center. You say to Lee, 'Let's sign up for some team sports.' Lee looks at the list of classes and responds, 'Sure, they have


Complete distribution: all 121,301 candidates

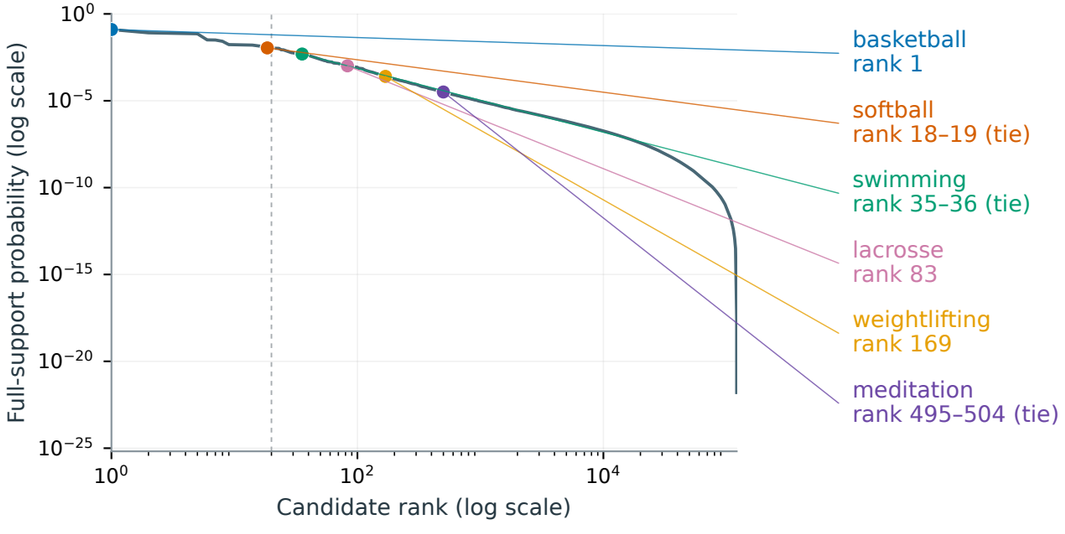

Closer view containing all six alternatives

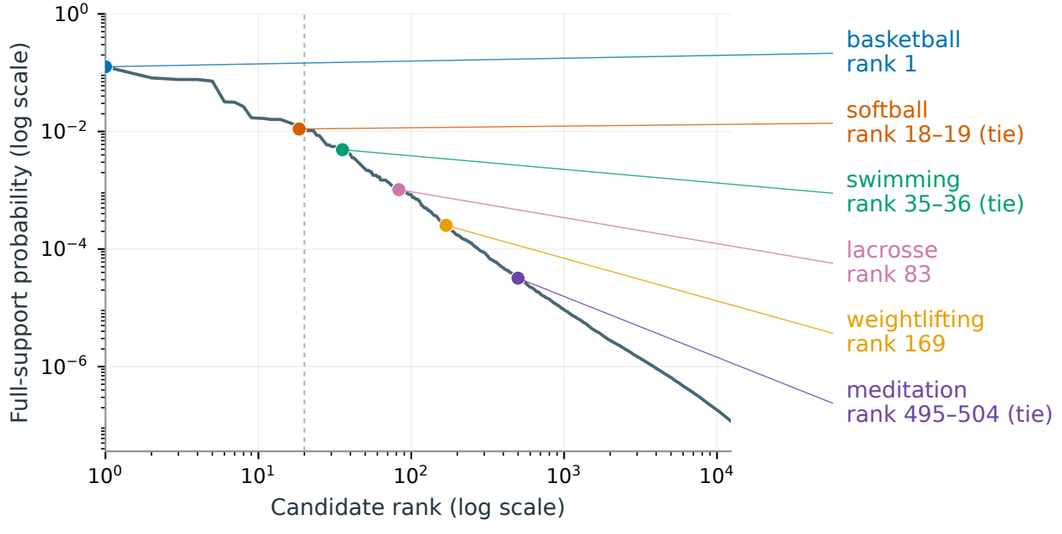

How quickly probability mass accumulates

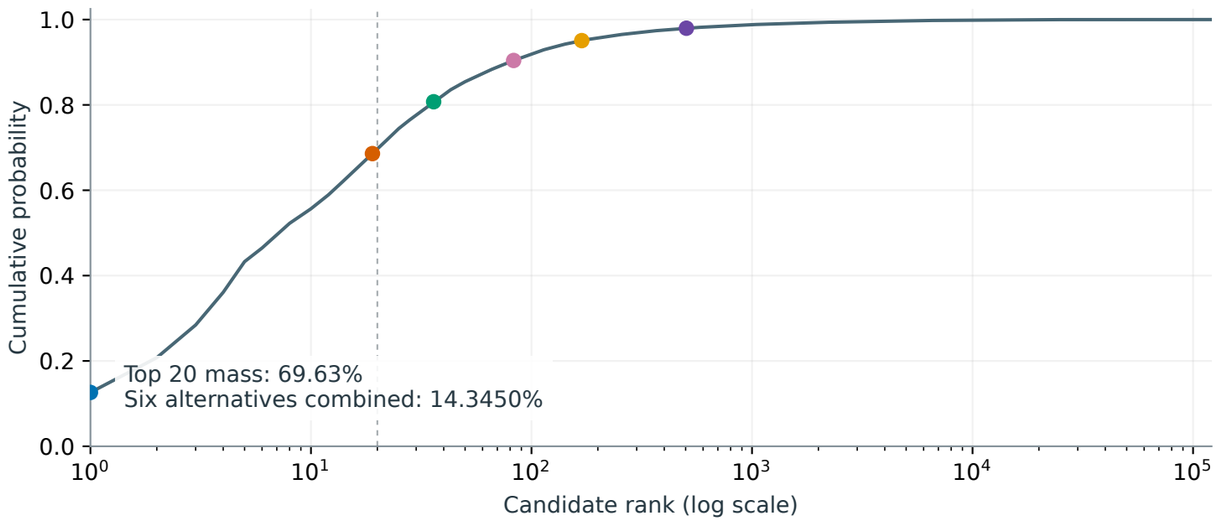

Alternative	Rank	Probability	Cum. mass	Set inclusion
basketball	1	0.126	0.1262	0.972
softball	18–19 (tie)	0.011	0.6859	0.292
swimming	35–36 (tie)	0.00489	0.8074	0.144
lacrosse	83	0.00102	0.9041	0.036
weightlifting	169	0.000253	0.9507	0.004
meditation	495–504 (tie)	3.2e-05	0.9797	0.004

Most probable candidate: 'basketball' (12.62%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

HOT · candidate distribution and experimental alternatives


Entropy 3.800 bits | Highest frozen score of four: Set | Set − Ordering: +28.498

You and your friend Grayson visit his grandparents' lake house after hiking on a hot summer day. You tell Grayson, 'It's sweltering in here!' Grayson talks to his grandparents and responds, 'Sure, they have their


Complete distribution: all 121,301 candidates

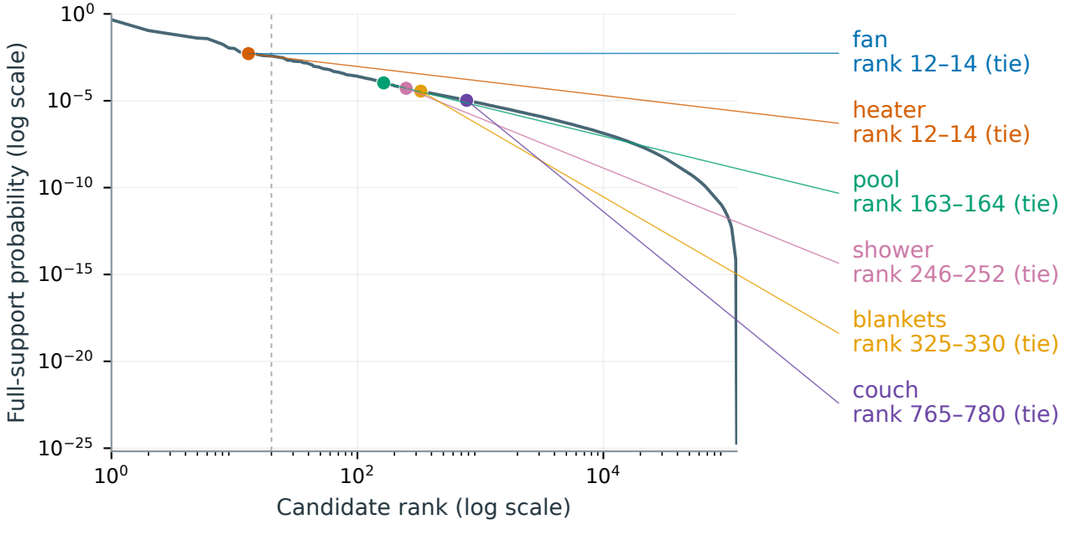

Closer view containing all six alternatives

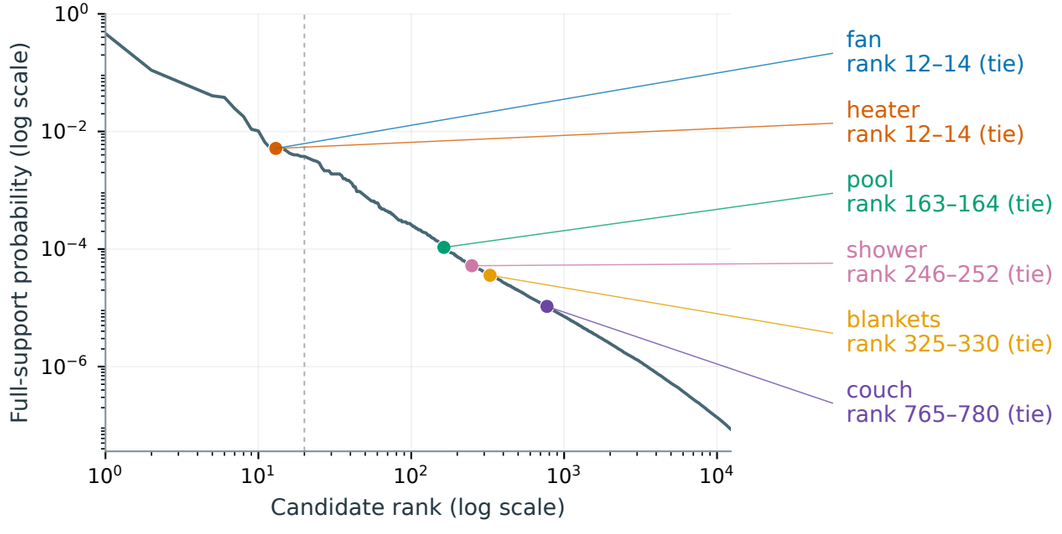

How quickly probability mass accumulates

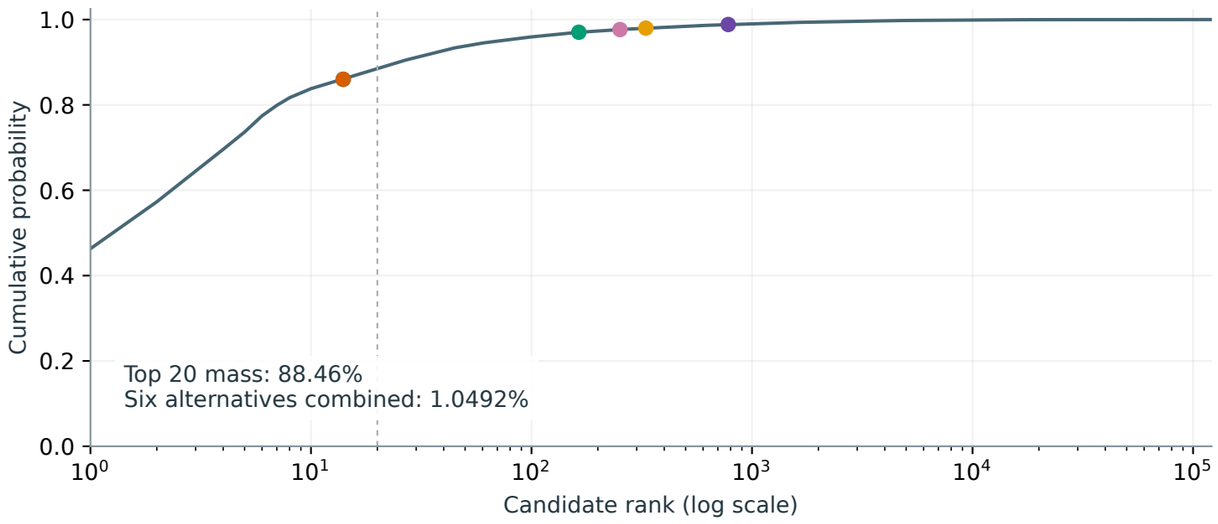

Alternative	Rank	Probability	Cum. mass	Set inclusion
fan	12–14 (tie)	0.00514	0.8600	0.336
heater	12–14 (tie)	0.00514	0.8600	0.340
pool	163–164 (tie)	0.000107	0.9703	0.004
shower	246–252 (tie)	5.2e-05	0.9766	0.014
blankets	325–330 (tie)	3.58e-05	0.9799	0.002
couch	765–780 (tie)	1.06e-05	0.9884	0.000

Most probable candidate: 'air' (46.30%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

MALL · candidate distribution and experimental alternatives


Entropy 4.316 bits | Highest frozen score of four: Disjunction | Set − Ordering: -133.457

You and your friend Alex are hanging out in a newly opened shopping mall. You say to Alex, 'Let's get lunch!' Alex looks at the map of the mall and responds, 'Sure, this mall has a


Complete distribution: all 121,301 candidates

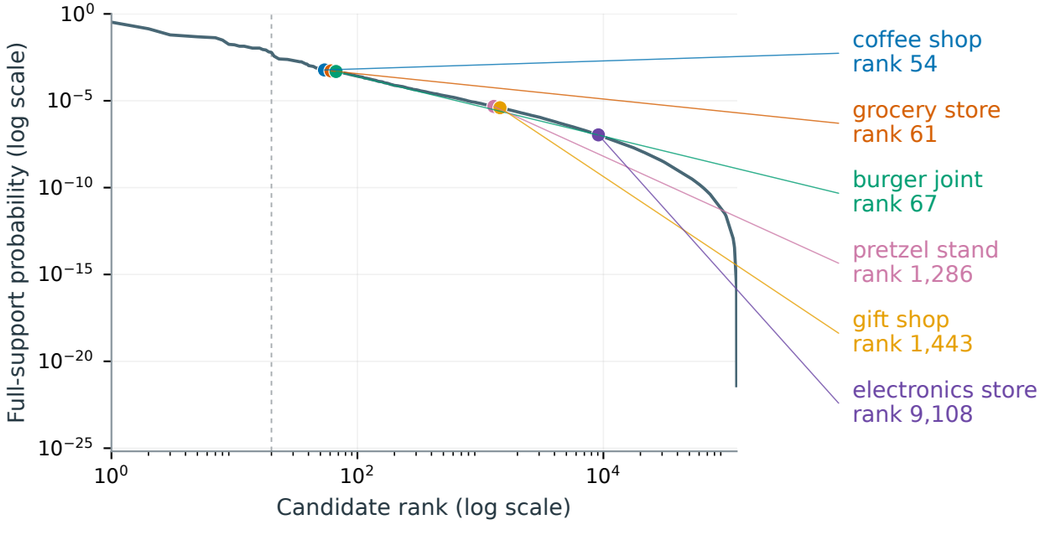

Closer view containing all six alternatives

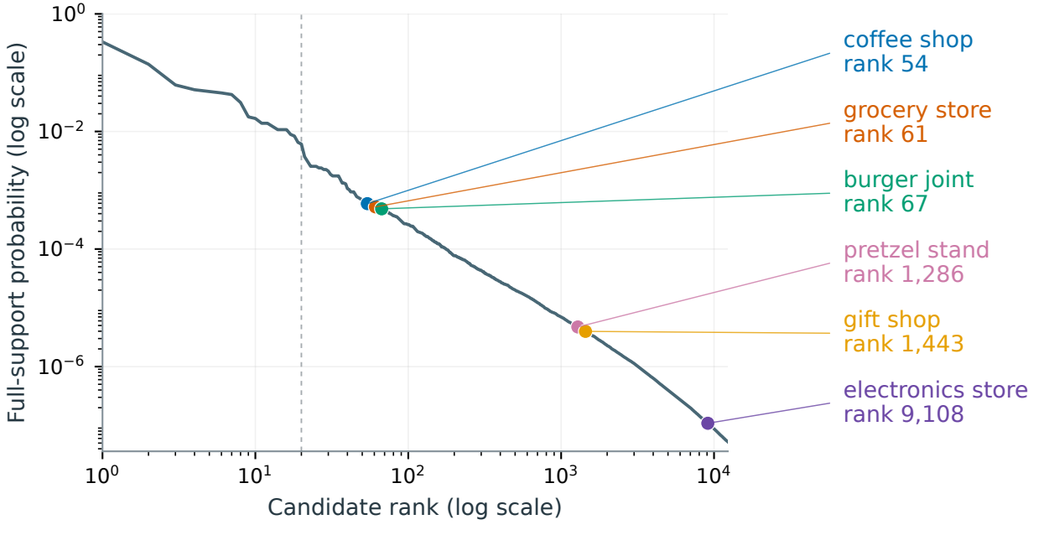

How quickly probability mass accumulates

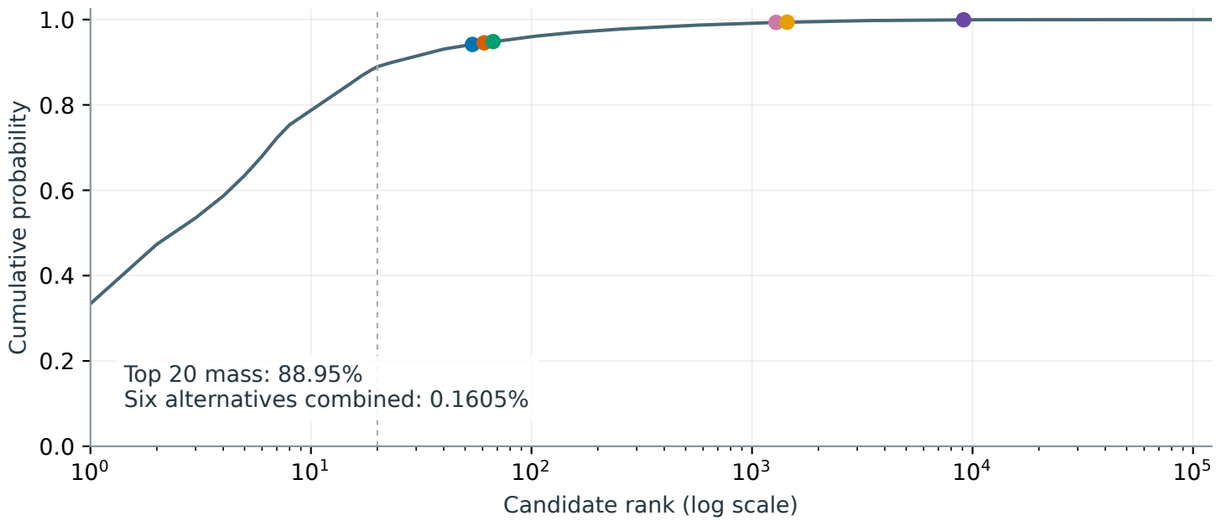

Alternative	Rank	Probability	Cum. mass	Set inclusion
coffee shop	54	0.000592	0.9417	0.038
grocery store	61	0.000521	0.9454	0.030
burger joint	67	0.000483	0.9484	0.028
pretzel stand	1,286	4.73e-06	0.9932	0.000
gift shop	1,443	3.98e-06	0.9939	0.000
electronics store	9,108	1.09e-07	0.9994	0.000

Most probable candidate: 'lot' (33.41%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

MASK · candidate distribution and experimental alternatives


Entropy 1.764 bits | Highest frozen score of four: Ordering | Set − Ordering: -18.879

You and your friend Carly go grocery shopping together. As you're about to enter the supermarket, you reach into your pocket and realize, 'I forgot to bring my mask!' Carly looks through her bag and responds, 'Sure, I have my


Complete distribution: all 121,301 candidates

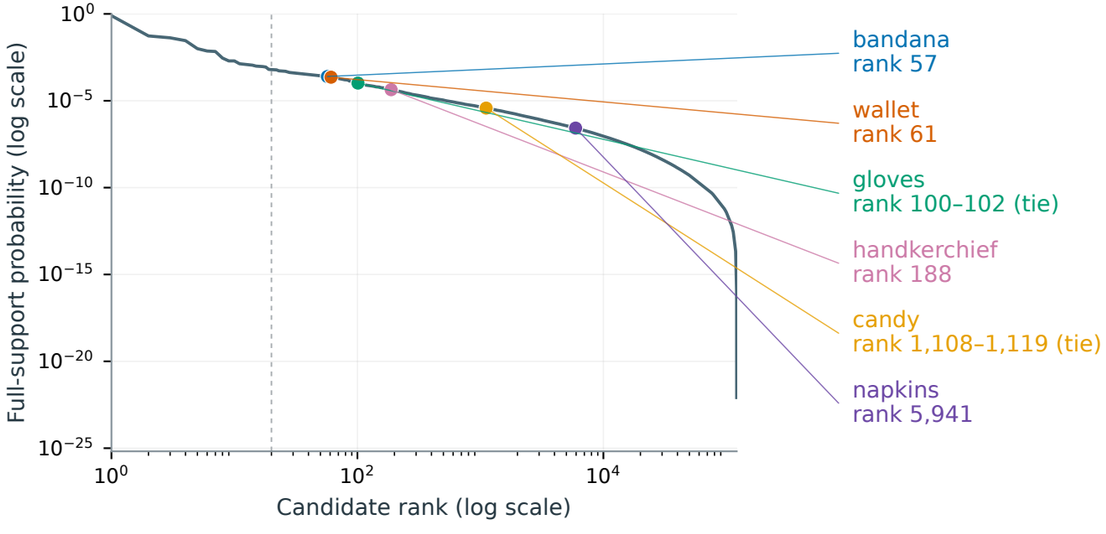

Closer view containing all six alternatives

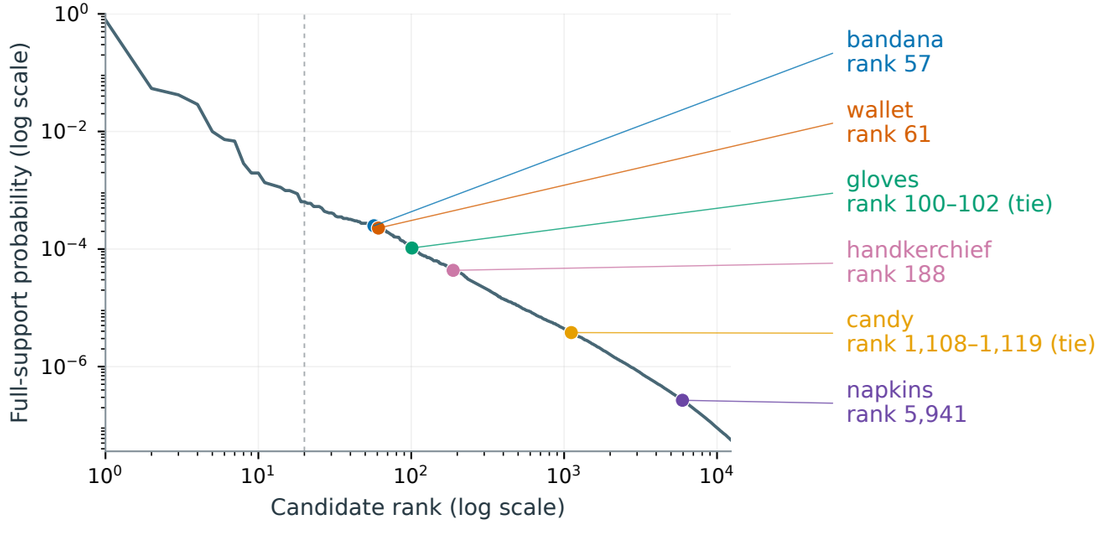

How quickly probability mass accumulates

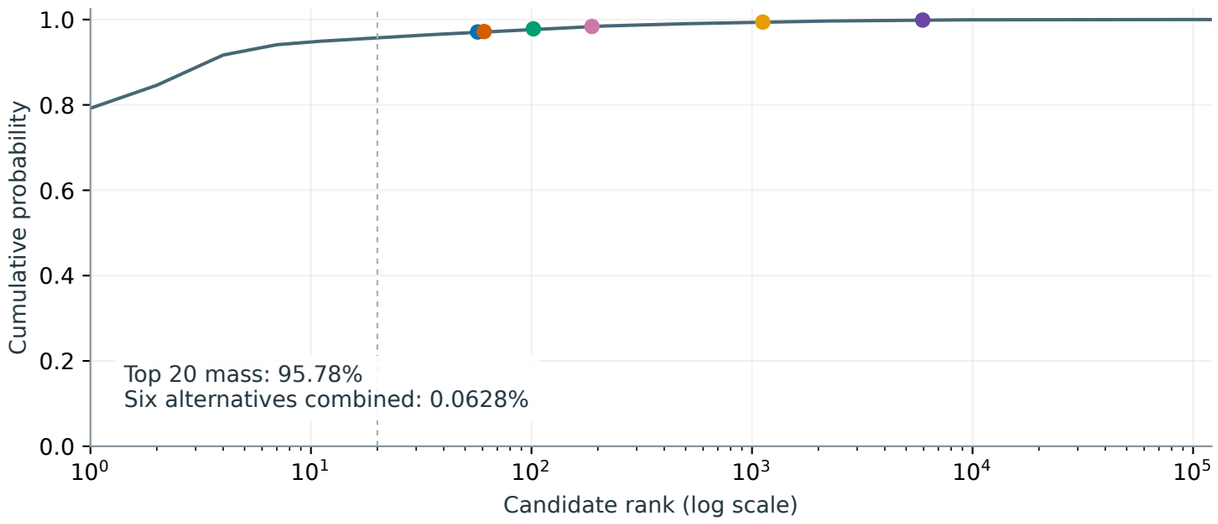

Alternative	Rank	Probability	Cum. mass	Set inclusion
bandana	57	0.000249	0.9709	0.084
wallet	61	0.000227	0.9719	0.042
gloves	100–102 (tie)	0.000104	0.9783	0.028
handkerchief	188	4.34e-05	0.9838	0.006
candy	1,108–1,119 (tie)	3.79e-06	0.9941	0.000
napkins	5,941	2.67e-07	0.9988	0.000

Most probable candidate: 'mask' (79.22%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

MEAT · candidate distribution and experimental alternatives


Entropy 6.227 bits | Highest frozen score of four: Disjunction | Set − Ordering: +5.715

Your friend MJ is calling a ramen restaurant to order takeout. You tell MJ, 'I'd like meat in mine, please.' MJ gives your order over the phone, and then responds, 'Sure, they have


Complete distribution: all 121,301 candidates

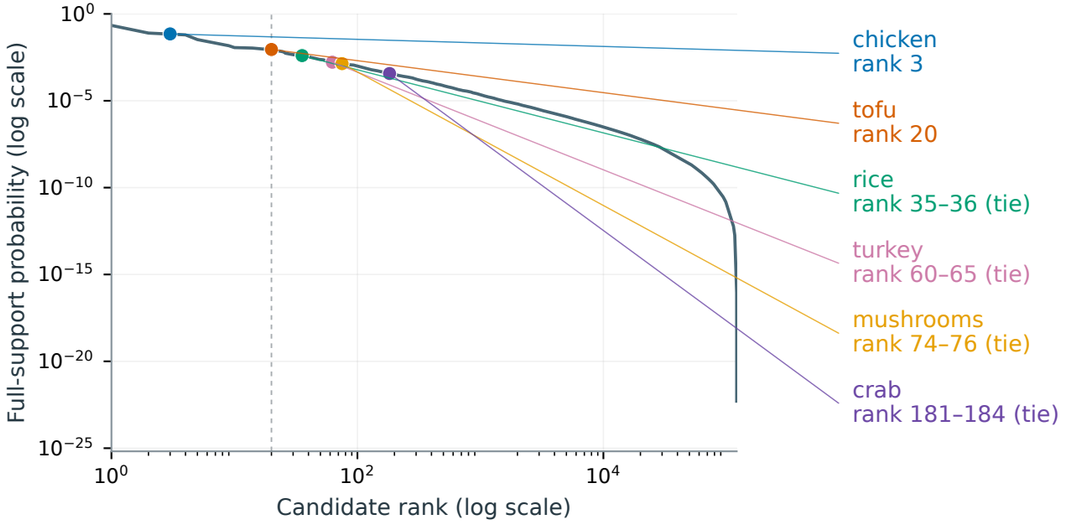

Closer view containing all six alternatives

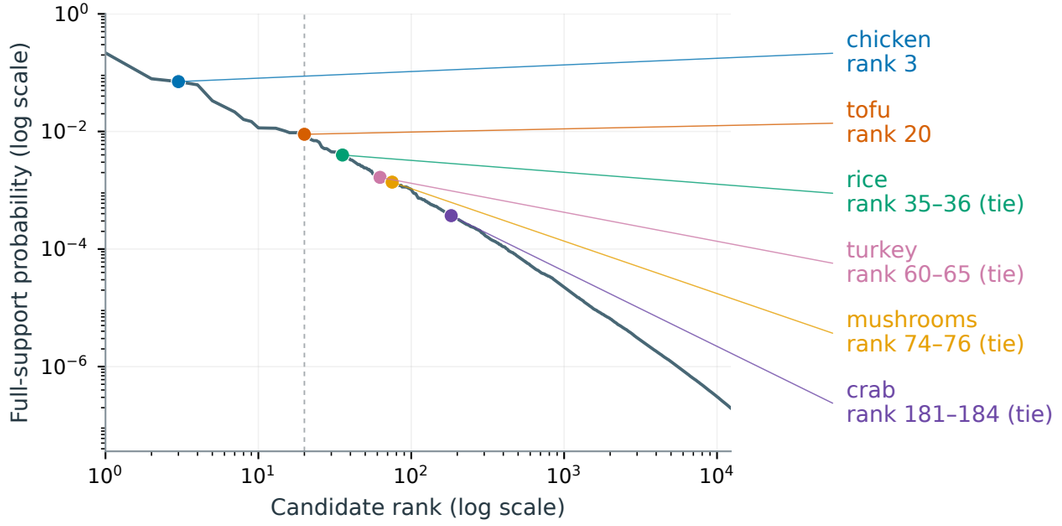

How quickly probability mass accumulates

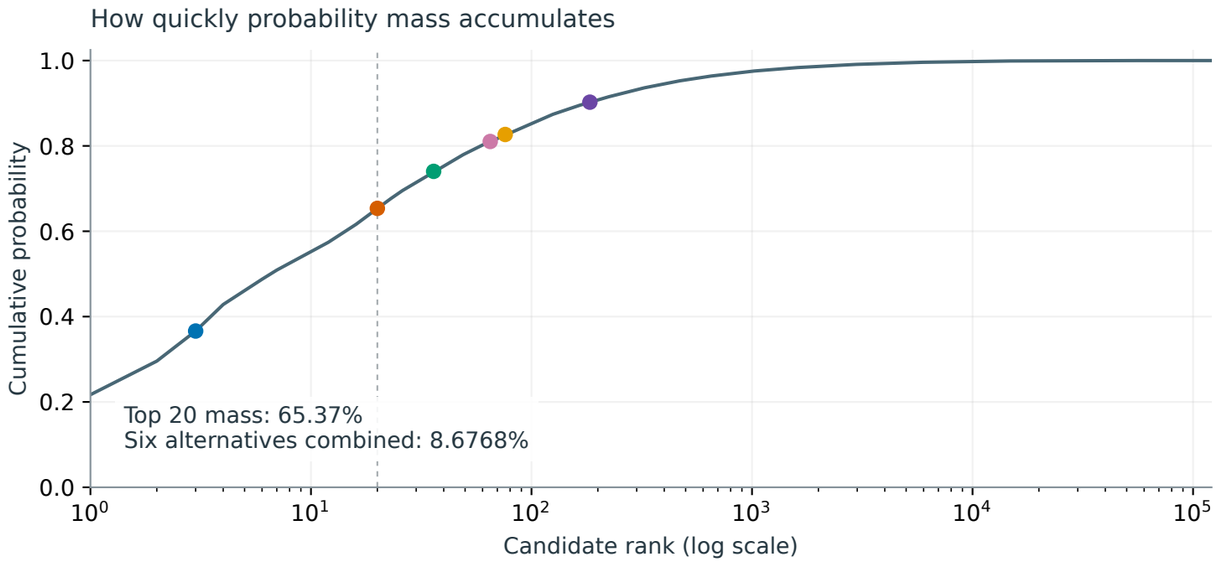

Alternative	Rank	Probability	Cum. mass	Set inclusion
chicken	3	0.0704	0.3662	0.896
tofu	20	0.00896	0.6537	0.254
rice	35–36 (tie)	0.00397	0.7403	0.138
turkey	60–65 (tie)	0.00166	0.8104	0.036
mushrooms	74–76 (tie)	0.00137	0.8268	0.058
crab	181–184 (tie)	0.00037	0.9025	0.006

Most probable candidate: 'meat' (21.70%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

RESTAURANT · candidate distribution and experimental alternatives


Entropy 5.251 bits | Highest frozen score of four: Disjunction | Set − Ordering: -63.719

You and your friend Billie go to a new restaurant. While you're there, you find out that it's Billie's 21st birthday. You say to Billie, 'Let's order some drinks!' Billie looks at the menu and responds, 'Sure, they have


Complete distribution: all 121,301 candidates

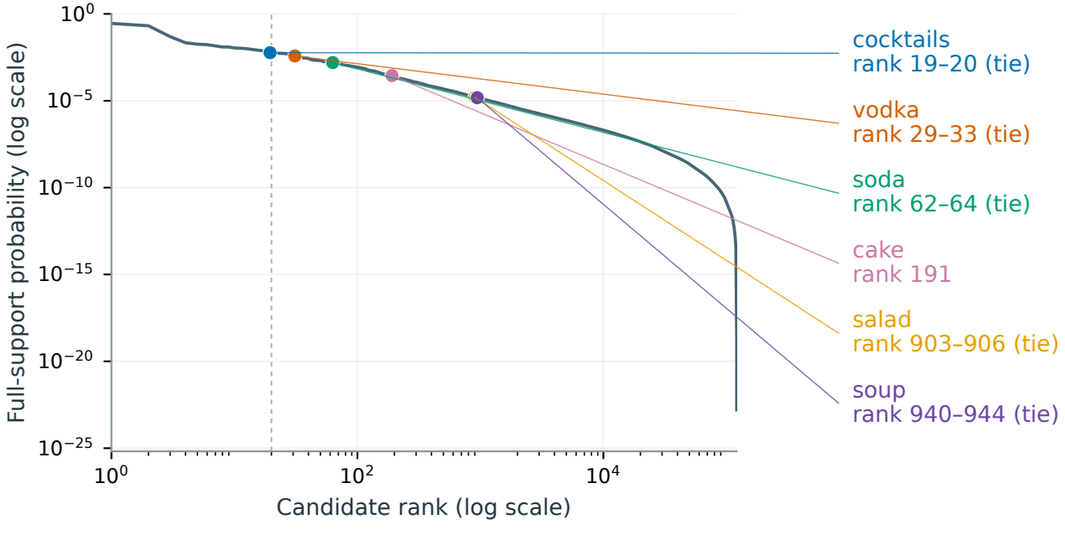

Closer view containing all six alternatives

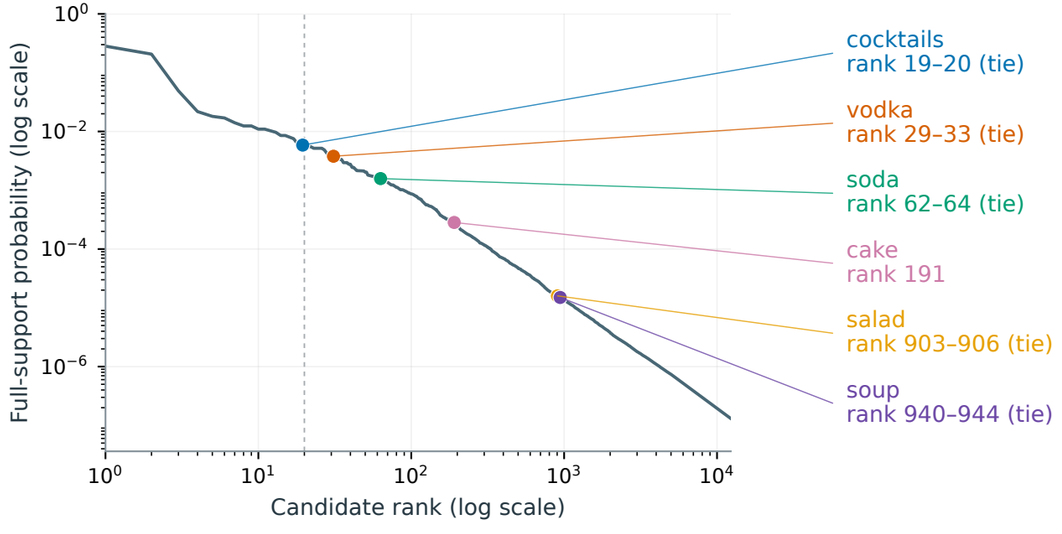

How quickly probability mass accumulates

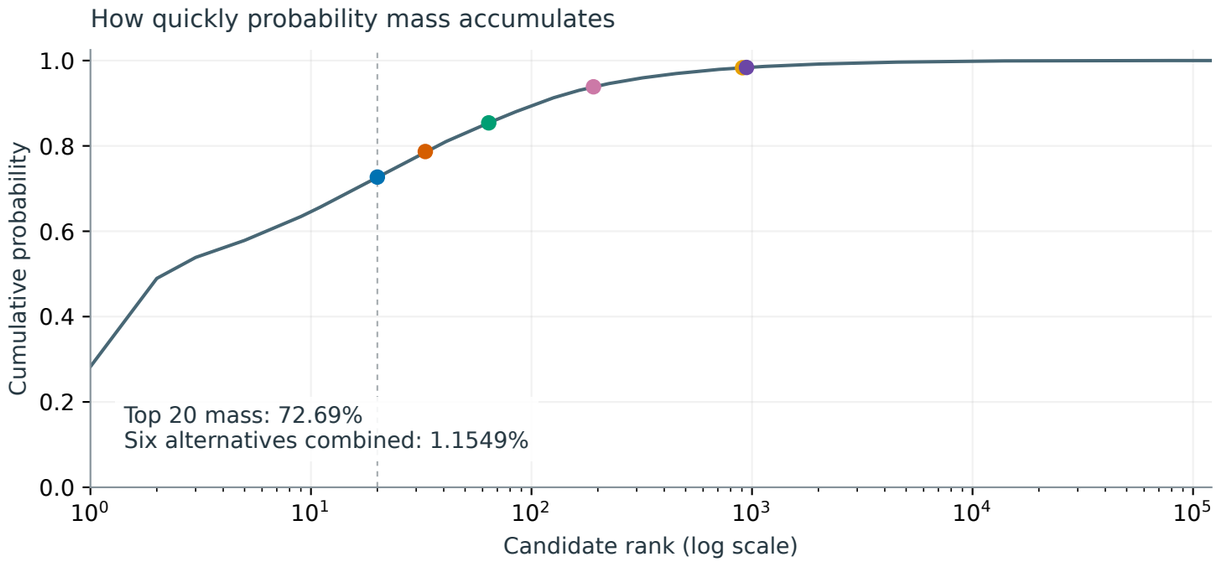

Alternative	Rank	Probability	Cum. mass	Set inclusion
cocktails	19–20 (tie)	0.00587	0.7269	0.222
vodka	29–33 (tie)	0.00379	0.7868	0.140
soda	62–64 (tie)	0.00158	0.8540	0.072
cake	191	0.000283	0.9385	0.008
salad	903–906 (tie)	1.6e-05	0.9832	0.000
soup	940–944 (tie)	1.5e-05	0.9838	0.000

Most probable candidate: 'a' (28.27%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

SALAD · candidate distribution and experimental alternatives


Entropy 5.792 bits | Highest frozen score of four: Disjunction | Set − Ordering: -43.963

You and your friend Ali are preparing dinner together. You tell Ali, 'I want to make a salad!' Ali runs to the corner store, and texts you, 'Sure, they have


Complete distribution: all 121,301 candidates

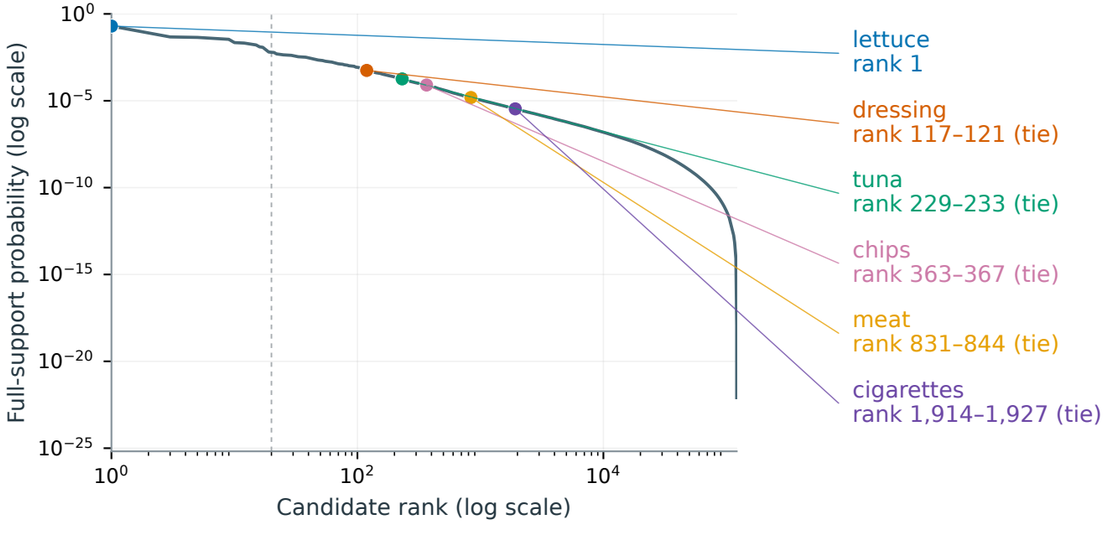

Closer view containing all six alternatives

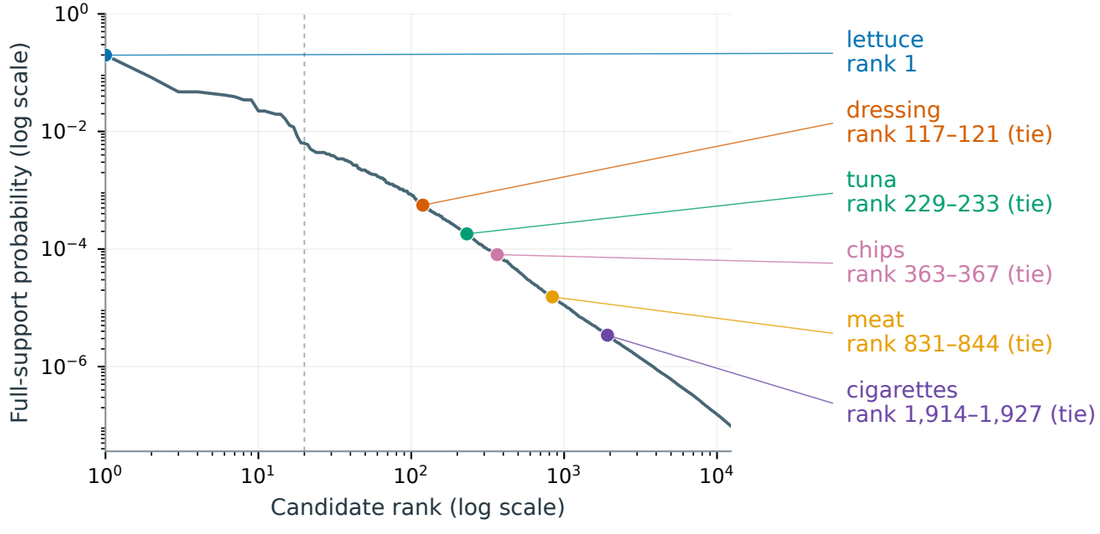

How quickly probability mass accumulates

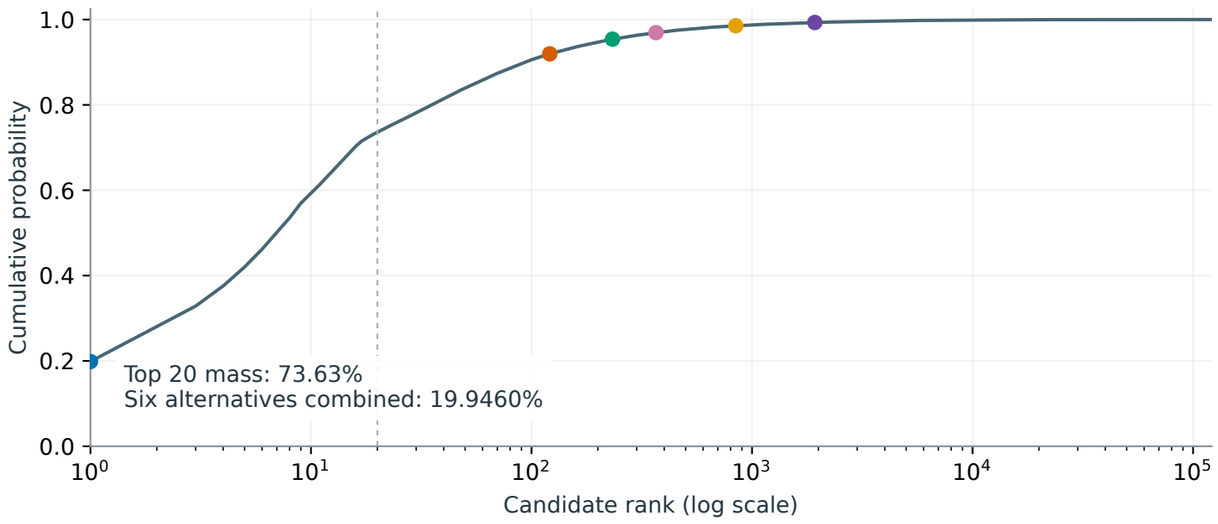

Alternative	Rank	Probability	Cum. mass	Set inclusion
lettuce	1	0.199	0.1986	0.998
dressing	117–121 (tie)	0.000558	0.9197	0.006
tuna	229–233 (tie)	0.000181	0.9540	0.006
chips	363–367 (tie)	8.04e-05	0.9694	0.000
meat	831–844 (tie)	1.53e-05	0.9855	0.000
cigarettes	1,914–1,927 (tie)	3.42e-06	0.9931	0.000

Most probable candidate: 'lettuce' (19.86%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

SCIENCE · candidate distribution and experimental alternatives


Entropy 5.213 bits | Highest frozen score of four: Disjunction | Set − Ordering: -17.645

You and your friend Drew are looking for books in a library. You say, 'I want to learn more about science.' Drew looks at the library catalogue and responds, 'Sure, they have books about


Complete distribution: all 121,301 candidates

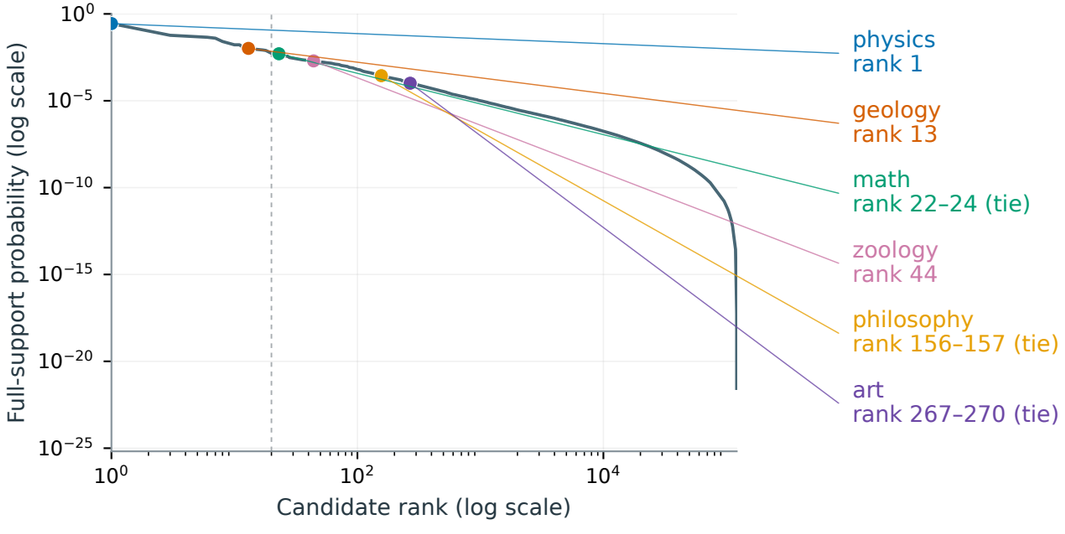

Closer view containing all six alternatives

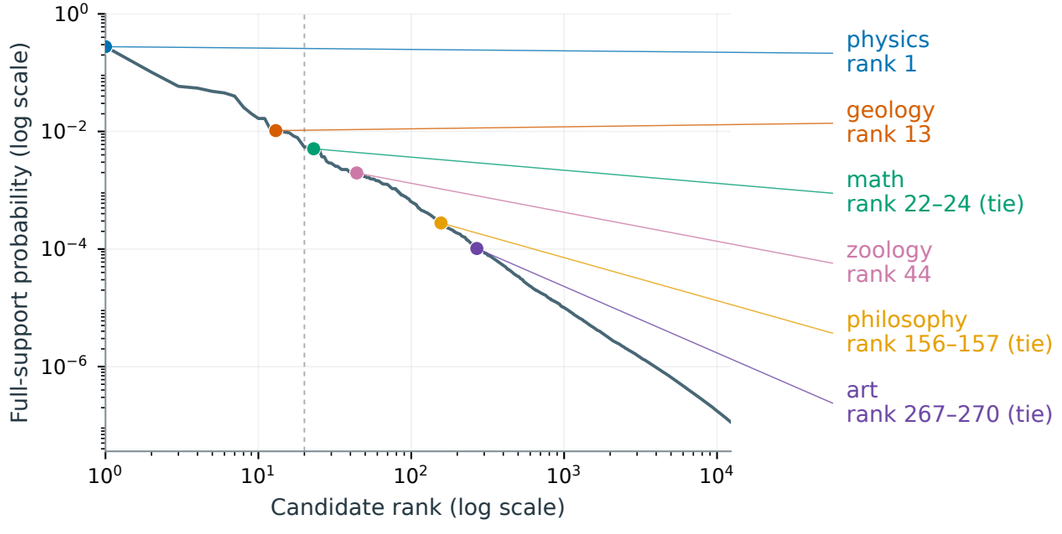

How quickly probability mass accumulates

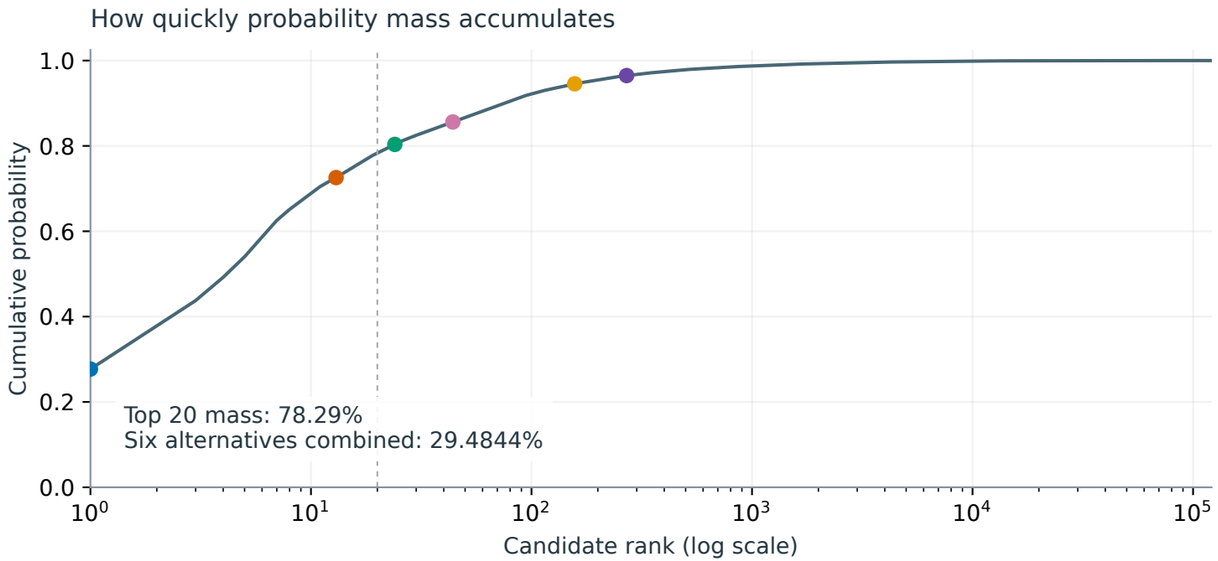

Alternative	Rank	Probability	Cum. mass	Set inclusion
physics	1	0.277	0.2771	1.000
geology	13	0.0103	0.7257	0.352
math	22–24 (tie)	0.00507	0.8035	0.210
zoology	44	0.00197	0.8561	0.076
philosophy	156–157 (tie)	0.000277	0.9455	0.014
art	267–270 (tie)	0.000102	0.9648	0.002

Most probable candidate: 'physics' (27.71%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

THROW · candidate distribution and experimental alternatives


Entropy 4.751 bits | Highest frozen score of four: Disjunction | Set − Ordering: -35.702

You and your friend Jo are relaxing at Jo's house.You tell Jo, 'It's sunny outside, let's play catch.' Jo looks through the garage and responds, 'Sure, we have a


Complete distribution: all 121,301 candidates

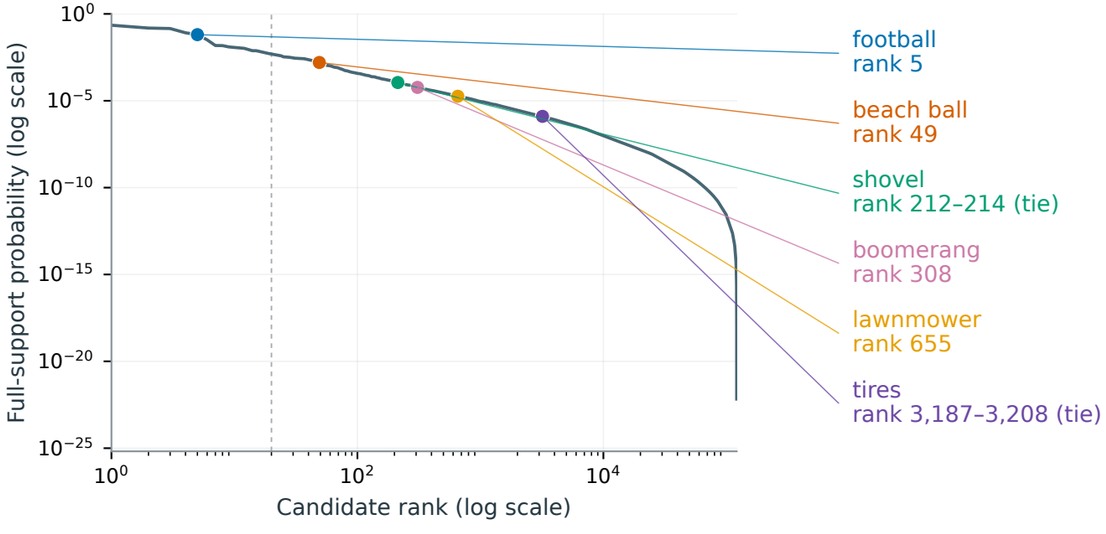

Closer view containing all six alternatives

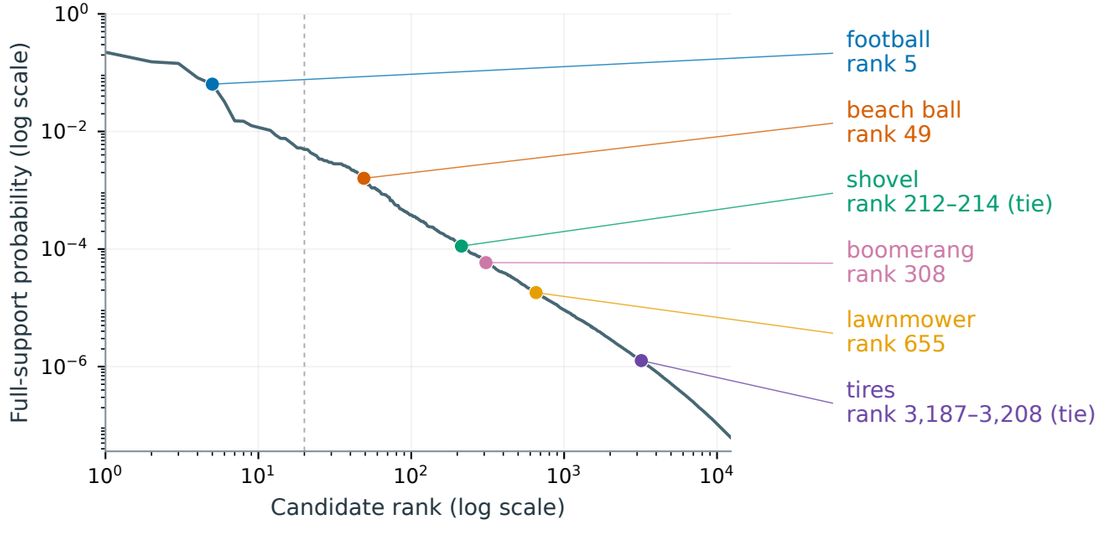

How quickly probability mass accumulates

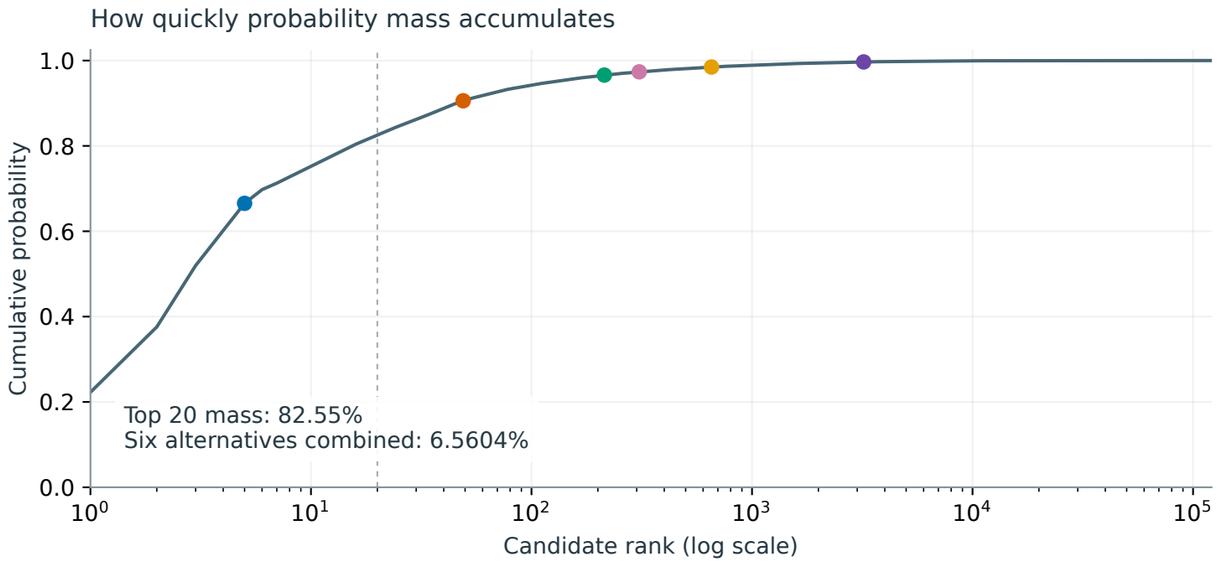

Alternative	Rank	Probability	Cum. mass	Set inclusion
football	5	0.0638	0.6654	0.972
beach ball	49	0.0016	0.9057	0.082
shovel	212–214 (tie)	0.000112	0.9659	0.000
boomerang	308	5.87e-05	0.9736	0.004
lawnmower	655	1.82e-05	0.9848	0.000
tires	3,187–3,208 (tie)	1.27e-06	0.9968	0.000

Most probable candidate: 'baseball' (22.27%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.


Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.

TRANSPORT · candidate distribution and experimental alternatives


Entropy 5.307 bits | Highest frozen score of four: Set | Set − Ordering: +21.958

You and your friend Dylan have been studying together at his uncle's house. Dylan suggests going into town to take a break. You say, 'Sure, but I don't want to walk.'
Dylan looks in the garage and responds, 'Sure, he has his


Complete distribution: all 121,301 candidates

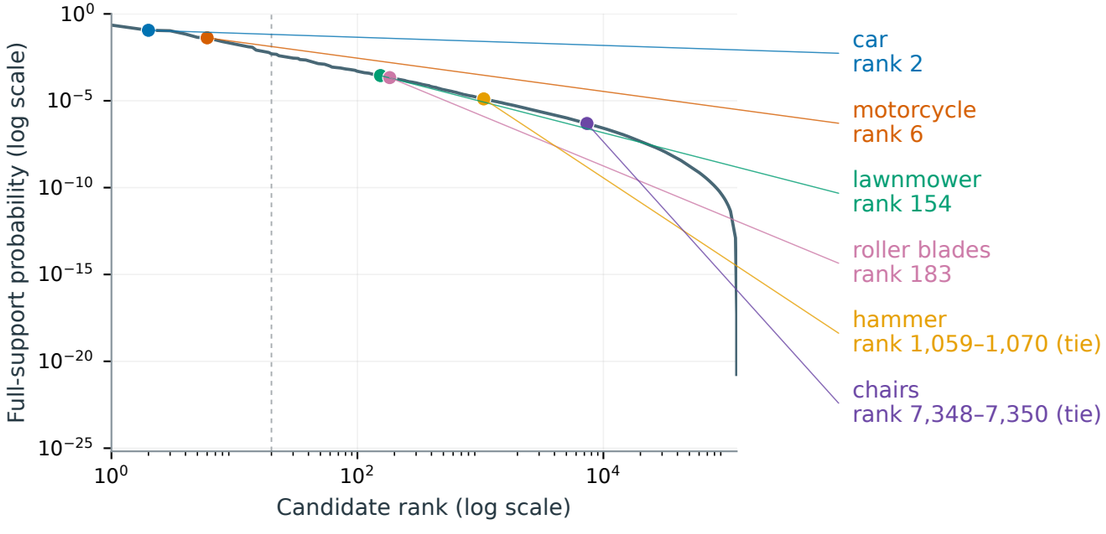

Closer view containing all six alternatives

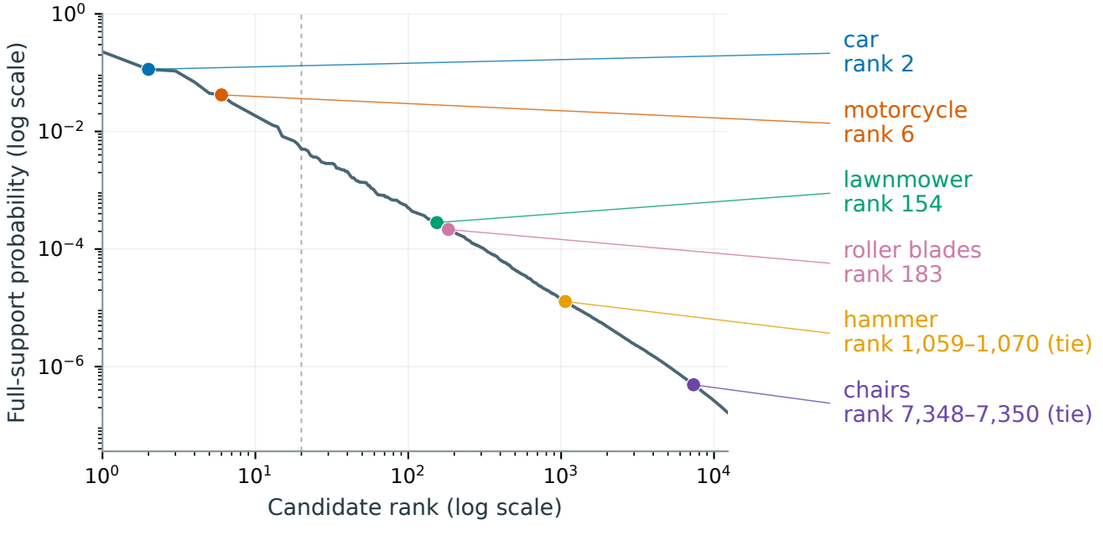

How quickly probability mass accumulates

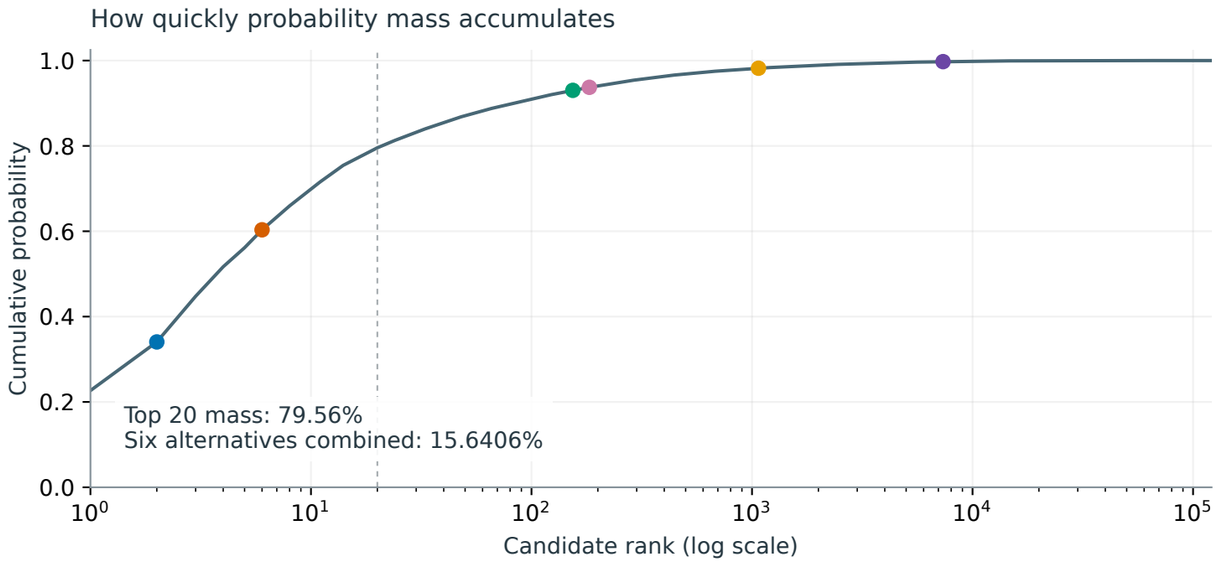

Alternative	Rank	Probability	Cum. mass	Set inclusion
car	2	0.114	0.3406	0.986
motorcycle	6	0.0419	0.6034	0.830
lawnmower	154	0.000282	0.9302	0.020
roller blades	183	0.000215	0.9373	0.008
hammer	1,059–1,070 (tie)	1.28e-05	0.9820	0.000
chairs	7,348–7,350 (tie)	4.91e-07	0.9975	0.000

Most probable candidate: 'bike' (22.67%).

Probabilities are normalized once over every saved one- and two-word candidate. Both views use the same probabilities; all axes have common limits across contexts.

Dashed rank-20 lines are visual references. The frozen Set model uses weighted samples of 20 candidates. Ties share a rank range and a midpoint marker.