


the five cells

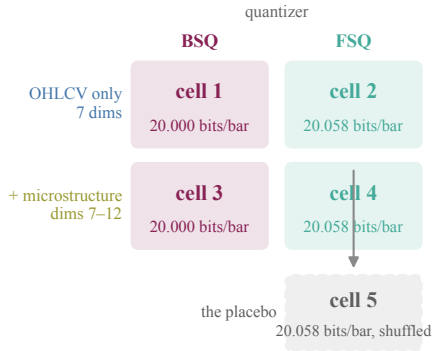

capacity is controlled, not assumed

20.058 vs 20.000 bits per bar (0.058 apart)
21,301,248 vs 21,231,616 backbone params (0.327% apart)

what shuffling the block destroys — and what it leaves

mean |corr| micro ↔ OHLCV, contemporaneous



before 0.2037

after 0.0005

destroyed

mean |lag-1 autocorr|, micro



before 0.4165

after 0.0006

destroyed

mean |corr| micro ↔ micro, within-bar



before 0.2886

after 0.2886

preserved

mean |corr| OHLCV ↔ OHLCV, within-bar



before 0.3105

after 0.3105

preserved

the handicap this creates, disclosed not removed

cell 4's micro dims are partly free: they share structure the code already carries. Shuffling removes that sharing too, so $\Delta IR(4-5)$ is (information) + (capacity handicap), not information alone. Cell 6 would bracket it; it is conditional on a pre-committed probe.